

# INTERNATIONAL STANDARD

**IEC**  
**61300-3-34**

Second edition  
2001-12

---

---

## **Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –**

### **Part 3-34: Examinations and measurements – Attenuation of random mated connectors**

*Dispositifs d'interconnexion et composants passifs  
à fibres optiques –  
Méthodes fondamentales d'essais et de mesures –*

*Partie 3-34:  
Examens et mesures –  
Affaiblissement dû à l'accouplement  
de connecteurs quelconques*



Reference number  
IEC 61300-3-34:2001(E)

## Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

## Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

## Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site** ([www.iec.ch](http://www.iec.ch))

- **Catalogue of IEC publications**

The on-line catalogue on the IEC web site ([www.iec.ch/catlg-e.htm](http://www.iec.ch/catlg-e.htm)) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

- **IEC Just Published**

This summary of recently issued publications ([www.iec.ch/JP.htm](http://www.iec.ch/JP.htm)) is also available by email. Please contact the Customer Service Centre (see below) for further information.

- **Customer Service Centre**

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: [custserv@iec.ch](mailto:custserv@iec.ch)  
Tel: +41 22 919 02 11  
Fax: +41 22 919 03 00

# INTERNATIONAL STANDARD

**IEC**  
**61300-3-34**

Second edition  
2001-12

---

---

## **Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –**

### **Part 3-34: Examinations and measurements – Attenuation of random mated connectors**

*Dispositifs d'interconnexion et composants passifs  
à fibres optiques –  
Méthodes fondamentales d'essais et de mesures –*

*Partie 3-34:  
Examens et mesures –  
Affaiblissement dû à l'accouplement  
de connecteurs quelconques*

© IEC 2001 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission  
Telefax: +41 22 919 0300

3, rue de Varembe Geneva, Switzerland  
e-mail: [inmail@iec.ch](mailto:inmail@iec.ch) IEC web site <http://www.iec.ch>



Commission Electrotechnique Internationale  
International Electrotechnical Commission  
Международная Электротехническая Комиссия

PRICE CODE

**M**

*For price, see current catalogue*

## CONTENTS

|                                 |    |
|---------------------------------|----|
| FOREWORD.....                   | 3  |
| 1 Scope.....                    | 5  |
| 2 Normative references .....    | 5  |
| 3 General description .....     | 5  |
| 3.1 Test methods .....          | 5  |
| 3.2 Precautions .....           | 6  |
| 4 Apparatus.....                | 6  |
| 4.1 Source (S).....             | 6  |
| 4.2 Launch conditions (E).....  | 7  |
| 4.3 Detector (D) .....          | 7  |
| 5 Procedure.....                | 8  |
| 5.1 Method 1 .....              | 8  |
| 5.2 Method 2.....               | 10 |
| 5.3 Analysis of results .....   | 13 |
| 6 Details to be specified ..... | 13 |

Withdawn  
IECNORM.COM : Click to view the full PDF of IEC 61300-3-34:2001

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

# **FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – BASIC TEST AND MEASUREMENT PROCEDURES –**

## **Part 3-34: Examinations and measurements – Attenuation of random mated connectors**

## FOREWORD

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical specifications, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.
- 6) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. The IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61300-3-34 has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics.

This second edition cancels and replaces the first edition published in 1997 and constitutes a technical revision.

The text of this standard is based on the following documents:

| FDIS          | Report on voting |
|---------------|------------------|
| 86B/1596/FDIS | 86B/1635/RVD     |

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 3.

IEC 61300 consists of the following parts, under the general title: *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures*:

- Part 1: General and guidance
- Part 2: Tests
- Part 3: Examinations and measurements

The committee has decided that the contents of this publication will remain unchanged until 2005. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

IECNORM.COM : Click to view the full PDF of IEC 61300-3-34:2001

Withdrawn

# **FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – BASIC TEST AND MEASUREMENT PROCEDURES –**

## **Part 3-34: Examinations and measurements – Attenuation of random mated connectors**

### **1 Scope**

The purpose of this part of IEC 61300 is to describe the procedure required to measure the statistical distribution and mean attenuation for random mated optical connectors. In this context the term attenuation can also be referred to as insertion loss.

### **2 Normative references**

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of IEC 61300. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of IEC 61300 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of IEC and ISO maintain registers of currently valid International Standards.

IEC 61300-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 1: General and guidance*

IEC 61300-3-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-1: Examinations and measurements – Visual examination*

### **3 General description**

#### **3.1 Test methods**

Two test methods are described for measuring the attenuation of random mated optical connectors. Both provide an estimate of the expected average performance that a group of patchcords (including adaptor, if applicable) selected from a batch will exhibit when utilised in an optical system. The patchcords, and any adaptors, must be chosen at random to ensure that the measurements provide a statistically unbiased estimate.

Method 1 describes the procedure based on the use of 10 patchcords (20 optical connectors) and 10 adaptors. In this case all of the plugs are sequentially used as “reference” plugs and all of the remaining plugs are tested against them. The result is based on 360 measurements as indicated in the test matrix shown in figure 3.

Method 1 is intended to be part of a design approval exercise that may involve one or more suppliers. Once approval is achieved, Method 2 would be relied on to maintain process control. However, in the event of a dispute, Method 1 shall act as the reference measurement method.

Method 2 describes a procedure based on the measurement of 15 patchcords.

Five patchcords are selected as “reference” patchcords, with one plug on each of the patchcords being nominated as a “reference” plug. All plugs of the remaining 10 patchcords are then tested against each of the five “reference” plugs. This produces 100 measurements as indicated in the test matrix shown in figure 6.

It is recognised that the number of measurements required by Method 1 may be excessive for day-to-day routine checking of either in-house or supplier produced products. In this case, as indicated above, Method 2 may be used as an alternative option.

NOTE In this measurement method, the terms “reference” plug or “reference” patchcord are used to define those components chosen at random from a batch, against which a number of comparative measurements are made. It is not intended that the terms should imply specially chosen or manufactured components, such as those used, for example, in screen testing.

## 3.2 Precautions

The following test requirements shall be met:

### 3.2.1

Precautions shall be taken to ensure that the cladding modes do not affect the measurement. Cladding modes shall be stripped as a function of the fibre coating.

### 3.2.2

Precautions shall be taken to ensure the position of the fibres in the test remains fixed between the measurement of  $P_1$  and  $P_2$  to avoid changes in attenuation due to bending losses.

### 3.2.3

The stability performance of the test equipment shall be  $\leq 0,05$  dB or 10 % of the attenuation to be measured, whichever is the lower value. The stability shall be maintained over the measurement time and operational temperature range. The required measurement resolution shall be 0,01 dB for both multimode and singlemode.

### 3.2.4

To achieve consistent results, clean and inspect all connectors and adaptors prior to measurement. Visual examination shall be undertaken in accordance with IEC 61300-3-1.

### 3.2.5

The power in the fibre shall be at a level that does not generate non-linear scattering effects.

## 4 Apparatus

### 4.1 Source (S)

The source consists of an optical emitter, the means to connect to it and associated drive electronics. In addition to meeting the stability and power level requirements, the source shall have the following characteristics:

Centre wavelength: As detailed in the performance and product standard.

Spectral width: Filtered LED  $\leq 150$  nm FWHM

Spectral width: LD  $< 10$  nm FWHM

For multimode fibres, broadband sources such as an LED shall be used.

For singlemode fibres either an LED or LD may be used.

NOTE The interference of modes from a coherent source will create speckle patterns in multimode fibres. These speckle patterns give rise to speckle or modal noise and are observed as power fluctuations, since their characteristic times are longer than the resolution time of the detector. As a result, it may be impossible to achieve stable launch conditions using coherent sources for multimode measurements. Consequently, lasers, including OTDR sources, should be avoided in favour of LED's or other incoherent sources for measuring multimode components.

## 4.2 Launch conditions (E)

Unless otherwise specified the launch conditions shall be in accordance with Annex B of IEC 61300-1. The launch conditions must ensure full cladding mode stripping and an equilibrium mode distribution.

Where the relevant specification calls for ultra-restrictive launch conditions to achieve EMD for multimode fibres, the output launch condition at the DUT shall be given by:

**Table 1 – Ultra-restrictive launch conditions**

| Fibre size<br>$\mu\text{m}$ | Spot size<br>$\mu\text{m}$ | NA   | CPR<br>dB |          |
|-----------------------------|----------------------------|------|-----------|----------|
|                             |                            |      | 850 nm    | 1 300 nm |
| 50                          | 35                         | 0,15 | 13,5      | 10,0     |
| 62,5                        | 44                         | 0,19 | 17,5      | 14,5     |

NOTE 1 Coupling power ratio (CPR) values  $\pm 1$  dB

NOTE 2 The tolerance on both spot size and NA shall be less than 10 % and 5 % respectively.

## 4.3 Detector (D)

The detector consists of an optical detector, the means to connect to it and associated electronics. The connection to the detector will be an adaptor that accepts a connector plug of the appropriate design. The detector shall capture all light emitted by the connector plug.

In addition to meeting the stability and resolution requirements, the detector shall have the following characteristics:

Linearity: Multimode  $\leq \pm 0,25$  dB (over  $-5$  to  $-60$  dBm)

Singlemode  $\leq \pm 0,1$  dB (over  $-5$  to  $-60$  dBm)

NOTE The power meter linearity shall be referenced to a power level of  $-23$  dBm at the operational wavelength.

Where the connection to the detector is broken between the measurement of  $P_1$  and  $P_2$ , the measurement repeatability shall be within 0,05 dB or 10 % of the attenuation to be measured, whichever is the lower value. A large sensitive area detector may be used to achieve this.

The precise characteristics of the detector shall be compatible with the measurement requirements. The dynamic range of the power meter shall be capable of measuring the power level exiting from the DUT at the wavelength being measured.

## 5 Procedure

### 5.1 Method 1

#### 5.1.1

Randomly choose 10 patchcords for testing. Label the plugs under test sequentially from 1a through to 10b (i.e. 1a – 1b, 2a – 2b, 3a – 3b.....10a – 10b).

#### 5.1.2

Randomly choose 10 adaptors. Label each adaptor sequentially 1 through 10.

#### 5.1.3

Insert patchcord 1a – 1b into the measurement system as shown in figure 1. Using plug 1a as the “reference” plug, measure the power  $P_1$ .

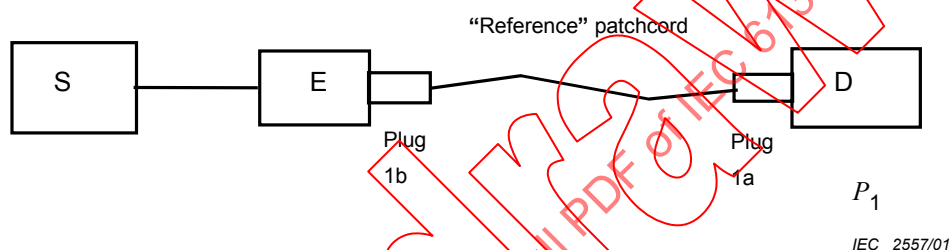


Figure 1 – “Reference” patchcord measurement – Method 1

#### 5.1.4

Insert test patchcord 2a – 2b and adaptor 1 into the system as shown in figure 2 and measure the transmitted power  $P_2$ .

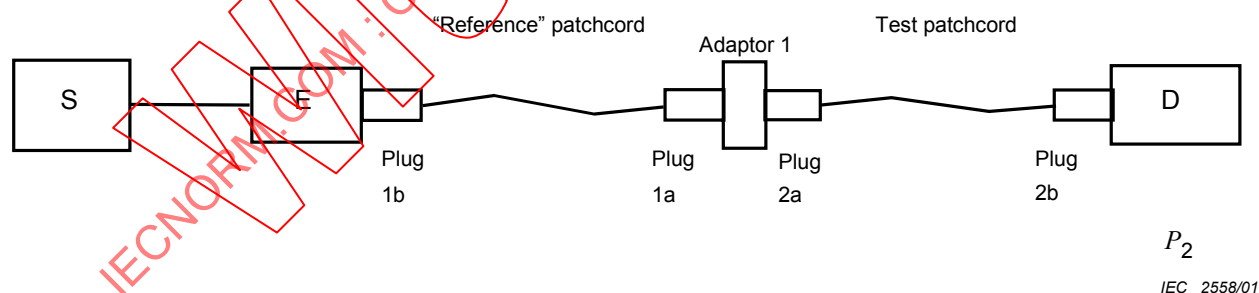


Figure 2 – Test patchcord measurement – Method 1

#### 5.1.5

Calculate the loss of the mated connector pair 1a/2a and adaptor 1, using the following equation:

$$\text{Insertion loss} = [10 \log (P_1/P_2)] - (A \times L) \text{ dB}$$

where

$A$  is fibre attenuation per kilometre;

$L$  is length of fibre in km.

NOTE The product  $A \times L$  may be ignored for both singlemode and multimode [50/125  $\mu\text{m}$  and 62,5/125  $\mu\text{m}$ ] where the patchcord length is small, i.e. <10 m

#### 5.1.6

Enter the insertion loss value into the test matrix shown in figure 3.

#### 5.1.7

Reverse the test patchcord 2a – 2b and measure the transmitted power  $P_2$  to obtain the insertion loss of the mated connector pair 1a/2b, using adaptor 1.

#### 5.1.8

Repeat step 5.1.6

#### 5.1.9

Maintaining plug 1a and adaptor 1 as the “reference” configuration, replace test patchcord 2a – 2b by patchcord 3a – 3b.

#### 5.1.10

Measure the transmitted power  $P_2$ .

#### 5.1.11

Repeat steps 5.1.9 and 5.1.10 until all of the plugs of the remaining test patchcords have been tested against the “reference” plug 1a.

#### 5.1.12

Once step 5.1.11 has been completed, reverse the “reference” patchcord so that plug 1b becomes the “reference” plug.

#### 5.1.13

Measure the insertion loss of all test plugs against the “reference” plug 1b and adaptor 1.

#### 5.1.14

Once step 5.1.13 has been completed, replace the “reference” plug and adaptor so that plug 2a and adaptor 2 becomes the “reference” configuration.

#### 5.1.15

Measure the insertion loss of all test plugs against “reference” plug 2a and adaptor 2.

#### 5.1.16

Repeat step 5.1.12 making plug 2b the “reference”.

#### 5.1.17

Continue this process until all of the plugs have been sequentially used as “reference” plugs and the remaining patchcords and adaptors have been tested against them.

#### 5.1.18

Enter the attenuation results into the test matrix as shown below.

| “Reference” configuration |     | Patchcord under test |    |    |    |    |    |    |    |    |    |         |    |            |    |                |    |    |    |     |     |
|---------------------------|-----|----------------------|----|----|----|----|----|----|----|----|----|---------|----|------------|----|----------------|----|----|----|-----|-----|
|                           |     | 1a                   | 1b | 2a | 2b | 3a | 3b | 4a | 4b | 5a | 5b | 6a      | 6b | 7a         | 7b | 8a             | 8b | 9a | 9b | 10a | 10b |
| Adaptor 1                 | 1a  | -                    | -  |    |    |    |    |    |    |    |    |         |    |            |    |                |    |    |    |     |     |
|                           | 1b  | -                    | -  |    |    |    |    |    |    |    |    |         |    |            |    |                |    |    |    |     |     |
| Adaptor 2                 | 2a  |                      |    | -  | -  |    |    |    |    |    |    |         |    |            |    |                |    |    |    |     |     |
|                           | 2b  |                      |    | -  | -  |    |    |    |    |    |    |         |    |            |    |                |    |    |    |     |     |
| Adaptor 3                 | 3a  |                      |    |    |    | -  | -  |    |    |    |    |         |    |            |    |                |    |    |    |     |     |
|                           | 3b  |                      |    |    |    | -  | -  |    |    |    |    |         |    |            |    |                |    |    |    |     |     |
| Adaptor 4                 | 4a  |                      |    |    |    |    |    | -  | -  |    |    |         |    |            |    |                |    |    |    |     |     |
|                           | 4b  |                      |    |    |    |    |    | -  | -  |    |    |         |    |            |    |                |    |    |    |     |     |
| Adaptor 5                 | 5a  |                      |    |    |    |    |    |    |    | -  | -  |         |    |            |    |                |    |    |    |     |     |
|                           | 5b  |                      |    |    |    |    |    |    |    | -  | -  |         |    |            |    |                |    |    |    |     |     |
| Adaptor 6                 | 6a  |                      |    |    |    |    |    |    |    |    |    | -       | -  |            |    |                |    |    |    |     |     |
|                           | 6b  |                      |    |    |    |    |    |    |    |    |    | -       | -  |            |    |                |    |    |    |     |     |
| Adaptor 7                 | 7a  |                      |    |    |    |    |    |    |    |    |    |         |    | -          | -  |                |    |    |    |     |     |
|                           | 7b  |                      |    |    |    |    |    |    |    |    |    |         |    | -          | -  |                |    |    |    |     |     |
| Adaptor 8                 | 8a  |                      |    |    |    |    |    |    |    |    |    |         |    |            |    | -              | -  |    |    |     |     |
|                           | 8b  |                      |    |    |    |    |    |    |    |    |    |         |    |            |    | -              | -  |    |    |     |     |
| Adaptor 9                 | 9a  |                      |    |    |    |    |    |    |    |    |    |         |    |            |    |                |    | -  | -  |     |     |
|                           | 9b  |                      |    |    |    |    |    |    |    |    |    |         |    |            |    |                |    | -  | -  |     |     |
| Adaptor 10                | 10a |                      |    |    |    |    |    |    |    |    |    |         |    |            |    |                |    |    |    | -   | -   |
|                           | 10b |                      |    |    |    |    |    |    |    |    |    |         |    |            |    |                |    |    |    | -   | -   |
| Average                   |     |                      |    |    |    |    |    |    |    |    |    |         |    |            |    |                |    |    |    |     |     |
| Max value                 |     |                      |    |    |    |    |    |    |    |    |    |         |    |            |    |                |    |    |    |     |     |
| Std deviation             |     |                      |    |    |    |    |    |    |    |    |    |         |    |            |    |                |    |    |    |     |     |
| Summary statistics        |     |                      |    |    |    |    |    |    |    |    |    | Average |    | Max. value |    | Std. deviation |    |    |    |     |     |

Figure 3 – Test matrix for measurement method 1

IEC 2559/01

## 5.2 Method 2

### 5.2.1

Randomly choose 15 patchcords and five adaptors for testing.

### 5.2.2

From these 15, choose five patchcords at random and label one plug on each patchcord (i.e. 1, 2, 3, 4, 5). These will be the “reference” plugs. Similarly, label the adaptors 1 to 5. Finally, label the remaining plugs sequentially from 1a through to 10b (i.e. 1a – 1b, 2a – 2b, 3a – 3b.....10a –10b).