

INTERNATIONAL STANDARD

IEC
62153-4-4

First edition
2006-05

Metallic communication cable test methods –

Part 4-4:

**Electromagnetic compatibility (EMC) –
Shielded screening attenuation, test method
for measuring of the screening attenuation a_s
up to and above 3 GHz**



Reference number
IEC 62153-4-4:2006(E)

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site** (www.iec.ch)

- **Catalogue of IEC publications**

The on-line catalogue on the IEC web site (www.iec.ch/searchpub) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

- **IEC Just Published**

This summary of recently issued publications (www.iec.ch/online_news/justpub) is also available by email. Please contact the Customer Service Centre (see below) for further information.

- **Customer Service Centre**

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

IEC
62153-4-4

First edition
2006-05

Metallic communication cable test methods –

Part 4-4:

Electromagnetic compatibility (EMC) – Shielded screening attenuation, test method for measuring of the screening attenuation a_s up to and above 3 GHz

© IEC 2006 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE

P

For price, see current catalogue

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references.....	5
3 Symbols and theoretical background.....	5
3.1 Electrical symbols.....	5
3.2 Theoretical background	6
3.3 Screening attenuation	6
3.4 Relationship between length and the surface transfer impedance Z_T	7
4 Principles of the measuring method	10
5 Measurement.....	11
5.1 Equipment	11
5.2 Cable under test	11
5.3 Procedure.....	14
5.4 Expression of results	14
6 Requirement.....	15
Figure 1 – Relationship of U_2/U_1 on a log (f) scale for a single braided cable	8
Figure 2 – Relationship of U_2/U_1 on a linear (f) scale and screening attenuation a_s on a linear (f) scale for a single braided cable	9
Figure 3 – Measured screening attenuation a_s formed by the maximum envelope curve to the measured coupling voltage ratio U_2/U_1 of a single braided cable	9
Figure 4 – Triaxial measuring set-up	10
Figure 5 – Triaxial measuring set-up connected to the network analyser	10
Figure 6 – Preparation of test sample (symmetrical and multi-conductor cables)	11
Figure 7 – Impedance matching for $Z_1 < 50 \Omega$	13
Figure 8 – Impedance matching for $Z_1 > 50 \Omega$	13

INTERNATIONAL ELECTROTECHNICAL COMMISSION

METALLIC COMMUNICATION CABLE TEST METHODS –

**Part 4-4: Electromagnetic compatibility (EMC) –
Shielded screening attenuation, test method for measuring of
the screening attenuation a_s up to and above 3 GHz**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62153-4-4 has been prepared by subcommittee 46A: Coaxial cables, of IEC technical committee 46: Cables, wires, waveguides, r.f. connectors, r.f. and microwave passive components and accessories.

The text of this standard is based on the following documents:

FDIS	Report on voting
46A/799/FDIS	46A/816/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

IEC 62153 consists of the following parts under the general title *Metallic communication cable test methods*:

- Part 1-1: Electrical – Measurement of the pulse/step return loss in the frequency domain using the Inverse Discrete Fourier Transformation (IDFT)
- Part 1-2: Reflection measurement correction¹
- Part 4-0: Electromagnetic Compatibility (EMC) – Relationship between Surface transfer impedance and Screening attenuation, recommended limits¹
- Part 4-1: Electromagnetic Compatibility (EMC) – Introduction to electromagnetic (EMC) screening measurements¹
- Part 4-2: Electromagnetic compatibility (EMC) – Screening and coupling attenuation – Injection clamp method
- Part 4-3: Electromagnetic Compatibility (EMC) – Surface transfer impedance – Triaxial method
- Part 4-4: Electromagnetic Compatibility (EMC) – Shielded screening attenuation, test method for measuring of the screening attenuation "as " up to and above 3 GHz
- Part 4-5: Electromagnetic Compatibility (EMC) – Coupling or screening attenuation – absorbing clamp method
- Part 4-6: Electromagnetic Compatibility (EMC) – Surface transfer impedance – line injection method
- Part 4-7: Electromagnetic Compatibility (EMC) – Shielded screening attenuation, test method for measuring the Transfer impedance Z_T, the screening attenuation as and the coupling attenuation ac of RF-Connectors up to and above 3 GHz; Tube in Tube method
- Part 4-8: Electromagnetic Compatibility (EMC) – Capacitive Coupling Admittance ¹

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

¹ Under consideration.

METALLIC COMMUNICATION CABLE TEST METHODS –

Part 4-4: Electromagnetic compatibility (EMC) – Shielded screening attenuation, test method for measuring of the screening attenuation a_s up to and above 3 GHz

1 Scope

This part of IEC 62153 determines the screening attenuation a_s of metallic communication cable screens. Due to the concentric outer tube, measurements are independent of irregularities on the circumference and outer electromagnetic field.

A wide dynamic and frequency range can be applied to test even super-screened cables with normal instrumentation from low frequencies up to the limit of defined transversal waves in the outer circuit at approximately 4 GHz.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61917:1998, *Cables, cable assemblies and connectors – Introduction to electromagnetic (EMC) screening measurements*²

3 Symbols and theoretical background

3.1 Electrical symbols

Z_1	characteristic impedance of the primary circuit (cable under test)
Z_2	characteristic impedance of the secondary circuit
Z_S	normalized value of the characteristic impedance of the environment of the cable under test (150 Ω outer circuit impedance Z_2)
R	input impedance of the receiver
Z_T	transfer impedance of the cable under test in Ω/m
$Z_F = Z_1 \times Z_2 \times j\omega \times C_T$	capacitive coupling impedance of the cable under test in Ω/m
f	frequency in Hz
C_T	through capacitance of the outer conductor per unit length in F/m
ϵ_{r1}	relative dielectric permittivity of the cable under test
ϵ_{r2}	relative dielectric permittivity of the secondary circuit
$\epsilon_{r2,n}$	normalized value of the relative dielectric permittivity of the environment of the cable
l	effective coupling length

² This is under revision and will be replaced by IEC 62153-4-1.

λ_0	vacuum wavelength
c_0	vacuum velocity
a_s	screening attenuation which is comparable to the results of the absorbing clamp method
a_{sn}	normalized screening attenuation ($Z_S = 150 \Omega$ and $ \Delta v/v_1 = 10 \%$)
P_1	feeding power of the primary circuit
P_2	measured power received on the input impedance R of the receiver in the secondary circuit
P_r	radiated power in the environment of the cable, which is comparable to $P_{2,n} + P_{2,f}$ of the absorbing clamp method
P_S	radiated power in the normalized environment of the cable under test ($Z_S = 150 \Omega$ and $ \Delta v/v_1 = 10 \%$)

$$\varphi_1 = 2\pi(\sqrt{\varepsilon_{r1}} - \sqrt{\varepsilon_{r2}})l / \lambda_0$$

$$\varphi_2 = 2\pi(\sqrt{\varepsilon_{r1}} + \sqrt{\varepsilon_{r2}})l / \lambda_0$$

$$\varphi_3 = \varphi_2 - \varphi_1 = 4\pi\sqrt{\varepsilon_{r2}}l / \lambda_0$$

3.2 Theoretical background

For exact calculation, if feedback from the secondary to the primary circuit is negligible, the ratio of the far-end voltages U_1 and U_2 are given by

$$\left| \frac{U_2}{U_1} \right| \approx \left| \frac{Z_T - Z_F}{\sqrt{\varepsilon_{r1}} - \sqrt{\varepsilon_{r2}}} \times \left[1 - e^{-j\varphi_1} \right] + \frac{Z_T + Z_F}{\sqrt{\varepsilon_{r1}} + \sqrt{\varepsilon_{r2}}} \times \left[1 - e^{-j\varphi_2} \right] \right| \times \left| \frac{1}{\omega Z_1} \right| \times \left| \frac{c_0}{2 + (Z_2 / R - 1) \times (1 - e^{-j\varphi_3})} \right| \quad (1)$$

i.e. formally $|A + B| \times C \times D$, where AC is the far-end crosstalk, BC is the reflected near-end crosstalk and D is the mismatch factor.

The total oscillations of D are

<2 dB, if

$$1 < Z_2/R < 1,25$$

3 dB, if

$$Z_2/R = 1,4$$

but

10 dB and more, if $Z_2/R > 3$.

Maximum values of AC and BC are given, if

$$\varphi_{1,2} = (2N + 1) \times \pi \text{ and } N \text{ is an integer.}$$

A more detailed description of the subject will be given in future IEC 62153-4-1 (which is intended to be a revision of IEC 61917).

3.3 Screening attenuation

The logarithmic ratio of the feeding power P_1 and the periodic maximum values of the power $P_{r,max}$ which may be radiated due to the peaks of voltage U_2 in the outer circuit is termed screening attenuation a_s .

$$a_s = -10 \times \log_{10} \left(\text{Env} \left| \frac{P_{r,\max}}{P_1} \right| \right) \quad (2)$$

The relationship of the radiated power P_r to the measured power P_2 received on the input impedance R is

$$\frac{P_r}{P_2} = \frac{P_{r,\max}}{P_{2,\max}} = \frac{R}{2 \times Z_S} \quad (3)$$

There will be a variation of the voltage U_2 on the far end, caused by the electromagnetic coupling through the screen and superimposition of the partial waves caused by the surface transfer impedance Z_T , the capacitive coupling impedance Z_F (travelling to the far and near end) and the totally reflected waves from the near end.

At high frequencies and when the cable under test is electrically long.

$$\sqrt{\left| \frac{P_{2,\max}}{P_1} \right|} \approx \frac{c_0}{\omega \sqrt{Z_1 \times R}} \times \left| \frac{Z_T - Z_F}{\sqrt{\epsilon_{r1}} - \sqrt{\epsilon_{r2}}} + \frac{Z_T + Z_F}{\sqrt{\epsilon_{r1}} + \sqrt{\epsilon_{r2}}} \right| \quad (4)$$

3.4 Relationship between length and the surface transfer impedance Z_T

The relationship between the effective coupling length of the cable under test and the electrical wave length is important for the characteristic curve of the screening attenuation (see Figures 1 and 2). In the frequency range of electrically short coupling lengths, the measured attenuation decreases with increasing length. Therefore, it is necessary to define the related length.

With electrically long lengths the screening attenuation formed by the maximum envelope curve to the coupling voltage ratio is constant for a 6 dB/octave increasing transfer impedance. Therefore, the screening attenuation is defined only at high frequencies.

The coupling length is electrically short, if

$$\lambda_0 / l > 10 \times \sqrt{\epsilon_{r1}} \quad \text{or} \quad f < \frac{c_0}{10 \times l \times \sqrt{\epsilon_{r1}}} \quad (5)$$

or electrically long, if

$$\lambda_0 / l \leq 2 \times \left| \sqrt{\epsilon_{r1}} - \sqrt{\epsilon_{r2}} \right| \quad \text{or} \quad f > \frac{c_0}{2 \times l \times \left| \sqrt{\epsilon_{r1}} - \sqrt{\epsilon_{r2}} \right|} \quad (6)$$

where

- l is the effective coupling length in metres (approximately 2 m in Figure 3);
- λ_0 is the free space wavelength in metres;
- ϵ_{r1} is the resulting relative permittivity of the dielectric of the cable;
- ϵ_{r2} is the resulting relative permittivity of the dielectric of the secondary circuit;
- f is the frequency in Hz.

The measured voltage ratio is related to the transfer impedance Z_T for electrically short coupling length by

$$Z_T \times l \approx Z_1 \times \left| \frac{U_2}{U_1} \right| \quad (7)$$

Also, at high frequencies, Z_T can be calculated if Z_F is negligible

$$Z_T \approx \left| \frac{\omega \times \sqrt{Z_1 \times R} \times |\epsilon_{r1} - \epsilon_{r2}|}{2 \times c_0 \times \sqrt{\epsilon_{r1}}} \times \sqrt{\left| \frac{P_{2\max}}{P_1} \right|} \right| \quad (8)$$

therefore

$$\sqrt{\left| \frac{P_{2\max}}{P_1} \right|} \approx \left| \frac{Z_T \times 2 \times c_0 \times \sqrt{\epsilon_{r1}}}{\omega \times \sqrt{Z_1 \times R} \times |\epsilon_{r1} - \epsilon_{r2}|} \right| \quad (9)$$

A more detailed description of the subject will be given in future IEC 62153-4-0 (which is intended to be a revision of IEC 61196-1:1995, Amendment 1:1999, Clause 14).

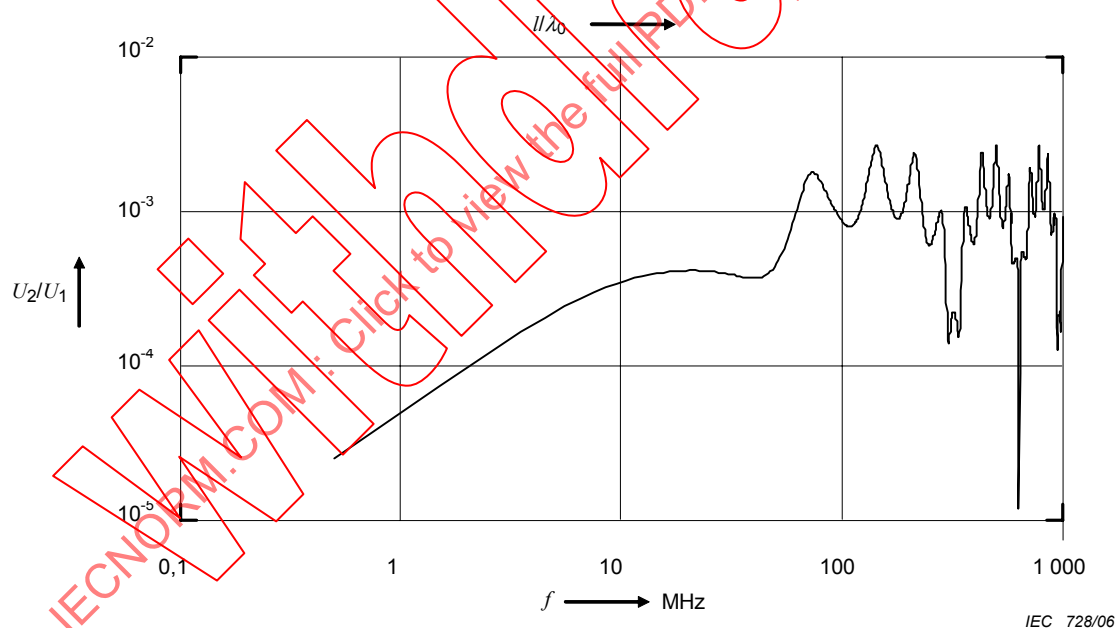


Figure 1 – Relationship of U_2/U_1 on a log (f) scale for a single braided cable

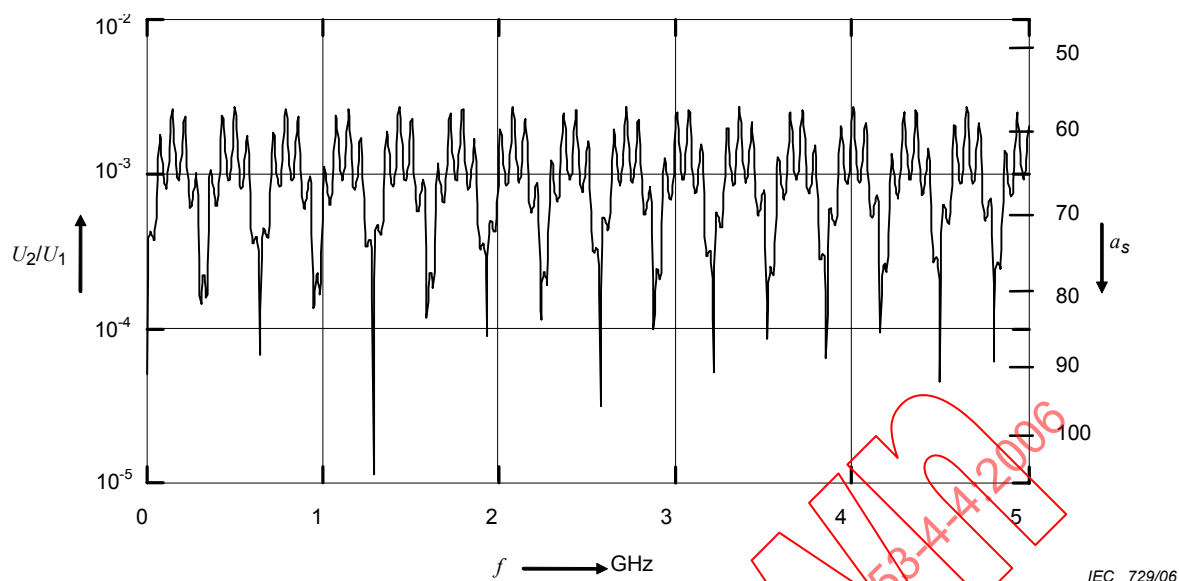


Figure 2 – Relationship of U_2/U_1 on a linear (f) scale and screening attenuation a_s on a linear (f) scale for a single braided cable

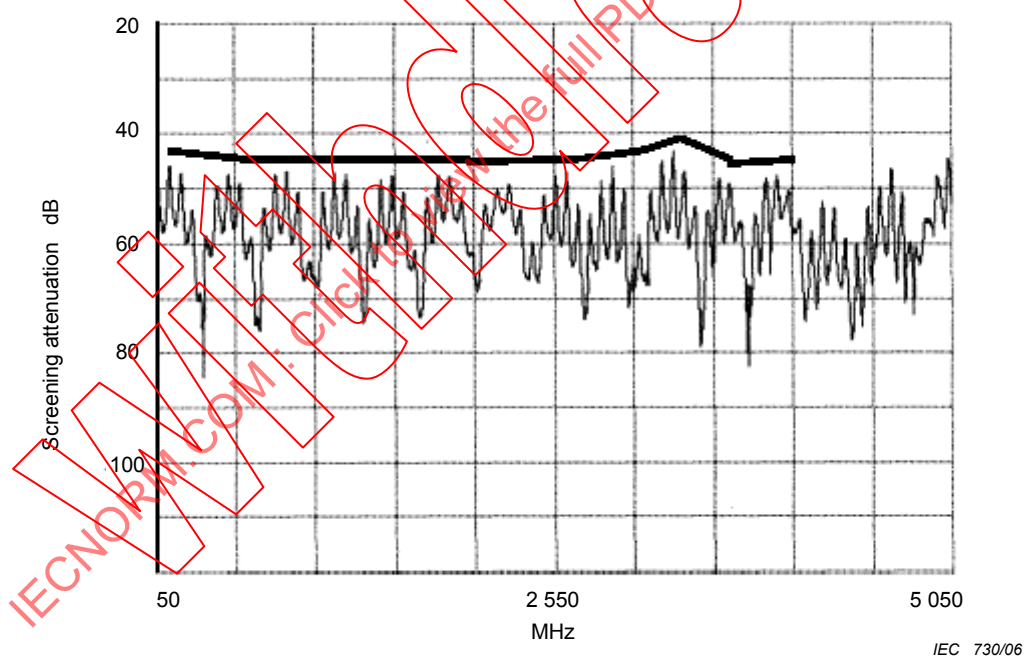


Figure 3 – Measured screening attenuation a_s formed by the maximum envelope curve to the measured coupling voltage ratio U_2/U_1 of a single braided cable

4 Principles of the measuring method

The disturbing or primary circuit is the matched cable under test. The disturbed or secondary circuit consists of the outer conductor (or the outermost layer in the case of multiscreen cables) of the cable under test and a solid metallic tube having the cable under test in its axis (see Figures 4 and 5).

The voltage peaks at the far end of the secondary circuit have to be measured. The near end of the secondary circuit is short-circuited. For this measurement, a matched receiver is not necessary. The expected voltage peaks at the far end are not dependent on the input impedance of the receiver, provided that it is lower than the characteristic impedance of the secondary circuit. However, it is an advantage to have a low mismatch, for example, by selecting a range of tube diameters for several sizes of coaxial cables.

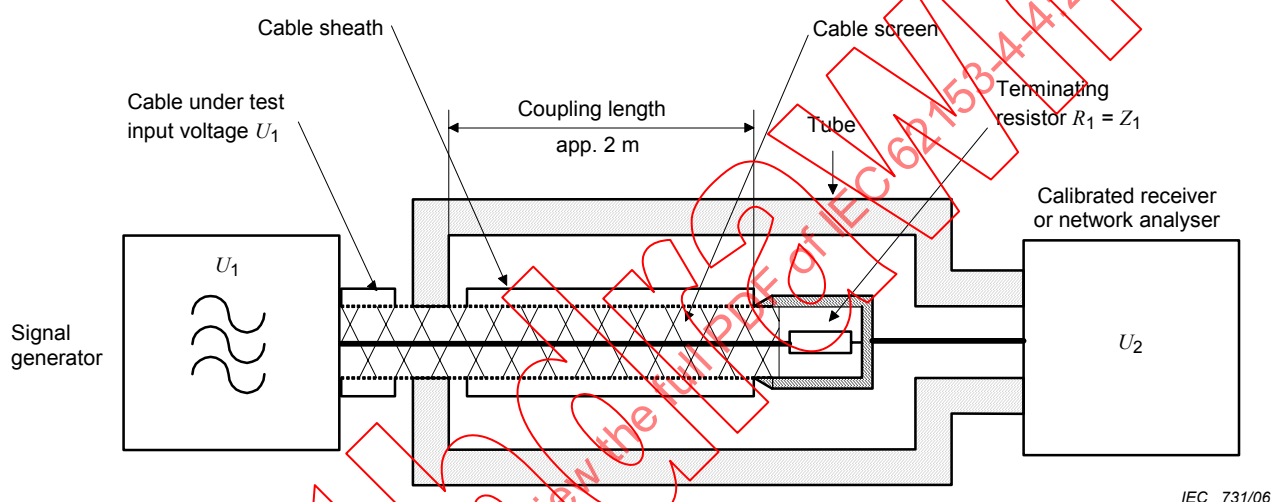


Figure 4 – Triaxial measuring set-up

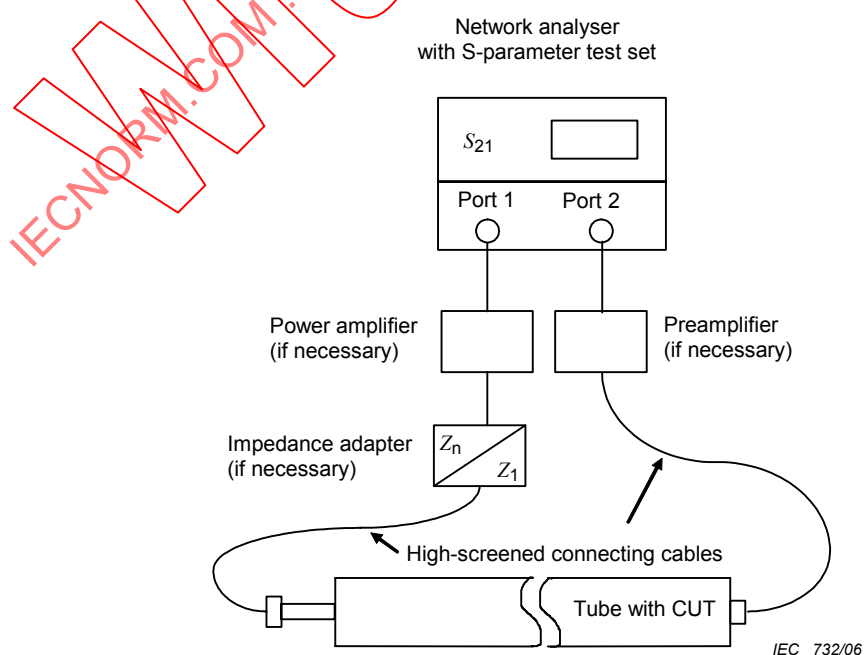


Figure 5 – Triaxial measuring set-up connected to the network analyser

5 Measurement

5.1 Equipment

The measuring set-up is shown in Figures 4 and 5 and consists of

- an apparatus of a triple coaxial form with a length sufficient to produce a superimposition of waves in narrow frequency bands which enable the envelope curve to be drawn;
- commonly, a coupling length of 2 m is preferable to determine the screening attenuation from less than 50 MHz upwards. The cylindrical cable screen forms both the outer conductor of the energized coaxial system and the inner conductor of the outer system. The outer conductor of the outer system is a tube of about 50 mm inner diameter with a short circuit to the screen on the fed side of the cable. The ratio of the inner diameter of the tube to the outer diameter of the screen must be sufficient to ensure that the characteristic impedance is larger than the input resistance of the receiver. The value of the relative dielectric permittivity of the outer circuit shall be approximately one, irrespective of the enclosing cable sheath;
- a signal generator with the same characteristic impedance as the cable under test or with an impedance adapter, completed by a power amplifier if necessary for very high screening attenuation;
- a receiver with a calibrated step attenuator or network analyser.

5.2 Cable under test

5.2.1 Coaxial cables

The cable sample is terminated at the far end by a very well screened resistance equal to the nominal value of the characteristic impedance. The connections between the terminating resistance, the screening cap and the cable screen shall be made with care so that the contact resistance can be neglected when interpreting the results. Special care shall be taken in preparing foil screens in order to avoid cracks in the foil which may introduce errors in the test results.


On the fed side, the cable screen is connected to the short-circuit disc of the outer tube, and care shall be taken so that the contact resistance is small and does not influence the results.

The cable under test shall be positioned as nearly concentric as possible in the outer tube to obtain homogeneous wave propagation.

5.2.2 Symmetrical and multiconductor cables

5.2.2.1 General

Screened symmetrical and multiconductor cables are treated as a quasi-coaxial system. Therefore, the conductors of all pairs shall be connected together at both ends. All screens, also those of individually screened pairs or quads, shall be connected together at both ends. The screens shall be connected over the whole circumference (see Figure 6).

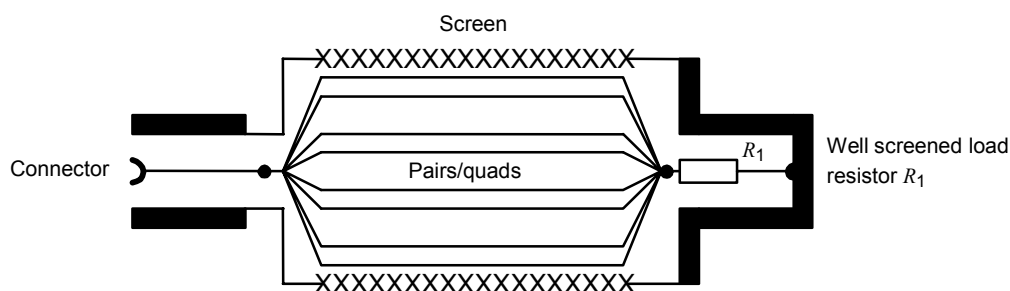

IEC 367/06

Figure 6 – Preparation of test sample (symmetrical and multi-conductor cables)

The quasi-coaxial system shall be terminated with its nominal characteristic impedance. The termination shall be well screened, so that the test results are not falsified. (The screening of the matching load shall be better than the screen under test). The impedance of the quasi-coaxial system can either be measured by using a TDR with maximum 200 ps risetime or using the method described in 5.2.2.2. Furthermore, an impedance matching adapter is necessary to match the impedance of the generator and the impedance of the quasi-coaxial system.

5.2.2.2 Impedance of inner system

One end of the prepared sample is connected to a network analyser, which is calibrated for impedance measurements at the connector interface reference plane. The test frequency shall be the approximate frequency for which the length of the sample is $1/8 \lambda$, where λ is the wavelength.

$$f_{\text{test}} \approx \frac{c}{8 \cdot L_{\text{sample}} \times \sqrt{\epsilon_{r1}}}$$

where

- f_{test} is the test frequency;
- c is the velocity of light, 3×10^8 m/s;
- L_{sample} is the length of the sample.

The sample is short-circuited at the far end. The impedance Z_{short} is measured.

The sample is left open at the same point where it was shorted. The impedance Z_{open} is measured.

The impedance of the quasi-coaxial system Z_1 is calculated as

$$Z_1 = \sqrt{Z_{\text{short}} \times Z_{\text{open}}}$$

5.2.2.3 $Z_1 < 50 \Omega$

If the impedance of the inner system Z_1 and subsequently the load resistor R_1 is less than 50Ω (the generator impedance), the formulas given below are used.

$$R_s = 50 \sqrt{1 - \frac{R_1}{50}}$$

$$R_p = \frac{R_1}{\sqrt{1 - \frac{R_1}{50}}}$$

The configuration is depicted in Figure 7.

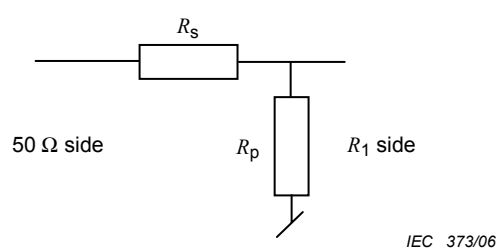


Figure 7 – Impedance matching for $Z_1 < 50 \Omega$

The voltage gain k_m of the circuit is

$$k_m = \frac{R_1 R_p}{R_1 R_p + R_p R_s + R_1 R_s}$$

5.2.2.4 $Z_1 > 50 \Omega$

If the impedance of the inner system Z_1 and subsequently R_1 is greater than 50Ω (the generator impedance), the formulas given below are used.

$$R_s = R_1 \sqrt{1 - \frac{50}{R_1}}$$

$$R_p = \frac{50}{\sqrt{1 - \frac{50}{R_1}}}$$

The configuration is depicted in Figure 8.

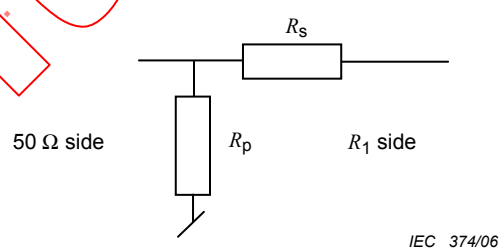


Figure 8 – Impedance matching for $Z_1 > 50 \Omega$

The voltage gain, k_m of the circuit is

$$k_m = \frac{R_1}{R_s + R_1}$$

5.3 Procedure

The quotient of the voltages at the output of the outer circuit and the input of the cable is measured, either directly by a network analyser or with a calibrated step attenuator (assuming that the receiver has the same input impedance as the output impedance of the signal generator ($R = Z_1$)) which is inserted as an alternative to the triaxial apparatus.

Only the peak values of the maximum of the voltage ratio or the minimum of the attenuation must be measured and recorded as a function of the frequency in order to determine the envelope curve.

The attenuation introduced by the inclusion of adapters, instead of direct connection, shall be taken into account when calibrating the triaxial apparatus.

The voltage ratio measured is not dependent on the diameter of the outer tube of the triaxial test set-up or on the characteristic impedance Z_2 of the outer system, provided that Z_2 is larger than the input impedance of the receiver.

5.4 Expression of results

5.4.1 Screening attenuation

The screening attenuation a_s which is comparable to the results of the absorbing clamp method shall be calculated with the normalized value $Z_S = 150 \Omega$.

$$\begin{aligned}
 a_s &= 10 \times \log_{10} \left| \frac{P_1}{P_{r,\max}} \right| = 10 \times \log_{10} \left| \frac{P_1}{P_{2,\max}} \times \frac{2 \times Z_S}{R} \right| \\
 &= 20 \times \log_{10} \left| \frac{U_1}{U_{2,\max}} \right| + 10 \times \log_{10} \left| \frac{300 \Omega}{Z_1} \right| \\
 &= a_{m,\min} - a_z + 10 \times \log_{10} \left| \frac{300 \Omega}{Z_1} \right|
 \end{aligned} \tag{10}$$

where

- a_s is the screening attenuation related to the radiating impedance of 150Ω in dB;
- $a_{m,\min}$ is the attenuation recorded as minimum envelope curve of the measured values in dB;
- a_z is the additional attenuation of an eventually inserted adapter, if not otherwise eliminated, for example, by the calibration, in dB);
- U_1 is the input voltage of the primary circuit formed by the cable in V;
- U_2 is the output voltage of the secondary circuit in V;
- Z_1 is the characteristic impedance of the cable under test in Ω .

At frequencies lower than the limit of the electrically long coupling length, the measurement will be similar to that for surface transfer impedance.

5.4.2 Normalized screening attenuation

The screening attenuation is dependent on the velocity difference between the inner and outer circuit. Therefore, the test results may also be presented in normalized conditions where $Z_S = 150 \Omega$ and the velocity difference is 10 %.