

INTERNATIONAL STANDARD



**Appliance couplers for household and similar general purposes –
Part 2-3: Appliance couplers with a degree of protection higher than IPX0**

IECNORM.COM : Click to view the full PDF of IEC 60320-2-3:2018 RLV



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2018 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 21 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IECNORM.COM : Click to view the full PDF IEC 60321-2-3:2018 PLV

INTERNATIONAL STANDARD



**Appliance couplers for household and similar general purposes –
Part 2-3: Appliance couplers with a degree of protection higher than IPX0**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.120.30

ISBN 978-2-8322-5860-6

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	3
1 Scope.....	6
2 Normative references.....	6
3 Terms and definitions	7
4 General requirements	7
5 General notes on tests.....	7
6 Standard ratings	8
7 Classification.....	8
8 Marking	9
9 Dimensions and compatibility.....	11
10 Protection against electric shock.....	12
11 Provision for earthing.....	12
12 Terminals and terminations	12
13 Construction.....	14
14 Moisture resistance	16
15 Insulation resistance and electric strength.....	16
16 Forces necessary to insert and to withdraw the connector/appliance outlet	18
17 Operation of contacts.....	20
18 Resistance to heating of appliance couplers for hot conditions or very hot conditions.....	20
19 Breaking capacity	20
20 Normal operation	20
21 Temperature rise	20
22 Cords and their connection	21
23 Mechanical strength.....	24
24 Resistance to heat and ageing.....	26
25 Screws, current-carrying parts and connections.....	26
26 Clearances, creepage distances, clearances and distances through solid insulation	26
27 Resistance of insulating material to heat, fire and tracking.....	27
28 Resistance to rusting	27
29 Electromagnetic compatibility (EMC) requirements	27
Annex A (normative) Proof tracking test	28
Annex B (informative normative) Routine tests for factory wired appliance couplers related to safety (protection against electric shock and correct polarity)	29
Annex C (normative) Test schedule.....	35
Annex D (informative) Comparison of typical conductor cross-sectional areas	36
 Figure 101 – Example of apparatus for inadvertent disengagement (see 16.101).....	19
 Table 101 – Pull forces for retaining devices	20
Table 10 – Types of cord for the rewirable connector/plug connector test.....	24

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**APPLIANCE COUPLERS FOR HOUSEHOLD
AND SIMILAR GENERAL PURPOSES –****Part 2-3: Appliance couplers with a degree
of protection higher than IPX0**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

International Standard IEC 60320-2-3 has been prepared by subcommittee 23G: Appliance couplers, of IEC technical committee 23: Electrical accessories.

This second edition cancels and replaces the first edition published in 1998 and Amendment 1:2004. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) Aligned with IEC 60320-1:2015.
- b) The scope is extended to cover current ratings up to and including 16 A.
- c) The scope is extended to cover Class I appliance couplers.
- d) The scope is extended to cover appliance couplers for hot and very hot conditions.
- e) Added classification regarding the use of retaining devices.
- f) Added classification for indoor and outdoor use.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
23G/401/FDIS	23G/403/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

This Part 2-3 is to be used in conjunction with IEC 60320-1: *Appliance couplers for household and similar general purposes – Part 1: General requirements*. It was established on the basis of the third edition of that standard (2015).

The clauses of this standard supplement or modify the corresponding clauses in IEC 60320-1. When a particular subclause or annex of Part 1 is not mentioned in this Part 2-3, the subclause or annex of IEC 60320-1 applies as far as is reasonable. Where this standard states “addition”, “amendment” or “replacement”, the relevant requirement, test specification or explanatory matter in IEC 60320-1 is to be adapted accordingly.

Subclauses which are additional to those in Part 1 are numbered starting from 101.

In this particular standard the following print types are used:

- requirements: in roman type;
- *test specifications: in italic type;*
- explanatory matter: in smaller roman type.

A list of all parts in the IEC 60320 series, published under the general title *Appliance couplers for household and similar general purposes*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The “colour inside” logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this publication using a colour printer.

IECNORM.COM : Click to view the full PDF of IEC 60320-2-3:2018 RLV

APPLIANCE COUPLERS FOR HOUSEHOLD AND SIMILAR GENERAL PURPOSES –

Part 2-3: Appliance couplers with a degree of protection higher than IPX0

1 Scope

This clause of IEC 60320-1 applies ~~amended as follows~~ with the following addition:

~~This standard applies to two pole non-reversible appliance couplers for cold conditions for a.c. only, with a degree of protection against ingress of water higher than IPX0, with a rated voltage not exceeding 250 V and a rated current not exceeding 10 A for a 50 Hz or 60 Hz supply.~~

~~They are intended for the connection of the supply cord to portable electrical appliances of class II for household, commercial and light industrial use.~~

~~NOTE 1 — This note of IEC 60320-1 applies.~~

~~NOTE 2 — This note of IEC 60320-1 applies.~~

~~NOTE 3 — This note of IEC 60320-1 applies.~~

~~NOTE 4 — This note of IEC 60320-1 does not apply.~~

~~NOTE 5 — This note of IEC 60320-1 applies.~~

Additional notes:

~~NOTE 6 — IEC 60529 specifies the degree of protection against the ingress of water (IP code).~~

~~NOTE 7 — IEC 60536 specifies the class of equipment.~~

This document applies to appliance couplers with a degree of protection against ingress of water higher than IPX0.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

This clause of IEC 60320-1 applies with the following additions:

IEC 60320-1:1994, *Appliance couplers for household and similar general purposes – Part 1: General requirements*

IEC 60320-3, *Appliance couplers for household and similar general purposes – Part 3: Standard sheets and gauges*

IEC 60529:1989, *Degrees of protection provided by enclosures (IP code)*

3 Terms and definitions

This clause of IEC 60320-1 applies with the following additions:

~~3.101~~

plug connector

~~appliance inlet intended to be attached by a cord to equipment~~

~~3.102~~ **3.101**

accessible surface of an accessory

surface of an accessory that can be touched by means of the test ~~finger shown in figure 10 of IEC 60320-1~~ probe B of IEC 61032 (standard test finger), when the accessory is assembled as in normal use and in the following conditions:

- a) for connectors and appliance outlets: without the complementary accessory in engagement but with the cover in the open position;
- b) for plug connectors and appliance inlets: with the complementary accessory in the most unfavourable degree of engagement but such that electrical contact is made between the contacts (pins and tubes).

~~3.103~~ **3.102**

cover

part that is accessible when the accessory is in normal use and removable only with the use of a tool, but which does not require the use of a tool to open it

~~3.104~~

type test sample

~~sample consisting of one or more similar specimens submitted for the purpose of a type test.~~

4 General requirements

This clause of IEC 60320-1 applies

5 General notes on tests

This clause of IEC 60320-1 applies ~~amended as follows.~~

~~5.1 This subclause of IEC 60320-1 applies.~~

~~5.2 Replacement:~~

~~Unless otherwise specified, the specimens are tested as delivered and under normal conditions of use, at an ambient temperature of $20\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$; they are tested with a.c. at 50 Hz or 60 Hz.~~

~~The specimens used for the tests shall be substantially identical to normal production items in respect of all details which may affect the test results.~~

~~Non-rewirable accessories shall be submitted with a cord at least 1 m long. The cord used for testing rewirable accessories shall be a sheathed circular flexible cord complying with 60227 IEC 53 unless otherwise specified in a particular clause.~~

~~5.3 This subclause of IEC 60320-1 does not apply.~~

~~5.4 This subclause of IEC 60320-1 does not apply.~~

5.5 Replacement:

A total sample comprising 18 specimens, of any one type, shall be submitted to inspection and tests as given in the following table:

Test	Number of specimens	Order of tests (clause and subclause references)
1—Visual inspection and manual examination	3	7, 8, 9, 10, 12, 13, 24.1, 25, 26, 28
2—General tests	3	14 (except 14.101), 15
3—General tests	3	22 (except 22.4), 16, 17, 19, 20, 21
4—Flexing test	3	22.4
5—Material test	3	23, 24.2, 14.101, 15.3
6—Material test	3	24.2, 27

NOTE 1—If any particular test is repeated, as part of the normal sequence, this requirement is specified in the appropriate clause.

NOTE 2—With the agreement of the manufacturer the same specimen may be used for more than one test sequence.

5.6 This subclause of IEC 60320-1 applies.

5.7 Replacement:

If no accessory fails in the complete series of tests specified in 5.5, then the accessories of that type are considered to comply with this standard.

If one accessory in any group fails in the complete series of tests specified in 5.5, then the accessories of that type are considered to have failed to comply with this standard, unless that accessory can be shown not to be of normal production or design, in which case a further set of accessories shall be submitted to the test or tests in that group. If there is no failure in this retest then the accessories of that type shall be deemed to comply with this standard.

If more than one accessory fails in the complete series of tests specified in 5.5, the accessories of that type shall be deemed to have failed to comply with this standard.

6 Standard ratings

This clause of IEC 60320-1 applies ~~amended as follows~~.

6.1 This subclause of IEC 60320-1 applies.

6.2 Replacement:

The rated current is 10 A.

7 Classification

This clause of IEC 60320-1 applies ~~amended as follows~~ with the following additions:

7.1.1 Amendment:

~~Only the reference to cold conditions applies.~~

~~7.1.2 Amendment:~~

~~Only the reference to class II equipment applies.~~

~~7.2 Replacement:~~

~~Accessories are classified, according to the method of connecting the cord, as:~~

- ~~— rewirable accessories;~~
- ~~— non-rewirable accessories.~~

~~Additional subclause:~~

~~7.101 Add a new classification:~~

~~Accessories are classified, according to the ambient temperature for their use, as:~~

- ~~— appliance couplers for use in normal temperature;~~
- ~~— appliance couplers for use in low temperature (– 15 °C).~~

~~NOTE Additional tests are under consideration for appliance couplers for use in low temperature.~~

7.101 Retaining devices:

- a) with retaining device
- b) without retaining device

7.102 Appliance coupler without retaining device.

NOTE Only to be used where permitted by the end product standard.

8 Marking

This clause of IEC 60320-1 applies amended as follows:

~~8.1 Replacement:~~

~~Couplers, except for appliance inlets supplied with the equipment, shall be marked with:~~

- ~~a) name, trade mark or identification mark of the maker or responsible vendor;~~
- ~~b) number of this standard;~~
- ~~c) rated current;~~
- ~~d) rated voltage;~~
- ~~e) symbol for nature of supply;~~
- ~~f) IP rating;~~
- ~~g) type reference, which may be a catalogue number, code number, etc.~~

~~8.2 Replacement:~~

~~Appliance inlets shall be marked with the information given in 8.1 a) and 8.1 g) which need not be visible when installed for use outdoors.~~

~~NOTE The marking on connectors and appliance inlets need not be visible when these are connected together.~~

~~8.3 This subclause of IEC 60320-1 applies.~~

~~8.4 This subclause of IEC 60320-1 applies with the following additional symbols:~~

~~Line ————— L~~

~~Neutral ————— N~~

~~Protected against splashing water — IPX4~~

~~NOTE In the IP code the letter X, concerning protection against ingress of solid objects, is replaced by the relevant number.~~

~~8.5 This subclause of IEC 60320-1 does not apply.~~

~~8.6 Amendment:~~

~~This subclause of IEC 60320-1 applies except for the reference to earthing contact and earthing terminal.~~

~~8.7 This subclause of IEC 60320-1 applies.~~

~~8.8 This subclause of IEC 60320-1 applies.~~

8.2 Addition:

– IP rating.

8.4 Addition:

IP rating for example IPX4

NOTE 101 In the IP code the letter "X" is replaced by the relevant number.

Additional subclauses (following 8.8):

8.101 Colours of outdoor cables

Cords of non-rewirable accessories for outdoor use shall not be coloured black, green, white or brown.

8.102 Instructions for retail sale

For couplers intended for retail sale the supplier shall include an instruction leaflet, on or inside the sales package, with each coupler or accessory, clearly describing the extent of its suitability for use outdoors. Information regarding weather resistance shall be clearly visible to the purchaser and a recommendation shall be made that the cord to be fitted to the accessory should not be coloured black, green, white or brown. The instruction sheet shall include information stating that the plug connector shall be connected to the equipment and the connector to the mains supply side.

If the coupler or accessory is non-rewirable with a cord attached, each free end shall be marked for connection to the appliance or mains supply as appropriate, with guidance on the danger of an incorrect connection or of a connection to an appliance requiring the protection of an earth continuity conductor.

Except when a plug connector or appliance inlet fitted with a cord is supplied direct to a manufacturer for incorporation in other equipment, the free end of such an assembly shall have a label attached stating:

"The cord of this accessory must be properly connected to a piece of equipment before the appliance is energized."

If the coupler or accessory is rewirable, instructions shall be provided on the following:

- a) stripping lengths for sheath and insulation;
- b) identity of accessories to be connected to appliance or mains cord, as appropriate;
- c) connection of brown wire to terminal marked L and blue wire to terminal marked N;
- d) importance of correct assembly of cord anchorage including need for at least 3 mm of sheath to protrude beyond the clamping device;
- e) suitable for use with circular type cords only.

Compliance with the requirements of 8.101 and 8.102 is checked by inspection.

9 Dimensions and compatibility

This clause of IEC 60320-1 applies ~~amended as follows~~ with the following addition:

~~9.1 Replacement:~~

~~Couplers shall comply with the appropriate dimensions given in standard sheets A and B of this standard, except as permitted by 9.6.~~

~~Compliance is checked by measurement and, where relevant, by the use of the appropriate gauge(s) shown in figures 1 and 2.~~

~~When the gauge shown in figure 1 is used it shall be possible to insert the connector fully into the gauge with a force not exceeding 60 N. To verify correct and full insertion the gauge insert shall be provided with an aperture.~~

~~When the primary and supplementary gauges of figure 2 are used it shall be possible to insert the primary gauge fully into the appliance inlet with a force not exceeding 60 N. The supplementary gauge shall be pushed over the bar.~~

~~Planes shall be provided with the primary gauge to check pin and shroud lengths; successful engagement of the supplementary gauge checks the appliance inlet outer recess.~~

~~9.2 Replacement:~~

~~Provision for retaining the connector in the plug connector or appliance inlet shall comply with standard sheets A and B.~~

~~Compliance is checked by the tests of clause 16.~~

~~9.3 This subclause of IEC 60320-1 applies.~~

~~9.4 This subclause of IEC 60320-1 applies.~~

~~9.5 This subclause of IEC 60320-1 applies.~~

~~9.6 This subclause of IEC 60320-1 applies.~~

Additional subclause (following 9.5):

9.101 Retaining devices

For standardized appliance couplers the provision for retaining the connector in the plug connector or appliance inlet shall comply with the relevant standard sheets.

NOTE The relevant standard sheets can be found in IEC 60320-3.

Compliance is checked by the tests of 16.101.

For non-standardized appliance couplers the provision for retaining the connector in the plug connector or appliance inlet shall comply with the manufacturer's specifications.

10 Protection against electric shock

This clause of IEC 60320-1 applies amended as follows:

~~10.1 Replacement:~~

~~Appliance couplers shall be so designed that live parts of appliance inlets are not accessible when the connector is in partial or complete engagement.~~

~~Connectors shall be so designed that live parts are not accessible when the connector is properly assembled and wired as in normal use, but with the cover open.~~

~~Compliance is checked by inspection and, if necessary, by a test with the test finger shown in figure 10 of IEC 60320-1. This finger is applied in every possible position, an electrical indicator being used to show contact with the relevant parts. For connectors with shrouds, enclosures or bodies of elastomeric or thermoplastic material, the test finger is applied for $30\text{ s} \pm 5\text{ s}$ with a force of $20\text{ N} \pm 3\text{ N}$ at all points where yielding of the insulating material could impair the safety of the connector; this test is made at an ambient temperature of $35^\circ\text{C} \pm 2^\circ\text{C}$.~~

~~NOTE 1 An electrical indicator with a voltage between 40 V and 50 V is used to show contact with the relevant part.~~

~~NOTE 2 Conformity to the standard sheets ensures compliance with the requirements so far as the inaccessibility of contact members during insertion of a connector into an appliance inlet is concerned.~~

~~10.2 This subclause of IEC 60320-1 applies.~~

~~10.3 This subclause of IEC 60320-1 applies.~~

~~10.4 This subclause of IEC 60320-1 applies.~~

10.1 Addition after the second paragraph:

Test is performed with the cover open.

11 Provision for earthing

This clause of IEC 60320-1 ~~does not apply~~ applies.

12 Terminals and terminations

This clause of IEC 60320-1 applies ~~amended as follows~~ applies.

~~12.1 General~~

~~The requirements of this subclause apply only to connectors and plug connectors.~~

~~For appliance inlets submitted as individual accessories not integrated or incorporated in an electrical appliance or equipment, particular requirements may be needed.~~

~~For appliance inlets integrated or incorporated in an electrical appliance or equipment, the requirements in the appropriate IEC standard for that equipment shall apply.~~

~~12.1.1 Replacement of first paragraph:~~

~~Rewirable accessories shall be provided with terminals with screw clamping.~~

~~Replacement of third paragraph:~~

~~Non-rewirable accessories shall be provided with soldered, welded, crimped or equally effective screwless connections, which shall not allow disconnection of the conductor; screwed connections shall not be used.~~

~~12.1.2 This subclause of IEC 60320-1 applies.~~

~~12.1.3 Replacement:~~

~~Rewirable accessories shall have terminals suitable for the connection of cords complying with 60227 IEC 53 and having conductor nominal cross-sectional areas of 0,75 mm² and 1 mm².~~

~~Compliance is checked by inspection, by measurement and by fitting conductors having nominal cross-sectional areas of 0,75 mm² and 1 mm².~~

~~12.2 Screw-type terminals~~

~~12.2.1 This subclause of IEC 60320-1 applies.~~

~~12.2.2 This subclause of IEC 60320-1 applies.~~

~~12.2.3 This subclause of IEC 60320-1 applies.~~

~~12.2.4 Replacement of fourth paragraph:~~

~~Each conductor is then subjected to a pull of 30 N ± 3 N applied without jerks for 60 s ± 5 s in the direction of the axis of the conductor space.~~

~~12.2.5 This subclause of IEC 60320-1 applies.~~

~~12.2.6 Replacement of third paragraph:~~

~~Terminals are fitted with a 1 mm² conductor.~~

~~12.2.7 This subclause of IEC 60320-1 applies.~~

~~12.2.8 Replacement of third paragraph:~~

~~A solid rigid copper conductor of 1 mm² nominal cross-sectional area is placed in the terminal.~~

~~12.2.9 This subclause of IEC 60320-1 does not apply.~~

~~12.2.10 This subclause of IEC 60320-1 does not apply.~~

~~12.2.11 This subclause of IEC 60320-1 does not apply.~~

~~12.2.12 This subclause of IEC 60320-1 applies.~~

~~The test conductor shall have a nominal cross-sectional area of 1 mm².~~

13 Construction

This clause of IEC 60320-1 applies ~~amended as follows~~ with the following additions:

~~13.1 This subclause of IEC 60320-1 does not apply.~~

~~13.2 This subclause of IEC 60320-1 applies.~~

~~13.3 This subclause of IEC 60320-1 applies.~~

~~13.4 This subclause of IEC 60320-1 applies.~~

~~13.5 Replacement:~~

~~Contacts of connectors shall be self-adjusting so as to provide adequate contact pressure.~~

~~The self-adjustment of the contacts shall not depend upon the resiliency of the insulating material.~~

~~Compliance is checked by inspection and by using the withdrawal pull gauge shown in figure 4 to check each individual line and neutral contact, ensuring that the hinged cover of the enclosure does not have any effect on the results of the test. During the test the connector contact shall retain the gauge for not less than 30 s when the connector is held vertically and the gauge is hanging downwards.~~

~~13.6 This subclause of IEC 60320-1 applies to all rewirable accessories.~~

~~The enclosure of rewirable accessories shall consist of more than one part and shall completely enclose the terminals and the end of the cord.~~

~~NOTE — Parts of the enclosure linked together by flexible means are considered to be separate parts.~~

~~The construction shall be such that, from the point of separation of the cores, the conductors can be properly connected and that, when the accessory is assembled and wired as in normal use, there is no risk of:~~

- ~~— the cores being pressed against each other;~~
- ~~— a core coming into contact with accessible metal parts;~~
- ~~— a core coming into contact with other live parts.~~

~~13.7 This subclause of IEC 60320-1 applies.~~

~~13.8 This subclause of IEC 60320-1 applies to connectors and to plug connectors.~~

~~13.9 This subclause of IEC 60320-1 does not apply.~~

~~13.10 This subclause of IEC 60320-1 applies to connectors and to plug connectors.~~

~~13.11 This subclause of IEC 60320-1 does not apply.~~

~~13.12 This subclause of IEC 60320-1 applies.~~

Additional subclauses (following 13.10):

13.101 Protection against ingress of water when in engagement

Appliance couplers shall incorporate means for ensuring the required degree of protection against ingress of water when ~~the inlet, plug connector and connector are in complete engagement with the complementary accessory~~ both parts of the appliance couplers are fully engaged.

Compliance is checked by inspection and by the test of 14.101.

13.102 Protection against ingress of water when not in engagement

A connector or plug connector, when fitted with a cord for normal use and when not in engagement with the complementary accessory, shall comply with Clause 10 and 14.101.

13.103 Covers for protection against ingress of water when not in engagement

Connectors and appliance outlets shall be provided with a cover to achieve the required degree of protection against moisture when the complementary accessory is not in position. The cover of a standardized appliance coupler shall be self-closing and shall be securely fixed to the connector or appliance outlet.

Compliance with the requirements of 13.102 and 13.103 is checked by the tests of Clauses 10, 20, 23, 28 and 14.101.

13.104 Protection against ingress of water for integrated appliance couplers

Appliance inlets and appliance outlets integrated or incorporated in the electrical appliance or equipment shall incorporate means of ensuring the required degree of protection against ingress of water, from the open interface to the terminals or terminations.

~~Non-rewirable plug connectors for incorporation in equipment shall be fitted with a cord of 500 mm or less (measured from the point of entry of the cord into the plug connector to the point of entry of the cord into the equipment).~~

Compliance is checked by inspection and the test of 14.101.

13.105 Requirements for cover springs

The cover spring(s), if any, of ~~a connector when fitted with a flexible cord as in normal use,~~ connectors and appliance outlets shall be sufficiently strong to rapidly close the cover when the complementary accessory is not engaged, and to withstand opening and closing in normal operation to an angle of not less than 90° and not more than 100°. The cover and associated spring(s), if any, shall withstand damage when opened to the fullest extent and shall be of corrosion-resistant materials.

This test is not applicable to couplers without retaining device, classified in 7.102.

Compliance with the requirements for corrosion-resistant materials is checked by the test of Clause 28.

Compliance is checked by inspection and by the following test. At the end of the test the cover shall close as required by this document.

The cover shall be opened to its fullest extent and allowed to close under the influence of the associated spring(s), in sequence, 4 000 times at a rate of 15 ± 2 times per minute.

14 Moisture resistance

This clause of IEC 60320-1 applies amended as follows:

Replacement of the ~~sixth~~ seventh paragraph:

The specimens are kept in the cabinet for 168 h (7 days).

Additional subclause:

14.101 Accessories shall have a degree of protection higher than IPX0 according to IEC 60529.

Compliance is checked by the appropriate test of IEC 60529 and with the treatment specified below, followed immediately by wiping the surplus surface water from the accessory and carrying out the electric strength test of Clause 15.

Accessories shall withstand the electric strength test and inspection shall show that water has not entered the samples to any appreciable extent and has not reached current-carrying parts.

Accessories designed for attachment by cord are tested as follows:

- a) for non-rewirable accessories, with the cord supplied;
- b) for 6 A rewirable accessories, with 0,75 mm² cord;
- c) for 10 A rewirable accessories, with 0,75 mm² and 1 mm² cord;
- d) for 16 A rewirable accessories, with 1 mm² and 1,5 mm² cord.

Appliance inlets and appliance outlets are tested when mounted in or on a suitable watertight enclosure, in accordance with the manufacturer's instructions for mounting.

Fixing screws of enclosures and covers are tightened with a torque equal to two-thirds of the appropriate torque given in Clause 25. The accessories are placed in the most unfavourable position.

Connectors and appliance outlets are tested with and also without the complementary accessory in engagement, the means for ensuring the required degree of protection against moisture (as specified in 13.102) being positioned as in normal use.

15 Insulation resistance and electric strength

This clause of IEC 60320-1 ~~is amended as follows~~ applies.

~~15.1 This subclause of IEC 60320-1 applies.~~

~~15.2 Replacement:~~

~~The insulation resistance is measured with a d.c. voltage of approximately 500 V applied, each measurement being made 60 s $\pm$ 5 s after the application of the voltage.~~

~~The insulation resistance is measured:~~

- ~~a) for appliance inlets with a connector in engagement, between the current-carrying pins connected together and the body;~~
- ~~b) for appliance inlets with a connector in engagement, between each current-carrying pin in turn and the other, the latter being connected to the body;~~
- ~~c) for connectors and plug connectors, between the current-carrying pins or contacts connected together and the body;~~
- ~~d) for connectors and plug connectors, between each current-carrying pin or contact in turn and the other, the latter being connected to the body;~~
- ~~e) for rewirable connectors and plug connectors, between any metal part of the cord anchorage, excluding clamping screws, and a metal rod, of the maximum diameter of the cord, inserted in its place.~~

~~NOTE — The maximum diameters of the cords are:~~

Type of cord	Number of cores and nominal cross-sectional area mm ²	Maximum diameter mm
60227 IEC 53	2 $\times$ 0,75	7,6
	2 $\times$ 1,0	8,0
60245 IEC 53	2 $\times$ 0,75	8,2
	2 $\times$ 1,0	8,8

~~The insulation resistance shall be not less than 5 M Ω .~~

~~The term "body" used in items a), b), c) and d) above includes all accessible metal parts, fixing screws, external assembly screws or the like and metal foil in contact with the outer surface of external parts of insulating material, including the engagement face of connectors (items c) and d)).~~

~~The metal foil is wrapped round the outer surface of external parts of insulating material; however, it is not pressed into openings.~~

~~15.3 Replacement~~

~~A voltage of substantially sine wave form with a frequency of 50 Hz to 60 Hz is applied for a period of not less than 1 min between the parts as indicated in 15.2.~~

~~The value of the test voltage is:~~

- ~~a) 4 000 V $\pm$ 60 V between current-carrying parts and the body;~~
- ~~b) 2 000 V $\pm$ 60 V between all other parts.~~

~~Initially, not more than half the prescribed voltage is applied, then it is raised rapidly to the full value.~~

~~No flashover or breakdown shall occur during the test.~~

~~NOTE 1 — The high voltage transformer used for the test must be so designed that, when the output terminals are short circuited after the output voltage has been adjusted to the appropriate test voltage, the output current is at least 200 mA. The overcurrent relay must not trip when the output current is less than 100 mA.~~

~~NOTE 2 — Care is taken that the r.m.s. value of the test voltage applied is measured within ± 3 %.~~

~~NOTE 3 — Glow discharges without drop in voltage are neglected.~~

16 Forces necessary to insert and to withdraw the connector/appliance outlet

This clause of IEC 60320-1 applies ~~amended as follows~~ with the following addition:

~~16.1 This subclause of IEC 60320-1 applies.~~

~~16.2 This subclause of IEC 60320-1 applies.~~

Additional subclause:

16.101 Verification of the retaining device

A retaining ~~catch~~ device shall be provided to prevent inadvertent disconnection of the accessories when engaged. The retaining catch shall operate correctly. It shall be possible to insert or withdraw the connector and operate the retaining catch with two hands without difficulty.


This test is not applicable to couplers without retaining device, classified in 7.101 b).

Compliance is checked by manual operation and by the following test. During this test the connection between the accessories shall be maintained during the application of the principal weight and shall disconnect when the supplementary weight is applied.

The maximum and minimum forces necessary to separate the coupler are determined by means of an apparatus as shown in Figure 3 101. This apparatus comprises a mounting plate (A) and an appliance coupler wired as in normal use (B), mounted so that the coupler hangs vertically with the plug connector or appliance inlet downwards.

IECNORM.COM : Click to view the full PDF of IEC 60320-2-3:2018 RLV

Dimensions in millimetres

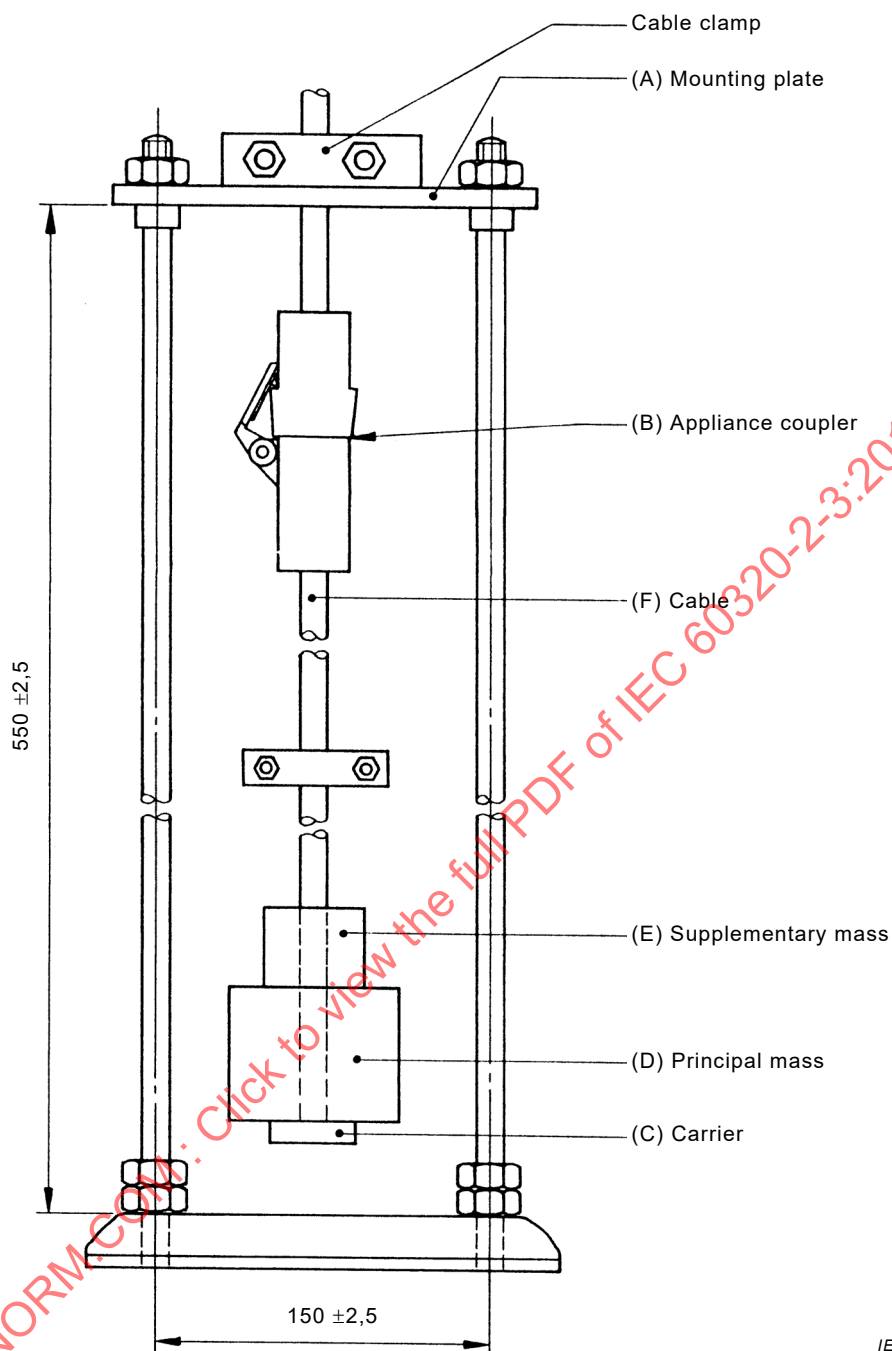

IEC

Figure 101 – Example of apparatus for inadvertent disengagement (see 16.101)

For rewirable appliance couplers using cord anchorages with clamping screws, these screws are tightened with a torque as given in 25.1.

The maximum and minimum separation forces provided by the retaining device are measured by inserting the connector into the plug connector or appliance inlet to the full depth. A carrier (C), with a principal ~~weight~~ mass (D) and a supplementary ~~weight~~ mass (E), is attached to the cord (F). The forces exerted by these components are given in Table 101. The principal ~~weight~~ mass is hung on without jolting the connector and the supplementary ~~weight~~ mass is allowed to fall from a height of 50 mm ± 2,5 mm onto the principal ~~weight~~ mass.

Table 101 – Pull forces for retaining devices

Component	Force N
Carrier (C) and principal weight mass (D)	60 ± 1
Supplementary weight mass (E)	30 ± 1

17 Operation of contacts

This clause of IEC 60320-1 applies.

18 Resistance to heating of appliance couplers for hot conditions or very hot conditions

This clause of IEC 60320-1 ~~does not apply~~ applies.

19 Breaking capacity

This clause of IEC 60320-1 applies amended as follows:

Replacement of ~~fourth~~ *seventh* paragraph:

The appliance inlet or plug connector is positioned so that the plane through the axes of the pins is horizontal and the cover removed or held open.

20 Normal operation

This clause of IEC 60320-1 applies amended as follows:

Addition:

The connector is tested with the cover removed or held open.

21 Temperature rise

This clause of IEC 60320-1 ~~is replaced~~ applies amended as follows:

~~Contacts and other current-carrying parts shall be so designed as to prevent excessive temperature rise due to the passage of current.~~

~~Compliance is checked by the following test.~~

~~Rewirable connectors and plug connectors are fitted with thermoplastic-insulated cords with a minimum length of 500 mm and a nominal cross-sectional area of 1 mm², the terminal screws being tightened with two-thirds of the torque specified in the appropriate column of the table of 25.1. Non-rewirable connectors and plug connectors are tested with the cord as delivered having a minimum length of 500 mm.~~

~~The connector is inserted into a plug connector complying with standard sheet B, except that pins shall have minimum dimensions with a tolerance of $\begin{smallmatrix} +0,02 \\ 0 \end{smallmatrix}$ mm, the distance between pin centres having the value specified in the standard sheet.~~

~~NOTE — Minimum dimensions implies the dimensions as given in standard sheet B with the stated negative tolerance applied.~~

~~Plug connectors are tested with a connector complying with this standard.~~

~~An alternating current of 1,25 times rated current, $\frac{0}{-0,5}$ A is passed through the current-carrying contacts for 1 h, or until steady conditions are attained, whichever is the longer.~~

~~The temperature is determined by means of thermocouples, which are so chosen and positioned that they have a negligible effect on the temperature being determined.~~

~~The temperature rise of terminals or terminations shall not exceed 45 K.~~

Table 8 Replacement of the rows for rewirable connectors:

Rewirable connectors	> 0,2 to ≤ 6	0,75	1,25 × rated current
	> 6 to ≤ 10	1,0	
	> 10	1,5	

22 Cords and their connection

This clause of IEC 60320-1 applies amended as follows:

22.1 Replacement:

~~Non-rewirable accessories shall be provided with a cord complying either with type 60227 IEC 53 or with type 60245 IEC 53 in accordance with the following table.~~

Type of coupler	Nominal cross-sectional area mm ²
Plug connector	0,75 — 1 as per appliance manufacturer's instructions
Connector with 2 m or less of attached cord	0,75 or 1
Connector with more than 2 m of attached cord	1

~~Compliance is checked by inspection.~~

22.2 Amendment:

~~This clause of IEC 60320-1 applies to connectors and to plug connectors.~~

22.3 Replacement:

For rewirable accessories:

- ~~— it shall be clear how the relief from strain and the prevention of twisting is intended to be effected;~~
- ~~— the cord anchorage, or at least part of it, shall be integral with or fixed to one of the other component parts of the accessory;~~
- ~~— makeshift methods, such as tying the cord into a knot or tying the ends with string, shall not be used;~~

- ~~— cord anchorages shall be suitable for the different types of cord which may be connected, and their effectiveness shall not depend upon the assembly of the parts of the body;~~
- ~~— cord anchorages shall be of insulating material or be provided with an insulating lining fixed to the metal parts;~~
- ~~— it shall not be possible for the cord to touch the clamping screws of the cord anchorage if these screws are accessible with the standard test finger shown in figure 10 of IEC 60320-1 or are electrically connected to accessible metal parts.~~

~~Compliance with the requirements of 22.2 and 22.3 is checked by inspection and by a pull test in an apparatus similar to that shown in figure 16 of IEC 60320-1, followed by a torque test.~~

~~Non-rewirable accessories are tested with the cord as delivered. Rewirable accessories are tested with a cord type 60227 IEC 53 or type 60245 IEC 53 with nominal cross-sectional area of 0,75 mm² and 1 mm².~~

~~Conductors of the cord of rewirable accessories are introduced into the terminals, and the terminal screws are tightened just sufficiently to prevent the conductors from easily changing their position.~~

~~The cord anchorage is used in the normal way, clamping screws being tightened with a torque equal to two-thirds of the appropriate torque specified in the appropriate column of the table of 25.1. After reassembly of the specimen, the component parts shall fit snugly and it shall not be possible to push the cord into the accessory to any appreciable extent.~~

~~The specimen is fixed in the test apparatus so that the axis of the cord is vertical where it enters the accessory.~~

~~The cord is then subjected 25 times to a pull of 150 N ± 3 N. The pulls are applied without jerks, each time for a minimum of 1 s.~~

~~Immediately afterwards, the cord is subjected for 60 s ± 5 s to a minimum torque of 0,15 Nm applied adjacent to the entry of the flexible cord.~~

~~During the tests, the cord shall not be damaged.~~

~~After the tests, the cord shall not have been displaced by more than 2 mm. For rewirable accessories, the ends of the conductors shall not have moved noticeably in the terminals; for non-rewirable accessories, there shall be no break in the electrical connections.~~

~~For the measurement of the longitudinal displacement, a mark is made on the cord before starting the test while subjecting it to a preliminary pull of the value specified; the mark is made at a distance of approximately 20 mm from the end of the accessory or the cord guard. If for non-rewirable accessories, there is no definite end to the accessory or the cord guard, an additional mark is made on the body, from which the distance to the other mark is measured.~~

~~After the tests, the displacement of the mark on the cord in relation to the accessory or the cord guard is measured while the cord is subjected to a pull of the value specified.~~

22.4 Replacement:

~~Accessories shall be so designed that the cord cannot be subjected to excessive bending where it enters the accessory.~~

~~Compliance is checked by inspection and the following test.~~

~~Accessories are subjected to a flexing test in an apparatus which has an oscillating member similar to that shown in figure 17 of IEC 60320-1.~~

~~Rewirable connectors and plug connectors are fitted with a 1 mm² cord, which has an appropriate length. The cord guard, if any, is put in place.~~

~~Non-rewirable connectors are tested with the cord as delivered.~~

~~The specimen is fixed to the oscillating member of the apparatus so that, when it is at the middle of its travel, the axis of the cord, where it enters the accessory, is vertical and passes through the axis of oscillation.~~

~~The oscillating member is, by variation of distance d shown in figure 17 of IEC 60320-1, so positioned that the cord makes the minimum lateral movement when the oscillating member of the test apparatus is moved over its full travel.~~

~~The cord is loaded so that the force applied is $20 \pm \frac{0}{2}$ N.~~

~~A current of 10 A $\pm$ 0,1 A is passed through the conductors, the voltage between them being equal to the rated voltage.~~

~~The oscillating member is moved backwards and forwards through an angle of 90° (45° $\pm$ 3° on either side of the vertical), the number of flexings being 20 000 for rewirable and non-rewirable accessories and the rate of flexing being 60 $\pm$ 1 per minute.~~

~~NOTE—A flexing is one movement, either backwards or forwards.~~

~~Accessories are rotated about the axis of the cord, through 90° in the oscillating member after half the required number of flexings.~~

~~The test shall be carried out on accessories not subjected to any other test.~~

~~During the test there shall be no interruption of the test current, and no short-circuit between conductors. A short-circuit between the conductors of the cord is considered to occur if the current attains a value equal to twice the rated current of the accessory.~~

~~After the test, the specimen shall show no damage within the meaning of this standard, the guard, if any, shall not have separated from the body and the insulation of the cord shall show no sign of abrasion or wear; moreover, for non-rewirable accessories, broken strands of the conductors shall not have pierced the insulation so as to become accessible.~~

Table 9 Replacement of the row for 6 A:

6 A	60227 IEC 53	0,75
	60245 IEC 53	

22.2.3 Pull test for cord anchorage

Replacement of Table 10:

Table 10 – Types of cord for the rewirable connector/plug connector test

Type of connector/plug connector	Type of cord ^a	Cross-sectional area	
		mm ²	
		Pull test acc. to 22.2.3	Flexing test acc. to 22.3
6 A for cold conditions	60227 IEC 53 and 60245 IEC 53	0,75	0,75
10 A for cold conditions	60227 IEC 53 and 60245 IEC 53	0,75 1,0	1,0
10 A for hot conditions	60245 IEC 53 60245 IEC 53	0,75 1,0	1,0
10 A for very hot conditions	60245 IEC 53 60245 IEC 53	0,75 1,0	1,0
16 A for cold conditions	60227 IEC 53 and 60245 IEC 53	1,0 1,5	1,5
16 A for very hot conditions	60245 IEC 53 60245 IEC 53	1,0 1,5	1,5
^a Other cable or cord with equivalent properties may also be used.			

Replacement of the fourth paragraph after Table 10:

The cord is then subjected 100 times to a pull of $150\text{ N} \pm 3\text{ N}$. The pulls are applied without jerks, each time for $1\text{ s} \pm 0,5\text{ s}$.

22.3 Replacement of the seventh, eighth and ninth paragraphs after Figure 7:

The cord is loaded so that the force applied is $20\text{ N} \pm 1\text{ N}$.

A current equal to the rated current of the connectors/plug connectors is passed through the conductors, the voltage between them being equal to the rated voltage. No current is passed through the earthing conductor, if any.

The oscillating member is moved backwards and forwards through an angle of $90^\circ \pm 3^\circ$ (45° on either side of the vertical), the number of flexings being 20 000 and the rate of flexing being 60 per minute ± 5 per minute.

23 Mechanical strength

This clause of IEC 60320-1 applies amended as follows:

~~23.1 Replacement:~~

~~Accessories shall have adequate mechanical strength.~~

~~Compliance is checked:~~

~~— for connectors, by the tests of 23.2, 23.3 and 23.7;~~

~~— for plug connectors, by the test of 23.2;~~

~~— for appliance inlets, by the test of 23.5.~~

~~NOTE — Shrouds of appliance inlets designed for flush mounting in an appliance or other equipment are not subjected to the test of 23.5.~~

~~23.2 This subclause of IEC 60320-1 applies amended as follows:~~

~~The number of falls shall be 500 with the connector and the plug connector connected together. Rewirable accessories shall be fitted with a cord type 60227 IEC 53 having a nominal cross-sectional area of 1 mm².~~

~~23.3 This subclause of IEC 60320-1 applies.~~

~~23.4 This subclause of IEC 60320-1 does not apply.~~

~~23.5 Replacement of first paragraph:~~

~~Appliance inlets designed for surface mounting and having a shroud of insulating material, other than elastomeric, thermoplastic or other resilient material are tested by means of the spring-operated impact test apparatus shown in figure 21 of IEC 60320-1. Before commencing the test, appliance inlets with enclosures of resilient or thermoplastic material, with their bases or cords, are placed in a refrigerator at a temperature of $5\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ for at least 16 h. When removed from the refrigerator, the appliance inlets are immediately subjected to the following test. Blows are applied to the specimen by means of the spring-operated impact test apparatus shown in figure 21 of IEC 60320-1.~~

~~Replacement of fifth paragraph:~~

~~The hammer head has a hemispherical face of polyamide having a Rockwell hardness of HR 100 and a radius of $10^{+0}_{-0,01}$ mm. It is fixed to the hammer shaft in such a way that the distance from its tip to the plane of the front of the cone when the striking element is on the point of release is 28 mm.~~

~~Replacement of seventh paragraph:~~

~~The hammer spring is adjusted so that the product of the compression, in millimetres, and the force exerted, in newtons, equals 2 000, the compression being approximately 28 mm. With this adjustment, the impact energy is $1\text{ J} \pm 0,05\text{ J}$.~~

~~Replacement of twelfth paragraph:~~

~~The specimen is rigidly supported and three blows are applied to every point that is likely to be weak.~~

~~Replacement of thirteenth paragraph:~~

~~After the test, the specimens shall show no damage within the meaning of this standard. In particular, live parts shall not have become accessible and the enclosure shall show no cracks visible to the naked eye. Appliance inlets shall comply with 14.101.~~

~~23.6 This subclause of IEC 60320-1 does not apply.~~

~~23.7 This subclause of IEC 60320-1 applies.~~

23.4 Replacement of third paragraph:

The impact energy is $1\text{ J} \pm 0,05\text{ J}$

Replacement of the last two paragraphs:

Before commencing the test, the appliance inlets/plug connectors with their bases or cords, are placed in a refrigerator at a temperature of $-5\text{ °C} \pm 2\text{ °C}$ for at least 16 h. When removed from the refrigerator, the appliance couplers are immediately subjected to the test.

The test sample is rigidly supported and 12 impacts are applied, three to each of four places chosen so as to include the weakest areas.

After the test, the specimens shall show no damage within the meaning of this document.

24 Resistance to heat and ageing

This clause of IEC 60320-1 applies ~~amended as follows~~.

~~24.1.1 This subclause of IEC 60320-1 applies.~~

~~24.1.2 This subclause of IEC 60320-1 applies.~~

~~24.1.3 Amendment:~~

~~This subclause of IEC 60320-1 applies to connectors and plug connectors.~~

~~24.2 This subclause of IEC 60320-1 applies.~~

25 Screws, current-carrying parts and connections

This clause of IEC 60320-1 applies ~~amended as follows~~.

~~25.1 This subclause of IEC 60320-1 applies.~~

~~25.2 This subclause of IEC 60320-1 applies.~~

~~25.3 This subclause of IEC 60320-1 applies.~~

~~25.4 This subclause of IEC 60320-1 applies.~~

~~25.5 This subclause of IEC 60320-1 applies.~~

~~25.6 This subclause of IEC 60320-1 applies.~~

~~25.7 This subclause of IEC 60320-1 applies.~~

~~25.8 This subclause of IEC 60320-1 does not apply.~~

26 Clearances, creepage distances, ~~clearances~~ and ~~distances through solid insulation~~

This clause of IEC 60320-1 applies ~~amended as follows~~.

~~Addition:~~

~~Accessories shall be tested with a flexible conductor having a nominal cross-sectional area of 1 mm^2 .~~

27 Resistance of insulating material to heat, fire and tracking

This clause of IEC 60320-1 applies amended as follows:

~~27.1 This subclause of IEC 60320-1 applies.~~

27.2 Replacement:

Insulating parts supporting, or in contact with, live parts of appliance couplers shall be of material resistant to tracking.

For materials other than ceramic, compliance is checked by the test of Annex A.

~~Compliance is checked, for materials other than ceramic, by the test described in IEC 60112. The test need not be made if the creepage distances have at least twice the values specified in clause 26.~~

27.2.1 Replacement:

~~Clause 3 of IEC 60112 is applicable.~~

~~NOTE — If it is not possible to carry out the test on a sample 3 mm thick, it is permitted to stack specimens to reach the 3 mm thickness value or else to use a plaque of the identical material 3 mm thick.~~

~~27.2.2 This subclause of IEC 60320-1 applies.~~

~~27.2.3 This subclause of IEC 60320-1 applies.~~

~~27.2.4 This subclause of IEC 60320-1 applies.~~

28 Resistance to rusting

This clause of IEC 60320-1 applies.

29 Electromagnetic compatibility (EMC) requirements

This clause of IEC 60320-1 applies.

Annex A
(normative)

Proof tracking test

This annex of IEC 60320-1 applies.

IECNORM.COM : Click to view the full PDF of IEC 60320-2-3:2018 RLV

Annex ~~A~~ B
(~~informative~~ normative)

Routine tests for factory wired appliance couplers related to safety
~~(protection against electric shock and correct polarity)~~

This annex of IEC 60320-1 applies.

IECNORM.COM : Click to view the full PDF of IEC 60320-2-3:2018 RLV

FEUILLE DE NORME B



STANDARD SHEET B

SOCLE DE CONNECTEUR 10 A 250 V
POUR CONDITIONS FROIDES
POUR MATÉRIELS DE LA CLASSE II, IPX4


10 A 250 V APPLIANCE INLET
FOR COLD CONDITIONS
FOR CLASS II EQUIPMENT IPX4

Dimensions en millimètres

Dimensions in millimetres

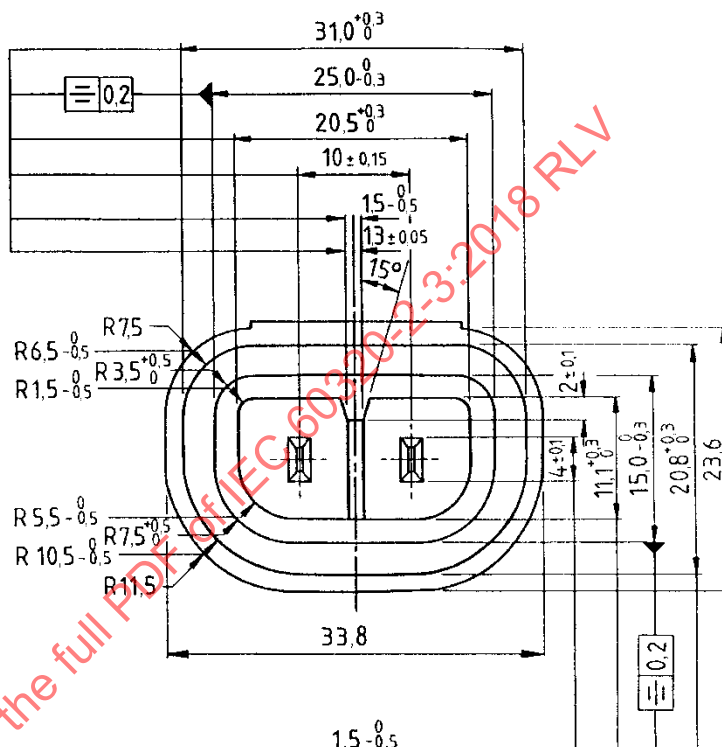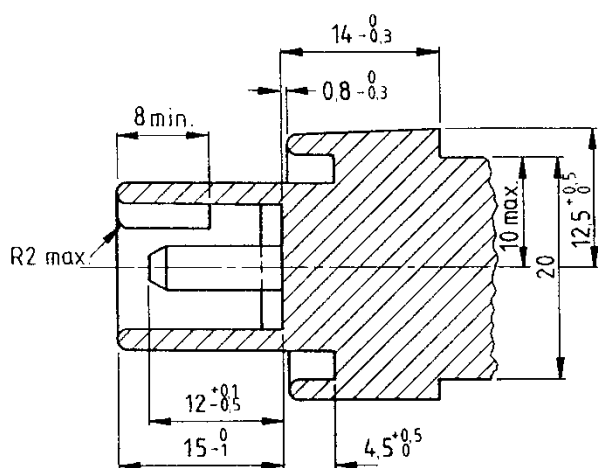

Variantes pour la forme des broches.
Alternatives for the shape of pins

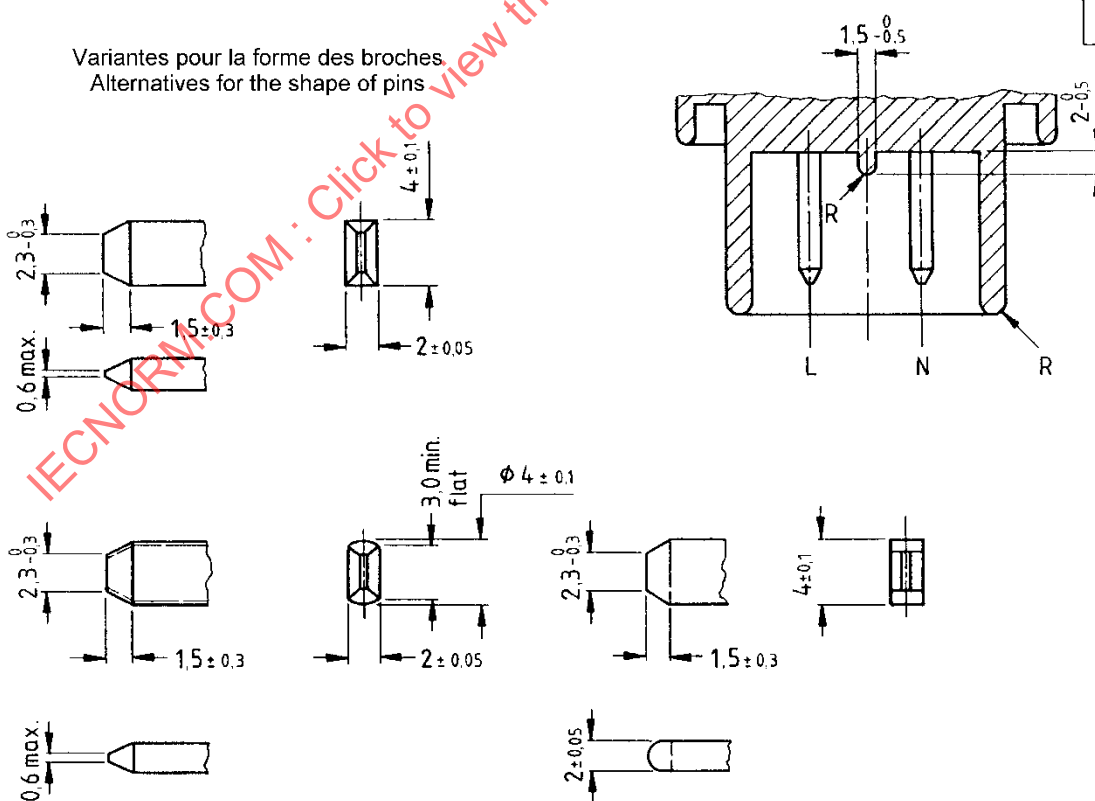


IEC 1 351/98

Les dessins ne préjugent pas des détails non cotés. Les dimensions sans tolérances sont seulement des recommandations.


The sketches are not intended to govern design, except as regards the dimensions shown. Dimensions without tolerances are only recommended.

~~Dimensions in millimetres~~

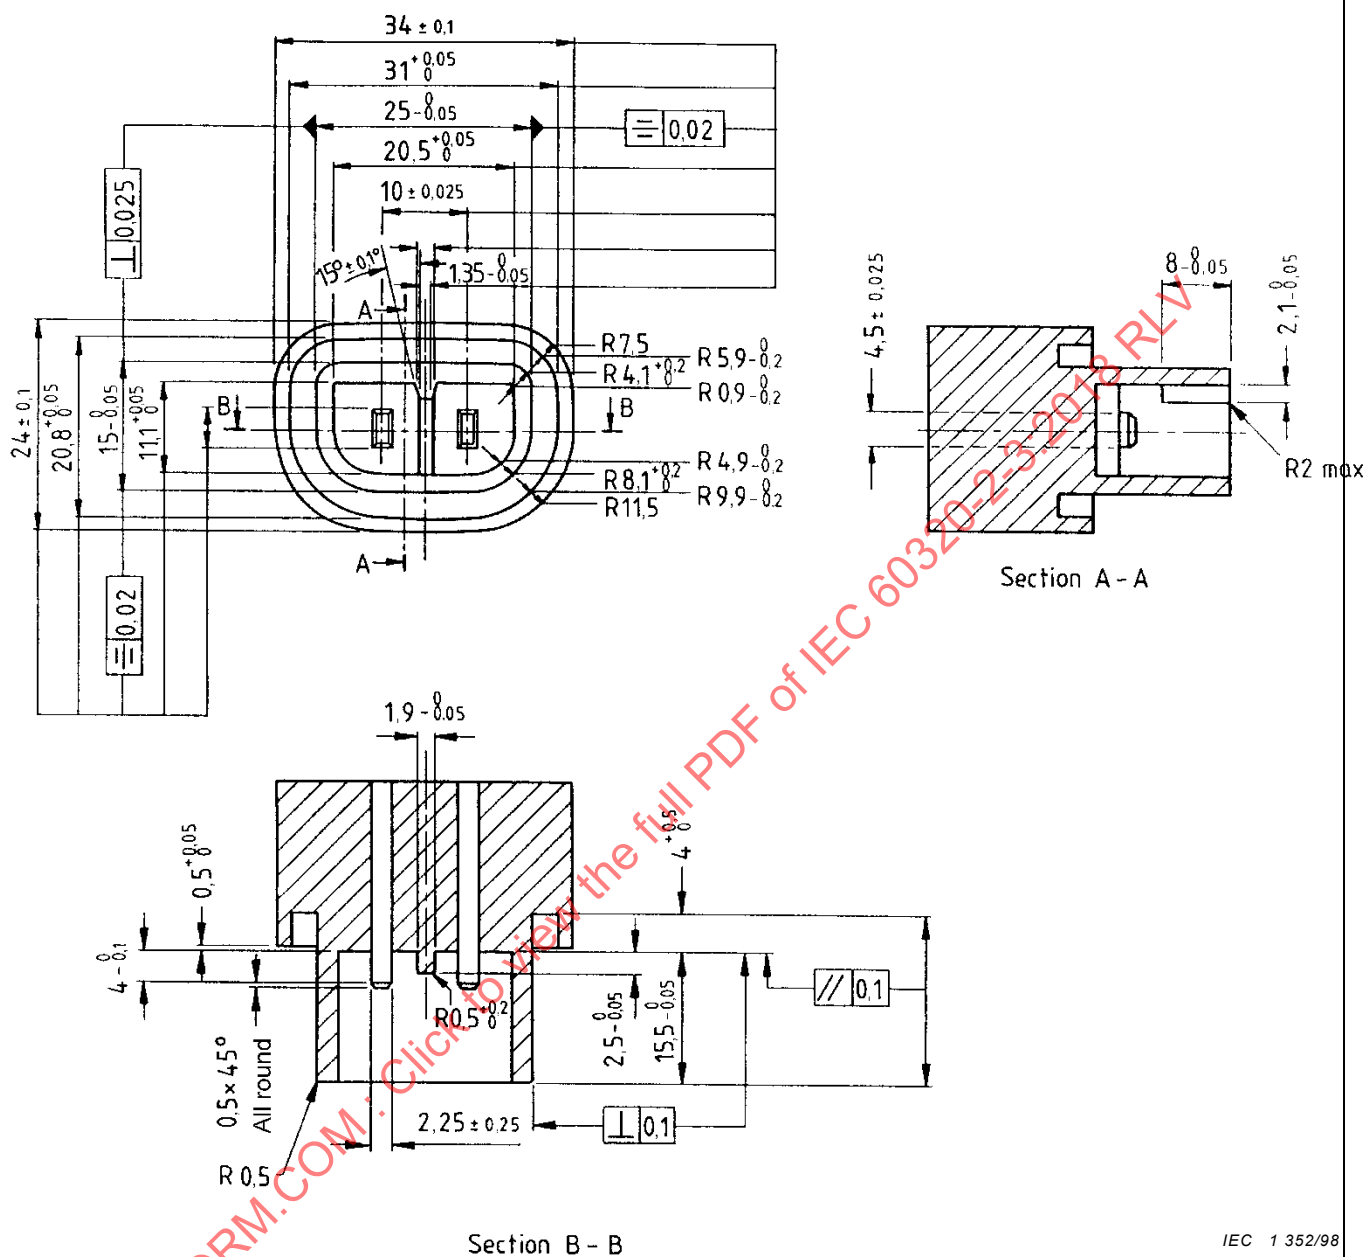

~~Gauge and pins: hardened steel.~~

~~Figure 1 – "GO" gauge for connectors according to standard sheet A (see 9.1)~~

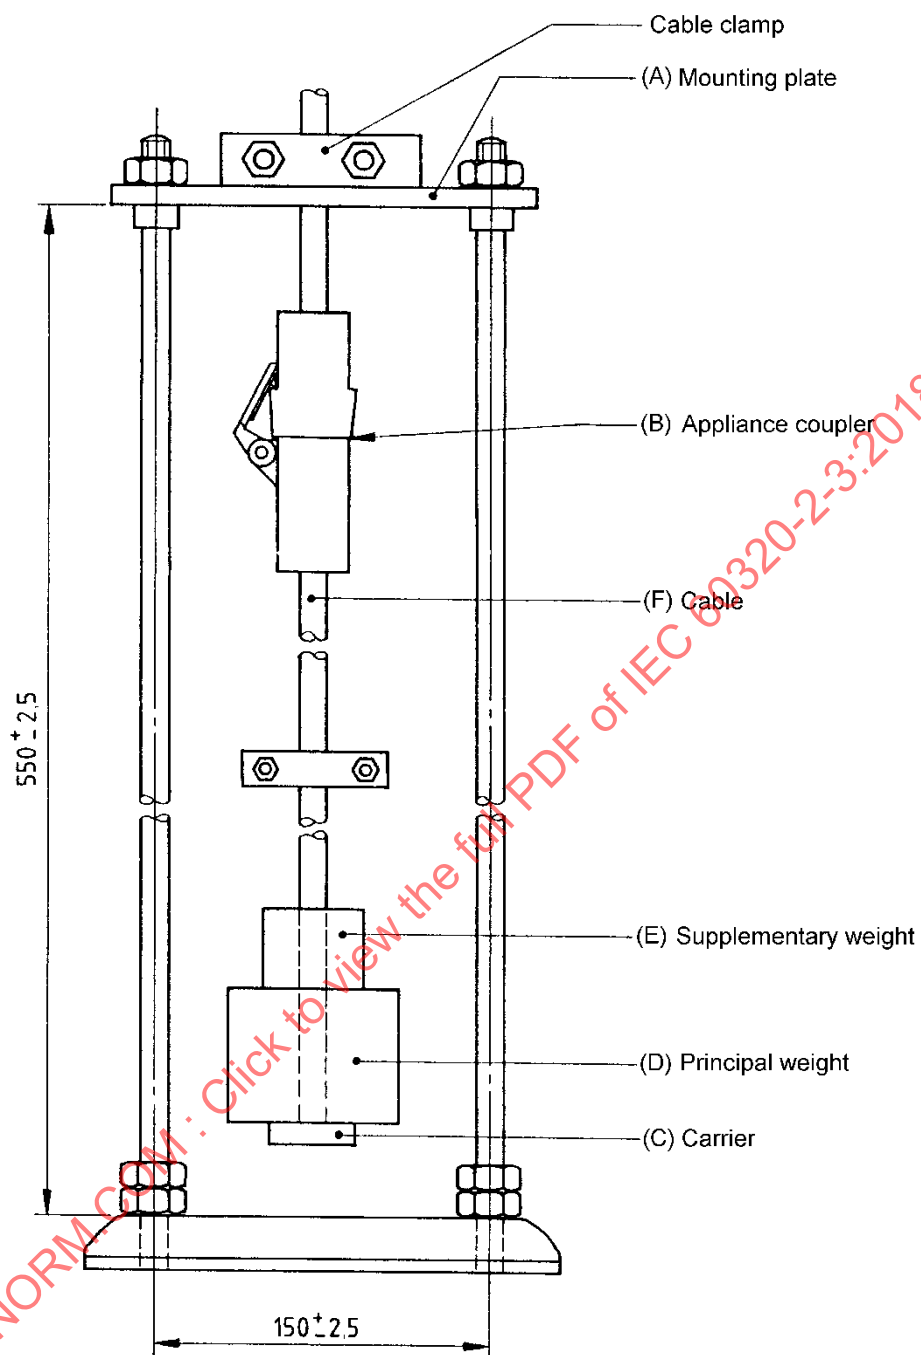Dimensions in millimetres

IEC 1 354/98

Figure 3 — Example of apparatus for inadvertent disengagement (see 16.101)

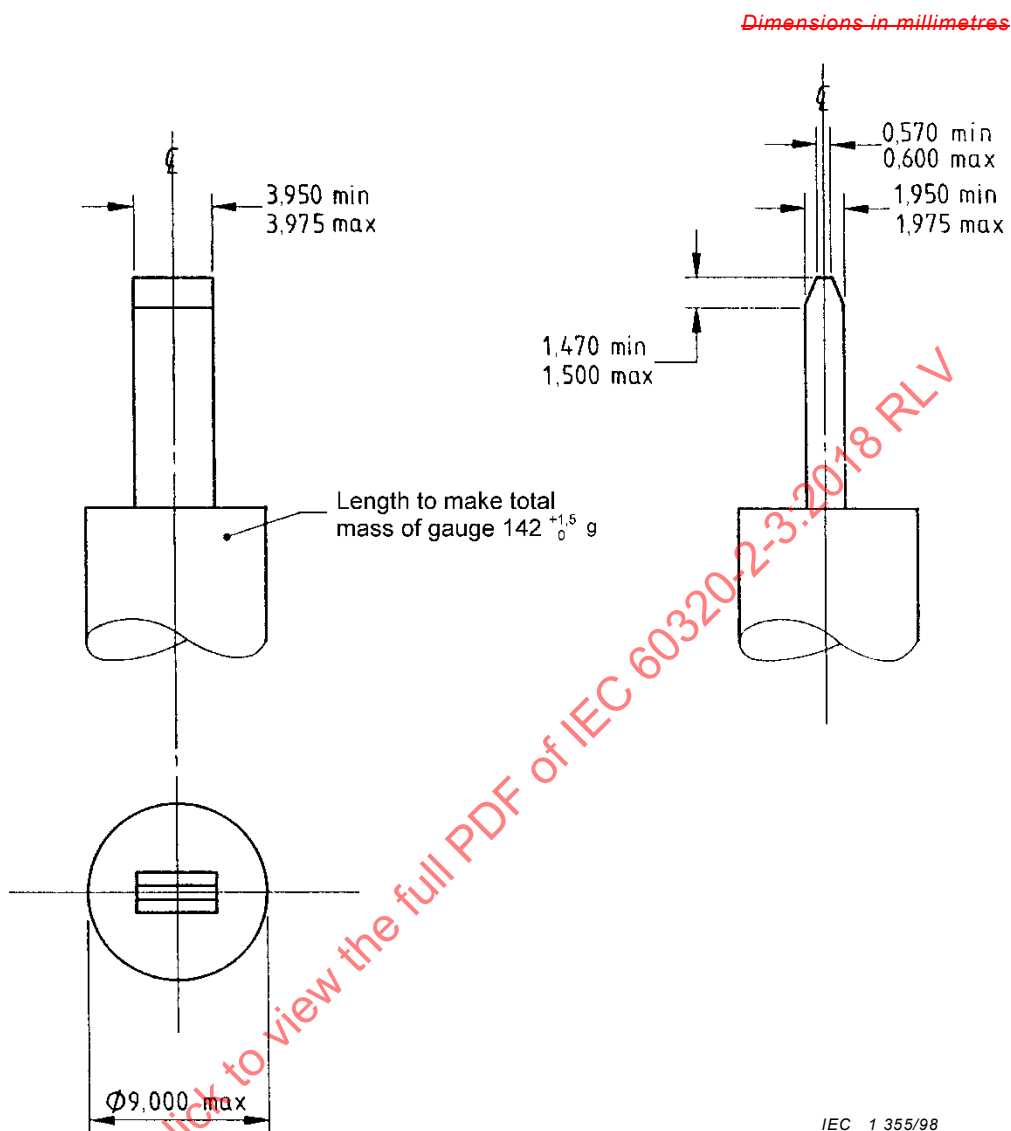


Figure 4 — Withdrawal pull gauge (see 13.5)

Annex C

(normative)

Test schedule

This annex of IEC 60320-1 applies amended as follows:

Addition of two new rows in Table C.1:

3 samples	14.101	IP test	X	X	X	X
3 samples	16.101	Retaining device test	X	X	X	X

IECNORM.COM : Click to view the full PDF of IEC 60320-2-3:2018 RLV

Annex D
(informative)

Comparison of typical conductor cross-sectional areas

This annex of IEC 60320-1 applies.

IECNORM.COM : Click to view the full PDF of IEC 60320-2-3:2018 RLV

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Appliance couplers for household and similar general purposes –
Part 2-3: Appliance couplers with a degree of protection higher than IPX0**

**Connecteurs pour usages domestiques et usages généraux analogues –
Partie 2-3: Connecteurs avec degré de protection supérieur à IPX0**

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references	5
3 Terms and definitions	5
4 General requirements	6
5 General notes on tests	6
6 Standard ratings	6
7 Classification	6
8 Marking	6
9 Dimensions and compatibility	7
10 Protection against electric shock	7
11 Provision for earthing	7
12 Terminals and terminations.....	8
13 Construction	8
14 Moisture resistance	9
15 Insulation resistance and electric strength	9
16 Forces necessary to insert and to withdraw the connector/appliance outlet.....	10
17 Operation of contacts	12
18 Resistance to heating of appliance couplers for hot conditions or very hot conditions.....	12
19 Breaking capacity	12
20 Normal operation	12
21 Temperature rise	12
22 Cords and their connection	12
23 Mechanical strength	13
24 Resistance to heat and ageing.....	14
25 Screws, current-carrying parts and connections.....	14
26 Clearances, creepage distances and solid insulation	14
27 Resistance of insulating material to heat, fire and tracking	14
28 Resistance to rusting	14
29 Electromagnetic compatibility (EMC) requirements	14
Annex A (normative) Proof tracking test.....	15
Annex B (normative) Routine tests for factory wired appliance couplers related to safety.....	16
Annex C (normative) Test schedule	17
Annex D (informative) Comparison of typical conductor cross-sectional areas	18
Figure 101 – Example of apparatus for inadvertent disengagement (see 16.101).....	11
Table 101 – Pull forces for retaining devices.....	12
Table 10 – Types of cord for the rewirable connector/plug connector test	13

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**APPLIANCE COUPLERS FOR HOUSEHOLD
AND SIMILAR GENERAL PURPOSES –****Part 2-3: Appliance couplers with a degree
of protection higher than IPX0**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60320-2-3 has been prepared by subcommittee 23G: Appliance couplers, of IEC technical committee 23: Electrical accessories.

This second edition cancels and replaces the first edition published in 1998 and Amendment 1:2004. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) Aligned with IEC 60320-1:2015.
- b) The scope is extended to cover current ratings up to and including 16 A.
- c) The scope is extended to cover Class I appliance couplers.

- d) The scope is extended to cover appliance couplers for hot and very hot conditions.
- e) Added classification regarding the use of retaining devices.
- f) Added classification for indoor and outdoor use.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
23G/401/FDIS	23G/403/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

This Part 2-3 is to be used in conjunction with IEC 60320-1: *Appliance couplers for household and similar general purposes – Part 1: General requirements*. It was established on the basis of the third edition of that standard (2015).

The clauses of this standard supplement or modify the corresponding clauses in IEC 60320-1. When a particular subclause or annex of Part 1 is not mentioned in this Part 2-3, the subclause or annex of IEC 60320-1 applies as far as is reasonable. Where this standard states “addition”, “amendment” or “replacement”, the relevant requirement, test specification or explanatory matter in IEC 60320-1 is to be adapted accordingly.

Subclauses which are additional to those in Part 1 are numbered starting from 101.

In this particular standard the following print types are used:

- requirements: in roman type;
- *test specifications: in italic type;*
- explanatory matter: in smaller roman type.

A list of all parts in the IEC 60320 series, published under the general title *Appliance couplers for household and similar general purposes*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

APPLIANCE COUPLERS FOR HOUSEHOLD AND SIMILAR GENERAL PURPOSES –

Part 2-3: Appliance couplers with a degree of protection higher than IPX0

1 Scope

This clause of IEC 60320-1 applies with the following addition:

This document applies to appliance couplers with a degree of protection against ingress of water higher than IPX0.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

This clause of IEC 60320-1 applies with the following additions:

IEC 60320-1, *Appliance couplers for household and similar general purposes – Part 1: General requirements*

IEC 60320-3, *Appliance couplers for household and similar general purposes – Part 3: Standard sheets and gauges*

IEC 60529, *Degrees of protection provided by enclosures (IP code)*

3 Terms and definitions

This clause of IEC 60320-1 applies with the following additions:

3.101

accessible surface

surface of an accessory that can be touched by means of the test probe B of IEC 61032 (standard test finger), when the accessory is assembled as in normal use and in the following conditions:

- a) for connectors and appliance outlets: without the complementary accessory in engagement but with the cover in the open position;
- b) for plug connectors and appliance inlets: with the complementary accessory in the most unfavourable degree of engagement but such that electrical contact is made between the contacts (pins and tubes).

3.102

cover

part that is accessible when the accessory is in normal use and removable only with the use of a tool, but which does not require the use of a tool to open it

4 General requirements

This clause of IEC 60320-1 applies.

5 General notes on tests

This clause of IEC 60320-1 applies.

6 Standard ratings

This clause of IEC 60320-1 applies.

7 Classification

This clause of IEC 60320-1 applies with the following additions:

7.101 Retaining devices:

- a) with retaining device
- b) without retaining device

7.102 Appliance coupler without retaining device.

NOTE Only to be used where permitted by the end product standard.

8 Marking

This clause of IEC 60320-1 applies amended as follows:

8.2 Addition:

- IP rating.

8.4 Addition:

IP rating for example IPX4

NOTE 101 In the IP code the letter "X" is replaced by the relevant number.

Additional subclauses (following 8.8):

8.101 Colours of outdoor cables

Cords of non-rewirable accessories for outdoor use shall not be coloured black, green, white or brown.

8.102 Instructions for retail sale

For couplers intended for retail sale the supplier shall include an instruction leaflet, on or inside the sales package, with each coupler or accessory, clearly describing the extent of its suitability for use outdoors. Information regarding weather resistance shall be clearly visible to the purchaser and a recommendation shall be made that the cord to be fitted to the accessory should not be coloured black, green, white or brown. The instruction sheet shall include information stating that the plug connector shall be connected to the equipment and the connector to the mains supply side.

If the coupler or accessory is non-rewirable with a cord attached, each free end shall be marked for connection to the appliance or mains supply as appropriate, with guidance on the danger of an incorrect connection or of a connection to an appliance requiring the protection of an earth continuity conductor.

Except when a plug connector or appliance inlet fitted with a cord is supplied direct to a manufacturer for incorporation in other equipment, the free end of such an assembly shall have a label attached stating:

"The cord of this accessory must be properly connected to a piece of equipment before the appliance is energized."

If the coupler or accessory is rewirable, instructions shall be provided on the following:

- a) stripping lengths for sheath and insulation;
- b) identity of accessories to be connected to appliance or mains cord, as appropriate;
- c) connection of brown wire to terminal marked L and blue wire to terminal marked N;
- d) importance of correct assembly of cord anchorage including need for at least 3 mm of sheath to protrude beyond the clamping device;
- e) suitable for use with circular type cords only.

Compliance with the requirements of 8.101 and 8.102 is checked by inspection.

9 Dimensions and compatibility

This clause of IEC 60320-1 applies with the following addition:

Additional subclause (following 9.5):

9.101 Retaining devices

For standardized appliance couplers the provision for retaining the connector in the plug connector or appliance inlet shall comply with the relevant standard sheets.

NOTE The relevant standard sheets can be found in IEC 60320-3.

Compliance is checked by the tests of 16.101.

For non-standardized appliance couplers the provision for retaining the connector in the plug connector or appliance inlet shall comply with the manufacturer's specifications.

10 Protection against electric shock

This clause of IEC 60320-1 applies amended as follows:

10.1 Addition after the second paragraph:

Test is performed with the cover open.

11 Provision for earthing

This clause of IEC 60320-1 applies.

12 Terminals and terminations

This clause of IEC 60320-1 applies.

13 Construction

This clause of IEC 60320-1 applies with the following additions:

Additional subclauses (following 13.10):

13.101 Protection against ingress of water when in engagement

Appliance couplers shall incorporate means for ensuring the required degree of protection against ingress of water when both parts of the appliance couplers are fully engaged.

Compliance is checked by inspection and by the test of 14.101.

13.102 Protection against ingress of water when not in engagement

A connector or plug connector, when fitted with a cord for normal use and when not in engagement with the complementary accessory, shall comply with Clause 10 and 14.101.

13.103 Covers for protection against ingress of water when not in engagement

Connectors and appliance outlets shall be provided with a cover to achieve the required degree of protection against moisture when the complementary accessory is not in position. The cover of a standardized appliance coupler shall be self-closing and shall be securely fixed to the connector or appliance outlet.

Compliance with the requirements of 13.102 and 13.103 is checked by the tests of Clauses 10, 20, 23, 28 and 14.101.

13.104 Protection against ingress of water for integrated appliance couplers

Appliance inlets and appliance outlets integrated or incorporated in the electrical appliance or equipment shall incorporate means of ensuring the required degree of protection against ingress of water, from the open interface to the terminals or terminations.

Compliance is checked by inspection and the test of 14.101.

13.105 Requirements for cover springs

The cover spring(s), if any, of connectors and appliance outlets shall be sufficiently strong to rapidly close the cover when the complementary accessory is not engaged, and to withstand opening and closing in normal operation to an angle of not less than 90° and not more than 100°. The cover and associated spring(s), if any, shall withstand damage when opened to the fullest extent and shall be of corrosion-resistant materials.

This test is not applicable to couplers without retaining device, classified in 7.102.

Compliance with the requirements for corrosion-resistant materials is checked by the test of Clause 28.

Compliance is checked by inspection and by the following test. At the end of the test the cover shall close as required by this document.

The cover shall be opened to its fullest extent and allowed to close under the influence of the associated spring(s), in sequence, 4 000 times at a rate of 15 ± 2 times per minute.

14 Moisture resistance

This clause of IEC 60320-1 applies amended as follows:

Replacement of the seventh paragraph:

The specimens are kept in the cabinet for 168 h (7 days).

Additional subclause:

14.101 Accessories shall have a degree of protection higher than IPX0 according to IEC 60529.

Compliance is checked by the appropriate test of IEC 60529 and with the treatment specified below, followed immediately by wiping the surplus surface water from the accessory and carrying out the electric strength test of Clause 15.

Accessories shall withstand the electric strength test and inspection shall show that water has not entered the samples to any appreciable extent and has not reached current-carrying parts.

Accessories designed for attachment by cord are tested as follows:

- a) for non-rewirable accessories, with the cord supplied;
- b) for 6 A rewirable accessories, with 0,75 mm² cord;
- c) for 10 A rewirable accessories, with 0,75 mm² and 1 mm² cord;
- d) for 16 A rewirable accessories, with 1 mm² and 1,5 mm² cord.

Appliance inlets and appliance outlets are tested when mounted in or on a suitable watertight enclosure, in accordance with the manufacturer's instructions for mounting.

Fixing screws of enclosures and covers are tightened with a torque equal to two-thirds of the appropriate torque given in Clause 25. The accessories are placed in the most unfavourable position.

Connectors and appliance outlets are tested with and also without the complementary accessory in engagement, the means for ensuring the required degree of protection against moisture (as specified in 13.102) being positioned as in normal use.

15 Insulation resistance and electric strength

This clause of IEC 60320-1 applies.

16 Forces necessary to insert and to withdraw the connector/appliance outlet

This clause of IEC 60320-1 applies with the following addition:

Additional subclause:

16.101 Verification of the retaining device

A retaining device shall be provided to prevent inadvertent disconnection of the accessories when engaged. The retaining catch shall operate correctly. It shall be possible to insert or withdraw the connector and operate the retaining catch with two hands without difficulty.

This test is not applicable to couplers without retaining device, classified in 7.101 b).

Compliance is checked by manual operation and by the following test. During this test the connection between the accessories shall be maintained during the application of the principal weight and shall disconnect when the supplementary weight is applied.

The maximum and minimum forces necessary to separate the coupler are determined by means of an apparatus as shown in Figure 101. This apparatus comprises a mounting plate (A) and an appliance coupler wired as in normal use (B), mounted so that the coupler hangs vertically with the plug connector or appliance inlet downwards.

IECNORM.COM : Click to view the full PDF of IEC 60320-2-3:2018 RLV

Dimensions in millimetres

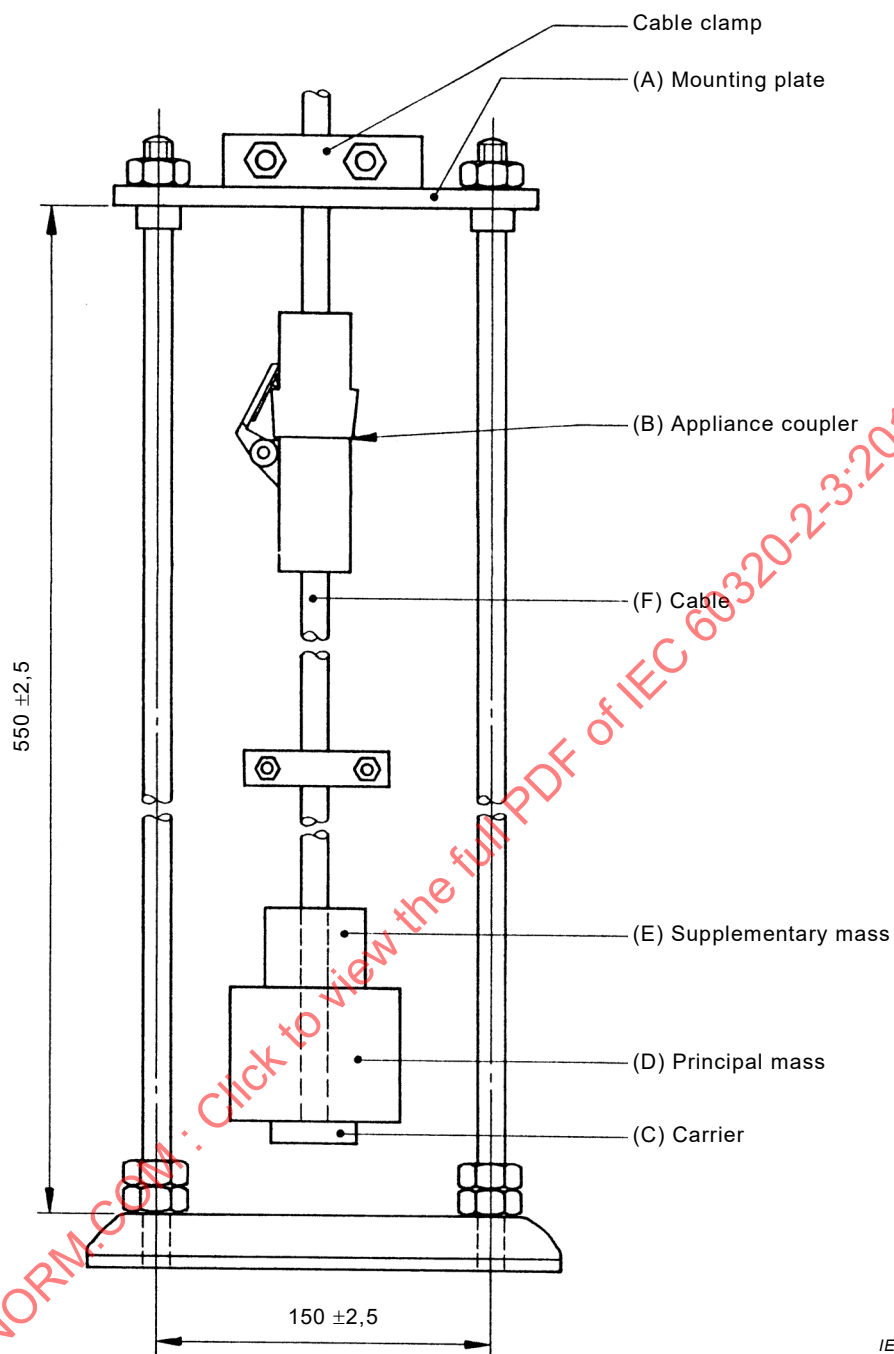


Figure 101 – Example of apparatus for inadvertent disengagement (see 16.101)

For rewirable appliance couplers using cord anchorages with clamping screws, these screws are tightened with a torque as given in 25.1.

The maximum and minimum separation forces provided by the retaining device are measured by inserting the connector into the plug connector or appliance inlet to the full depth. A carrier (C), with a principal mass (D) and a supplementary mass (E), is attached to the cord (F). The forces exerted by these components are given in Table 101. The principal mass is hung on without jolting the connector and the supplementary mass is allowed to fall from a height of 50 mm ± 2,5 mm onto the principal mass.

Table 101 – Pull forces for retaining devices

Component	Force N
Carrier (C) and principal mass (D)	60 ± 1
Supplementary mass (E)	30 ± 1

17 Operation of contacts

This clause of IEC 60320-1 applies.

18 Resistance to heating of appliance couplers for hot conditions or very hot conditions

This clause of IEC 60320-1 applies.

19 Breaking capacity

This clause of IEC 60320-1 applies amended as follows:

Replacement of seventh paragraph:

The appliance inlet or plug connector is positioned so that the plane through the axes of the pins is horizontal and the cover removed or held open.

20 Normal operation

This clause of IEC 60320-1 applies amended as follows:

Addition:

The connector is tested with the cover removed or held open.

21 Temperature rise

This clause of IEC 60320-1 applies amended as follows:

Table 8 *Replacement of the rows for rewirable connectors:*

Rewirable connectors	> 0,2 to ≤ 6	0,75	1,25 × rated current
	> 6 to ≤ 10	1,0	
	> 10	1,5	

22 Cords and their connection

This clause of IEC 60320-1 applies amended as follows:

Table 9 Replacement of the row for 6 A:

6 A	60227 IEC 53	0,75
	60245 IEC 53	

22.2.3 Pull test for cord anchorage

Replacement of Table 10:

Table 10 – Types of cord for the rewirable connector/plug connector test

Type of connector/plug connector	Type of cord ^a	Cross-sectional area mm ²	
		Pull test acc. to 22.2.3.	Flexing test acc. to 22.3
6 A for cold conditions	60227 IEC 53 and 60245 IEC 53	0,75	0,75
10 A for cold conditions	60227 IEC 53 and 60245 IEC 53	0,75 1,0	1,0
10 A for hot conditions	60245 IEC 53 60245 IEC 53	0,75 1,0	1,0
10 A for very hot conditions	60245 IEC 53 60245 IEC 53	0,75 1,0	1,0
16 A for cold conditions	60227 IEC 53 and 60245 IEC 53	1,0 1,5	1,5
16 A for very hot conditions	60245 IEC 53 60245 IEC 53	1,0 1,5	1,5
^a Other cable or cord with equivalent properties may also be used.			

Replacement of the fourth paragraph after Table 10:

The cord is then subjected 100 times to a pull of $150 \text{ N} \pm 3 \text{ N}$. The pulls are applied without jerks, each time for $1 \text{ s} \pm 0,5 \text{ s}$.

22.3 Replacement of the seventh, eighth and ninth paragraphs after Figure 7:

The cord is loaded so that the force applied is $20 \text{ N} \pm 1 \text{ N}$.

A current equal to the rated current of the connectors/plug connectors is passed through the conductors, the voltage between them being equal to the rated voltage. No current is passed through the earthing conductor, if any.

The oscillating member is moved backwards and forwards through an angle of $90^\circ \pm 3^\circ$ (45° on either side of the vertical), the number of flexings being 20 000 and the rate of flexing being 60 per minute $\pm$ 5 per minute.

23 Mechanical strength

This clause of IEC 60320-1 applies amended as follows:

23.4 Replacement of third paragraph:

The impact energy is $1 \text{ J} \pm 0,05 \text{ J}$

Replacement of the last two paragraphs:

Before commencing the test, the appliance inlets/plug connectors with their bases or cords, are placed in a refrigerator at a temperature of $-5\text{ °C} \pm 2\text{ °C}$ for at least 16 h. When removed from the refrigerator, the appliance couplers are immediately subjected to the test.

The test sample is rigidly supported and 12 impacts are applied, three to each of four places chosen so as to include the weakest areas.

After the test, the specimens shall show no damage within the meaning of this document.

24 Resistance to heat and ageing

This clause of IEC 60320-1 applies.

25 Screws, current-carrying parts and connections

This clause of IEC 60320-1 applies.

26 Clearances, creepage distances and solid insulation

This clause of IEC 60320-1 applies.

27 Resistance of insulating material to heat, fire and tracking

This clause of IEC 60320-1 applies amended as follows:

27.2 Replacement:

Insulating parts supporting, or in contact with, live parts of appliance couplers shall be of material resistant to tracking.

For materials other than ceramic, compliance is checked by the test of Annex A.

28 Resistance to rusting

This clause of IEC 60320-1 applies.

29 Electromagnetic compatibility (EMC) requirements

This clause of IEC 60320-1 applies.

Annex A
(normative)

Proof tracking test

This annex of IEC 60320-1 applies.

IECNORM.COM : Click to view the full PDF of IEC 60320-2-3:2018 RLV

Annex B
(normative)

Routine tests for factory wired appliance couplers related to safety

This annex of IEC 60320-1 applies.

IECNORM.COM : Click to view the full PDF of IEC 60320-2-3:2018 RLV

Annex C

(normative)

Test schedule

This annex of IEC 60320-1 applies amended as follows:

Addition of two new rows in Table C.1:

3 samples	14.101	IP test	X	X	X	X
3 samples	16.101	Retaining device test	X	X	X	X

IECNORM.COM : Click to view the full PDF of IEC 60320-2-3:2018 RLV

Annex D
(informative)

Comparison of typical conductor cross-sectional areas

This annex of IEC 60320-1 applies.

IECNORM.COM : Click to view the full PDF of IEC 60320-2-3:2018 RLV

IECNORM.COM : Click to view the full PDF of IEC 60320-2-3:2018 RLV

SOMMAIRE

AVANT-PROPOS	21
1 Domaine d'application	23
2 Références normatives	23
3 Termes et définitions	23
4 Exigences générales	24
5 Généralités sur les essais.....	24
6 Valeurs assignées normales	24
7 Classification	24
8 Marquage	24
9 Dimensions et compatibilité	25
10 Protection contre les chocs électriques.....	25
11 Dispositions en vue de la mise à la terre	26
12 Bornes et sorties	26
13 Construction	26
14 Résistance à l'humidité.....	27
15 Résistance d'isolement et rigidité diélectrique	28
16 Forces nécessaires pour insérer et pour retirer la prise mobile/socle femelle de connecteur	28
17 Fonctionnement des contacts	30
18 Résistance à l'échauffement des connecteurs pour conditions chaudes ou très chaudes.....	30
19 Pouvoir de coupure	30
20 Fonctionnement normal	30
21 Échauffement	30
22 Cordons et leur raccordement.....	30
23 Résistance mécanique.....	31
24 Résistance à la chaleur et au vieillissement.....	32
25 Vis, parties transportant le courant et connexions.....	32
26 Distances d'isolement, lignes de fuite et isolation solide	32
27 Résistance du matériau isolant à la chaleur, au feu et au cheminement.....	32
28 Protection contre la rouille	32
29 Exigences relatives à la compatibilité électromagnétique (CEM).....	32
Annexe A (normative) Essai de tenue au cheminement.....	33
Annexe B (normative) Essais individuels de série, portant sur la sécurité, pour les connecteurs câblés en usine	34
Annexe C (normative) Programme d'essais.....	35
Annexe D (informative) Comparaison des sections de conducteurs types	36
Figure 101 – Exemple d'appareillage d'essai de séparation involontaire (voir 16.101).....	29
Tableau 101 – Forces de traction pour dispositifs de retenue.....	30
Tableau 10 – Types de cordons pour l'essai de prise mobile/fiche mobile mâle démontable	31

COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

**CONNECTEURS POUR USAGES DOMESTIQUES
ET USAGES GÉNÉRAUX ANALOGUES –****Partie 2-3: Connecteurs avec degré
de protection supérieur à IPX0**

AVANT-PROPOS

- 1) La Commission Electrotechnique Internationale (IEC) est une organisation mondiale de normalisation composée de l'ensemble des comités électrotechniques nationaux (Comités nationaux de l'IEC). L'IEC a pour objet de favoriser la coopération internationale pour toutes les questions de normalisation dans les domaines de l'électricité et de l'électronique. A cet effet, l'IEC – entre autres activités – publie des Normes internationales, des Spécifications techniques, des Rapports techniques, des Spécifications accessibles au public (PAS) et des Guides (ci-après dénommés "Publication(s) de l'IEC"). Leur élaboration est confiée à des comités d'études, aux travaux desquels tout Comité national intéressé par le sujet traité peut participer. Les organisations internationales, gouvernementales et non gouvernementales, en liaison avec l'IEC, participent également aux travaux. L'IEC collabore étroitement avec l'Organisation Internationale de Normalisation (ISO), selon des conditions fixées par accord entre les deux organisations.
- 2) Les décisions ou accords officiels de l'IEC concernant les questions techniques représentent, dans la mesure du possible, un accord international sur les sujets étudiés, étant donné que les Comités nationaux de l'IEC intéressés sont représentés dans chaque comité d'études.
- 3) Les Publications de l'IEC se présentent sous la forme de recommandations internationales et sont agréées comme telles par les Comités nationaux de l'IEC. Tous les efforts raisonnables sont entrepris afin que l'IEC s'assure de l'exactitude du contenu technique de ses publications; l'IEC ne peut pas être tenue responsable de l'éventuelle mauvaise utilisation ou interprétation qui en est faite par un quelconque utilisateur final.
- 4) Dans le but d'encourager l'uniformité internationale, les Comités nationaux de l'IEC s'engagent, dans toute la mesure possible, à appliquer de façon transparente les Publications de l'IEC dans leurs publications nationales et régionales. Toutes divergences entre toutes Publications de l'IEC et toutes publications nationales ou régionales correspondantes doivent être indiquées en termes clairs dans ces dernières.
- 5) L'IEC elle-même ne fournit aucune attestation de conformité. Des organismes de certification indépendants fournissent des services d'évaluation de conformité et, dans certains secteurs, accèdent aux marques de conformité de l'IEC. L'IEC n'est responsable d'aucun des services effectués par les organismes de certification indépendants.
- 6) Tous les utilisateurs doivent s'assurer qu'ils sont en possession de la dernière édition de cette publication.
- 7) Aucune responsabilité ne doit être imputée à l'IEC, à ses administrateurs, employés, auxiliaires ou mandataires, y compris ses experts particuliers et les membres de ses comités d'études et des Comités nationaux de l'IEC, pour tout préjudice causé en cas de dommages corporels et matériels, ou de tout autre dommage de quelque nature que ce soit, directe ou indirecte, ou pour supporter les coûts (y compris les frais de justice) et les dépenses découlant de la publication ou de l'utilisation de cette Publication de l'IEC ou de toute autre Publication de l'IEC, ou au crédit qui lui est accordé.
- 8) L'attention est attirée sur les références normatives citées dans cette publication. L'utilisation de publications référencées est obligatoire pour une application correcte de la présente publication.
- 9) L'attention est attirée sur le fait que certains des éléments de la présente Publication de l'IEC peuvent faire l'objet de droits de brevet. L'IEC ne saurait être tenue pour responsable de ne pas avoir identifié de tels droits de brevets et de ne pas avoir signalé leur existence.

La Norme internationale IEC 60320-2-3 a été établie par le sous-comité 23G: Connecteurs, du comité d'études 23 de l'IEC: Petit appareillage.

Cette deuxième édition annule et remplace la première édition parue en 1998 et l'Amendement 1:2004. Cette édition constitue une révision technique.

Cette édition inclut les modifications techniques majeures suivantes par rapport à l'édition précédente:

- a) Aligement sur l'IEC 60320-1:2015.

- b) Le domaine d'application est étendu afin de couvrir les courants assignés jusqu'à et y compris 16 A.
- c) Le domaine d'application est étendu afin de couvrir les connecteurs de Classe I.
- d) Le domaine d'application est étendu afin de couvrir les connecteurs pour conditions chaudes et très chaudes.
- e) Ajout d'une classification relative à l'utilisation de dispositifs de retenue.
- f) Ajout d'une classification relative à l'utilisation à l'intérieur et à l'extérieur.

Le texte de cette Norme internationale est issu des documents suivants:

FDIS	Rapport de vote
23G/401/FDIS	23G/403/RVD

Le rapport de vote indiqué dans le tableau ci-dessus donne toute information sur le vote ayant abouti à l'approbation de cette Norme internationale.

Ce document a été rédigé selon les Directives ISO/IEC, Partie 2.

La présente Partie 2-3 doit être utilisée conjointement avec l'IEC 60320-1: *Connecteurs pour usages domestiques et usages généraux analogues – Partie 1 Exigences générales*. Elle a été établie sur la base de la troisième édition de cette norme (2015).

Les articles de la présente norme complètent ou modifient les articles correspondants de l'IEC 60320-1. Lorsqu'un paragraphe particulier ou une annexe particulière de la Partie 1 n'est pas mentionné(e) dans la présente Partie 2-3, le paragraphe ou l'annexe de l'IEC 60320-1 s'applique dans la mesure du raisonnable. Lorsque la présente norme spécifie «addition», «modification» ou «remplacement», il convient d'adapter en conséquence l'exigence, la modalité d'essai ou le commentaire correspondant(e) de l'IEC 60320-1.

Les paragraphes complémentaires à ceux de la Partie 1 sont numérotés à partir de 101.

Dans la présente norme particulière, les caractères d'imprimerie suivants sont utilisés:

- exigences: caractères romains;
- *modalités d'essais: caractères italiques;*
- notes: petits caractères romains.

Une liste de toutes les parties de la série IEC 60320, publiées sous le titre général *Connecteurs pour usages domestiques et usages généraux analogues*, peut être consultée sur le site web de l'IEC.

Le comité a décidé que le contenu de ce document ne sera pas modifié avant la date de stabilité indiquée sur le site web de l'IEC sous "<http://webstore.iec.ch>" dans les données relatives au document recherché. A cette date, le document sera

- reconduit,
- supprimé,
- remplacé par une édition révisée, ou
- amendé.