

INTERNATIONAL STANDARD

**Information technology – Wireless beacon-enabled energy efficient mesh network (WiBEEM) standard for wireless home network services –
Part 2: MAC layer**

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 29145-2:2014



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2014 ISO/IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 14 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

More than 55 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

STANDARDSISO.COM : Click to view the full PDF of IEC 23145-2:2014



ISO/IEC 29145-2

Edition 1.0 2014-03

INTERNATIONAL STANDARD

**Information technology – Wireless beacon-enabled energy efficient mesh
network (WiBEEM) standard for wireless home network services –
Part 2: MAC layer**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE

U

ICS 35.200

ISBN 978-2-8322-1449-7

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	5
INTRODUCTION	6
1 Scope	7
2 Normative reference	7
3 Terms, definitions and abbreviations	7
3.1 Terms and definitions	7
3.2 Abbreviations	8
3.3 Conventions	9
4 Conformance	10
5 Overview of the WiBEE technology	10
6 MAC layer specifications	10
6.1 General	10
6.2 MAC layer service specifications	10
6.2.1 Service overview	10
6.2.2 MAC data service	11
6.2.3 MAC management service	17
6.2.4 Association primitives	17
6.2.5 Disassociation primitives	22
6.2.6 Beacon notification primitive	24
6.2.7 Primitives for reading PIB attributes	27
6.2.8 RAP management primitives	28
6.2.9 Primitives for orphan notification	31
6.2.10 Primitives for resetting the MAC layer	34
6.2.11 Primitives for specifying the receiver enable time	35
6.2.12 Primitives for channel scanning	37
6.2.13 Communication status primitive	39
6.2.14 Primitives for writing MAC PIB attributes	41
6.2.15 Primitives for updating the superframe configuration	42
6.2.16 Primitives for synchronising with a WRC	45
6.2.17 Primitives for requesting data from a WRC	47
6.3 MAC frame formats	49
6.3.1 General	49
6.3.2 General MAC frame format	50
6.3.3 Beacon frame format	52
6.3.4 MAC command frame format	52
Bibliography	62
Figure 1 – MAC layer structure	11
Figure 2 – Message sequence chart describing the MAC data service	16
Figure 3 – Message sequence chart for association	22
Figure 4 – Message sequence chart for disassociation	24
Figure 5 – Message sequence chart for RAP allocation initiated by a device	31
Figure 6 – Message sequence chart for RAP deallocation initiated by a device and the WMC	31

Figure 7 – Beacon lost (orphan notification) message sequence chart	33
Figure 8 – Message sequence chart for updating the superframe configuration	45
Figure 9 – Message sequence chart for synchronising to a WRC in a beacon-enabled WPAN	47
Figure 10 – Message sequence chart for requesting data from the WRC	49
Figure 11 – General MAC frame format	50
Figure 12 – Beacon frame format	52
Table 1 – MLDE-DATA.request parameters	12
Table 2 – MLDE-DATA.confirm parameters	13
Table 3 – MLDE-DATA.indication parameters	14
Table 4 – MLDE-ERASE.request parameters	15
Table 5 – MLDE-ERASE.confirm parameters	16
Table 6 – Summary of the primitives accessed through the MLME-SAP	17
Table 7 – MLME-ASSOCIATE.request parameters	18
Table 8 – MLME-ASSOCIATE.indication parameters	19
Table 9 – MLME-ASSOCIATE.response parameters	20
Table 10 – MLME-ASSOCIATE.confirm parameters	21
Table 11 – MLME-DISASSOCIATE.request parameters	22
Table 12 – MLME-DISASSOCIATE.indication parameters	23
Table 13 – MLME-DISASSOCIATE.confirm parameters	24
Table 14 – MLME-BEACON-NOTIFY.indication parameters	25
Table 15 – Elements of mesh descriptor	26
Table 16 – MLME-READ-MIB.request parameters	27
Table 17 – MLME-READ-MIB.confirm parameters	28
Table 18 – MLME-RAP-MANAGEMENT.request parameters	29
Table 19 – MLME-RAP-MANAGEMENT.confirm parameters	29
Table 20 – MLME-RAP-MANAGEMENT.indication parameters	30
Table 21 – MLME-BEACON-LOST.indication parameters	32
Table 22 – MLME-BEACON-LOST.indication parameters	33
Table 23 – MLME-RESET.request parameters	34
Table 24 – MLME-RESET.confirm parameters	35
Table 25 – MLME-RX-ON.request parameters	35
Table 26 – MLME-RX-ON.confirm parameters	36
Table 27 – MLME-SCAN.request parameters	37
Table 28 – MLME-SCAN.confirm parameters	39
Table 29 – MLME-COMM-RESULT.indication parameters	40
Table 30 – MLME-WRITE-MIB.request parameters	41
Table 31 – MLME-WRITE-MIB.confirm parameters	42
Table 32 – MLME-START.request parameters	43
Table 33 – MLME-START.confirm parameters	44
Table 34 – MLME-SYNC.request parameters	45
Table 35 – MLME-SYNC-LOSS.indication parameters	46

Table 36 – MLME-INDIRECT-COMM.request parameters	48
Table 37 – MLME-INDIRECT-COMM.confirm parameters	48
Table 38 – MAC command frame	53
Table 39 – Association request command	53
Table 41 – Association response command	54
Table 42 – Association status field	55
Table 43 – Disassociation notification command format	55
Table 44 – Disassociation reason code	56
Table 45 – Data request command format	57
Table 46 – Mesh ID conflict notification command format	57
Table 47 – Orphan notification command format	58
Table 48 – Beacon request command format	58
Table 49 – Co-ordinator realignment command format	59
Table 50 – CFP request command format	60
Table 51 – CFP characteristics field format	60
Table 52 – Rate reconfiguration request format	60
Table 53 – Data rate	61
Table 54 – Rate reconfiguration request command format	61

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 29145-2:2014

INFORMATION TECHNOLOGY – WIRELESS BEACON-ENABLED ENERGY EFFICIENT MESH NETWORK (WIBEEM) STANDARD FOR WIRELESS HOME NETWORK SERVICES –

Part 2: MAC layer

FOREWORD

- 1) ISO (International Organization for Standardization) and IEC (International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards. Their preparation is entrusted to technical committees; any ISO and IEC member body interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with ISO and IEC also participate in this preparation.
- 2) In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.
- 3) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC and ISO member bodies.
- 4) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 5) In order to promote international uniformity, IEC and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 6) ISO and IEC provide no marking procedure to indicate their approval and cannot be rendered responsible for any equipment declared to be in conformity with an ISO/IEC publication.
- 7) All users should ensure that they have the latest edition of this publication.
- 8) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.
- 9) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 10) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 29145-2 was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

The list of all currently available parts of the ISO/IEC 29145 series, under the general title *Information technology – Wireless beacon-enabled energy efficient mesh network (WiBEEM) for wireless home network services*, can be found on the IEC web site.

This International Standard has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the second title page.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

INTRODUCTION

This International Standard specifies the WiBEEM (Wireless Beacon-enabled Energy Efficient Mesh network) protocol, which provides low-power-consuming mesh network functions by enabling the “beacon mode operation”. WiBEEM is based on IEEE 802.15.4 standard with additional upper layer protocols and a specific usage of the MAC layer protocol. Through the novel use of beacons, WiBEEM technology achieves longer battery life, larger network support, quicker response, enhanced mobility and dynamic reconfiguration of the network topology compared with other protocols such as ZigBee.

In the beacon mode, Beacon information propagates over the entire mesh network nodes during the BOP (Beacon-Only Period) of the superframe structure without any beacon conflicts by utilising a smart beacon scheduling technique in the BOP. It also provides location information about moving devices without spending extra time running a positioning and locating algorithm by using RSSI (Received Signal Strength Indication). These features allow the WiBEEM protocol to be widely used for wireless home network services in the ubiquitous network era.

One of the key features of the WiBEEM protocol is that it has a special time interval called BOP (Beacon-Only Period) in the superframe structure that allows more than two beacons to be transmitted. This unique time period is located at the beginning of the Superframe. Because the BOP does not use the CSMA/CA mechanism, the network will not work properly in the beacon mode unless an appropriate algorithm is applied. This algorithm needs to manage and control multiple beacons in a single superframe. The solution is the Beacon Scheduling method applied in the BOP to avoid collisions among beacons, providing synchronisation among all the nodes of the entire mesh network.

For the network layer, the NAA (Next Address Available) mechanism, which is a short address allocation algorithm, has been adopted to provide an efficient way of utilising the complete 16-bit address space. The NAA algorithm does not limit the maximum number of children nodes that a node of a mesh network can have. Since the number of children nodes is unlimited, the NAA mechanism allows the WiBEEM protocol to be used not only for home network services, but also for community services. WiBEEM can be used where high network expandability through efficient use of short address spaces, device mobility and end-to-end QoS are required.

This part of the standard ISO/IEC 29145 specifies the Medium Access Control (MAC) layer of the WiBEEM protocol.

INFORMATION TECHNOLOGY – WIRELESS BEACON-ENABLED ENERGY EFFICIENT MESH NETWORK (WiBEEM) STANDARD FOR WIRELESS HOME NETWORK SERVICES –

Part 2: MAC layer

1 Scope

This part of ISO/IEC 29145 specifies the MAC of the WiBEEM (Wireless Beacon-enabled Energy Efficient Mesh network) protocol for wireless home network services that supports a low power-consuming wireless mesh network as well as device mobility and QoS.

2 Normative reference

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 29145-1:2014, *Information technology – Wireless beacon-enabled energy efficient mesh network (WiBEEM) for wireless home network services – Part 1: PHY layer*

IEEE 802.15.4:2003, *IEEE Standard for Information technology – Telecommunications and information exchange between systems – Local and metropolitan area networks – Specific requirements – Part 15.4: Wireless Medium Access Control (MAC) and Physical Layer (PHY) Specifications for Low-Rate Wireless Personal Area Networks (LR-WPANs)*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 29145-1, as well as the following apply.

3.1.1

association

service used to establish the membership of a device in a wireless mesh network

3.1.2

co-ordinator

wireless device configured to provide synchronisation services through the transmission of beacons

Note 1 to entry: If a co-ordinator is the principal controller of a wireless mesh network, it is called the WMC (WiBEEM Mesh Co-ordinator).

3.1.3

device

entity containing an implementation of the WiBEEM applications, NWK, MAC and physical interface to the wireless medium

3.1.4

disassociation

service that removes an existing association

3.1.5

frame

data format of aggregated bits from a medium access control (MAC) layer entity transmitted in a specified sequence

3.1.6

logical channel

abstract representation of a communications link independent of the physical implementation

Note 1 to entry: Defines "logical channel" as it is used this International Standard.

3.1.7

mobile device

device that uses network communications while in motion

3.1.8

orphaned device

device that has lost its parent node with its associated mesh network

3.1.9

packet

format of aggregated bits transmitted in a specified sequence across the physical medium

3.1.10

payload data

contents of a data message that is being transmitted

3.1.11

personal operating space

space of typically about 10 m around a person or an object, no matter whether this person or object is stationary or in motion

3.1.12

protocol data unit

unit of data exchanged between two peer entities

3.1.13

service data unit

information delivered as a unit through a service access point (SAP)

3.2 Abbreviations

The following acronyms and abbreviations are used in this standard. They are commonly used in other industry publications.

BI	Beacon Interval
BN	Beacon Number
BO	Beacon Order
BOP	Beacon Only Period
BSN	Beacon Sequence Number
BTTSL	Beacon Transmit Time Slot Length
CAP	Contention Access Period

CFP	Contention-Free Period
CRC	Cyclic Redundancy Check
CSMA-CA	Carrier Sense Multiple Access With Collision Avoidance
DSN	Data Sequence Number
ED	Energy Detection
ID	Identifier
IFS	Interframe Space or Spacing
LIFS	Long Interframe Spacing
LQ	Link Quality
LQI	Link Quality Indication
LR-WPAN	Low-Rate Wireless Personal Area Network
MAC	Medium Access Control
MFR	MAC Footer
MHR	MAC Header
MIB	MAC Information Base
MLME	MAC Layer Management Entity
MLME-SAP	MAC Layer Management Entity-Service Access Point
MPDU	MAC Protocol Data Unit
MSDU	MAC Service Data Unit
NAA	Next Address Available
PDU	Protocol Data Unit
PHY	Physical Layer
PIB	PAN Information Base
PLME	Physical Layer Management Entity
PLME-SAP	Physical Layer Management Entity-Service Access Point
POS	Personal Operating Space
PQP	Prioritised QoS Period
QoS	Quality of Service
RAP	Reservation-based Access Period
RSSI	Received Signal Strength Indication
RX	Receive or Receiver
SAP	Service Access Point
SD	Superframe Duration
SDL	Specification and Description Language
SDU	Service Data Unit
SO	Superframe Order
WED	WiBEEM End Device
WiBEEM	Wireless Beacon-enabled Energy Efficient Mesh network
WMC	WiBEEM Mesh Co-ordinator
WRC	WiBEEM Routable Co-ordinator

3.3 Conventions

All the italicized words used in this standard represent relevant constants defined and stored in the MIB (Management Information Base) of each layer.

4 Conformance

A wireless device that claims conformance to this standard shall implement all the primitives that are specified in 6.2 and the MAC frame formats in 6.3. Each WiBEEM device shall be able to act as a WMC, a WRC and a WED. When operating in the role of a WMC it shall act as specified in 5.3.2 of ISO/IEC 29145-1:2014, when operating in the role of a WRC, it shall act as specified in 5.3.3 of ISO/IEC 29145-1:2014, and when operating in the role of a WED, it shall act as specified in 5.3.3 of ISO/IEC 29145-1:2014.

5 Overview of the WiBEEM technology

Clause 5 of ISO/IEC 29145-1:2014 presents an overview of the WiBEEM technology and the functionalities of the WiBEEM devices.

6 MAC layer specifications

6.1 General

This clause specifies the MAC layer of this standard. The MAC layer handles all access to the physical radio channel and is responsible for the following tasks:

- generating network beacons if the device is a co-ordinator;
- synchronising to network beacons;
- supporting the mesh network association and disassociation;
- supporting device security;
- employing the CSMA/CA mechanism for channel access;
- handling and maintaining the RAP mechanism;
- providing a reliable link between two peer MAC entities;
- providing multi-rate operation between PLME and MLME.

Constants and attributes that are specified and maintained by the MAC layer are written in the text of this clause in *italics*. Constants have a general prefix of “a”. Attributes have a general prefix of “mac”.

6.2 MAC layer service specifications

6.2.1 Service overview

The MAC layer services provide an interface between the MAC layer and the PHY layer. The MAC layer conceptually includes a management entity called MLME. This entity shall provide the service interfaces through which layer management functions may be invoked. MLME is also responsible for maintaining a database of managed objects pertaining to the MAC layer. This database is referred to as the MIB representing the MAC layer information base. The MAC layer provides two services, accessed through two SAPs:

- MAC data service, accessed through the MAC layer data SAP (MLDE-SAP), and
- MAC management service, accessed through the MLME-SAP.

These two services provide the interface between the MAC and the PHY layers, via the PLDE-SAP and PLME-SAP interfaces shown in Figure 1. In addition to these external interfaces, an implicit interface also exists between the two layers.

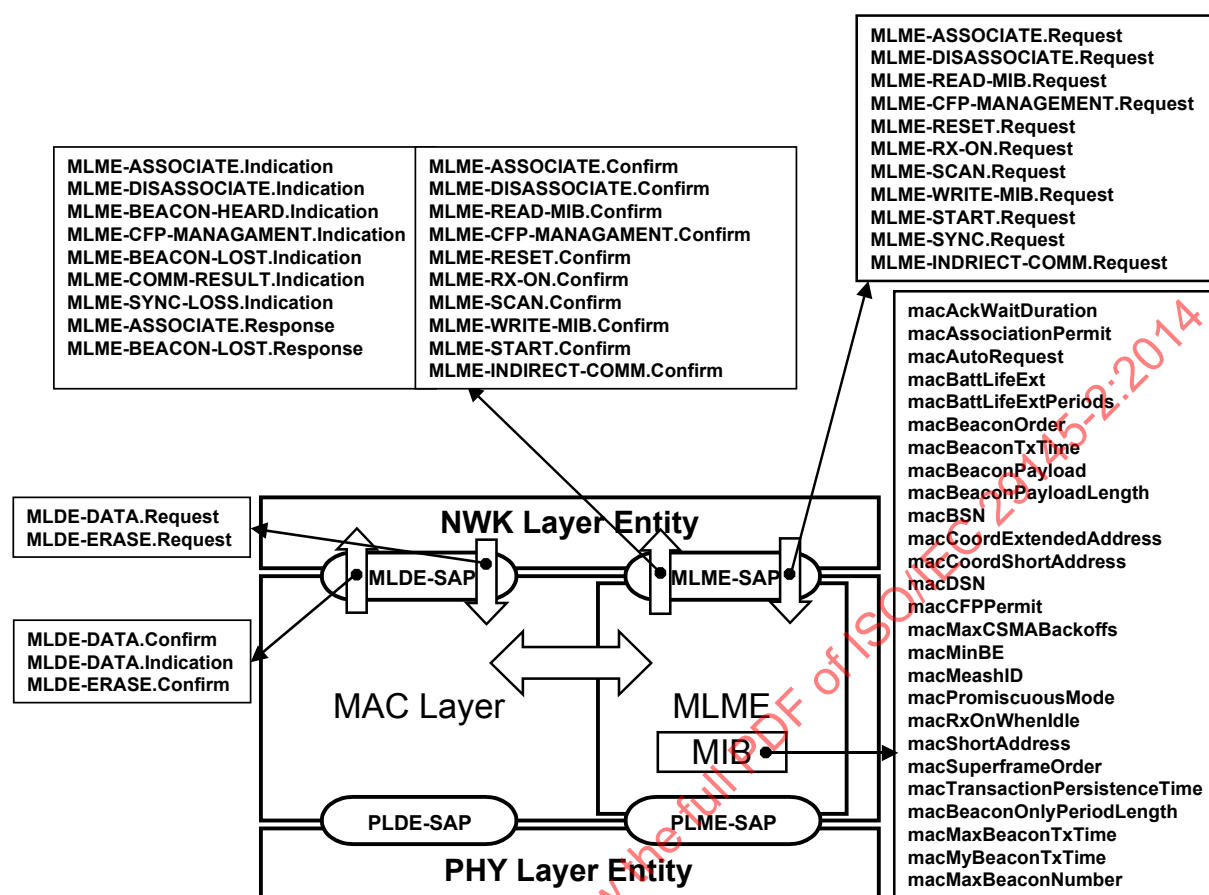


Figure 1 – MAC layer structure

6.2.2 MAC data service

6.2.2.1 Overview

The MLDE-SAP supports the transport of MAC protocol data units (MPDUs) between peer MAC entities.

6.2.2.2 MLDE-DATA.request

6.2.2.2.1 Function

The MLDE-DATA.request primitive requests the transfer of a data MSDU from a local MAC entity to a single peer MAC entity.

6.2.2.2.2 Semantics of the service primitive

The semantics of the MCPS-DATA.request primitive are as follows:

```
MLDE-DATA.request (
    SrcAddrMode,
    SrcMeshId,
    SrcAddr,
    DstAddrMode,
    DstMeshId,
    DstAddr,
    msduLength,
    msdu,
    msduHandle,
```

TxOptions
)

Table 1 specifies the parameters for the MLDE-DATA.request primitive.

Table 1 – MLDE-DATA.request parameters

Name	Type	Valid range	Description
SrcAddrMode	Integer	0x00 to 0x03	The source addressing mode for this primitive and subsequent MPDU. This value can take one of the following values: 0x00 = no address (addressing fields omitted, see 6.3.2). 0x01 = reserved. 0x02 = 16-bit short address. 0x03 = 64-bit extended address.
SrcMeshId	Integer	0x0000 to 0xffff	The 16-bit Mesh identifier of the entity to which the MSDU is being transferred.
SrcAddr	Device address	As specified by the SrcAddrMode parameter	The individual device address of the entity to which the MSDU is being transferred.
DstAddrMode	Integer	0x00 to 0x03	The destination addressing mode for this primitive and subsequent MPDU. This value can take one of the following values: 0x00 = no address (addressing fields omitted, see 6.3.2). 0x01 = reserved. 0x02 = 16-bit short address. 0x03 = 64-bit extended address.
DstMeshId	Integer	0x0000 to 0xffff	The 16-bit mesh network identifier of the entity to which the MSDU is being transferred.
DstAddr	Device address	As specified by the DstAddrMode parameter	The individual device address of the entity to which the MSDU is being transferred.
msduLength	integer	≤ aMaxMAC-FrameSize	The number of octets contained in the MSDU to be transmitted by the MAC layer entity.
msdu	Set of octets	–	The set of octets forming the MSDU to be transmitted by the MAC layer entity.
msduHandle	integer	0x00 to 0xff	The handle associated with the MSDU to be transmitted by the MAC layer entity.
TxOptions	Bitmap	3-bit field	The 3 bits (b ₀ , b ₁ , b ₂) indicate the transmission options for this MSDU. 0x01 = acknowledged transmission 0x02 = RAP transmission 0x04 = Indirect transmission 0x08 = security enabled transmission

6.2.2.2.3 Appropriate usage

The MLDE-DATA.request primitive is generated by a local MAC entity when an MSDU is to be transferred to a peer MAC entity.

6.2.2.2.4 Effect on receipt

On receipt of the MLDE-DATA.request primitive, the MAC layer entity begins the transmission of the supplied MSDU.

6.2.2.3 MLDE-DATA.confirm

6.2.2.3.1 Function

The MLDE-DATA.confirm primitive reports the results of a request to transfer a data MSDU from a local MAC entity to a single peer MAC entity.

6.2.2.3.2 Semantics of the service primitive

The semantics of the MLDE-DATA.confirm primitive are as follows:

```
MLDE-DATA.confirm      (
                        msduHandle,
                        Status
                        )
```

Table 2 specifies the parameters for the MLDE-DATA.confirm primitive.

Table 2 – MLDE-DATA.confirm parameters

Name	Type	Valid range	Description
MsdHandle	Integer	0x00 to 0xff	The handle associated with the MSDU being confirmed.
Status	Enumeration	SUCCESS, TRANSACTION_OVERFLOW, TRANSACTION_EXPIRED, CHANNEL_ACCESS_FAILURE, INVALID_RAP, NO_ACK, UNAVAILABLE_KEY, FRAME_TOO_LONG, FAILED_SECURITY_CHECK, or INVALID_PARAMETER	The status of the last MSDU transmission.

6.2.2.3.3 When generated

The MLDE-DATA.confirm primitive is generated by the MAC layer entity in response to an MLDE-DATA.request primitive. The MLDE-DATA.confirm primitive returns a status of either SUCCESS, indicating that the request to transmit was successful, or the appropriate error code, including TRANSACTION_OVERFLOW, TRANSACTION_EXPIRED, CHANNEL_ACCESS_FAILURE, INVALID_RAP, NO_ACK, UNAVAILABLE_KEY, FRAME_TOO_LONG, FAILED_SECURITY_CHECK, or INVALID_PARAMETER.

6.2.2.3.4 Appropriate usage

On receipt of the MLDE-DATA.confirm primitive, the MAC of the initiating device is notified of the result of its request to transmit. If the transmission attempt was successful, the status parameter will be set to SUCCESS. Otherwise, the status parameter will indicate the error.

6.2.2.4 MLDE-DATA.indication

6.2.2.4.1 Function

The MLDE-DATA.indication primitive indicates the transfer of an MSDU from the MAC layer to the local MAC entity.

6.2.2.4.2 Semantics of the service primitive

The semantics of the MLDE-DATA.indication primitive are as follows:

```
MLDE-DATA.indication (
    SrcAddrMode,
    SrcMeshID,
    SrcAddr,
    DstAddrMode,
    DstMeshID,
    DstAddr,
    msduLength,
    msdu,
    mpduLinkQuality,
    SecurityUse,
    ACLEntry
)
```

Table 3 specifies the parameters for the MLDE-DATA.indication primitive.

Table 3 – MLDE-DATA.indication parameters

Name	Type	Valid range	Description
SrcAddrMode	Integer	0x00 to 0x03	The source addressing mode for this primitive corresponding to the received MPDU. This value can take one of the following values: 0x00 = no address (addressing fields omitted). 0x01 = reserved. 0x02 = 16-bit short address. 0x03 = 64-bit extended address.
SrcMeshID	Integer	0x0000 to 0xffff	The 16-bit Mesh identifier of the entity from which the MSDU was received.
SrcAddr	Device address	Specified by the SrcAddrMode parameter	The individual device address of the entity from which the MSDU was received.
DstAddrMode	Integer	0x00 to 0x03	The destination addressing mode for this primitive corresponding to the received MPDU. This value can take one of the following values: 0x00 = no address (addressing fields omitted). 0x01 = reserved. 0x02 = 16-bit short device address. 0x03 = 64-bit extended device address.
DstMeshID	Integer	0x0000 to 0xffff	The 16-bit Mesh identifier of the entity to which the MSDU is being transferred.
DstAddr	Device address	Specified by the DstAddr	The individual device address of the entity to which the MSDU is being transferred.
msduLength	integer	≤ aMaxMAC-FrameSize	The number of octets contained in the MSDU being indicated by the MAC layer entity.
msdu	Set of octets	-	The set of octets forming the MSDU being indicated by the MAC layer entity.
mpduLinkQuality	integer	0x00 to 0xff	LQI value measured during reception of the MPDU. Lower values represent lower LQI.
SecurityUse	Boolean	TRUE or FALSE	The security level purportedly used by the received data frame.
ACLEntry	integer	0x00 to 0x08	Parameter Value of ACL <i>macSecurityMode</i>

6.2.2.4.3 When generated

The MLDE-DATA.indication primitive is generated by the MAC layer and issued to the SSCS on receipt of a data frame at the local MAC layer entity.

6.2.2.4.4 Appropriate usage

On receipt of the MLDE-DATA.indication primitive, the MAC entity is notified of the arrival of data at the device.

6.2.2.5 MLDE-ERASE.request

6.2.2.5.1 Function

The MLDE-ERASE.request primitive allows the next higher layer to erase an MSDU from the transaction queue.

6.2.2.5.2 Semantics of the service primitive

The semantics of the MLDE-ERASE.request primitive are as follows:

```
MLDE-ERASE.request (
    msduHandle
)
```

Table 4 specifies the parameters for the MLDE-ERASE.request primitive.

Table 4 – MLDE-ERASE.request parameters

Name	Type	Valid range	Description
msduHandle	Integer	0x00 to 0xff	The handle of the MSDU to be purged from the transaction queue.

6.2.2.5.3 Appropriate usage

The MLDE-ERASE.request primitive is generated by the next higher layer whenever a MSDU is to be erased from the transaction queue.

6.2.2.5.4 Effect on receipt

On receipt of the MLDE-ERASE.request primitive, the MAC layer attempts to find in its transaction queue the MSDU indicated by the msduHandle parameter. If an MSDU has left the transaction queue, the handle will not be found, and the MSDU can no longer be erased. If an MSDU matching the given handle is found, the MSDU is discarded from the transaction queue, and the MAC layer issues the MLDE-ERASE.confirm primitive with a status of SUCCESS. If an MSDU matching the given handle is not found, the MAC layer issues the MLDE-ERASE.confirm primitive with a status of INVALID_HANDLE.

6.2.2.6 MLDE-ERASE.confirm

6.2.2.6.1 Function

The MLDE-ERASE.confirm primitive allows the MAC layer to notify the next higher layer of the success of its request to erase an MSDU from the transaction queue.

6.2.2.6.2 Semantics of the service primitive

The semantics of the MLDE-ERASE.confirm primitive are as follows:

```
MLDE-ERASE.confirm (
    msduHandle,
    Status
)
```

Table 5 specifies the parameters for the **MLDE-ERASE.confirm** primitive.

Table 5 – MLDE-ERASE.confirm parameters

Name	Type	Valid range	Description
msduHandle	Integer	0x00 to 0xff	The handle of the MSDU requested to be erased from the transaction queue.
Status	Enumeration	SUCCESS or INVALID_HANDLE	The status of the request to be erased an MSDU from the transaction queue.

6.2.2.6.3 When generated

The MLDE-ERASE.confirm primitive is generated by the MAC layer entity in response to an MLDE-ERASE.request primitive. The MLDE-ERASE.confirm primitive returns a status of either SUCCESS, indicating that the erase request was successful, or INVALID_HANDLE, indicating an error.

6.2.2.6.4 Appropriate usage

On receipt of the MLDE-ERASE.confirm primitive, the next higher layer is notified of the result of its request to purge an MSDU from the transaction queue. If the erase request was successful, the status parameter will be set to SUCCESS. Otherwise, the status parameter will indicate the error.

6.2.2.7 Data service message sequence chart

Figure 2 illustrates a sequence of messages necessary for a successful data transfer between two devices.

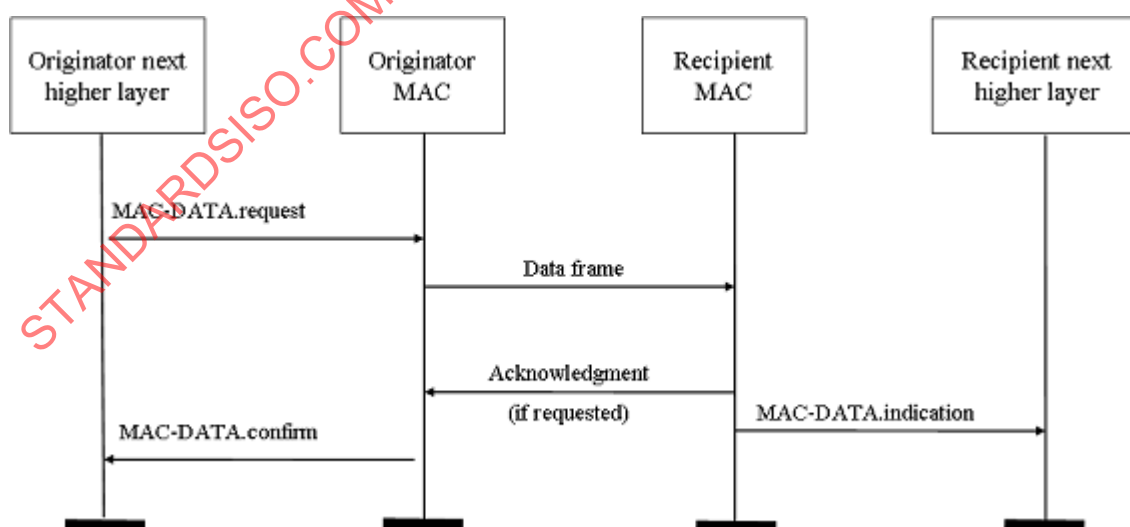


Figure 2 – Message sequence chart describing the MAC data service

6.2.3 MAC management service

The MLME-SAP allows the transport of management commands between the next higher layer and the MLME. Table 6 summarises the primitives supported by the MLME through the MLME-SAP interface. Primitives marked with an (opt) are optional.

Table 6 – Summary of the primitives accessed through the MLME-SAP

Name	Request	Indication	Response	Confirm
MLME-ASSOCIATE	O	O (opt)	O (opt)	O
MLME-DISASSOCIATE	O	O		O
MLME-BEACON-HEARD		O		
MLME-READ-MIB	O			O
MLME-RAP-MANAGEMENT	O (opt)	O (opt)		O (opt)
MLME-BEACON-LOST		O (opt)	O (opt)	
MLME-RESET	O			O
MLME-RX-ON	O			O
MLME-SCAN	O			O
MLME-COMM-RESULT		O		
MLME-WRITE-MIB	O			O
MLME-START	O (opt)			O (opt)
MLME-SYNC	O			
MLME-SYNC-LOSS		O		
MLME-INDIRECT-COMM	O			O

6.2.4 Association primitives

6.2.4.1 Overview

MLME-SAP association primitives define how a device becomes associated with a WMC or WRC. All devices shall provide an interface for the request and confirm association primitives. The indication and response association primitives are optional for a WED.

6.2.4.2 MLME-ASSOCIATE.request

6.2.4.2.1 Function

The MLME-ASSOCIATE.request primitive allows a device to request an association with a WRC.

6.2.4.2.2 Semantics of the service primitive

The semantics of the MLME-ASSOCIATE.request primitive are as follows:

```
MLME-ASSOCIATE.request (
    LogicalChannel,
    Co-ordAddrMode,
    Co-ordMeshId,
    Co-ordAddress,
    CapabilityInformation,
    SecurityEnable
)
```

Table 7 specifies the parameters for the MLME-ASSOCIATE.request primitive.

Table 7 – MLME-ASSOCIATE.request parameters

Name	Type	Valid range	Description
LogicalChannel	Integer	Selected from the available logical channels supported by the PHY	The logical channel on which to attempt association.
Co-ordAddrMode	Integer	0x02 to 0x03	The WRC addressing mode for this primitive and subsequent MPDU. This value can take one of the following values: 2 = 16-bit short address. 3 = 64-bit extended address.
Co-ordMeshId	Integer	0x0000 to 0xffff	The identifier of the mesh network with which to associate.
Co-ordAddress	Device address	As specified by the Co-ordAddrMode parameter.	The address of the WRC with which to associate.
CapabilityInformation	Bitmap	–	Specifies the operational capabilities of the associating device.
SecurityEnable	Boolean	TRUE or FALSE	TRUE if security is enabled for this transfer or FALSE otherwise.

6.2.4.2.3 When generated

This primitive is generated by the next higher layer of an unassociated device and issued to its MLME to request an association with a WRC. If the device wishes to associate with a WRC on a beacon enabled mesh network, the MLME may optionally track the beacon of that WRC prior to issuing this primitive.

6.2.4.2.4 Effect on receipt

On receipt of this primitive, the MLME of an unassociated device first updates *phyCurrentChannel* with the value of the LogicalChannel parameter by issuing the PLME-SET.request primitive and then update *mac-MeshId* with the value of the Co-ordMeshId parameter. The MLME then generates an association request command.

6.2.4.3 MLME-ASSOCIATE.indication

6.2.4.3.1 Function

The MLME-ASSOCIATE.indication primitive is used to indicate the reception of an association request command.

6.2.4.3.2 Semantics of the service primitive

The semantics of the MLME-ASSOCIATE.indication primitive are as follows:

```
MLME-ASSOCIATE.indication
(
    DeviceAddress,
    CapabilityInformation,
    SecurityUse,
    ACLEntry
)
```

Table 8 specifies the parameters for the MLME-ASSOCIATE.indication primitive.

Table 8 – MLME-ASSOCIATE.indication parameters

Name	Type	Valid range	Description
DeviceAddress	Device address	extended address(64 bit)	The address of the device requesting association.
CapabilityInformation	Bitmap		The operational capabilities of the device requesting association.
SecurityUse	Bitmap	TRUE or FALSE	An indication of whether the received MAC command frame is using security. This value is set to TRUE if the security enable subfield was set to 1 or FALSE if the security enabled subfield was set to 0.
ACLEntry	Bitmap	0x00 to 0x08	The <i>macSecurityMode</i> parameter value from the ACL entry associated with the sender of the data frame.

6.2.4.3.3 When generated

This primitive is generated by the MLME of the WRC and issued to its next higher layer to indicate the reception of an association request command.

6.2.4.3.4 Effect on receipt

When the next higher layer of a WRC receives this primitive, the WRC determines whether to accept or reject the unassociated device using an algorithm outside the scope of this standard. The next higher layer of the WRC then issues the MLME-ASSOCIATE.response primitive to its MLME.

6.2.4.4 MLME-ASSOCIATE.response**6.2.4.4.1 Function**

This primitive is used to initiate a response to an MLME-ASSOCIATE.indication primitive.

6.2.4.4.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-ASSOCIATE.response (
    DeviceAddress,
    AssocShortAddress,
    Status,
    SecurityEnable
)
```

Table 9 specifies the parameters for the MLME-ASSOCIATE.response primitive.

Table 9 – MLME-ASSOCIATE.response parameters

Name	Type	Valid range	Description
DeviceAddress	Device address	64-bit Extended address	The address of the device requesting association.
AssocShortAddress	Integer	0x0000 to 0xffff	The 16-bit short address of a device allocated by the coordinator on successful association. This parameter is set to 0xffff if the association was unsuccessful.
Status	Enumeration	–	The status of the association attempt.
SecurityEnable	Boolean	TRUE or FALSE	TRUE if security is enabled for this transfer or FALSE otherwise.

6.2.4.4.3 When generated

This primitive is generated by the next higher layer of a WRC and issued to its MLME in order to respond to the MLME-ASSOCIATE.indication primitive.

6.2.4.4.4 Effect on receipt

When the MLME of a WRC receives this primitive, it generates an association response command. The command is sent to the device requesting association using indirect transmission, i.e. the command frame is added to the list of pending transactions stored on the WRC.

6.2.4.5 MLME-ASSOCIATE.confirm

6.2.4.5.1 Function

This primitive is used to inform the next higher layer of the initiating device whether its request to associate was successful or unsuccessful.

6.2.4.5.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-ASSOCIATE.confirm (
    AssocShortAddress,
    Status
)
```

Table 10 specifies the parameters for the MLME-ASSOCIATE.confirm primitive.

Table 10 – MLME-ASSOCIATE.confirm parameters

Name	Type	Valid range	Description
AssocShortAddress	Integer	0x0000 to 0xffff	The short device address allocated by the co-ordinator on successful association. This parameter will be equal to 0xffff if the association attempt was unsuccessful.
Status	Enumeration	The value of the status field of the associate response command SUCCESS, CHANNEL_ACCESS_FAILURE, NO_ACK, NO_DATA, UNAVAILABLE_KEY, FAILED_SECURITY_CHECK or INVALID_PARAMETER.	The status of the association attempt.

6.2.4.5.3 When generated

This primitive is generated by the initiating MLME and issued to its next higher layer in response to an MLME-ASSOCIATE.request primitive. If the request was successful, the status parameter will indicate a successful association, as contained in the status field of the association response command. Otherwise, the status parameter indicates either an error code from the received association response command or an error code of CHANNEL_ACCESS_FAILURE, NO_ACK, NO_DATA, UNAVAILABLE_KEY, FAILED_SECURITY_CHECK or INVALID_PARAMETER.

6.2.4.5.4 Effect on receipt

On receipt of this primitive, the next higher layer of the initiating device is notified of the result of its request to associate with a co-ordinator. If the association attempt was successful, the status parameter will indicate a successful association, as contained in the status field of the associate response command, and the device will be provided with a short address. If this short address is in the range of 0x0000 to 0xfffd, it may be used for communication in the mesh network. If the short address is equal to 0xfffe, the device will use its extended 64-bit address for communication in the mesh network. If the association attempt was unsuccessful, the address will be equal to 0xffff and the status parameter will indicate the error.

6.2.4.6 Association message sequence charts

Figure 3 illustrates the sequence of messages necessary for a device to successfully associate with a mesh network.

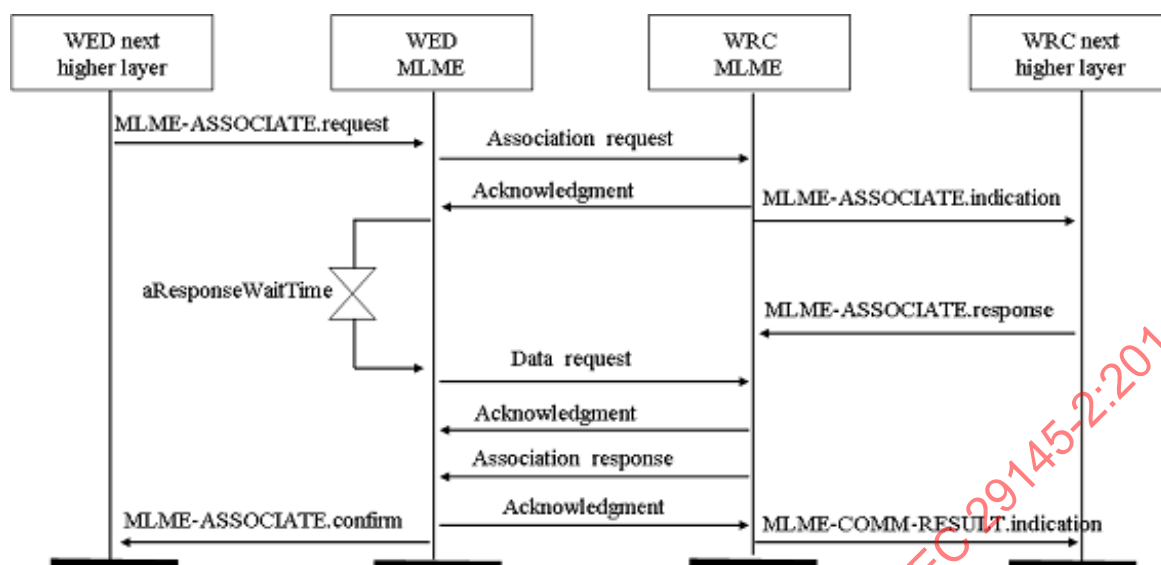


Figure 3 – Message sequence chart for association

6.2.5 Disassociation primitives

6.2.5.1 Overview

These primitives define how a device can disassociate from a mesh network. All devices shall provide an interface for these primitives.

6.2.5.2 MLME-DISASSOCIATE.request

6.2.5.2.1 Function

This primitive is used by an associated device to notify the WRC of its intent to leave the mesh network. It is also used by the WRC to instruct an associated device to leave the mesh network.

6.2.5.2.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```

MLME-DISASSOCIATE.request (
    DeviceAddress,
    DisassociateReason,
    SecurityEnable
)
    
```

Table 11 specifies the parameters for the MLME-DISASSOCIATE.request primitive.

Table 11 – MLME-DISASSOCIATE.request parameters

Name	Type	Valid range	Description
Device Address	Device address	An extended 64-bit, IEEE address.	The address of the device to which to send the disassociation notification command.
DisassociateReason	Integer	0x00 to 0xff	The reason for the disassociation.
SecurityEnable	Boolean	TRUE or FALSE	TRUE if security is enabled for this transfer or FALSE otherwise.

6.2.5.2.3 When generated

This primitive is generated by the next higher layer of an associated device and issued to its MLME to request disassociation from the mesh network. It is also generated by the next higher layer of the WRC and issued to its MLME to instruct an associated device to leave the mesh network.

6.2.5.2.4 Effect on receipt

On receipt of this primitive, the MLME generates a disassociation notification command. If the DeviceAddress parameter is equal to *macCo-ordExtendedAddress*, the command will be sent to its WRC in the CAP for a beacon enabled mesh network.

6.2.5.3 MLME-DISASSOCIATE.indication

6.2.5.3.1 Function

This primitive is used to indicate the reception of a disassociation notification command.

6.2.5.3.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-DISASSOCIATE.indication (
    DeviceAddress,
    DisassociateReason,
    SecurityUse,
    ACLEntry
)
```

Table 12 specifies the parameters for the MLME-DISASSOCIATE.indication primitive.

Table 12 – MLME-DISASSOCIATE.indication parameters

Name	Type	Valid range	Description
Device Address	Device address	An extended 64-bit, IEEE address.	The address of the device requesting disassociation.
DisassociateReason	Integer	0x00 to 0xff	The reason for the disassociation.
SecurityUse	Bitmap	TRUE or FALSE	This value is set to TRUE if the security enable subfield was set to 1 or FALSE if the security enabled subfield was set to 0.
ACLEntry	Bitmap	0x00 to 0x08	The <i>macSecurityMode</i> parameter value from the ACL entry associated with the sender of the data frame.

6.2.5.3.3 When generated

This primitive is generated by the MLME and issued to its next higher layer on receipt of a disassociation notification command.

6.2.5.3.4 Effect on receipt

The next higher layer is notified of the reason for the disassociation.

6.2.5.4 MLME-DISASSOCIATE.confirm

6.2.5.4.1 Function

This primitive reports the results of an MLME-DISASSOCIATE.request primitive

6.2.5.4.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-DISASSOCIATE.confirm    (
                               Status
                              )
```

Table 13 specifies the parameters for the MLME-DISASSOCIATE.confirm primitive.

Table 13 – MLME-DISASSOCIATE.confirm parameters

Name	Type	Valid range	Description
Status	Enumeration	SUCCESS, TRANSACTION_OVERFLOW, TRANSACTION_EXPIRED, NO_ACK, CHANNEL_ACCESS_FAILURE, UNAVAILABLE_KEY, FAILED_SECURITY_CHECK, or INVALID_PARAMETER	The status of the disassociation attempt.

6.2.5.4.3 When generated

This primitive is generated by the initiating MLME and issued to its next higher layer in response to an MLME-DISASSOCIATE.request primitive. This primitive returns a status of either SUCCESS, indicating that the disassociation request was successful, or an error code of TRANSACTION_OVERFLOW, TRANSACTION_EXPIRED, NO_ACK, CHANNEL_ACCESS_FAILURE, UNAVAILABLE_KEY, FAILED_SECURITY_CHECK or INVALID_PARAMETER.

6.2.5.5 Disassociation message sequence charts

Figure 4 illustrates the sequence of messages necessary for successful disassociation from a mesh network. The originating device may either be a device or the WRC to which the device has associated.

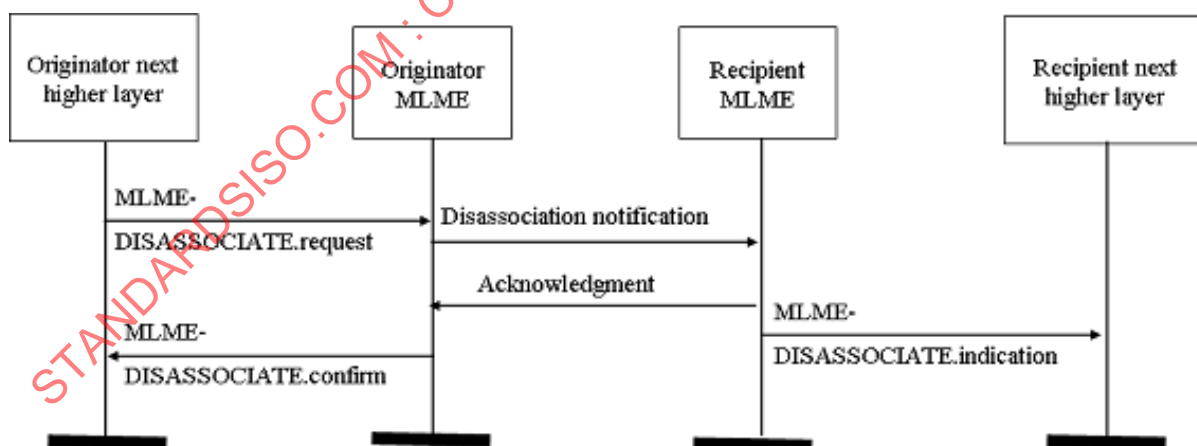


Figure 4 – Message sequence chart for disassociation

6.2.6 Beacon notification primitive

6.2.6.1 General

This primitive defines how a device may be notified when a beacon is received during normal operating conditions. All devices shall provide an interface for this primitive.

6.2.6.2 MLME-BEACON-HEARD.indication

6.2.6.2.1 Function

This primitive is used to send parameters contained within a beacon frame received by the MAC layer to the next higher layer. The primitive also sends a measure of the link quality and the time the beacon frame was received.

6.2.6.2.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-BEACON-HEARD.indication (
    BSN,
    PANDescriptor,
    PendAddrSpec,
    AddrList,
    sduLength,
    sdu
)
```

Table 14 specifies the parameters for the MLME-BEACON-HEARD.indication primitive, while Table 15 describes the elements of the PANDescriptor type.

Table 14 – MLME-BEACON-NOTIFY.indication parameters

Name	Type	Valid range	Description
BSN	Integer	0x00 to 0xff	The beacon sequence number.
PANDescriptor	PANDescriptor value	–	The PAN descriptor for the received beacon.
PendAddrSpec	Bitmap	–	The beacon pending address specification.
AddrList	List of device addresses	–	The list of addresses of the devices for which the beacon source has data.
sduLength	Integer	0 to aMaxBeaconPayloadLength	The number of octets contained in the beacon payload of the beacon frame received by the MAC sublayer.
sdu	Set of octets	–	The set of octets comprising the beacon payload to be transferred from the MAC sublayer entity to the next higher layer.

Table 15 – Elements of mesh descriptor

Name	Type	Valid range	Description
Co-ordAddrMode	Integer	0x02 to 0x03	The co-ordinator addressing mode corresponding to the received beacon frame. This value can take one of the following values: 2 = 16-bit short address, 3 = 64-bit extended address
Co-ordMeshId	Integer	0x0000 to 0xffff	The Mesh identifier of the co-ordinator as specified in the received beacon frame.
Co-ordAddress	Device address	As specified by the Co-ordAddrMode parameter.	The address of the co-ordinator as specified in the received beacon frame.
LogicalChannel	Integer	Selected from the available logical channels supported by the PHY.	The current logical channel occupied by the network.
SuperframeSpec	Bitmap		The superframe specification as specified in the received beacon frame.
RAPPermit	Boolean	TRUE or FALSE	TRUE if the beacon is from a WMC which is accepting RAP requests.
LinkQuality	Integer	0x00 to 0xff	The link quality at which the network beacon was received. Lower values represent lower link quality.
TimeStamp	Integer	0x000000 to 0xfffff	The time at which the beacon frame was received, in symbols. This value is equal to the timestamp taken when the beacon frame was received. The precision of this value is a minimum of 20-bit, with the lowest four bit being the least significant.
SecurityUse	Boolean	True or FALSE	An indication of whether the received beacon frame is using security. This value is set to TRUE if the security enable subfield was set to 1 or FALSE if the security enabled subfield was set to 0.
ACLEntry	Integer	0x00 to 0x08	The macSecurityMode parameter value from the ACL entry associated with the sender of the data frame.
SecurityFailure	Boolean	TRUE or FALSE	The parameter is set to TRUE if there was an error in the security processing of the frame. Otherwise, the parameter is set to FALSE.
BTTS	Integer	0x00 to 0xff	The time slot in which a device transmits its beacon.
maxBeaconTxSize	Integer	0x00 to 0xff	The maximum size of the beacons transmitted in a superframe, including BeaconTxMargin.
BTDSL	BYTE	0x00 to 0xff	The length of the beacon transmission time slot. This value can be calculated by adding the size of the beacon and the BeaconTxMargin.
Depth	BYTE	0x00 to 0xff	The depth of the device from the WMC.
NAA	BYTE	0x0000 to 0xffff	The short address that is delivered to the entire mesh nodes using the beacon payload in such a way that a newly joining WiBEEM device shall decide to use as its short address. This address is determined by the NWK layer.
Profile ID	BYTE	0x00 to 0xff	The number that specifies its corresponding application. A different application program is running based on this value.
PQPL	BYTE	0x00 to 0xff	The length of PQP. This field is generated when the value of PQP enable in the superframe specification of beacon frame is 1. This field represents the value when the mesh network decides to use the QoS capability.

6.2.6.2.3 When generated

This primitive is generated by the MLME and issued to its next higher layer upon receipt of a beacon frame either when *macAutoRequest* is set to FALSE or the beacon frame contains one or more octets of payload.

6.2.6.2.4 Effect on receipt

On receipt of this primitive, the next higher layer is notified of the arrival of a beacon frame at the MAC layer.

6.2.7 Primitives for reading PIB attributes

6.2.7.1 General

These primitives define how to read values from the PIB. All devices shall provide an interface for these primitives.

6.2.7.2 MLME-READ-MIB.request

6.2.7.2.1 Function

This primitive requests information about a given MIB attribute.

6.2.7.2.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-READ-MIB.request  (
                        MIBAttribute
                        )
```

Table 16 specifies the parameters for the MLME-GET.request primitive.

Table 16 – MLME-READ-MIB.request parameters

Name	Type	Valid range	Description
MIBAttribute	Integer	–	The identifier of the MIB attribute to read.

6.2.7.2.3 When generated

This primitive is generated by the next higher layer and issued to its MLME to obtain information from the MIB.

6.2.7.2.4 Effect on receipt

On receipt of this primitive, the MLME attempts to retrieve the requested MIB attribute from its database. If the identifier of the MIB attribute is not found in the database, the MLME will issue the MLM-READ-MIB.confirm primitive with a status of UNSUPPORTED_ATTRIBUTE. If the requested MIB attribute is successfully retrieved, the MLME will issue the MLME-READ-MIB.confirm primitive with a status of SUCCESS.

6.2.7.3 MLME-READ-MIB.confirm

6.2.7.3.1 Function

This primitive reports the results of an information request from the MAC PIB.

6.2.7.3.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-READ-MIB.confirm (
    Status,
    MIBAttribute,
    MIBAttributeValue
)
```

Table 17 specifies the parameters for the MLME-READ-MIB.confirm primitive.

Table 17 – MLME-READ-MIB.confirm parameters

Name	Type	Valid range	Description
Status	Enumeration	SUCCESS, UNSUPPORTED_ATTRIBUTE	The result of the request for MIB attribute information.
MIBAttribute	Integer	–	The identifier of the MIB attribute that was read.
MIBAttributeValue	Various	–	The identifier of the MIB attribute that was read.

6.2.7.3.3 When generated

This primitive is generated by the MLME and issued to its next higher layer in response to an MLME-READ-MIB.request primitive. This primitive returns a status of either SUCCESS, indicating that the request to read a MAC PIB attribute was successful, or an error code of UNSUPPORTED_ATTRIBUTE.

6.2.7.3.4 Effect on receipt

On receipt of this primitive, the next higher layer is notified of the results of its request to read a MIB attribute. If the request to read a MIB attribute was successful, the status parameter will be set to SUCCESS. Otherwise, the status parameter indicates the error.

6.2.8 RAP management primitives

6.2.8.1 General

These primitives define how RAP (Reservation-based Access Period) are requested and maintained. Devices wishing to use these primitives and RAP in general will already be tracking the beacons of their WMC.

6.2.8.2 MLME-RAP-MANAGEMENT.request

6.2.8.2.1 Function

This primitive allows a device to send a request to the WMC to allocate a new RAP or to deallocate an existing RAP.

6.2.8.2.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-RAP-MANAGEMENT.request (
    RAPCharacteristics,
    SecurityEnable
)
```

Table 18 specifies the parameters for the MLME- RAP-MANAGEMENT.request primitive.

Table 18 – MLME- RAP-MANAGEMENT.request parameters

Name	Type	Valid range	Description
RAPCharacteristics	RAP characteristics	–	The characteristics of the RAP request.
SecurityEnable	Boolean	TRUE or FALSE	TRUE if security is enabled for this transfer or FALSE otherwise.

6.2.8.2.3 When generated

This primitive is generated by the next higher layer and issued to its MLME to request the allocation of a new RAP or to request the deallocation of an existing RAP. The RAP characteristics parameter specifies whether the request is for the allocation of a new RAP or for the deallocation of an existing RAP. If the characteristics type field of the RAP characteristics parameter is equal to 1, the remaining fields in the RAP characteristics will specify the desired characteristics of the new RAP, i.e., its length and direction. If the characteristics type field of the RAP characteristics parameter is equal to 0, the remaining fields in the RAP characteristics will specify the length and direction of the RAP that the device wishes to reallocate.

6.2.8.2.4 Effect on receipt

On receipt of this primitive, the MLME of a device attempts to generate a RAP request command with the information contained in this primitive and, if successful, sends it to the WMC.

6.2.8.3 MLME-RAP-MANAGEMENT.confirm

6.2.8.3.1 Function

This primitive reports the results of a request to allocate a new RAP or deallocate an existing RAP.

6.2.8.3.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-RAP-MANAGEMENT.confirm (
    RAPCharacteristics,
    Status
)
```

Table 19 specifies the parameters for the MLME-RAP-MANAGEMENT.confirm primitive.

Table 19 – MLME-RAP-MANAGEMENT.confirm parameters

Name	Type	Valid range	Description
RAPCharacteristics	RAP Characteristics	–	The characteristics of RAP request.
Status	Enumeration	SUCCESS, DENIED, NO_SHORT_ADDRESS, CHANNEL_ACCESS_FAILURE, NO_ACK, NO_DATA, UNAVAILABLE_KEY, FAILED_SECURITY_CHECK, INVALID_PARAMETER.	The status of the RAP request.

6.2.8.3.3 When generated

This primitive is generated by the MLME and issued to its next higher layer in response to a previously issued MLME-RAP-MANAGEMENT.request primitive. If the request to allocate or deallocate a RAP was successful, this primitive will return a status of SUCCESS and the characteristics type field of the RAP characteristics parameter will have the value of 1 or 0, respectively. If the WMC denied the request, the primitive will return a status of DENIED. Otherwise, the status parameter indicates an error code of NO_SHORT_ADDRESS, CHANNEL_ACCESS_FAILURE, NO_ACK, NO_DATA, UNAVAILABLE_KEY, FAILED_SECURITY_CHECK or INVALID_PARAMETER.

6.2.8.3.4 Effect on receipt

On receipt of this primitive the next higher layer is notified of the result of its request to allocate or deallocate a RAP. If the request was successful, the status parameter will indicate a successful RAP operation. Otherwise, the status parameter will indicate the error.

6.2.8.4 MLME- RAP-MANAGEMENT.indication

6.2.8.4.1 Function

This primitive indicates that a RAP has been allocated or that a previously allocated RAP has been deallocated.

6.2.8.4.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-RAP-MANAGEMENT.indication (
    DevAddress,
    RAPCharacteristics,
    SecurityUse,
    ACLEntry
)
```

Table 20 specifies the parameters for the MLME- RAP-MANAGEMENT.indication primitive.

Table 20 – MLME-RAP-MANAGEMENT.indication parameters

Name	Type	Valid range	Description
Device Address	Device address	0x0000 to 0xffffd	The short address of the device that has been allocated or deallocated a RAP.
RAPCharacteristics	RAP characteristics	–	The characteristics of the RAP.
SecurityUse	Boolean	TRUE or FALSE	An indication whether the received frame is using security. This value is set to TRUE if the security enable subfield was set to 1 or FALSE if the security enabled subfield was set to 0.
ACLEntry	integer	0x00 to 0x08	The macSecurityMode parameter value from the ACL entry associated with the sender of the data frame.

6.2.8.4.3 When generated

This primitive is generated by the MLME of the WMC to its next higher layer whenever a RAP is allocated or deallocated following the reception of a RAP request command by the MLME. The MLME of the WMC also generates this primitive when a RAP deallocation is initiated by the WMC itself. The characteristics type field in the RAP characteristics parameter will be equal to 1 if a RAP has been allocated or 0 if a RAP has been deallocated.

6.2.8.4.4 Effect on receipt

On receipt of this primitive the next higher layer is notified of the allocation or deallocation of a RAP.

6.2.8.5 RAP management message sequence charts

Figure 5 and Figure 6 illustrate the sequence of messages necessary for successful RAP management. The first depicts the message flow for the case in which the device initiates the RAP allocation. The second depicts the message flow for the two cases for which a RAP deallocation occurs, firstly by a device a) and secondly by the WMC b), see Figure 6.

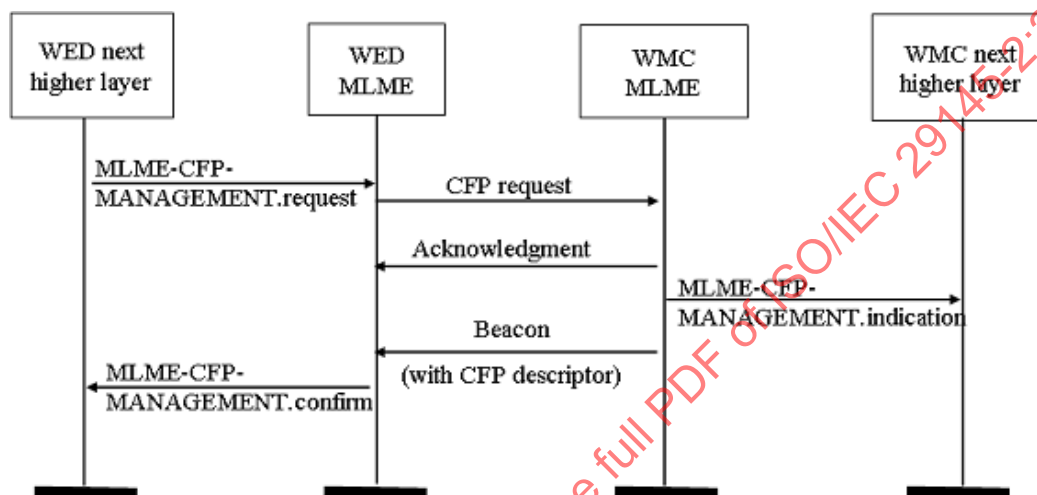


Figure 5 – Message sequence chart for RAP allocation initiated by a device

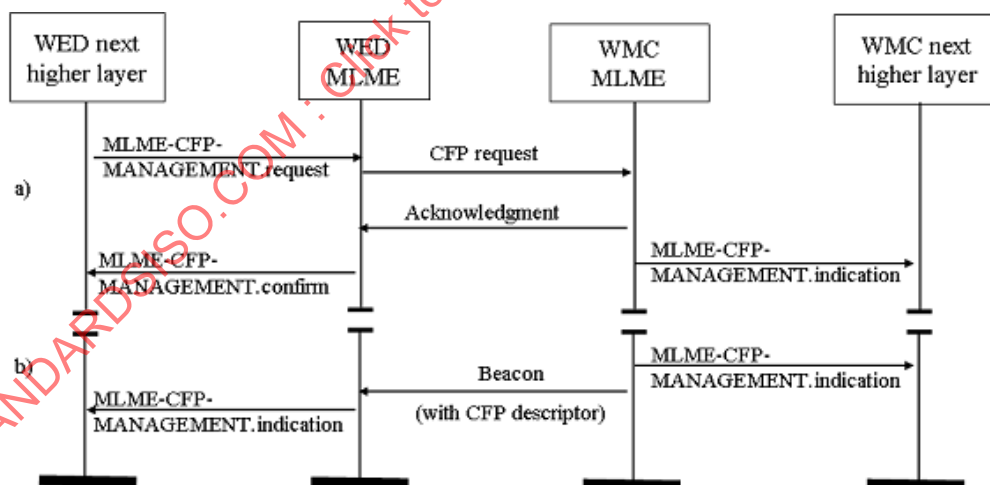


Figure 6 – Message sequence chart for RAP deallocation initiated by a device and the WMC

6.2.9 Primitives for orphan notification

6.2.9.1 Overview

MLME-SAP orphan notification primitives define how a WRC can issue a notification of an orphaned device. These orphan notification primitives are optional for a WED.

6.2.9.2 MLME-BEACON-LOST.indication

6.2.9.2.1 Function

The MLME-ORPHAN.indication primitive allows the MLME of a WRC to notify the next higher layer of the presence of an orphaned device.

6.2.9.2.2 Semantics of the service primitive

The semantics of the MLME-BEACON-LOST.indication primitive are as follows:

```
MLME-BEACON-LOST.indication  (
                                OrphanAddress,
                                SecurityUse,
                                ACLEntry
                                )
```

Table 21 specifies the parameters for the MLME-BEACON-LOST.indication primitive.

Table 21 – MLME-BEACON-LOST.indication parameters

Name	Type	Valid range	Description
OrphanAddress	Device Address	Extended 64 bit IEEE address	The address of the orphaned device
SecurityUse	Boolean	TRUE or FALSE	An indication of whether the received MAC command frame is using security. This value is set to TRUE if the security enable subfield was set to 1 or FALSE if the security enabled subfield was set to 0.
ACLEntry	Integer	0x00 to 0x08	The macSecurityMode parameter value from the ACL entry associated with the sender of the data frame. This value is set to 0x08 if the sender of the data frame was not found in the ACL.

6.2.9.2.3 When generated

The MLME-ORPHAN.indication primitive is generated by the MLME of a WRC and issued to its next higher layer on receipt of an orphan notification command.

6.2.9.2.4 Effect on receipt

The effect on receipt of the MLME-ORPHAN.indication primitive is that the next higher layer is notified of the orphaned device. The next higher layer then determines whether the device was previously associated and issues the MLME-ORPHAN.response primitive to the MLME with its decision.

6.2.9.3 MLME-BEACON-LOST.response

6.2.9.3.1 Function

The MLME-ORPHAN.response primitive allows the next higher layer of a WRC to respond to the MLME-ORPHAN.indication primitive.

6.2.9.3.2 Semantics of the primitives

The semantics of MLME-BEACON-LOST.response primitive are as follows:

```
MLME-BEACON-LOST.response  (
                                OrphanAddress,
                                ShortAddress,
                                )
```

AssociatedMember,
SecurityEnable
)

Table 22 specifies the parameters for the of MLME-BEACON-LOST.response primitive.

Table 22 – MLME-BEACON-LOST.indication parameters

Name	Type	Valid range	Description
OrphanAddress	Device address	Extended 64 bit IEEE address	The address of the orphaned device.
ShortAddress	Integer	0x0000 to 0xffff	The short address allocated to the orphaned device if it is associated with this WRC. The special short address 0xffff indicates that no short address was allocated, and the device will use its 64-bit extended address in all communications. If the device was not associated with this WRC, this field will contain the value 0xffff and shall be ignored on receipt.
AssociatedMember	Boolean	TRUE or FALSE	TRUE if the orphaned device is associated with this WRC, FALSE otherwise.
SecurityEnable	Boolean	TRUE or FALSE	TRUE if security is enabled for this transfer or FALSE otherwise.

6.2.9.3.3 When generated

The MLME-ORPHAN.response primitive is generated by the next higher layer and issued to its MLME when it reaches a decision about whether the orphaned device indicated in the MLME-ORPHAN.indication primitive is associated.

6.2.9.3.4 Effect on receipt

If the AssociatedMember parameter is set to TRUE, the orphaned device is associated with the WRC. In this case, the MLME generates and sends the WRC realignment command to the orphaned device containing the value of the ShortAddress field. This command is sent in the CAP if the WRC is on a beacon-enabled mesh network or immediately otherwise. If the AssociatedMember parameter is set to FALSE, the orphaned device is not associated with the WRC and this primitive will be ignored.

6.2.9.4 Beacon lost (orphan notification) message sequence chart

Figure 7 illustrates the sequence of messages necessary for a WRC to issue a notification of an orphaned device.

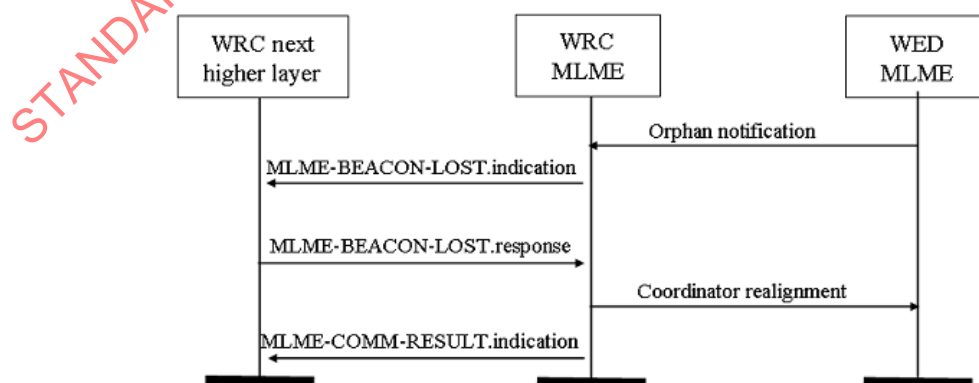


Figure 7 – Beacon lost (orphan notification) message sequence chart

6.2.10 Primitives for resetting the MAC layer

6.2.10.1 General

MLME-SAP reset primitives specify how to reset the MAC sublayer to its default values. All devices shall provide an interface for these reset primitives.

6.2.10.2 MLME-RESET.request

6.2.10.2.1 Function

The MLME-RESET.request primitive allows the next higher layer to request that the MLME perform a reset operation.

6.2.10.2.2 Semantics of the service primitive

The semantics of the MLME-RESET.request primitive are as follows:

```
MLME-RESET.request (
    SetDefaultMIB
)
```

Table 23 specifies the parameter for the MLME-RESET.request primitive.

Table 23 – MLME-RESET.request parameters

Name	Type	Valid range	Description
SetDefaultMIB	Boolean	TRUE or FALSE	If TRUE, the MAC sublayer is reset and all MAC MIB attributes are set to their default values. If FALSE, the MAC sublayer is reset but all MAC MIB attributes retain their values prior to the generation of the MLME-RESET.request primitive.

6.2.10.2.3 When generated

The MLME-RESET.request primitive is generated by the next higher layer and issued to the MLME to request a reset of the MAC sublayer to its initial conditions. The MLME-RESET.request primitive is issued prior to the use of the MLME-START.request or the MLME-ASSOCIATE.request primitives.

6.2.10.2.4 Effect on receipt

On receipt of the MLME-RESET.request primitive, the MLME issues the PLME-SET-TRX-STATE.request primitive with a state of FORCE_TRX_OFF. On receipt of the PLME-SET-TRXSTATE.confirm primitive, the MAC sublayer is then set to its initial conditions, clearing all internal variables to their default values. If the SetDefaultPIB parameter is set to TRUE, the MAC PIB attributes are set to their default values. The MLME-RESET.confirm primitive with a status of SUCCESS is issued on completion.

6.2.10.3 MLME-RESET.confirm

6.2.10.3.1 Function

The MLME-RESET.confirm primitive reports the results of the reset operation.

6.2.10.3.2 Semantics of the service primitive

The semantics of the MLME-RESET.confirm primitive are as follows:

```
MLME-RESET.confirm (
    Status
)
```

Table 24 specifies the parameter for the MLME-RESET.confirm primitive.

Table 24 – MLME-RESET.confirm parameters

Name	Type	Valid range	Description
Status	Enumeration	SUCCESS or DISABLE_TRX_FAILURE	The result of the reset operation.

6.2.10.3.3 When generated

The MLME-RESET.confirm primitive is generated by the MLME and issued to its next higher layer in response to an MLME-RESET.request primitive and following the receipt of the PLME-SET-TRXSTATE.confirm primitive.

6.2.10.3.4 Effect on receipt

On receipt of the MLME-RESET.confirm primitive, the next higher layer is notified of its request to reset the MAC sublayer. This primitive returns a status of SUCCESS indicating that the request to reset the MAC sublayer was successful.

6.2.11 Primitives for specifying the receiver enable time

6.2.11.1 Overview

MLME-SAP receiver state primitives define how a device can enable or disable the receiver at a given time. These receiver state primitives are optional.

6.2.11.2 MLME-RX-ON.request

6.2.11.2.1 Function

The MLME-RX-ENABLE.request primitive allows the next higher layer to request that the receiver is either enabled for a finite period of time or disabled.

6.2.11.2.2 Semantics of the service primitive

The semantics of the MLME-RX-ON.request primitive are as follows:

```
MLME-RX-ON.request (
    DeferPermit,
    RxOnTime,
    RxOnDuration
)
```

Table 25 specifies the parameters for the MLME-RX-ON.request primitive.

Table 25 – MLME-RX-ON.request parameters

Name	Type	Valid range	Description
DeferPermit	Boolean	TRUE or FALSE	TRUE if the receiver enable can be deferred until during the next superframe if the requested time has already passed. FALSE if the receiver enable is only to be attempted in the current superframe. This parameter is ignored for non-beacon enabled PANs.
RxOnTime	Integer	0x000000 to 0xfffff	The number of symbols from the start of the superframe before the receiver is to be enabled. The precision of this value is a minimum of 20 bit, with the lowest four bit being the least significant. This parameter is ignored for non-beacon enabled PANs.
RxOnDuration	Integer	0x000000 to 0xfffff	The number of symbols for which the receiver is to be enabled.

6.2.11.2.3 When generated

The MLME-RX-ENABLE.request primitive is generated by the next higher layer and issued to the MLME to enable the receiver for a fixed duration, at a time relative to the start of the current or next superframe on a beacon-enabled PAN. This primitive may also be generated to cancel a previously generated request to enable the receiver. The receiver is enabled or disabled exactly once per primitive request.

6.2.11.2.4 Effect on receipt

The MLME will treat the request to enable or disable the receiver as secondary to other responsibilities of the device (e.g., CFP, WRC beacon tracking, beacon transmissions). When the primitive is issued to enable the receiver, the device will enable its receiver until either the device has a conflicting responsibility or the time specified by RxOnDuration has expired. In the case of a conflicting responsibility, the device will interrupt the receive operation. After the completion of the interrupting operation, the RxOnDuration will be checked to determine whether the time has expired. If so, the operation is complete. If not, the receiver is re-enabled until either the device has another conflicting responsibility or the time specified by RxOnDuration has expired. When the primitive is issued to disable the receiver, the device will disable its receiver unless the device has a conflicting responsibility.

6.2.11.3 MLME-RX-ON.confirm

6.2.11.3.1 Function

The MLME-RX-ENABLE.confirm primitive reports the results of the attempt to enable or disable the receiver.

6.2.11.3.2 Semantics of the service primitive

The semantics of the MLME-RX-ON.confirm primitive are as follows:

```
MLME-RX-ON.confirm (
    Status
)
```

Table 26 specifies the parameter for the MLME-RX-ON.confirm primitive.

Table 26 – MLME-RX-ON.confirm parameters

Name	Type	Valid range	Description
Status	Enumeration	SUCCESS, TX_ACTIVE, OUT_OF_CAP, or INVALID_PARAMETER	The result of the receiver enable request.

6.2.11.3.3 When generated

The MLME-RX-ENABLE.confirm primitive is generated by the MLME and issued to its next higher layer in response to an MLME-RX-ENABLE.request primitive.

6.2.11.3.4 Effect on receipt

On receipt of the MLME-RX-ENABLE.confirm primitive, the next higher layer is notified of its request to enable or disable the receiver. This primitive returns a status of either SUCCESS, if the request to enable or disable the receiver was successful, or the appropriate error code.

6.2.12 Primitives for channel scanning

6.2.12.1 Overview

MLME-SAP scan primitives define how a device can determine the energy usage or the presence or absence of PANs in a communications' channel. All devices shall provide an interface for these scan primitives.

6.2.12.2 MLME-SCAN.request

6.2.12.2.1 Function

The MLME-SCAN.request primitive is used to initiate a channel scan over a given list of channels. A device can use a channel scan to measure the energy on the channel, search for the WRC with which it is associated, or search for all WRCs transmitting beacon frames within the POS of the scanning device.

6.2.12.2.2 Semantics of the service primitive

The semantics of the MLME-SCAN.request primitive are as follows:

```
MLME-SCAN.request (
    ScanType,
    ScanChannels,
    ScanDuration
)
```

Table 27 specifies the parameters for the MLME-SCAN.request primitive.

Table 27 – MLME-SCAN.request parameters

Name	Type	Valid range	Description
ScanType	Integer	0x00 to 0x03	Indicates the type of scan performed: 0x00 = energy detection scan (WRC only), 0x01 = active scan (WRC only), 0x02 = passive scan, 0x03 = orphan scan.
ScanChannels	Bitmap	32bit field	The five most significant bits ($b_{27}, \dots, b_{31}$) are reserved. The 27 least significant bits ($b_0, b_1, \dots, b_{26}$) indicate which channels are to be scanned (1 = scan, 0 = do not scan) for each of the 27 valid channels.
ScanDuration	Integer	0 to 14	A value used to calculate the length of time to spend scanning each channel for energy detection, active and passive scans. This parameter is ignored for orphan scans. The time spent scanning each channel is ($aBaseSuperframeDuration * (2^n + 1)$) symbols, where n is the value of the ScanDuration parameter.

6.2.12.2.3 When generated

The MLME-SCAN.request primitive is generated by the next higher layer and issued to its MLME to initiate a channel scan to search for activity within the POS of the device. This primitive can be used to perform an ED scan to determine channel usage, an active or passive scan to locate beacon frames containing any PAN identifier, or an orphan scan to locate a PAN to which the device is currently associated. All devices shall be capable of performing passive scans and orphan scans. ED scans and active scans are optional for a WED.

6.2.12.2.4 Effect on receipt

If the MLME receives the MLME-SCAN.request primitive while performing a previously initiated scan operation, it issues the MLME-SCAN.confirm primitive with a status of SCAN_IN_PROGRESS. Otherwise, the MLME initiates a scan in all channels specified in the ScanChannels parameter.

6.2.12.3 MLME-SCAN.confirm

6.2.12.3.1 Function

The MLME-SCAN.confirm primitive reports the result of the channel scan request.

6.2.12.3.2 Semantics of the service primitive

The semantics of the MLME-SCAN.confirm primitive are as follows:

```
MLME-SCAN.confirm (
    Status,
    ScanType,
    ChannelPage,
    UnscannedChannels,
    ResultListSize,
    EnergyDetectList,
    PANDescriptorList
)
```

Table 28 specifies the parameters for the MLME-SCAN.confirm primitive.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 29145-2:2014

Table 28 – MLME-SCAN.confirm parameters

Name	Type	Valid range	Description
Status	Enumeration	SUCCESS, NO_BEACON, or INVALID_PARAMETER	The status of the scan request.
ScanType	Integer	0x00 to 0x03	Indicates if the type of scan performed is: 0x00 = energy detection scan (WRC only), 0x01 = active scan (WRC only), 0x02 = passive scan, 0x03 = orphan scan.
UnscannedChannels	Bitmap	32 bit field	Indicates which channels given in the request were not scanned (1 = not scanned, 0 = scanned or not requested). This parameter is only valid for passive or active scans.
ResultListSize	Integer	Implementation specific	The number of elements returned in the appropriate result lists. This value is 0 for the result of an orphan scan.
EnergyDetectList	List of integers	0x00 to 0xff for each integer	The list of energy measurements, one for each channel searched during an energy detection scan. This parameter is null for active, passive and orphan scans.
PANDescriptorList	List of PANDescriptor values		The list of PAN descriptors, one for each beacon found during an active or passive scan. This parameter is null for energy detection and orphan scans.

6.2.12.3.3 When generated

The MLME-SCAN.confirm primitive is generated by the MLME and issued to its next higher layer when the channel scan initiated with the MLME-SCAN.request primitive has completed. If the MLMESCAN.request primitive requested an active, passive, or orphan scan, the EnergyDetectList parameter will be null. If the MLME-SCAN.request primitive requested an ED or orphan scan, the PANDescriptorList parameter will be null; this is also the case if the MLME-SCAN.request primitive requested an active or passive scan with *macAutoRequest* set to FALSE. If the MLME-SCAN.request primitive requested an orphan scan, the ResultListSize parameter will be set to zero.

6.2.12.3.4 Effect on receipt

On receipt of the MLME-SCAN.confirm primitive, the next higher layer is notified of the results of the scan procedure. If the requested scan was successful, the status parameter will be set to SUCCESS. Otherwise, the status parameter indicates the error.

6.2.13 Communication status primitive**6.2.13.1 Overview**

The MLME-SAP communication status primitive defines how the MLME communicates to the next higher layer about transmission status, when the transmission was instigated by a response primitive, and about security errors on incoming packets. All devices shall provide an interface for this communication status primitive.

6.2.13.2 MLME-COMM-RESULT.indication

6.2.13.2.1 Function

This primitive allows the MLME to indicate a communications status.

6.2.13.2.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-COMM-RESULT.indication (
    MeshID,
    SrcAddrMode,
    SrcAddr,
    DstAddrMode,
    DstAddr,
    Status
)
```

Table 29 specifies the parameters for the MLME-COMM- RESULT.indication primitive.

Table 29 – MLME-COMM-RESULT.indication parameters

Name	Type	Valid range	Description
MeshID	integer	0x0000 to 0xffff	The 16-bit PAN identifier of the device from which the frame was received or to which the frame was being sent.
SrcAddrMode	integer	0x00 to 0x03	The source addressing mode for this primitive. This value can take one of the following values: 0x00 = no address (addressing fields omitted). 0x01 = reserved. 0x02 = 16-bit short address. 0x03 = 64-bit extended address.
SrcAddr	Device address	SrcAddrMode parameters	The individual device address of the entity from which the frame causing the error originated.
DstAddrMode	Integer	0x00 to 0x03	The destination addressing mode for this primitive. This value can take one of the following values: 0x00 = no address (addressing fields omitted). 0x01 = reserved. 0x02 = 16-bit short address. 0x03 = 64-bit extended address.
DstAddr	Device address	DstAddrMode parameters	The individual device address of the device for which the frame was intended.
Status	Enumeration	SUCCESS. TRANSACTION_OVERFLOW TRANSACTION_EXPIRED CHANNEL_ACCESS_FAILURE NO_ACK UNAVAILABLE_KEY FRAME_TOO_LONG FAILED_SECURITY_CHECK or INVALID_PARAMETER	The communications status.

6.2.13.2.3 When generated

This primitive is generated by the MLME and issued to its next higher layer either following a transmission instigated through response primitive or on receipt of a frame which generates an error in its secure processing.

6.2.13.2.4 Effect on receipt

On receipt of this primitive, the next higher layer is notified of the communication status of a transmission or that an error has occurred during the secure processing of incoming frame.

6.2.14 Primitives for writing MAC PIB attributes

6.2.14.1 Overview

These primitives define how MAC PIB attributes may be written. All devices shall provide an interface for these primitives.

6.2.14.2 MLME-WRITE-MIB.request

6.2.14.2.1 Function

This primitive attempts to write the given value to the indicated MAC PIB attribute.

6.2.14.2.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-WRITE-MIB.request (
    MIBAttribute,
    MIBAttributeValue
)
```

Table 30 specifies the parameters for MLME-WRITE-MIB.request primitive.

Table 30 – MLME-WRITE-MIB.request parameters

Name	Type	Valid range	Description
MIBAttribute	Integer	–	The identifier of the MAC PIB attribute to write.
MIBAttributeValue	Various	–	The value to write to the indicated MAC PIB attribute.

6.2.14.2.3 When generated

This primitive is generated by the next higher layer and issued to its MLME to write the indicated MAC PIB attribute.

6.2.14.2.4 Effect on receipt

On receipt of this primitive, the MLME attempts to write the given value to the indicated MAC PIB attribute in its database. If the PIBAttribute parameter specifies an attribute that is not found in the database, the MLME will issue the MLME-SET.confirm primitive with a status of UNSUPPORTED_ATTRIBUTE. If the PIBAttributeValue parameter specifies a value that is out of the valid range for the given attribute, the MLME will issue the MLME-SET.confirm primitive with a status of INVALID_PARAMETER. If the requested MAC PIB attribute is successfully written, the MLME will issue the MLME-SET.confirm primitive with a status of SUCCESS.

6.2.14.3 MLME-WRITE-MIB.confirm

6.2.14.3.1 Function

This primitive reports the results of an attempt to write a value to a MAC PIB attribute.

6.2.14.3.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-WRITE-MIB.confirm (
    Status,
    MIBAttribute
)
```

Table 31 specifies the parameters for the MLME-WRITE-MIB.confirm primitive.

Table 31 – MLME-WRITE-MIB.confirm parameters

Name	Type	Valid range	Description
Status	Enumeration	SUCCESS, UNSUPPORTED_ATTRIBUTE, or INVALID_PARAMETER	The result of the request to write the MAC PIB attribute.
MIBAttribute	Integer	–	The identifier of the MAC PIB attribute that was written.

6.2.14.3.3 When generated

This primitive is generated by the MLME and issued to its next higher layer in response to an MLME-SET.request primitive. This primitive returns a status of either SUCCESS, indicating that the requested value was written to the indicated MAC PIB attribute, or an error code of UNSUPPORTED_ATTRIBUTE or INVALID_PARAMETER.

Effect on receipt of this primitive, the next higher layer is notified of the result of its request to set the value of a MAC PIB attribute. If the requested value was written to the indicated MAC PIB attribute, the status parameter will be set to SUCCESS. Otherwise, the status parameter indicates the error.

6.2.15 Primitives for updating the superframe configuration

6.2.15.1 Overview

These primitives define how an WRC can request to start using a new superframe configuration in order to either initiate a PAN, begin transmitting beacons on an already existing PAN, facilitating device discovery, or to stop transmitting beacons. These primitives are optional for a WED.

6.2.15.2 MLME-START.request

6.2.15.2.1 Function

This primitive makes a request for the device to start using a new superframe configuration.

6.2.15.2.2 Semantics of the service primitive

The semantics of this primitive is as follows:

MLME-START.request (

- MeshId,
- LogicalChannel,
- BeaconOrder,
- SuperframeOrder,
- PANWRC,
- BatteryLifeExtension,
- Co-ordRealignment,
- SecurityEnable,
- My_BTTS,
- BTDSL,
- MaxBeaconTxNumber,
- Profile ID

)

Table 32 specifies the parameters for the MLME-START.request primitive.

Table 32 – MLME-START.request parameters

Name	Type	Valid range	Description
MeshId	integer	0x0000-0xffff	The mesh identifier to be used by the beacon.
LogicalChannel	integer	logical channel range	The logical channel on which to start transmitting beacons.
BeaconOrder	integer	0 to 15	This specifies how often the beacon is to be transmitted. The BeaconOrder, <i>BO</i> , and the beacon interval, <i>BI</i> , are related as follows: for $0 \leq BO \leq 14$, $BI = aBaseSuperframeduration * 2^{BO}$ symbols. If <i>BO</i> = 15, the WRC will not transmit a beacon and the SuperframeOrder parameter value is ignored.
SuperframeOrder	integer	0 to <i>BO</i> or 15	This specifies the length of the active portion of the superframe, including the beacon frame. The SuperframeOrder, <i>SO</i> , and the superframe duration, <i>SD</i> , are related as follows: for $0 \leq SO \leq BO \leq 14$, $SD = aBaseSuperFrameduration * 2^{SO}$ symbols. If <i>SO</i> = 15, the superframe will not be active after the beacon.
PANWRC	Boolean	TRUE or FALSE	If this value is TRUE, the device will become the PAN WRC of a new PAN. If this value is FALSE, the device will begin transmitting beacons on the PAN with which it is associated.
BatteryLifeExtension	Boolean	TRUE or FALSE	If this value is TRUE, the receiver of the beaconing device is disabled <i>mac-BattLifeExtPeriods</i> full backoff periods after the inter-frame space (IFS) period of the beacon frame. If this value is FALSE, the receiver of the beaconing device remains enabled for the entire CAP.
Co-ordRealignment	Boolean	TRUE or FALSE	TRUE if a WRC realignment command is to be transmitted prior to changing the superframe configuration or FALSE otherwise.
SecurityEnable	Boolean	TRUE or FALSE	TRUE if security is enabled for beacon transmissions or FALSE otherwise.
My_BTTS	Integer	0x00 to 0xff	Beacon Transfer offset parameter with BOP
BTDSL	BYTE	0x00 to 0xff	Beacon size + TxBeaconMargin. Calculated BOP sized.
MaxBeaconTxNumber	BYTE	0x00 to 0xff	Maximum Beacon Number with BOP
Profile ID	BYTE	0x00 to 0xff	Application identifier

6.2.15.2.3 When generated

This primitive is generated by the next higher layer and issued to its MLME to request that a device start using a new superframe configuration.

6.2.15.2.4 Effect on receipt

If this primitive is received when *macShortAddress* is set to 0xffff, the MLME will issue the MLME-START.confirm primitive with a status of NO_SHORT_ADDRESS. On receipt of this primitive, the MLME sets *macBeaconOrder* to the value of the BeaconOrder parameter. If *macBeaconOrder* is equal to 15, the MLME will also set *macSuperframeOrder* to 15. In this case, this primitive configures a beaconless PAN. If *macBeaconOrder* is less than 15, the MLME will set *macSuperframeOrder* to the value of the SuperframeOrder parameter. In the case where the PANWRC parameter is set to TRUE, the MLME updates *macMeshId* with the value of the MeshId parameter and *phyCurrentChannel* with the value of the LogicalChannel parameter, by issuing the PLME-SET.request primitive. In the case where the PANWRC parameter is set to FALSE, the MLME ignores the MeshId and LogicalChannel parameters.

6.2.15.3 MLME-START.confirm

6.2.15.3.1 Function

This primitive reports the results of the attempt to start using a new superframe configuration.

6.2.15.3.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-START.confirm (
    Status
)
```

Table 33 specifies the parameters for the MLME-START.confirm primitive.

Table 33 – MLME-START.confirm parameters

Name	Type	Valid range	Description
Status	Enumeration	SUCCESS, NO_SHORT_ADDRESS, UNAVAILABLE_KEY, FRAME_TOO_LONG, FAILED_SECURITY_CHECK, or INVALID_PARAMETER	The result of the attempt to start using an updated superframe configuration.

6.2.15.3.3 When generated

This primitive is generated by the MLME and issued to its next higher layer in response to an MLME-START.request primitive. This primitive returns a status of either SUCCESS, indicating that the MAC sublayer has started using the new superframe configuration, or an error code of NO_SHORT_ADDRESS, UNAVAILABLE_KEY, FRAME_TOO_LONG, FAILED_SECURITY_CHECK or INVALID_PARAMETER.

6.2.15.3.4 Effect on receipt

On receipt of this primitive, the next higher layer is notified of the result of its request to start using a new superframe configuration. If the MAC sublayer has been successful, the status parameter will be set to SUCCESS. Otherwise, the status parameter indicates the error.

6.2.15.4 Message sequence chart for updating the superframe configuration

Figure 8 illustrates the sequence of messages necessary for initiating beacon transmissions in a WRC.

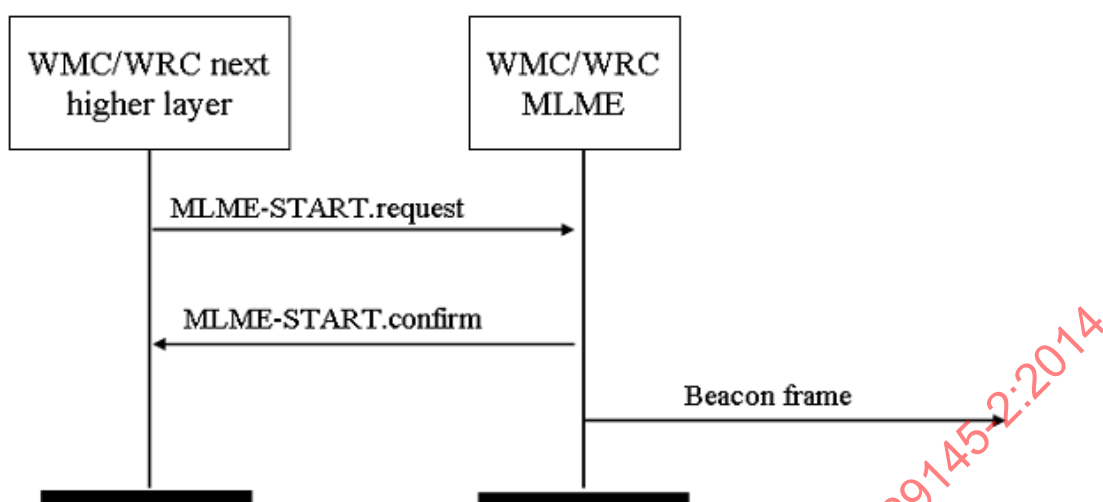


Figure 8 – Message sequence chart for updating the superframe configuration

6.2.16 Primitives for synchronising with a WRC

6.2.16.1 Overview

These primitives define how synchronisation with a WRC may be achieved and how a loss of synchronisation is communicated to the next higher layer.

All devices shall provide an interface for these primitives.

6.2.16.2 MLME-SYNC.request

6.2.16.2.1 Function

This primitive requests to synchronise with the WRC by acquiring and, if specified, tracking its beacons.

6.2.16.2.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```

MLME-SYNC.request (
    LogicalChannel,
    TrackBeacon
)

```

Table 34 specifies the parameters for the MLME-SYNC.request primitive.

Table 34 – MLME-SYNC.request parameters

Name	Type	Valid range	Description
LogicalChannel	Integer	PHY supported used logical channel range	The logical channel on which to attempt WRC synchronisation.
TrackBeacon	Boolean	TRUE or FALSE	TRUE if the MLME is to synchronise with the next beacon and attempt to track all future beacons. FALSE if the MLME is to synchronise with only the next beacon.

6.2.16.2.3 When generated

This primitive is generated by the next higher layer of a device on a beacon enabled PAN and issued to its MLME to synchronise with the WRC.

6.2.16.2.4 Effect on receipt

If this primitive is received by the MLME on a beacon enabled PAN, it will first set *phyCurrentChannel* equal to the LogicalChannel parameter by issuing the PLME-SET.request primitive to the PHY layer. The MLME then enables its receiver and search for the current network beacon. If the TrackBeacon parameter is equal to TRUE, the MLME will track the beacon, i.e. enable its receiver just before the expected time of each beacon so that the beacon frame can be processed. If the TrackBeacon parameter is equal to FALSE, the MLME will locate the beacon but not continue to track it. If this primitive is received by the MLME while it is currently tracking the beacon, the MLME will not discard the primitive but rather treat it as a new synchronisation request. If the beacon could not be located either on its initial search or during tracking, the MLME will issue the MLME-SYNC-LOSS.indication primitive with a loss reason of BEACON_LOST.

6.2.16.3 MLME-SYNC-LOSS.indication

6.2.16.3.1 Function

This primitive indicates the loss of synchronisation with a WRC.

6.2.16.3.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-SYNC-LOSS.indication (
    LossReason
)
```

Table 35 specifies the parameters for the MLME-SYNC-LOSS.indication primitive.

Table 35 – MLME-SYNC-LOSS.indication parameters

Name	Type	Valid range	Description
LossReason	Enumeration	REALIGNMENT or BEACON_LOST	The reason that synchronisation was lost.

6.2.16.3.3 When generated

This primitive is generated by the MLME of a device and issued to its next higher layer in the event of a loss of synchronisation with the WRC. It is also generated by the MLME of a PAN WRC and issued to its next higher layer in the event of a mesh ID conflict.

6.2.16.3.4 Effect on receipt

On receipt of this primitive, the next higher layer is notified of a loss of synchronisation.

6.2.16.4 Message sequence chart for synchronising with a WRC

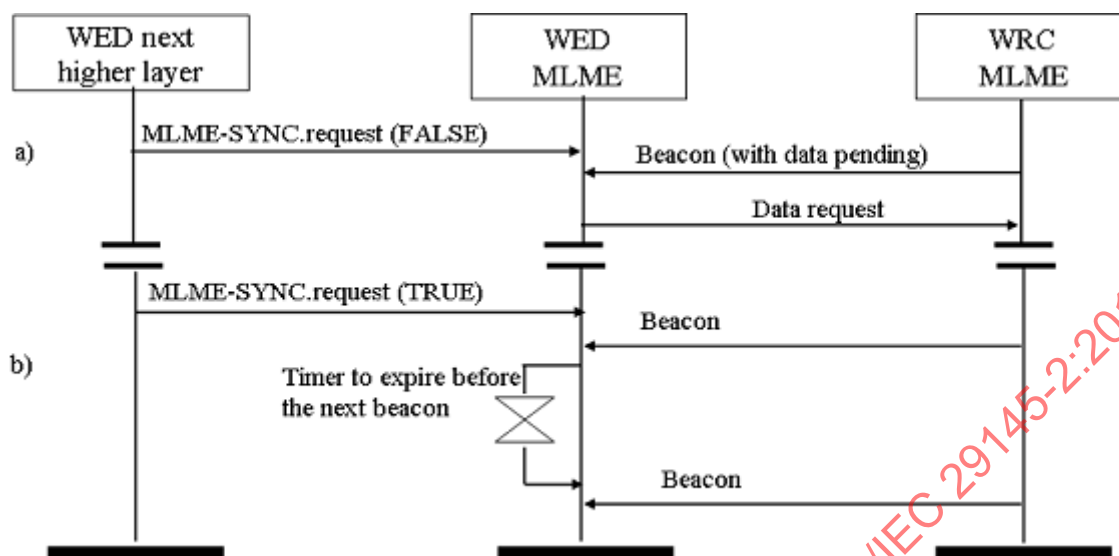


Figure 9 – Message sequence chart for synchronising to a WRC in a beacon-enabled WPAN

Figure 9 illustrates the sequence of messages necessary for a device to synchronise with a WRC. In a), a single synchronisation request is issued. The MLME then searches for a beacon and, if found, determines whether the WRC has any data pending for the device. If so, the data is requested. In b), a track synchronisation request is issued. The MLME then searches for a beacon and, if found, attempts to keep track of it using a timer which expires just before the expected time of the next beacon. The MLME also checks for any data pending in the WRC for the device whenever a beacon frame is received.

6.2.17 Primitives for requesting data from a WRC

6.2.17.1 Overview

These primitives define how to request data from a WRC. All devices shall provide an interface for these primitives.

6.2.17.2 MLME-INDIRECT-COMM.request

6.2.17.2.1 Function

This primitive prompts the device to request data from the WRC.

6.2.17.2.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```

MLME-INDIRECT-COMM.request (
    Co-ordAddrMode,
    Co-ordMeshId,
    Co-ordAddress,
    SecurityEnable
)
  
```

Table 36 specifies the parameter for the MLME-INDIRECT-COMM.request primitive.

Table 36 – MLME-INDIRECT-COMM.request parameters

Name	Type	Valid range	Description
Co-ordAddrMode	Integer	0x02 to 0x03	The addressing mode of the WRC to which the poll is intended. This parameter can take one of the following values: 2 = 16-bit short address, 3 = 64-bit extended address.
Co-ordMeshId	Integer	0x0000 to 0xffff	The PAN identifier of the WRC to which the poll is intended.
Co-ordAddress	Device address	Co-ordAddrMode parameters.	The address of the WRC to which the poll is intended.
SecurityEnable	Boolean	TRUE or FALSE	TRUE if security is enabled for this transfer or FALSE otherwise.

6.2.17.2.3 When generated

This primitive is generated by the next higher layer and issued to its MLME when data is to be requested from a WRC.

6.2.17.2.4 Effect on receipt

On receipt of this primitive the MLME generates and sends a data request command. If the poll is directed to the PAN WRC, the data request command is generated without any destination address information present. Otherwise, the data request command is generated with the destination address information comprised of the Co-ordMeshId and Co-ordAddress parameters.

6.2.17.3 MLME-INDIRECT-COMM.confirm

6.2.17.3.1 Function

This primitive reports the results of a request to poll the WRC for data.

6.2.17.3.2 Semantics of the service primitive

The semantics of this primitive is as follows:

```
MLME-INDIRECT-COMM.confirm (
    Status
)
```

Table 37 specifies the parameters for the MLME-INDIRECT-COMM.confirm primitive.

Table 37 – MLME-INDIRECT-COMM.confirm parameters

Name	Type	Valid range	Description
Status	Enumeration	SUCCESS, CHANNEL_ACCESS_FAILURE, NO_ACK, NO_DATA, UNAVAILABLE_KEY, FAILED_SECURITY_CHECK, or INVALID_PARAMETER	The status of the data request.

6.2.17.3.3 When generated

This primitive is generated by the MLME and issued to its next higher layer in response to an MLMEPOLL.request primitive. If the request was successful, the status parameter will be

equal to SUCCESS indicating a successful poll for data. Otherwise, the status parameter indicates an error code of CHANNEL_ACCESS_FAILURE, NO_ACK, NO_DATA, UNAVAILABLE_KEY, FAILED_SECURITY_CHECK or INVALID_PARAMETER.

6.2.17.3.4 Effect on receipt

On receipt of this primitive, the next higher layer is notified of the status of the procedure to request data from the WRC.

6.2.17.3.5 Message sequence chart for requesting data from a WRC

Figure 10 illustrates the sequence of messages necessary for a device to request data from a WRC. In both cases, a poll request is issued to the MLME, which then sends a data request command to the WRC. In a), the corresponding acknowledgement has the frame pending (FP) subfield set to 0 and the MLME issues the poll request confirmation immediately. In b), the corresponding acknowledgement has the frame pending (FP) subfield set to 1 and the MLME enables the receiver in anticipation of the data frame from the WRC. On receipt of this data frame, the MLME issues a poll request confirmation followed by a data indication containing the data of the received frame.

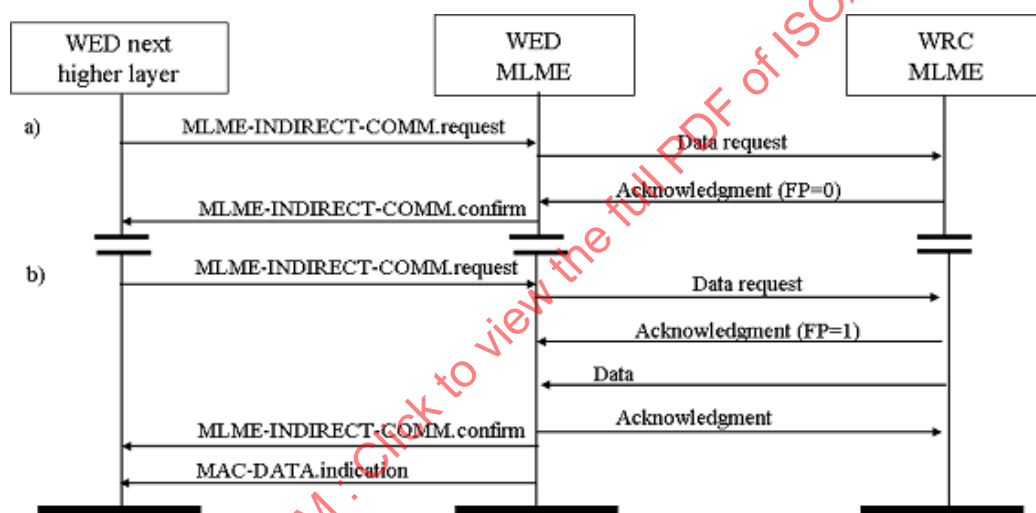


Figure 10 – Message sequence chart for requesting data from the WRC

6.3 MAC frame formats

6.3.1 General

This subclause specifies the format of the MAC frame (MPDU). Each MAC frame consists of the following basic components.

- A MHR, which comprises frame control, sequence number, address information and security related information.
- A MAC payload, of variable length, which contains information specific to the frame type. Acknowledgement frames do not contain a payload.
- A MFR, which contains a FCS.

The frames in the MAC layer are described as a sequence of fields in a specific order. All frame formats in this subclause are depicted in the order in which they are transmitted by the PHY, from left to right, where the leftmost bit is transmitted first in time. Bits within each field are numbered from 0 (leftmost and least significant) to $k - 1$ (rightmost and most significant), where the length of the field is k bit. Fields that are longer than a single octet are sent to the PHY in the order from the octet containing the lowest numbered bits to the octet containing

the highest numbered bits. For every MAC frame, all reserved bits shall be set to zero upon transmission and shall be ignored upon receipt.

6.3.2 General MAC frame format

The MAC frame format is composed of a MHR, a MAC payload and a MFR. The fields of the MHR appear in a fixed order. However, the addressing fields may not be included in all frames. The general MAC frame shall be formatted as illustrated in Figure 11.

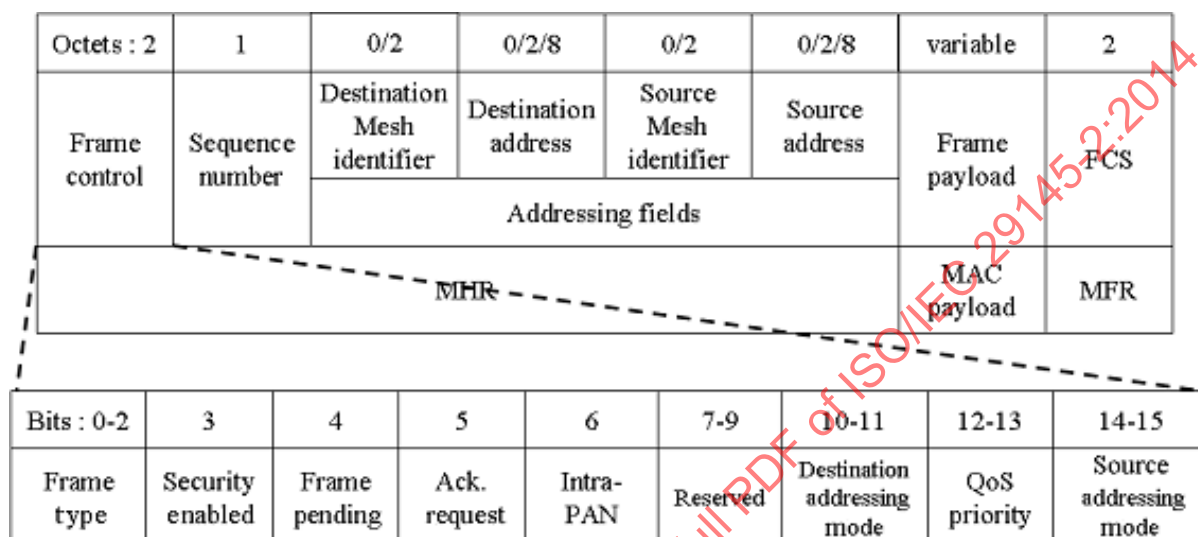


Figure 11 – General MAC frame format

The frame control field is 2 octets in length and contains information defining the frame type, addressing fields and other control flags. The frame control field shall be formatted as illustrated in Figure 11. The frame type subfield is 3 bit in length and shall be set to one of the non-reserved values. The security enabled subfield is 1 bit in length, and it shall be set to one if the frame is protected by the MAC sublayer and shall be set to zero otherwise. The auxiliary security header field of the MHR shall be present only if the security enabled subfield is set to one.

The frame pending subfield is 1 bit in length and shall be set to one if the device sending the frame has more data for the recipient. This subfield shall be set to zero otherwise. The frame pending subfield shall be used only in beacon frames or frames transmitted either during the CAP by devices operating on a beacon-enabled mesh or at any time by devices operating on a non-beacon-enabled mesh network. At all other times, it shall be set to zero on transmission and ignored on reception. The acknowledgement request subfield is 1 bit in length and specifies whether an acknowledgement is required from the recipient device on receipt of a data or MAC command frame. If this subfield is set to one, the recipient device shall send an acknowledgement frame only if, upon reception, the frame passes the third level of filtering. If this subfield is set to zero, the recipient device shall not send an acknowledgement frame.

The mesh ID compression subfield is 1 bit in length and specifies whether the MAC frame is to be sent containing only one of the mesh identifier fields when both source and destination addresses are present. If this subfield is set to one, and both the source and destination addresses are present, the frame shall contain only the destination mesh identifier field, and the source mesh identifier field shall be assumed equal to that of the destination. If this subfield is set to zero and both the source and destination addresses are present, the frame shall contain both the source mesh identifier and destination mesh identifier fields. If only one of the addresses is present, this subfield shall be set to zero and the frame shall contain the mesh identifier field corresponding to the address. If neither address is present, this subfield shall be set to zero, and the frame shall not contain either mesh identifier field.