

INTERNATIONAL STANDARD

AMENDMENT 1

Semiconductor devices – Discrete devices – Part 8: Field-effect transistors

IECNORM.COM : Click to view the full PDF of IEC 60747-8:2010/AMD1:2021



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2021 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC online collection - oc.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IECNORM.COM : Click to view the full PDF of IEC 60143-2-2010 (AMD1:2021)

INTERNATIONAL STANDARD

AMENDMENT 1

Semiconductor devices – Discrete devices – Part 8: Field-effect transistors

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 31.080.30

ISBN 978-2-8322-9851-0

Warning! Make sure that you obtained this publication from an authorized distributor.

INTERNATIONAL ELECTROTECHNICAL COMMISSION

SEMICONDUCTOR DEVICES – DISCRETE DEVICES –

Part 8: Field-effect transistors

AMENDMENT 1

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

Amendment 1 to IEC 60747-8:2021 has been prepared by subcommittee 47E: Discrete semiconductor devices, of IEC technical committee 47: Semiconductor devices.

The text of this Amendment is based on the following documents:

Draft	Report on voting
47E/726/CDV	47E/744/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this Amendment is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications/.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IECNORM.COM : Click to view the full PDF of IEC 60747-8:2010/AMD1:2021

3.4 Conventional used terms

Replace the existing Table 1 title and whole table in this subclause with the following new Table 1:

Table 1 – Terms for MOSFET in this document and the conventional used terms for the inverse diode integrated in the MOSFETs for N-channel

Preferred terms	Letter symbol	Deprecated terms for inverse diode with MOSFET in off-state
Drain-source reverse voltage	V_{SD}	Inverse diode forward voltage
MOSFET forward recovery current	I_{fr}	Inverse diode reverse recovery current
MOSFET peak forward recovery current	I_{frm}	Inverse diode peak reverse recovery current
MOSFET forward recovery time	t_{fr}	Inverse diode reverse recovery time
MOSFET forward recovery charge	Q_f	Inverse diode reverse recovery charge
MOSFET forward recovery energy	E_{fr}	Inverse diode reverse recovery energy
Reverse drain current	I_S	Inverse diode forward current
Repetitive peak reverse drain current	I_{SRM}	Inverse diode repetitive peak forward current

4.3.2 Currents

Delete, in this subclause, the existing third item I_{DRM} .

Replace, in 4.3.2, the existing seventh item with the following new item:

Source (d.c.) current (for P-channel)	I_S	
---------------------------------------	-------	--

Add, after the new item "Source (d.c.) current (for P-channel) I_S ", the following new item:

Peak source current (for P-channel)	I_{SM}	
-------------------------------------	----------	--

Replace, in this subclause, the existing eighth item with the following new item:

Source current, at a specified gate-drain condition (for P-channel)	I_{SDX}	
---	-----------	--

Replace, in this subclause, the existing ninth item with the following new item:

Source current, with gate short-circuited to drain ($V_{GD} = 0$) (for P-channel)	I_{SDS}	
---	-----------	--

Delete, in this subclause, the existing tenth item I_G .

4.3.7 Inverse diodes integrated in MOSFETs

Replace the existing title of 4.3.7 with the following new title.

Replace, in 4.3.7, the existing first, second, third and seventh items with the following new items:

4.3.7 Inverse diodes integrated in MOSFETs for N-channel		
Drain-source reverse voltage	V_{SD}	Forward voltage of the inverse diode
MOSFET forward recovery current	I_{fr}	Reverse recovery current of the inverse diode
MOSFET peak forward recovery current	I_{frm}	Peak reverse recovery current of the inverse diode
Reverse drain current	I_S	Forward current of the inverse diode

Add, in 4.3.7, the following new item:

Repetitive peak reverse drain current	I_{SRM}	Repetitive peak forward current of the inverse diode
---------------------------------------	-----------	--

5.2.4.8 Maximum continuous (d.c.) reverse drain current (I_{DR})

(forward current of the inverse diode)

5.2.4.9 Maximum peak reverse drain current (I_{DRM}) (Maximum peak

forward current of the inverse diode)

Replace the existing Subclauses 5.2.4.8 and 5.2.4.9 with the following new subclauses:

		TYPES		
		A	B	C
5.2.4.8	Maximum continuous (d.c.) reverse drain current (I_S) (forward current of the inverse diode)		+	+
5.2.4.9	Maximum peak reverse drain current (I_{SM}) (Maximum peak forward current of the inverse diode)		+	+

Under specified pulse conditions.

5.3.3.10.1 Drain-source reverse voltage (V_{DSR}) (Forward voltage of the inverse diode)

5.3.3.10.3 Peak forward recovery current (I_{FRM}) (Peak reverse recovery current of the inverse diode)

Replace the existing Subclauses 5.3.3.10.1 and 5.3.3.10.3 with the following new subclauses:

5.3.3.10.1 Drain-source reverse voltage (V_{SD}) (Forward voltage of the inverse diode)

Maximum value at specified reverse drain current (I_S) (forward current of the inverse diode) and at $V_{GS} = 0$.

5.3.3.10.3 Peak forward recovery current (I_{frm}) (Peak reverse recovery current of the inverse diode)

Maximum value under specified conditions.

TYPES		
A	B	C
	+	+
	+	+

5.3.4.9.1 Reverse drain current (I_{DR}) (forward current of the inverse diode)

Replace the existing Subclause 5.3.4.9.1 with the following new subclause:

5.3.4.9.1 Reverse drain current (I_S) (forward current of the inverse diode)

Maximum value at specified Reverse drain current (I_S) and at $V_{GS} = 0$.

TYPES		
A	B	C
	+	+

6.2.1.6 Reverse drain current (I_{DRS}) or (I_{DRX})

Replace the existing title of 6.2.1.6 with the following new title:

6.2.1.6 Reverse drain current (I_{SS}) or (I_{SX})

Replace, in the paragraph "Specified conditions", the existing fourth bullet with the following new condition:

- Reverse drain current I_S

6.2.1.7 Peak reverse drain current (I_{DRM})

Replace the existing title of 6.2.1.7 with the following new title:

6.2.1.7 Peak reverse drain current (I_{SM})

Replace the existing Figure 10 with the following new Figure 10:

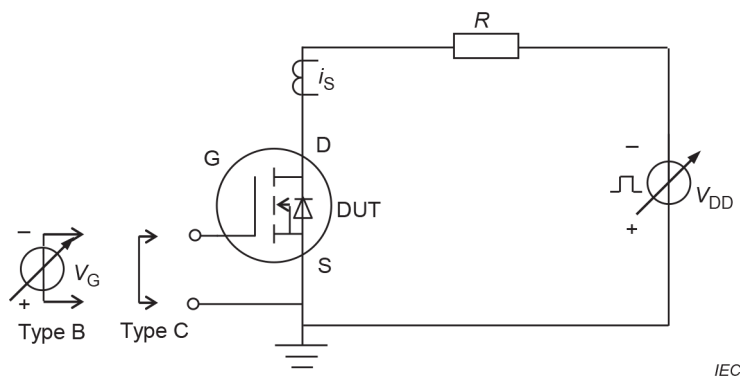


Figure 10 – Basic circuit for the testing of peak reverse drain current of MOSFETs

Replace, under "Specified conditions", the existing fourth bullet with the following new bulleted point:

- Peak reverse drain current I_{SM}

6.2.2.2 Reverse-bias safe operation area (RBSOA)

Replace, in 6.2.2.2, the first paragraph of the existing testing procedure with the following:

DUT is turned off at specified I_D and V_{DS} . I_D and V_{DS} are monitored. The DUT has to turn off I_D and withstand $V_{DS} = V_{DS(clamp)}$.

Figure 34 – Current waveform through MOSFET (Method 1)

Replace the existing Figure 34 with the following new Figure 34:

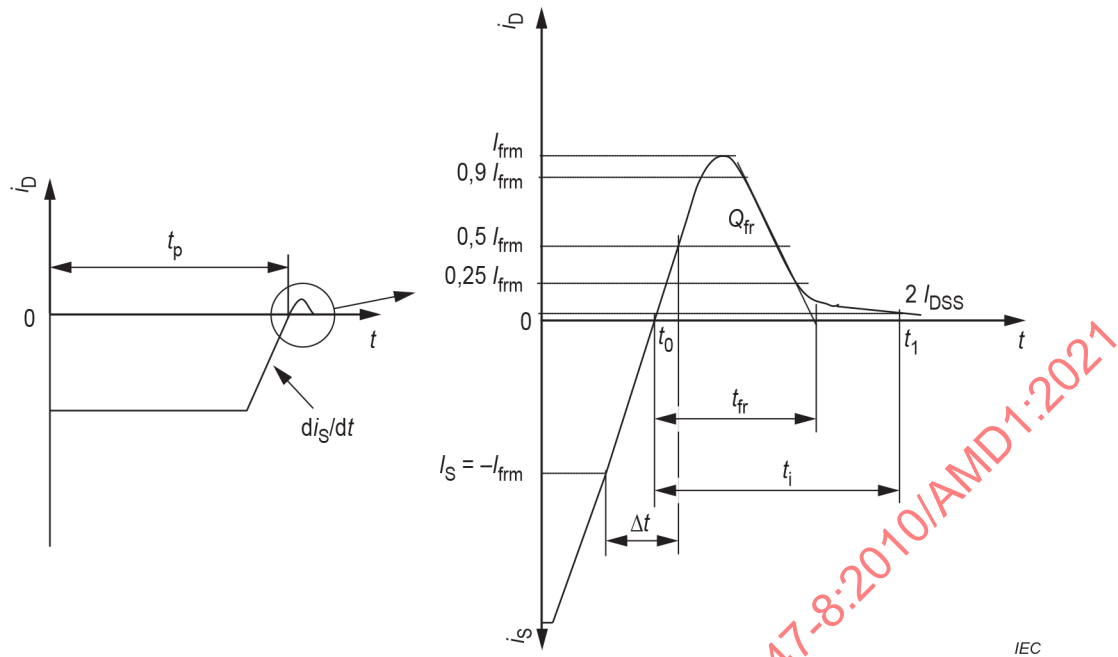


Figure 34 – Current waveform through MOSFET (Method 1)

6.3.14 MOSFET forward recovery time (t_{fr}) and MOSFET forward recovered charge (Q_f)

Replace, in 6.3.14, Method 1, under "– Circuit description and requirements", "MOSFET T" with "MOSFET T" and the letter symbol " di_{DR}/dt " with " di_S/dt ".

Replace, in 6.3.14, Method 1, the existing text under "Measurement procedure" with the following new sentences:

MOSFET T is turned on and turned off twice, and then the second turn-on is observed. Waveforms of the current i_S are monitored. The recovered charge is measured as

$$Q_f = \int_{t_0}^{t_0 + t_i} i_S \cdot dt$$

where

t_0 is the instant when the current passes through zero;

t_i is the integration time.

Integral end time t_1 is the time when forward drain current reaches $2 \times I_{DSS}$, preferably equal to the specified maximum value of t_{fr} . Δt can be adjusted by MOSFET T driving conditions, such as V_G and/or R . The forward recovery time t_{fr} is measured as the interval between the time of t_0 when the drain current passes through zero and the time when, for decreasing values of I_D , a line through the points for $0.9 I_{fr}$ and $0.25 I_{fr}$ crosses the zero current axis.

Replace, in Subclause 6.3.14, Method 1, the existing second and third bullets under "Specified conditions" with the following new bulleted points:

- Peak reverse drain current I_{SM}

- Figure 36 – Current waveform through MOSFET (Method 2)**

Figure 36 – Current waveform through MOSFET (Method 2)

Replace, in 6.3.14, Method 2, first paragraph of the measurement procedure, the letter symbols " I_{DRM} " with " I_{SM} ", " $d i_{\text{DR}}/dt$ " with " $d i_{\text{S}}/dt$ " and " I_{FRM} " with " I_{frm} ".

Replace, in 6.3.14, Method 2, the existing second and third bullets under "Specified conditions" with the following new bullets:

- Peak drain reverse current I_{frm}
- Rate of change of drain current di_S/dt

Replace, in 6.3.14, Method 2, the existing note with the following new note:

NOTE The rate of change of drain current is measured at zero crossing current, for example over time Δt , between current values of $I_S = -I_{DM}$ and $I_S = 0,5 I_{DM}$.

6.3.15 Drain-source reverse voltage (V_{DSR})

Replace the existing title of 6.3.15 with the following new title:

6.3.15 Drain-source reverse voltage (V_{SD})

Replace the existing sentence of 6.3.15, under "- Purpose" with the following new sentence:

To measure the drain-source reverse voltage V_{SD} under specified conditions.

Replace, in 6.3.15, the existing second bullet under "Specified conditions" with the following new bulleted point: