

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE



**Fibre optic interconnecting devices and passive components – Non-wavelength-selective fibre optic branching devices –  
Part 1: Generic specification**

**Dispositifs d'interconnexion et composants passifs à fibres optiques –  
Dispositifs de couplage pour fibres optiques ne dépendant pas de la longueur  
d'onde –  
Partie 1: Spécification générique**



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2010 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland  
Email: [inmail@iec.ch](mailto:inmail@iec.ch)  
Web: [www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: [www.iec.ch/online\\_news/justpub](http://www.iec.ch/online_news/justpub)

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: [www.iec.ch/webstore/custserv](http://www.iec.ch/webstore/custserv)

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: [csc@iec.ch](mailto:csc@iec.ch)

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

### A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

### A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

- Catalogue des publications de la CEI: [www.iec.ch/searchpub/cur\\_fut-f.htm](http://www.iec.ch/searchpub/cur_fut-f.htm)

Le Catalogue en-ligne de la CEI vous permet d'effectuer des recherches en utilisant différents critères (numéro de référence, texte, comité d'études,...). Il donne aussi des informations sur les projets et les publications retirées ou remplacées.

- Just Published CEI: [www.iec.ch/online\\_news/justpub](http://www.iec.ch/online_news/justpub)

Restez informé sur les nouvelles publications de la CEI. Just Published détaille deux fois par mois les nouvelles publications parues. Disponible en-ligne et aussi par email.

- Electropedia: [www.electropedia.org](http://www.electropedia.org)

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 20 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International en ligne.

- Service Clients: [www.iec.ch/webstore/custserv/custserv\\_entry-f.htm](http://www.iec.ch/webstore/custserv/custserv_entry-f.htm)

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions, visitez le FAQ du Service clients ou contactez-nous:

Email: [csc@iec.ch](mailto:csc@iec.ch)

Tél.: +41 22 919 02 11

Fax: +41 22 919 03 00

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE



**Fibre optic interconnecting devices and passive components – Non-wavelength-selective fibre optic branching devices –  
Part 1: Generic specification**

**Dispositifs d'interconnexion et composants passifs à fibres optiques –  
Dispositifs de couplage pour fibres optiques ne dépendant pas de la longueur  
d'onde –  
Partie 1: Spécification générique**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

COMMISSION  
ELECTROTECHNIQUE  
INTERNATIONALE

PRICE CODE  
CODE PRIX

T

ICS 33.180.20

ISBN 978-2-88912-187-8

## CONTENTS

|                                                                                    |    |
|------------------------------------------------------------------------------------|----|
| FOREWORD.....                                                                      | 4  |
| 1 Scope.....                                                                       | 6  |
| 2 Normative references.....                                                        | 6  |
| 3 Terms and definitions .....                                                      | 7  |
| 3.1 Basic term definitions .....                                                   | 7  |
| 3.2 Component definitions .....                                                    | 8  |
| 3.3 Performance parameter definitions .....                                        | 9  |
| 4 Requirements .....                                                               | 10 |
| 4.1 Classification .....                                                           | 10 |
| 4.1.1 General .....                                                                | 10 |
| 4.1.2 Types .....                                                                  | 11 |
| 4.1.3 Style .....                                                                  | 11 |
| 4.1.4 Variant.....                                                                 | 12 |
| 4.1.5 Assessment level.....                                                        | 12 |
| 4.1.6 Normative reference extensions .....                                         | 13 |
| 4.2 Documentation .....                                                            | 14 |
| 4.2.1 Symbols.....                                                                 | 14 |
| 4.2.2 Specification system.....                                                    | 14 |
| 4.2.3 Drawings .....                                                               | 15 |
| 4.2.4 Measurements .....                                                           | 16 |
| 4.2.5 Test data sheets .....                                                       | 16 |
| 4.2.6 Instructions for use .....                                                   | 16 |
| 4.3 Standardization system.....                                                    | 16 |
| 4.3.1 Interface standards.....                                                     | 16 |
| 4.3.2 Performance standards.....                                                   | 17 |
| 4.3.3 Reliability standards.....                                                   | 17 |
| 4.3.4 Interlinking .....                                                           | 18 |
| 4.4 Design and construction .....                                                  | 19 |
| 4.4.1 Materials.....                                                               | 19 |
| 4.4.2 Workmanship .....                                                            | 20 |
| 4.5 Quality .....                                                                  | 20 |
| 4.6 Performance requirements.....                                                  | 20 |
| 4.7 Identification and marking .....                                               | 20 |
| 4.7.1 General .....                                                                | 20 |
| 4.7.2 Variant identification number.....                                           | 20 |
| 4.7.3 Component marking.....                                                       | 20 |
| 4.7.4 Package marking .....                                                        | 21 |
| 4.8 Safety.....                                                                    | 21 |
| Annex A (informative) Examples of technology of fibre optic branching devices..... | 22 |
| Bibliography .....                                                                 | 24 |
| Figure 1 – Non-wavelength-selective branching device .....                         | 11 |
| Figure 2 – Non-wavelength-selective branching device .....                         | 11 |
| Figure 3 – Non-wavelength-selective branching device .....                         | 12 |
| Figure 4 – Non-wavelength-selective branching device .....                         | 12 |
| Figure 5 – Standards.....                                                          | 19 |

|                                                         |    |
|---------------------------------------------------------|----|
| Figure A.1 – FBT fibre .....                            | 22 |
| Figure A.2 – PLC by chemical vapour deposition .....    | 22 |
| Figure A.3 – PLC by ion-exchange .....                  | 23 |
| Table 1 – Three-level IEC specification structure ..... | 14 |
| Table 2 – Standards interlink matrix .....              | 19 |
| Table 3 – Quality assurance options .....               | 19 |

IECNORM.COM :: Click to view the full PDF of IEC 60875-1:2010

Withd2Wm

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

### **FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – NON-WAVELENGTH-SELECTIVE FIBRE OPTIC BRANCHING DEVICES –**

#### **Part 1: Generic specification**

#### FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60875-1 has been prepared by subcommittee SC86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics.

This fifth edition cancels and replaces the fourth edition published in 2000. It constitutes a technical revision. The changes with respect to the previous edition are to delete the clause of Quality assessment procedures and reconsider the constitution of this standard.

This bilingual version (2010-10) replaces the English version.

The text of this standard is based on the following documents:

| FDIS          | Report on voting |
|---------------|------------------|
| 86B/2986/FDIS | 86B/3022/RVD     |

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The French version of this standard has not been voted upon.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The list of all parts of IEC 60875 series, published under the general title, *Fibre optic interconnecting and passive components – Non-wavelength-selective fibre optic branching devices* can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

**IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

# **FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – NON-WAVELENGTH-SELECTIVE FIBRE OPTIC BRANCHING DEVICES –**

## **Part 1: Generic specification**

### **1 Scope**

This part of IEC 60875 applies to non-wavelength-selective fibre optic branching devices, all exhibiting the following features:

- they are passive, in that they contain no optoelectronic or other transducing elements;
- they have three or more ports for the entry and/or exit of optical power, and share optical power among these ports in a predetermined fashion;
- the ports are optical fibres, or optical fibre connectors.

This standard establishes uniform requirements for the optical, mechanical and environmental properties.

### **2 Normative references**

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60027 (all parts), *Letter symbols to be used in electrical technology*

IEC 60050-731, *International Electrotechnical Vocabulary (IEV) – Chapter 731: Optical fibre communication*

IEC 60617-SN, *Graphical symbols for diagrams*

IEC 60695-11-5, *Fire hazard testing – Part 11-5: Test flames – Needle-flame test method – Apparatus, confirmatory test arrangement and guidance*

IEC 60825 (all parts), *Safety of laser products*

IEC 61300 (all parts), *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures*

IEC 61930, *Fibre optic graphic symbology*

IEC Guide 102, *Electronic components – Specification structures for quality assessment (Qualification approval and capability approval)*

IECQ 01, *IEC Quality Assessment System for Electronic Components (IECQ Scheme) – Basic Rules*

IECQ 001002-3, *IEC Quality Assessment System for Electronic Components (IECQ) – Rules of Procedure – Part 3: Approval procedures*

ISO 129-1, *Technical drawings – Indication of dimensions and tolerances – Part 1: General principles*

ISO 286-1, *ISO system of limits and fits – Part 1: Bases of tolerances, deviations and fits*

ISO 1101, *Geometrical Product Specifications (GPS) – Geometrical tolerancing – Tolerances of form, orientation, location and run-out*

ISO 8601, *Data elements and interchange formats – Information interchange – Representation of dates and times*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-731 and the following apply.

#### 3.1 Basic term definitions

##### 3.1.1

##### **port**

optical fibre or optical connector attached to a passive component for the entry (input port) and/or exit (output port) of the optical power

##### 3.1.2

##### **optical pigtail**

short length of jumper or cable forming an optical port for an optic component

##### 3.1.3

##### **transfer matrix**

optical properties of a non-wavelength-selective optic branching device can be defined in terms of an  $n \times n$  matrix of coefficients,  $n$  being the number of ports, with the coefficients representing the fractional optical power transferred between designated ports

In general, the transfer matrix  $T$  is as follows:

$$T = \begin{bmatrix} t_{11} & t_{12} & \dots & t_{1n} \\ t_{21} & & & \\ \vdots & & t_{ij} & \\ t_{n1} & & & t_{nn} \end{bmatrix}$$

where

$t_{ij}$  is the ratio of the optical power  $P_{ij}$  transferred out of port  $j$  with respect to input power  $P_i$  into port  $i$ , that is:

$$t_{ij} = P_{ij}/P_i$$

The transfer matrix is used to classify the different types of non-wavelength-selective branching devices which are specified in this generic specification.

In a non-wavelength-selective branching device, the coefficients  $t_{ij}$  may be a function of the input wavelength, input polarization or modal power distribution. The values of these parameters are provided in the detail specification, when necessary.

Single-mode, non-wavelength-selective branching devices may operate in a coherent fashion with respect to multiple inputs. Consequently, the transfer coefficients may be affected by the relative phase and intensity of simultaneous coherent optical power inputs at two or more ports

### 3.1.4

#### **transfer coefficient**

element  $t_{ij}$  of the transfer matrix

### 3.1.5

#### **logarithmic transfer matrix**

in general, the logarithmic transfer matrix is as follows:

$$A = \begin{bmatrix} a_{11} & a_{12} & \dots & a_{1n} \\ a_{21} & & & \\ \vdots & & a_{ij} & \\ a_{n1} & & & a_{nn} \end{bmatrix}$$

where

$a_{ij}$  is the optical power reduction in decibels out of port  $j$  with unit power into port  $i$ , that is:

$$a_{ij} = -10 \log t_{ij}$$

where  $t_{ij}$  is the transfer matrix coefficient

### 3.1.6

#### **conducting ports**

two ports  $i$  and  $j$  between which  $t_{ij}$  is nominally greater than zero

### 3.1.7

#### **isolated ports**

two ports  $i$  and  $j$  between which  $t_{ij}$  is nominally zero, and  $a_{ij}$  is nominally infinite

## 3.2 Component definitions

### 3.2.1

#### **non-wavelength-selective branching device**

passive component possessing three or more ports which operates over a specified range of wavelengths and shares the optical power coming into an input port among its output ports in a predetermined fashion, without any amplification, switching, or other active modulation

### 3.2.2

#### **splitter**

term frequently used as a synonym for a non-wavelength-selective branching device with 1 or 2 entries (input ports) and more than 4 exits (output ports) designed and intended to produce equal optical power at the output ports

### 3.2.3

#### **coupler**

term frequently used as a synonym for a non-wavelength-selective branching device with 1 or 2 entries (input ports) and 4 or less exits (output ports) or with  $M$  entries (input ports) and up to  $N$  exits (output ports) where the number of exits (output ports) is larger than one ( $N > 1$ )

### 3.2.4

#### **symmetric non-wavelength-selective branching device**

device whose transfer matrix is diagonally symmetric, i.e. where for all  $i$  and  $j$ ,  $t_{ij}$  and  $t_{ji}$  are nominally equal

**3.2.5****asymmetric non-wavelength-selective branching device**

device whose transfer matrix is diagonally asymmetric, i.e. where there exists at least one  $i$  and  $j$  for which  $t_{ij}$  and  $t_{ji}$  are nominally unequal

**3.2.6****balanced coupler**

term frequently used as a synonym for a symmetric non-wavelength-selective branching device which is designed and intended to produce that each output port power from the same input port is equal

**3.2.7****unbalanced coupler**

term frequently used as a synonym for a asymmetric non-wavelength-selective branching device which is designed and intended to produce that power at each output port is different

**3.2.8****tap-coupler**

term frequently used as a synonym for a unbalanced coupler, typically the coupling ratio is from 1 % to 20 %

**3.2.9****polarization dependent loss****PDL**

maximum variation of insertion loss due to a variation of the state of polarization (SOP) over all the SOPs

**3.3 Performance parameter definitions****3.3.1****insertion loss**

element,  $a_{ij}$  (where  $i \neq j$ ), of the logarithmic transfer matrix; reduction in optical power between an input and output port of a passive component expressed in decibels and defined as

$$a = -10 \log (P_1/P_0)$$

where

$P_0$  is the optical power launched into the input port;

$P_1$  is the optical power received from the output port

**3.3.2****return loss**

element,  $a_{ij}$  (where  $i = j$ ), of the logarithmic transfer matrix; fraction of input power that is returned from the input port of a passive component and defined as

$$RL = -10 \log (P_1/P_0)$$

where

$P_0$  is the optical power launched into the input port;

$P_1$  is the optical power received back from the same port

**3.3.3****directivity**

value of  $a_{ij}$  between two isolated ports

### 3.3.4

#### **excess loss**

total power lost in a non-wavelength-selective branching device when an optical signal is launched into port  $i$ , defined as

$$EL_i = -10 \log \sum_j t_{ij}$$

where the summation is performed only over those values  $j$  for which  $i$  and  $j$  are conducting ports. For a non-wavelength-selective branching device with  $N$  input ports, there is an array of  $N$  values of excess loss, one for each input port  $i$

### 3.3.5

#### **uniformity**

logarithmic transfer matrix of a branching device may contain a specified set of coefficients which are nominally finite and equal. In this case, the range of these coefficients  $a_{ij}$ , expressed in decibels, is termed the uniformity of the branching device

### 3.3.6

#### **coupling ratio**

for a given input port  $i$ , the ratio of light at a given output port  $k$  to the total light from all output ports and defined as

$$CR_{ik} = t_{ik} / \sum_j t_{ij}$$

where  $j$  represents the operational output ports

### 3.3.7

#### **operating wavelength**

nominal wavelength  $\lambda$ , at which a passive component is designed to operate with the specified performance

### 3.3.8

#### **operating wavelength range**

specified range of wavelengths from  $\lambda_{i \min}$  to  $\lambda_{i \max}$  about a nominal operating wavelength  $\lambda_i$ , within which a passive component is designed to operate with the specified performance

NOTE For a non-wavelength-selective branching device with more than one operating wavelength, the corresponding wavelength ranges are not necessarily equal.

## **4 Requirements**

### **4.1 Classification**

#### **4.1.1 General**

Non-wavelength-selective branching devices shall be classified as follows:

- type;
- style;
- variant;
- performance standard grad;
- assessment level;
- normative reference extensions.

### 4.1.2 Types

The main characteristics of each type are as follows:

- transmissive or reflective;
- bidirectional or unidirectional;
- tree or star;
- any combination of the above.

### 4.1.3 Style

#### 4.1.3.1 General

Non-wavelength-selective branching devices may be classified into styles based on the fibre type(s), the connector type(s), cable type(s), housing shape, and the configuration. The configuration of branching device ports are classified as follows:

#### 4.1.3.2 Configuration A

Device containing integral fibre optic pigtails, without connectors.

EXAMPLE

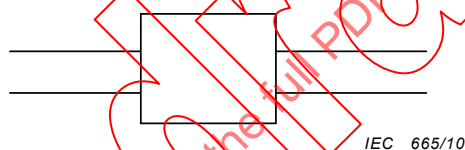


**Figure 1 – Non-wavelength-selective branching device**

#### 4.1.3.3 Configuration B

Device containing integral fibre optic pigtails, with a connector on each pigtail.

EXAMPLE

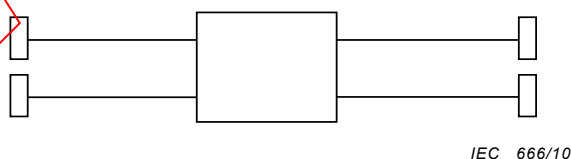


**Figure 2 – Non-wavelength-selective branching device**

#### 4.1.3.4 Configuration C

Device containing fibre optic connectors as an integral part of the device housing.

#### EXAMPLE




**Figure 3 – Non-wavelength-selective branching device**

#### 4.1.3.5 Configuration D

Device containing some combination of the interfacing features of the preceding configurations.

#### EXAMPLE

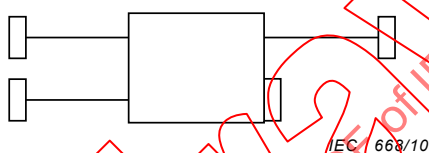


**Figure 4 – Non-wavelength-selective branching device**

#### 4.1.4 Variant

The branching device variant identifies those common features which encompass structurally similar components.

Examples of features which define a variant include, but are not limited to the following:

- orientation of ports;
- means of mounting.

#### 4.1.5 Assessment level

Assessment level defines the inspection levels and the acceptable quality level (AQL) of groups A and B and the periodicity of inspection of groups C and D. Detail specifications shall specify one or more assessment levels, each of which shall be designated by a capital letter.

The following are the preferred levels:

##### Assessment level A

- group A inspection: inspection level II, AQL = 4 %;
- group B inspection: inspection level II, AQL = 4 %;
- group C inspection: 24 month periods;
- group D inspection: 48 month periods.

##### Assessment level B

- group A inspection: inspection level II, AQL = 1 %;
- group B inspection: inspection level II, AQL = 1 %;

- group C inspection: 18 month periods;
- group D inspection: 36 month periods.

#### Assessment level C

- group A inspection: inspection level II, AQL = 0,4 %;
- group B inspection: inspection level II, AQL = 0,4 %;
- group C inspection: 12 month periods;
- group D inspection: 24 month periods.

One additional assessment level may be added in the detail specification. When this is done, the capital letter X shall be used.

#### 4.1.6 Normative reference extensions

Normative reference extensions are used to identify the integration of independent standards specifications or other reference documents into blank detail specifications.

Unless otherwise specified, additional requirements imposed by an extension are mandatory. Usage is primarily intended to merge associated components to form hybrid devices or integrated functional application requirements that are dependent on technical expertise used for other than fibre optics.

Published reference documents produced by ITU, consistent with the scope of the relevant IEC specification series may be used as extension.

Some optical splice configurations require special qualification provisions which shall not be imposed universally. This accommodates individual component design configurations, specialized field tooling or specific application processes. In this case, requirements necessary to assure repeatable performance or adequate safety, and provide additional guidance for complete product specification. These extensions are mandatory whenever used to prepare, assemble or install an optical splice either for field application usage or preparation of qualification test specimens. The relevant specification shall clarify all stipulations. However, design and style dependent extensions shall not be imposed universally.

In the event of conflicting requirements, precedence, in descending order, shall be generic over mandatory extension, over blank detail, over detail, over application specific extension.

Examples of optical connector extensions are given as follows:

- Using IEC 61754-4 and IEC 61754-15 to partially define a future specification of the IEC 60874 series for a duplex type SC/LSH hybrid connector adapter.
- Using IEC 61754-13 and IEC 60869-1 to partially define a future specification of the IEC 60874 series for an integrated type "FC" preset attenuated optical connector.
- Using IEC 61754-15 and IEC 61754-4 to partially define a future specification of the IEC 60874 series for a duplex LSH receptacle incorporating integral mechanical splices.

Other examples of requirements for normative extensions are as follows:

- a) Some commercial or residential building applications may require direct reference to specific safety codes and regulations or incorporate other specific material flammability or toxicity requirements for specialized locations.
- b) Specialized field tooling may require an extension to implement specific ocular safety, electrical shock, burn hazard avoidance requirements, or require isolation procedures to prevent potential ignition of combustible gases.

## 4.2 Documentation

### 4.2.1 Symbols

Graphical and letter symbols shall, whenever possible, be taken from IEC 60027, IEC 60617 and IEC 61930.

### 4.2.2 Specification system

#### 4.2.2.1 General

This specification is part of a three-level IEC specification system. Subsidiary specifications shall consist of blank detail specifications and detail specifications. This system is shown in Table 1. There are no sectional specifications for non-wavelength-selective branching devices.

**Table 1 – Three-level IEC specification structure**

| Specification level | Examples of information to be included                                                                                                                                                                                                                                            | Applicable to                                  |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| Basic               | Assessment system rules<br>Inspection rules<br>Optical measuring methods<br>Environmental test methods<br>Sampling plans<br>Identification rule<br>Marking standards<br>Dimensional standards<br>Terminology standards<br>Symbol standards<br>Preferred number series<br>SI units | Two or more component families or sub-families |
| Generic             | Specific terminology<br>Specific symbols<br>Specific units<br>Preferred values<br>Marking<br>Quality assessment procedures<br>Selection of tests<br>Qualification approval and/or capability approval procedures                                                                  | Component family                               |
| Blank detail        | Quality conformance test schedule<br>Inspection requirements<br>Information common to a number of types                                                                                                                                                                           | Groups of types having a common test schedule  |
| Detail              | Individual values<br>Specific information<br>Completed quality conformance test schedules                                                                                                                                                                                         | Individual type                                |

#### 4.2.2.2 Blank detail specifications

Blank detail specifications are not, by themselves, a specification level. They are associated with the generic specification.

Each blank detail specification shall be limited to one environmental category.

Each blank detail specification shall contain:

- the minimum mandatory test schedules and performance requirements;
- one or more assessment levels;
- the preferred format for stating the required information in the detail specification;
- in case of hybrid components, including connectors, addition of appropriate entry fields to show the reference normative document, document title and issue date.

#### **4.2.2.3 Detail specifications**

A specific non-wavelength-selective branching device is described by a corresponding detail specification, which is prepared by filling in the blanks of the blank detail specification. Within the constraints imposed by this generic specification, the blank detail specification may be filled in by any national committee of the IEC, thereby defining a particular non-wavelength-selective branching device design as an IEC standard.

Detail specifications shall specify the following, as applicable:

- type (see 4.1.2);
- style (see 4.1.3);
- variant(s) (see 4.1.4);
- assessment level (see 4.1.5);
- part identification number for each variant (see 4.7.2);
- drawings, dimensions required (see 4.2.3);
- quality assessment test schedules (see 4.1.4);
- performance requirements (see 4.6).

### **4.2.3 Drawings**

#### **4.2.3.1 General**

The drawings and dimensions given in detail specifications shall not restrict themselves to details of construction, nor shall they be used as manufacturing drawings.

#### **4.2.3.2 Projection system**

Either first angle or third angle projection shall be used for the drawings in documents covered by this specification. All drawings within a document shall use the same projection system and the drawings shall state which system is used.

#### **4.2.3.3 Dimensional system**

All dimensions shall be given in accordance with ISO 129-1, ISO 286-1 and ISO1101.

The metric system shall be used in all specifications.

Dimensions shall not contain more than five significant digits.

When units are converted, a note shall be added in each relevant specification and the conversion between systems of units shall use a factor of 25,4 mm to 1 inch.

#### **4.2.4 Measurements**

##### **4.2.4.1 Measurement method**

The measurement method for optical, mechanical, climatic, and environmental characteristics of branching devices to be used shall be defined and selected preferentially from the IEC 61300 series.

The size measurement method to be used shall be specified in the detail specification for any dimensions which are specified within a total tolerance zone of 0,01 mm or less.

##### **4.2.4.2 Reference components**

Reference components for measurement purposes, if required, shall be specified in the relevant specification.

##### **4.2.4.3 Gauges**

Gauges, if required, shall be specified in the relevant specification.

##### **4.2.5 Test data sheets**

Test data sheets shall be prepared for each test conducted as required by a relevant specification. The data sheets shall be included in the qualification report and in the periodic inspection report.

Data sheets shall contain the following information as a minimum:

- title of test and date;
- specimen description including the type of fibre and the variant identification number (see 4.7.2);
- test equipment used and date of latest calibration;
- all applicable test details;
- all measurement values and observations;
- sufficiently detailed documentation to provide traceable information for failure analysis.

##### **4.2.6 Instructions for use**

Instructions for use, when required, shall be given by the manufacturer and shall include:

- assembly and connection instructions;
- cleaning method;
- safety aspects;
- additional information, as necessary.

#### **4.3 Standardization system**

##### **4.3.1 Interface standards**

The interface standards provide both manufacturer and user with all the information they require to make or use a product conforming to the physical features of that standard interface. Interface standards fully define and provide dimensions for the features essential for the mating and unmating of optical connectors and other components. They also serve to position the optical datum target, where defined, relative to other reference datum.

Interface standards ensure that connectors and adaptors that comply with the standard will fit together. The standards may also contain tolerance grades for ferrules and alignment devices. Tolerance grades are used to provide different levels of alignment precision.

The interface dimensions may also be used to design other components that will mate with the connectors. For example, an active device mount can be designed using the adapter interface dimensions. The use of these dimensions combined with those of a standard plug, provides the designer with assurance that the standard plugs will fit into the optical device mount. They also provide the location of the plug's optical datum target.

Standard interface dimensions do not, by themselves, guarantee optical performance. They guarantee connector mating at a specified fit. Optical performance is currently guaranteed via the manufacturing specification. Products from the same or different manufacturing specifications using the same standard interface will always fit together. Guaranteed performance can be given by any single manufacturer only for products delivered to the same manufacturing specification. However, it can be reasonably expected that some level of performance will be obtained from products having different manufacturing specifications, although the level of performance cannot be expected to be any better than that of the lowest specified performance.

#### **4.3.2 Performance standards**

Performance standards contain a series of tests and measurements (which may or may not be grouped into a specified schedule depending on the requirements of that standard) with clearly defined conditions, severities and pass/fail criteria. The tests are intended to be run on a "once-off" basis to prove any product's ability to satisfy the "performance standards" requirements of a market sector, user group or system location. A product that has been shown to meet all the requirements of a performance standard can be declared as complying with a performance standard, but should then be controlled by a quality assurance/quality conformance programme.

A key point of the test and measurement standards for their application (particularly with regard to insertion loss and return loss) in conjunction with the interface standards of interproduct compatibility can be defined. Conformity of each individual product to this standard will be ensured.

#### **4.3.3 Reliability standards**

Reliability standards are intended to ensure that a component can meet performance specifications under stated conditions for a stated time period.

For each type of component, the following shall be identified (and shall appear in the standard):

- failure modes (observable, general mechanical or optical effects of failure);
- failure mechanisms (general causes of failure common to several components);
- failure effects (detailed cause of failure, specific to component).

These are all related to environmental and material aspects.

Initially, just after component manufacture, there is an "infant mortality phase" during which many components would fail if deployed in the field. To avoid early field failure, all components can be subjected to a screening process in the factory, involving environmental stress that may be mechanical, thermal or humidity related. This is to induce known failure mechanisms in a controlled environmental situation to occur earlier than would normally be seen in an unscreened population. For those components that survive (and are then sold), there is a reduced failure rate since these mechanisms have been eliminated.

Screening is an optional part of the manufacturing process rather than a test method. It does not affect the "useful life" of a component, defined as the period during which it performs

according to specifications. Eventually, other failure mechanisms appear and the failure rate increases beyond the defined threshold. At this point, the useful life ends and the "wear-out period" begins and the component must be replaced.

At the beginning of useful life, performance testing on a sampled population of components may be applied by the supplier, by the manufacturer or by a third party. This is to ensure that the component meets performance specifications over the range of intended environments at this initial time. Reliability testing, on the other hand, is applied to ensure that the component meets performance specifications for at least a specified minimum useful lifetime or for a specified maximum failure rate. These tests are usually carried out by utilizing the performance testing but increasing duration and severity in order to accelerate the failure mechanism.

A reliability theory relates component reliability testing to component parameters and to lifetime or failure rate under testing. The theory then extrapolates these to life or failure rate under less stressful service conditions. The reliability specifications include values of the component parameters needed to ensure the specified minimum lifetime or maximum failure rate in service.

#### 4.3.4 Interlinking

Standards currently under preparation are given in Figure 5. A large number of the test and measurement standards exist already and the quality assurance qualification approval standards, recognized by the term IECQ, exist already and have done so for many years. As previously mentioned, alternative methods of quality assurance / quality conformance are being developed under the headings Capability Approval and Technology Approval, covered by IECQ 01, IECQ 001002, and IEC Guide 102.

When interface, performance and reliability standards are in place, the matrix given in Table 2 demonstrates some of the options available for product standardization.

Product A is a product that is fully IEC standardized, having a standard interface and meeting defined performance standards and reliability standards.

Product B is a product with a proprietary interface, but which meets a defined IEC performance standard and reliability standard.

Product C is a product which complies with an IEC standard interface but does not meet the requirement of either an IEC performance standard or reliability standard.

Product D is a product which complies with an IEC interface standard and with a performance standard, but does not meet a reliability requirement.

Obviously, the matrix is more complex than shown since there will be a number of interface, performance and reliability standards that can be cross-related. In addition, all the products may be subject to a quality assurance programme that could be under IEC qualification approval, capability approval, technology approval, (as Table 3 attempts to demonstrate), or even a national or company quality assurance system.

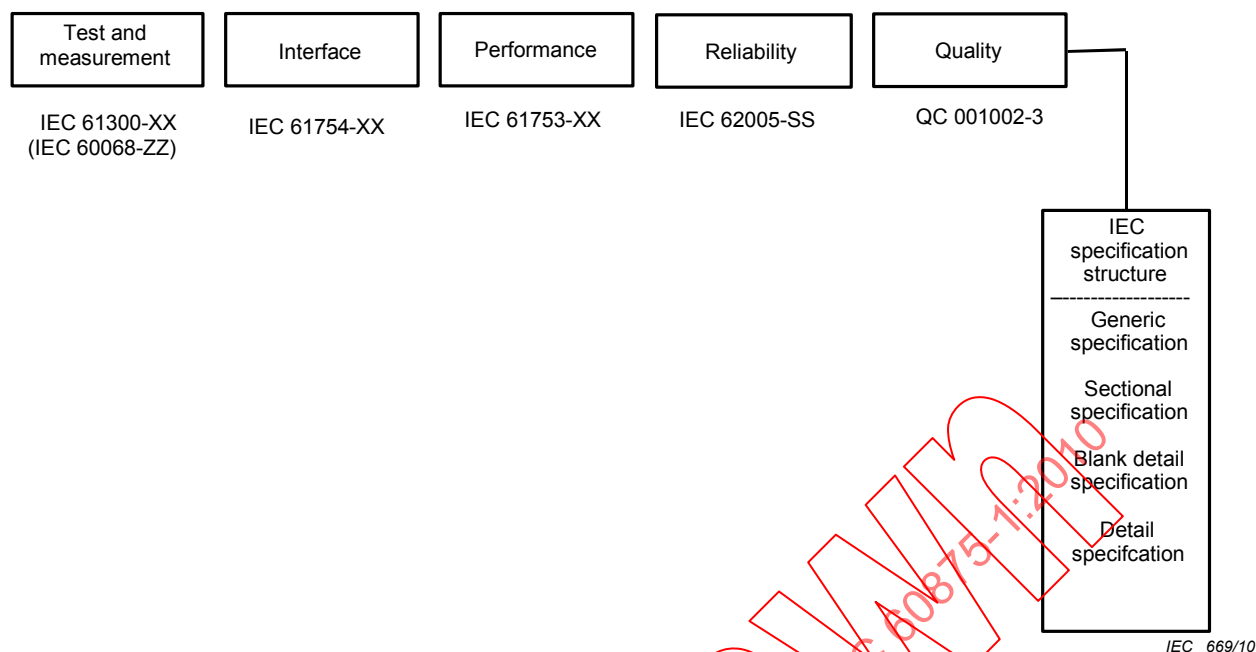


Figure 5 – Standards

Table 2 – Standards interlink matrix

|           | Interface standard | Performance standard | Reliability standard |
|-----------|--------------------|----------------------|----------------------|
| Product A | Yes                | Yes                  | Yes                  |
| Product B | No                 | Yes                  | Yes                  |
| Product C | Yes                | No                   | No                   |
| Product D | Yes                | Yes                  | No                   |

Table 3 – Quality assurance options

|           | Company A |    |    | Company B |    |    | Company C |    |    |
|-----------|-----------|----|----|-----------|----|----|-----------|----|----|
|           | QA        | CA | TA | QA        | CA | TA | QA        | CA | TA |
| Product A | x         |    |    | x         |    |    |           |    | x  |
| Product B | x         |    |    |           | x  |    |           |    | x  |
| Product C | x         |    |    |           | x  |    |           |    | x  |
| Product D | x         |    |    |           |    | x  |           |    | x  |

## 4.4 Design and construction

### 4.4.1 Materials

#### 4.4.1.1 Corrosion resistance

All materials used in the construction shall be corrosion resistant or suitably finished to meet the requirements of the relevant specification.

#### 4.4.1.2 Non-flammable materials

When non-flammable materials are required, the requirement shall be specified in the specification and reference shall be made to IEC 60695-11-5.

#### 4.4.2 Workmanship

Components and associated hardware shall be manufactured to a uniform quality and shall be free of sharp edges, burrs or other defects that will affect service life, serviceability, or appearance. Particular attention shall be given to neatness and thoroughness of marking, plating, soldering, bonding, etc.

#### 4.5 Quality

Non-wavelength-selective branching devices shall be controlled by the quality assessment procedures. The measurement and test procedures from the IEC 61300 series shall be used, as applicable.

#### 4.6 Performance requirements

Branching devices shall meet the performance requirements specified in the relevant IEC performance standard.

#### 4.7 Identification and marking


##### 4.7.1 General

Components, associated hardware, and packages shall be permanently and legibly identified and marked when this is required by the detail specification.

##### 4.7.2 Variant identification number

Each variant in a detail specification shall be assigned a variant identification number. The number shall consist of the number assigned to the detail specification followed by a four-digit number preceded by a dash and a letter designating the assessment level. The first digit of the four-digit number shall be sequentially assigned to each component type covered by the detail specification. The last three digits shall be sequentially assigned to each variant of the component.

Example:

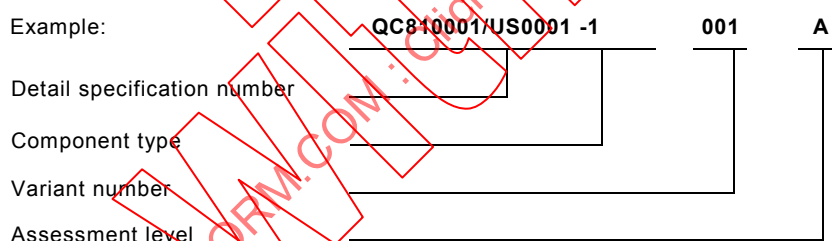

##### 4.7.3 Component marking

Component marking, if required, shall be specified in the detail specification. The preferred order of marking is as follows:

- port identification;
- manufacturer's part number (including serial number, if applicable);
- manufacturer's identification mark or logo;
- manufacturing date;
- variant identification number;
- any additional marking required by the detail specification.

If space does not allow for all the required marking on the component, each unit shall be individually packaged with a data sheet containing all of the required information which is not marked.

#### 4.7.4 Package marking

Several non-wavelength-selective branching devices may be packed together for shipment.

Package marking, if required, shall be specified in the detail specification. The preferred order of marking is as follows:

- a) manufacturer's identification mark or logo;
- b) manufacturer's part number;
- c) manufacturing date code (year/week, see ISO 8601);
- d) variant identification number(s) (see 4.7.2);
- e) assessment level;
- f) type designation (see 4.1.2);
- g) assessment level;
- h) any additional marking required by the detail specification.

When applicable, individual unit packages (within the sealed package) shall be marked with the reference number of the certified record of released lots, the manufacturer's factory identity code, and the component identification.

#### 4.8 Safety

Non-wavelength-selective branching devices, when used on an optical transmission system and/or equipment, may emit potentially hazardous radiation from an uncapped or unterminated output port or end.

The non-wavelength-selective branching device manufacturers shall make available sufficient information to alert system designers and users about the potential hazard and shall indicate the required precautions and working practices.

In addition, each detail specification shall include the following:

##### **WARNING NOTE**

**Care should be taken when handling small diameter fibre optics to prevent puncturing the skin, especially near the eyes. Direct viewing of the end of an optical fibre or an optical connector when it is propagating energy is not recommended unless prior assurance has been obtained as to the safety of the energy output level.**

Reference shall be made to the IEC 60825 series, the relevant standard on safety.


## Annex A (informative)

### Examples of technology of fibre optic branching devices

Non-wavelength selective branching devices are typically based on the following optical technologies:


- fused biconic tapered (FBT) fibre;
- planar lightwave circuit (PLC).

Figures A.1, A.2 and A.3 provide an illustration of both technologies.

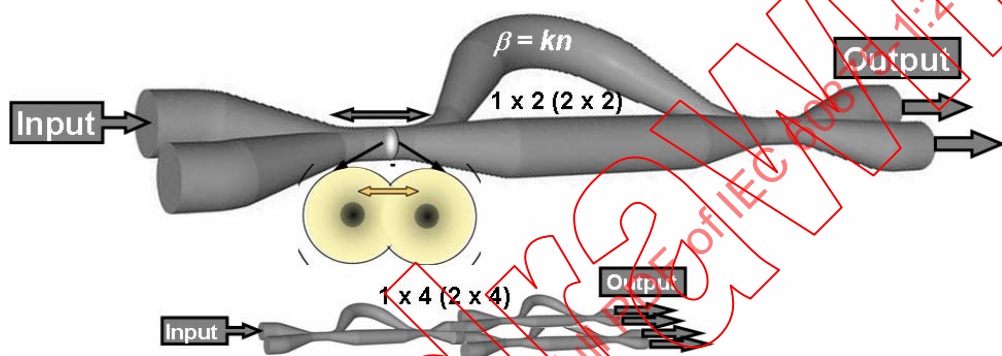

IEC 670/10

Figure A.1 – FBT fibre

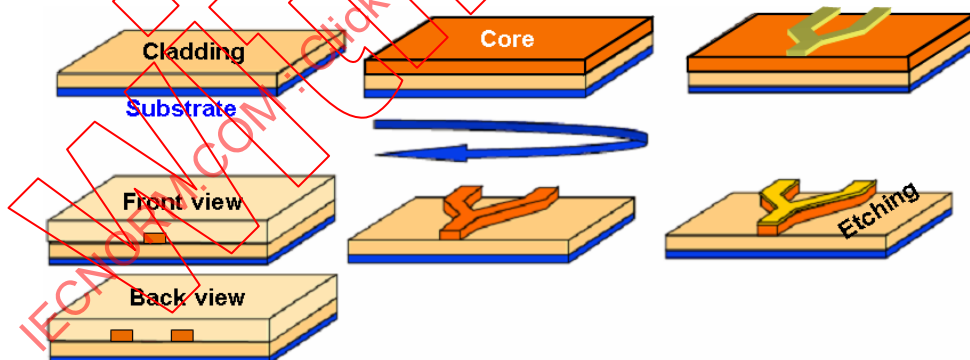

IEC 671/10

Figure A.2 – PLC by chemical vapour deposition

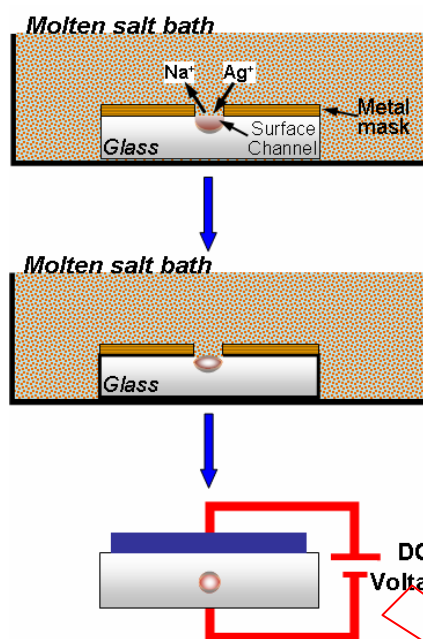


Figure A.3 – PLC by ion-exchange

IEC 672/10

## Bibliography

IEC Guide 104:1997, *The preparation of safety publications and the use of basic safety publications and group safety publications*

IEC 60068 (all parts), *Environmental testing*

IEC 60410, *Sampling plans and procedures for inspection by attributes*

IEC 60874 (all parts), *Connectors for optical fibres and cables*

IEC 60869-1, *Fibre optic attenuators – Part 1: Generic specification*

IEC 60974 (all parts), *Arc welding equipment*

IEC 61300-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 1: General and guidance*

IEC 61300-2 (all parts), *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2: Tests*

IEC 61300-3 (all parts), *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3: Examinations and measurements*

IEC 61753 (all parts), *Fibre optic interconnecting devices and passive components performance standard*

IEC 61754-4, *Fibre optic connector interfaces – Part 4: Type SC connector family*

IEC 61754-13, *Fibre optic connector interfaces – Part 13: Type FC-PC connector*

IEC 61754-15, *Fibre optic interconnecting devices and passive components – Fibre optic connector interfaces – Part 15: Type LSH connector family*

IEC/TR 61931, *Fibre optic – Terminology*

IEC 62005 (all parts), *Reliability of fibre optic interconnecting devices and passive optical components*

ITU-T Recommendation G.671: *Transmission characteristics of optical components and subsystems*

---

IECNORM.COM :: Click to view the full PDF of IEC 60875-1:2010

## SOMMAIRE

|                                                                                                      |    |
|------------------------------------------------------------------------------------------------------|----|
| AVANT-PROPOS .....                                                                                   | 28 |
| 1 Domaine d'application .....                                                                        | 30 |
| 2 Références normatives .....                                                                        | 30 |
| 3 Termes et définitions .....                                                                        | 31 |
| 3.1 Définitions des termes fondamentaux .....                                                        | 31 |
| 3.2 Définitions des composants .....                                                                 | 32 |
| 3.3 Définitions des paramètres de qualité de fonctionnement .....                                    | 33 |
| 4 Exigences .....                                                                                    | 35 |
| 4.1 Classification .....                                                                             | 35 |
| 4.1.1 Généralités .....                                                                              | 35 |
| 4.1.2 Types .....                                                                                    | 35 |
| 4.1.3 Modèle .....                                                                                   | 35 |
| 4.1.4 Variante .....                                                                                 | 37 |
| 4.1.5 Niveau d'assurance de la qualité .....                                                         | 37 |
| 4.1.6 Extensions de références normatives .....                                                      | 37 |
| 4.2 Documentation .....                                                                              | 38 |
| 4.2.1 Symboles .....                                                                                 | 38 |
| 4.2.2 Structure des spécifications .....                                                             | 38 |
| 4.2.3 Plans .....                                                                                    | 40 |
| 4.2.4 Mesures .....                                                                                  | 41 |
| 4.2.5 Fiches techniques d'essais .....                                                               | 41 |
| 4.2.6 Instructions d'utilisation .....                                                               | 41 |
| 4.3 Système de normalisation .....                                                                   | 41 |
| 4.3.1 Normes d'interface .....                                                                       | 41 |
| 4.3.2 Normes de qualité de fonctionnement .....                                                      | 42 |
| 4.3.3 Normes de fiabilité .....                                                                      | 42 |
| 4.3.4 Correspondances croisées .....                                                                 | 43 |
| 4.4 Conception et construction .....                                                                 | 45 |
| 4.4.1 Matériaux .....                                                                                | 45 |
| 4.4.2 Qualité d'exécution .....                                                                      | 45 |
| 4.5 Qualité .....                                                                                    | 45 |
| 4.6 Exigences de qualité de fonctionnement .....                                                     | 45 |
| 4.7 Identification et marquage .....                                                                 | 45 |
| 4.7.1 Généralités .....                                                                              | 45 |
| 4.7.2 Numéro d'identification de la variante .....                                                   | 45 |
| 4.7.3 Marquage des composants .....                                                                  | 46 |
| 4.7.4 Marquage des emballages .....                                                                  | 46 |
| 4.8 Sécurité .....                                                                                   | 46 |
| Annex A (informative) Exemples de technologie des dispositifs de couplage pour fibres optiques ..... | 48 |
| Bibliographie .....                                                                                  | 50 |
| Figure 1 – Dispositif de couplage ne dépendant pas de la longueur d'onde .....                       | 36 |
| Figure 2 – Dispositif de couplage ne dépendant pas de la longueur d'onde .....                       | 36 |
| Figure 3 – Dispositif de couplage ne dépendant pas de la longueur d'onde .....                       | 36 |
| Figure 4 – Dispositif de couplage ne dépendant pas de la longueur d'onde .....                       | 36 |

|                                                                                |    |
|--------------------------------------------------------------------------------|----|
| Figure 5 – Normes .....                                                        | 44 |
| Figure A.1 – Dérivation biconique par fusion.....                              | 48 |
| Figure A.2 – Circuit optique planaire par dépôt chimique en phase vapeur ..... | 48 |
| Figure A.3 – Circuit optique planaire par échange d'ions.....                  | 49 |
| <br>Tableau 1 – Structure à trois niveaux des spécifications de la CEI .....   | 39 |
| Tableau 2 – Matrice de correspondances croisées des normes.....                | 44 |
| Tableau 3 – Options d'assurance de la qualité .....                            | 44 |

IECNORM.COM: Click to view the full PDF of IEC 60875-1:2010

Withdrawn

## COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

### **DISPOSITIFS D'INTERCONNEXION ET COMPOSANTS PASSIFS À FIBRES OPTIQUES – DISPOSITIFS DE COUPLAGE POUR FIBRES OPTIQUES NE DÉPENDANT PAS DE LA LONGUEUR D'ONDE –**

#### **Partie 1: Spécification générique**

#### **AVANT-PROPOS**

- 1) La Commission Electrotechnique Internationale (CEI) est une organisation mondiale de normalisation composée de l'ensemble des comités électrotechniques nationaux (Comités nationaux de la CEI). La CEI a pour objet de favoriser la coopération internationale pour toutes les questions de normalisation dans les domaines de l'électricité et de l'électronique. A cet effet, la CEI – entre autres activités – publie des Normes internationales, des Spécifications techniques, des Rapports techniques, des Spécifications accessibles au public (PAS) et des Guides (ci-après dénommés "Publication(s) de la CEI"). Leur élaboration est confiée à des comités d'études, aux travaux desquels tout Comité national intéressé par le sujet traité peut participer. Les organisations internationales, gouvernementales et non gouvernementales, en liaison avec la CEI, participent également aux travaux. La CEI collabore étroitement avec l'Organisation Internationale de Normalisation (ISO), selon des conditions fixées par accord entre les deux organisations.
- 2) Les décisions ou accords officiels de la CEI concernant les questions techniques représentent, dans la mesure du possible, un accord international sur les sujets étudiés, étant donné que les Comités nationaux de la CEI intéressés sont représentés dans chaque comité d'études.
- 3) Les Publications de la CEI se présentent sous la forme de recommandations internationales et sont agréées comme telles par les Comités nationaux de la CEI. Tous les efforts raisonnables sont entrepris afin que la CEI s'assure de l'exactitude du contenu technique de ses publications; la CEI ne peut pas être tenue responsable de l'éventuelle mauvaise utilisation ou interprétation qui en est faite par un quelconque utilisateur final.
- 4) Dans le but d'encourager l'uniformité internationale, les Comités nationaux de la CEI s'engagent, dans toute la mesure possible, à appliquer de façon transparente les Publications de la CEI dans leurs publications nationales et régionales. Toutes divergences entre toutes Publications de la CEI et toutes publications nationales ou régionales correspondantes doivent être indiquées en termes clairs dans ces dernières.
- 5) La CEI elle-même ne fournit aucune attestation de conformité. Des organismes de certification indépendants fournissent des services d'évaluation de conformité et, dans certains secteurs, accèdent aux marques de conformité de la CEI. La CEI n'est responsable d'aucun des services effectués par les organismes de certification indépendants.
- 6) Tous les utilisateurs doivent s'assurer qu'ils sont en possession de la dernière édition de cette publication.
- 7) Aucune responsabilité ne doit être imputée à la CEI, à ses administrateurs, employés, auxiliaires ou mandataires, y compris ses experts particuliers et les membres de ses comités d'études et des Comités nationaux de la CEI, pour tout préjudice causé en cas de dommages corporels et matériels, ou de tout autre dommage de quelque nature que ce soit, directe ou indirecte, ou pour supporter les coûts (y compris les frais de justice) et les dépenses découlant de la publication ou de l'utilisation de cette Publication de la CEI ou de toute autre Publication de la CEI, ou au crédit qui lui est accordé.
- 8) L'attention est attirée sur les références normatives citées dans cette publication. L'utilisation de publications référencées est obligatoire pour une application correcte de la présente publication.
- 9) L'attention est attirée sur le fait que certains des éléments de la présente Publication de la CEI peuvent faire l'objet de droits de propriété intellectuelle ou de droits analogues. La CEI ne saurait être tenue pour responsable de ne pas avoir identifié de tels droits de propriété et de ne pas avoir signalé leur existence.

La Norme internationale CEI 60875-1 a été établie par le sous-comité 86B: Dispositifs d'interconnexion et composants passifs à fibres optiques, du comité d'études 86 de la CEI: Fibres optiques.

Cette cinquième édition annule et remplace la quatrième édition parue en 2000 et constitue une révision technique. Les modifications par rapport à l'édition précédente sont la suppression de l'article concernant les procédures d'assurance de la qualité et une reconsidération de la structure de la présente norme.

Cette version bilingue (2010-10) remplace la version monolingue anglaise.

Le texte anglais de cette norme est issu des documents 86B/2986/FDIS et 86B/3022/RVD.

Le rapport de vote 86B/3022/RVD donne toute information sur le vote ayant abouti à l'approbation de cette norme.

La version française de cette norme n'a pas été soumise au vote.

Cette publication a été rédigée selon les Directives ISO/CEI, Partie 2.

La liste de toutes les parties de la série CEI 60875, publiées sous le titre général *Dispositifs d'interconnexion et composants passifs à fibres optiques – Dispositifs de couplage pour fibres optiques ne dépendant pas de la longueur d'onde*, peut être consultée sur le site web de la CEI.

Le comité a décidé que le contenu de cette publication ne sera pas modifié avant la date de stabilité indiquée sur le site web de la CEI sous "<http://webstore.iec.ch>" dans les données relatives à la publication recherchée. A cette date, la publication sera

- reconduite,
- supprimée,
- remplacée par une édition révisée, ou
- amendée.

**IMPORTANT – Le logo "colour inside" qui se trouve sur la page de couverture de cette publication indique qu'elle contient des couleurs qui sont considérées comme utiles à une bonne compréhension de son contenu. Les utilisateurs devraient, par conséquent, imprimer cette publication en utilisant une imprimante couleur.**

# **DISPOSITIFS D'INTERCONNEXION ET COMPOSANTS PASSIFS À FIBRES OPTIQUES – DISPOSITIFS DE COUPLAGE POUR FIBRES OPTIQUES NE DÉPENDANT PAS DE LA LONGUEUR D'ONDE –**

## **Partie 1: Spécification générique**

### **1 Domaine d'application**

La présente partie de la CEI 60875 s'applique aux dispositifs de couplage pour fibres optiques qui ne dépendent pas de la longueur d'onde. Tous présentent les caractéristiques suivantes:

- ils sont passifs, au sens où ils ne contiennent aucun élément optoélectronique ou transducteur;
- ils ont trois ports ou plus pour l'entrée et/ou la sortie de la puissance optique, et ils partagent la puissance optique parmi ces ports, selon une modalité spécifiée;
- les ports sont des fibres optiques ou des connecteurs à fibres optiques.

La présente norme établit des exigences uniformes relatives aux propriétés optiques, mécaniques et environnementales.

### **2 Références normatives**

Les documents de référence suivants sont indispensables pour l'application du présent document. Pour les références datées, seule l'édition citée s'applique. Pour les références non datées, la dernière édition du document de référence s'applique (y compris les éventuels amendements).

CEI 60027 (toutes les parties), *Symboles littéraux à utiliser en électrotechnique*

CEI 60050(731), *Vocabulaire Electrotechnique International (VEI) – Chapitre 731: Télécommunications par fibres optiques*

CEI 60617-SN, *Symboles graphiques pour schémas*

CEI 60695-11-5, *Essais relatifs aux risques du feu – Partie 11-5: Flammes d'essai – Méthode d'essai au brûleur-aiguille – Appareillage, dispositif d'essai de vérification et lignes directrices*

CEI 60825 (toutes les parties), *Sécurité des appareils à laser*

CEI 61300 (toutes les parties), *Dispositifs d'interconnexion et composants passifs à fibre optiques – Procédures fondamentales d'essais et de mesures*

CEI 61930, *Symbologie des graphiques de fibres optiques*

Guide CEI 102, *Composants électroniques – Structure des spécifications pour l'assurance de la qualité (Homologation et agrément de savoir-faire)*

IECQ 01, *IEC Quality Assessment System for Electronic Components (IECQ Scheme) – Basic Rules* (disponible en anglais uniquement)

IECQ 001002-3, *IEC Quality Assessment System for Electronic Components (IECQ) – Rules of Procedure – Part 3: Approval procedures* (disponible en anglais uniquement)

ISO 129-1, *Dessins techniques – Indication des cotes et tolérances – Partie 1: Principes généraux*

ISO 286-1, *Système ISO de tolérances et d'ajustements – Partie 1: Base des tolérances, écarts et ajustements*

ISO 1101, *Spécification géométrique des produits (GPS) – Tolérancement géométrique – Tolérancement de forme, orientation, position et battement*

ISO 8601, *Éléments de données et formats d'échange – Echange d'information – Représentation de la date et de l'heure*

### 3 Termes et définitions

Pour les besoins du présent document, les termes et définitions de la CEI 60050-731, ainsi que les suivants, s'appliquent.

#### 3.1 Définitions des termes fondamentaux

##### 3.1.1

##### **port**

fibre optique ou connecteur optique fixée) à un composant passif pour coupler la puissance optique en entrée (port d'entrée) et/ou sortie (port de sortie)

##### 3.1.2

##### **fibre optique amorce**

fibre optique de courte longueur, jarretière ou câble, formant un port optique pour un composant à fibre optique

##### 3.1.3

##### **matrice de transfert**

les propriétés optiques d'un dispositif de couplage pour fibres optiques ne dépendant pas de la longueur d'onde peuvent être définies en termes d'une matrice  $n \times n$  de coefficients,  $n$  étant le nombre de ports, et les coefficients représentant la puissance optique fractionnée, transférée entre les ports désignés

En général, la matrice de transfert  $T$  est la suivante:

$$T = \begin{bmatrix} t_{11} & t_{12} & \dots & t_{1n} \\ t_{21} & & & \\ \vdots & & t_{ij} & \\ t_{n1} & & & t_{nn} \end{bmatrix}$$

où

$t_{ij}$  est le quotient de la puissance optique  $P_{ij}$  sortant par le port  $j$  par la puissance d'entrée  $P_i$  pénétrant dans le port  $i$ , c'est-à-dire:

$$t_{ij} = P_{ij}/P_i$$

La matrice de transfert est utilisée pour classifier les différents types de dispositifs de couplage ne dépendant pas de la longueur d'onde, spécifiés dans la présente spécification générique.

Dans un dispositif de couplage ne dépendant pas de la longueur d'onde, les coefficients  $t_{ij}$  peuvent être fonction de la longueur d'onde d'entrée, de la polarisation d'entrée ou de la distribution de la puissance modale. Les valeurs de ces paramètres sont fournies dans la spécification particulière, si nécessaire.

Des dispositifs de couplage unimodaux ne dépendant pas de la longueur d'onde peuvent fonctionner d'une manière cohérente avec plusieurs entrées. Par conséquent, les coefficients de transfert peuvent être affectés par l'intensité et la phase relatives de puissances optiques d'entrée cohérentes simultanées, à deux ou plusieurs ports

### 3.1.4

#### **coefficient de transfert**

élément  $t_{ij}$  de la matrice de transfert

### 3.1.5

#### **matrice logarithmique de transfert**

matrice logarithmique de transfert se présentant généralement de la manière suivante:

$$A = \begin{bmatrix} a_{11} & a_{12} & \dots & a_{1n} \\ a_{21} & & & \\ \vdots & & a_{ij} & \\ a_{n1} & & & a_{nn} \end{bmatrix}$$

où

$a_{ij}$  est la réduction de la puissance optique en décibels au port de sortie  $j$  par rapport à la puissance unitaire au port d'entrée  $i$ , c'est-à-dire:

$$a_{ij} = -10 \log t_{ij}$$

où  $t_{ij}$  est le coefficient de la matrice de transfert

### 3.1.6

#### **ports de conduction**

les deux ports  $i$  et  $j$  entre lesquels  $t_{ij}$  a une valeur nominale supérieure à zéro

### 3.1.7

#### **ports isolés**

les deux ports  $i$  et  $j$  entre lesquels  $t_{ij}$  a une valeur nominale égale à zéro, et  $a_{ij}$  possède une valeur nominale infinie

## 3.2 Définitions des composants

### 3.2.1

#### **dispositif de couplage ne dépendant pas de la longueur d'onde**

composant passif ayant trois ports ou plus, qui fonctionne sur une gamme spécifiée de longueurs d'ondes et distribue la puissance optique arrivant dans un port d'entrée, à ses ports de sortie d'une manière prédéterminée, sans amplification, commutation ou autre modulation active

### 3.2.2

#### **répartiteur**

terme fréquemment utilisé comme synonyme d'un dispositif de couplage ne dépendant pas de la longueur d'onde, avec 1 ou 2 entrées (ports d'entrée) et plus de 4 sorties (ports de sortie), conçu pour, et destiné à produire une puissance optique égale au niveau des ports de sortie

### 3.2.3

#### **coupleur optique**

terme fréquemment utilisé comme synonyme d'un dispositif de couplage ne dépendant pas de la longueur d'onde, avec 1 ou 2 entrées (ports d'entrée) et 4 sorties ou moins (ports de sortie), ou avec M entrées (ports d'entrée) et jusqu'à N sorties (ports de sortie), où le nombre de sorties (ports de sortie) est supérieur à un ( $N > 1$ )

### 3.2.4

#### **dispositif de couplage ne dépendant pas de la longueur d'onde, symétrique**

dispositif à matrice de transfert symétrique par rapport à la diagonale, c'est-à-dire que, pour tous les  $i$  et  $j$ ,  $t_{ij}$  et  $t_{ji}$  ont la même valeur nominale

### 3.2.5

#### **dispositif de couplage ne dépendant pas de la longueur d'onde, asymétrique**

dispositif à matrice de transfert asymétrique par rapport à la diagonale, c'est-à-dire que, à chaque fois qu'il existe au moins un  $i$  et un  $j$ ,  $t_{ij}$  et  $t_{ji}$  ont une valeur nominale différente

### 3.2.6

#### **coupleur optique équilibré**

terme fréquemment utilisé comme synonyme d'un dispositif de couplage ne dépendant pas de la longueur d'onde, symétrique, qui est conçu pour, et destiné à produire une puissance au niveau de chaque port de sortie égale à la puissance au niveau du port d'entrée correspondant

### 3.2.7

#### **coupleur optique non équilibré**

terme fréquemment utilisé comme synonyme d'un dispositif de couplage ne dépendant pas de la longueur d'onde, asymétrique, qui est conçu pour, et destiné à produire une puissance différente au niveau de chaque port de sortie

### 3.2.8

#### **coupleur de dérivation**

terme fréquemment utilisé comme synonyme d'un coupleur optique non équilibré, dont le rapport de couplage est généralement compris entre 1 % et 20 %

### 3.2.9

#### **pertes dépendant de la polarisation**

##### **PDL (*Polarization dependent loss*)**

variation maximale de la perte d'insertion due à la variation de l'état de polarisation (SOP: *state of polarization*) pour tous les SOP

## **3.3 Définitions des paramètres de qualité de fonctionnement**

### 3.3.1

#### **perte d'insertion**

élément,  $a_{ij}$  (où  $i \neq j$ ), de la matrice logarithmique de transfert. Il s'agit d'une diminution de la puissance optique entre un port d'entrée et de sortie d'un composant passif, exprimée en décibels et définie comme suit:

$$a = -10 \log (P_1/P_0)$$

où

$P_0$  est la puissance optique injectée dans le port d'entrée;

$P_1$  est la puissance optique reçue du port de sortie

### 3.3.2

#### **affaiblissement de réflexion**

élément,  $a_{ij}$  (où  $i = j$ ), de la matrice logarithmique de transfert. Il s'agit de la part de puissance d'entrée qui est réfléchi au port d'entrée d'un composant passif. Elle est définie de la manière suivante:

$$RL = -10 \log (P_1/P_0)$$

où

$P_0$  est la puissance optique injectée dans le port d'entrée;

$P_1$  est la puissance optique reçue en retour du même port

### 3.3.3

#### **directivité**

valeur de  $a_{ij}$  entre deux ports isolés

### 3.3.4

#### **perte par excès**

puissance totale perdue dans un dispositif de couplage ne dépendant pas de la longueur d'onde lorsqu'un signal optique est injecté dans un port  $i$ , et définie par:

$$EL_i = -10 \log \sum_j t_{ij}$$

sachant que l'opération est effectuée seulement au-delà des valeurs  $j$  pour lesquelles  $i$  et  $j$  sont des ports conducteurs. Dans un dispositif de couplage ne dépendant pas de la longueur d'onde à  $N$  ports d'entrée, il y a un tableau de  $N$  valeurs de pertes par excès, une perte pour chaque port d'entrée  $i$

### 3.3.5

#### **uniformité**

matrice logarithmique de transfert d'un dispositif de couplage pouvant contenir un jeu spécifié de coefficients nominale finis et égaux. Dans ce cas, la gamme de ces coefficients  $a_{ij}$ , exprimés en décibels, est appelée uniformité du dispositif de couplage

### 3.3.6

#### **rapport de couplage**

pour un port d'entrée donné  $i$ , il s'agit du quotient de la lumière à un port de sortie donné  $k$  par la lumière totale provenant de tous les ports de sortie, et défini par:

$$CR_{ik} = t_{ik} / \sum_j t_{ij}$$

où  $j$  représente les ports de sortie en fonctionnement

### 3.3.7

#### **longueur d'onde de fonctionnement**

longueur d'onde nominale  $\lambda$ , pour laquelle un composant passif est destiné à fonctionner à la performance prescrite

### 3.3.8

#### **gamme de longueurs d'ondes de fonctionnement**

gamme spécifiée de longueurs d'ondes de  $\lambda_{i \text{ min}}$  à  $\lambda_{i \text{ max}}$  autour d'une longueur d'onde nominale de fonctionnement  $\lambda_i$ , dans laquelle un composant passif est conçu pour fonctionner à la performance prescrite

NOTE A un dispositif de couplage ne dépendant pas de la longueur d'onde de plus d'une longueur d'onde de fonctionnement, correspondent des gammes de longueurs d'ondes qui ne sont pas nécessairement égales.

## **4 Exigences**

### **4.1 Classification**

#### **4.1.1 Généralités**

Les dispositifs de couplage ne dépendant pas de la longueur d'onde doivent être classés selon les catégories suivantes:

- type;
- modèle;
- variante;
- classe de la norme de qualité de fonctionnement;
- niveau d'assurance de la qualité;
- extensions de références normatives.

#### **4.1.2 Types**

Les caractéristiques principales de chaque type sont les suivantes:

- de transmission ou de réflexion;
- bidirectionnelles ou unidirectionnelles;
- arbre ou étoile,
- combinaison des éléments ci-dessus.

#### **4.1.3 Modèle**

##### **4.1.3.1 Généralités**

Les dispositifs de couplage ne dépendant pas de la longueur d'onde peuvent être classés par modèles fondés sur le ou les types de fibre(s), le ou les types de connecteur(s), le ou les types de câble(s), la forme du boîtier et la configuration. Les configurations des ports des dispositifs de couplage sont classées comme suit:

##### **4.1.3.2 Configuration A**

Dispositif comportant des fibres optiques amorces intégrées, sans connecteurs.

# EXEMPLE

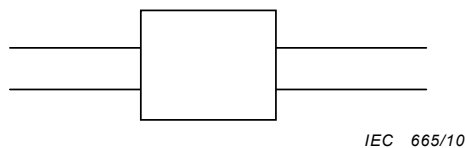


**Figure 1 – Dispositif de couplage ne dépendant pas de la longueur d'onde**

## 4.1.3.3 Configuration B

Dispositif comportant des fibres optiques amorces intégrées, avec un connecteur sur chaque fibre amorce.

# EXEMPLE

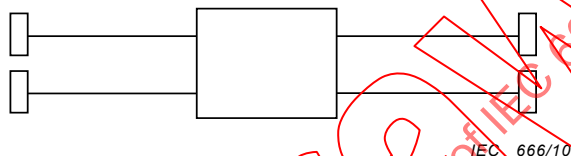


**Figure 2 – Dispositif de couplage ne dépendant pas de la longueur d'onde**

## 4.1.3.4 Configuration C

Dispositif comportant des connecteurs à fibres optiques, en tant que partie intégrante du boîtier du dispositif.

# EXEMPLE




**Figure 3 – Dispositif de couplage ne dépendant pas de la longueur d'onde**

## 4.1.3.5 Configuration D

Dispositif comportant une certaine combinaison de caractéristiques d'interfaces des configurations précédentes.

# EXEMPLE

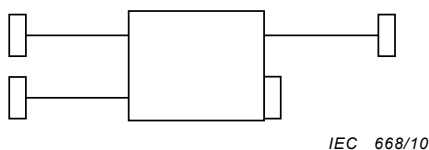


**Figure 4 – Dispositif de couplage ne dépendant pas de la longueur d'onde**

#### 4.1.4 Variante

La variante d'un dispositif de couplage identifie les caractéristiques en commun de composants dont la structure est similaire.

Exemples non exhaustifs de caractéristiques définissant des variantes:

- orientation des ports;
- moyens de montage.

#### 4.1.5 Niveau d'assurance de la qualité

Le niveau d'assurance de la qualité définit les niveaux de contrôle et le niveau de qualité acceptable (NQA) des groupes A et B et la périodicité du contrôle des groupes C et D. Les spécifications particulières doivent préciser au moins un niveau d'assurance de la qualité. Chacun de ces niveaux doit être désigné par une lettre majuscule.

Les niveaux suivants sont préférentiels:

Niveau d'assurance de la qualité A

- contrôle du groupe A: niveau de contrôle II, NQA = 4 %;
- contrôle du groupe B: niveau de contrôle I, NQA = 4 %;
- contrôle du groupe C: périodicité de 24 mois;
- contrôle du groupe D: périodicité de 48 mois.

Niveau d'assurance de la qualité B

- contrôle du groupe A: niveau de contrôle II, NQA = 1 %;
- contrôle du groupe B: niveau de contrôle II, NQA = 1 %;
- contrôle du groupe C: périodicité de 18 mois;
- contrôle du groupe D: périodicité de 36 mois.

Niveau d'assurance de la qualité C

- contrôle du groupe A: niveau de contrôle II, NQA = 0,4 %;
- contrôle du groupe B: niveau de contrôle II, NQA = 0,4 %;
- contrôle du groupe C: périodicité de 12 mois;
- contrôle du groupe D: périodicité de 24 mois.

Il est possible d'ajouter un niveau d'assurance de la qualité supplémentaire dans la spécification particulière. Dans ce cas, la lettre majuscule X doit être utilisée.

#### 4.1.6 Extensions de références normatives

Les extensions de références normatives sont utilisées pour identifier l'intégration des spécifications de normes indépendantes ou d'autres documents de référence dans les spécifications particulières cadres.

Sauf spécification contraire, les exigences supplémentaires imposées par une extension sont obligatoires. Leur usage est prévu principalement pour unir des composants associés afin de constituer des dispositifs hybrides, ou bien il peut s'agir des exigences d'application fonctionnelle intégrée qui sont dépendantes de l'expertise technique autre que celle des fibres optiques.

Les documents de référence élaborés par l'UIT, compatibles avec l'énoncé du domaine d'application de la série de spécifications CEI applicables, peuvent être utilisés comme extension.

Certaines configurations d'épissures (optiques) exigent des dispositions spéciales d'homologation qui ne doivent pas être imposées universellement. Ces dispositions s'adaptent aux configurations de conceptions de composants individuelles, à l'outillage de terrain spécialisé, ou à des procédés d'application spécifiques. Dans ce cas, il s'agit d'exigences nécessaires pour assurer une qualité de fonctionnement renouvelable ou une sécurité suffisante et pour fournir un guide supplémentaire pour une spécification de produit complète. Ces extensions sont obligatoires quand elles sont utilisées pour préparer, assembler ou installer une épissure (optique), soit pour l'utilisation d'une application de terrain, soit pour la préparation d'éprouvettes d'essais d'homologation. La spécification applicable doit clarifier toutes les stipulations. Cependant, les extensions dépendant de la conception et du modèle ne doivent pas être imposées universellement.

Dans le cas d'exigences non compatibles, la priorité, dans l'ordre décroissant, doit être donnée à l'extension générique sur l'extension obligatoire, viennent ensuite l'extension particulière cadre, puis l'extension particulière, et enfin l'extension d'application spécifique.

Des exemples d'extensions de connecteurs optiques sont donnés ci-après:

- Utilisation de la CEI 61754-4 et de la CEI 61754-15 pour définir partiellement une future spécification de la série CEI 60874 pour un raccord de connecteur hybride SC/LSH de type duplex.
- Utilisation de la CEI 61754-13 et de la CEI 60869-1 pour définir partiellement une future spécification de la série CEI 60874 pour un type intégré «FC» de connecteur optique à affaiblissement préréglé.
- Utilisation de la CEI 61754-15 et de la CEI 61754-4 pour définir partiellement une future spécification de la série CEI 60874 pour un socle LSH de type duplex comportant des épissures mécaniques intégrées.

D'autres exemples d'exigences d'extensions normatives figurent ci-après:

- a) Les applications dans les bâtiments à usage commercial ou résidentiel qui peuvent nécessiter des références directes à des codes et des règlements de sécurité spécifiques ou bien incorporer d'autres exigences spécifiques d'inflammabilité ou de toxicité de matériaux pour emplacements spéciaux.
- b) L'outillage de terrain spécialisé qui peut nécessiter une extension pour appliquer les exigences spécifiques de sécurité oculaire, de chocs électriques et d'élimination de risques de brûlures, ou bien qui peut nécessiter des procédures d'isolation dans le but d'éviter l'inflammation potentielle de gaz combustibles.

## **4.2 Documentation**

### **4.2.1 Symboles**

Les symboles graphiques et littéraux doivent, dans toute la mesure du possible, être issus de la CEI 60027, de la CEI 60617 et de la CEI 61930.

### **4.2.2 Structure des spécifications**

#### **4.2.2.1 Généralités**

La présente spécification fait partie d'un système de spécification CEI comportant trois niveaux. Les spécifications auxiliaires doivent comprendre les spécifications particulières cadres et les spécifications particulières. Ce système est présenté au Tableau 1. Il n'existe pas de spécifications intermédiaires pour les dispositifs de couplage ne dépendant pas de la longueur d'onde.

**Tableau 1 – Structure à trois niveaux des spécifications de la CEI**

| Niveau des spécifications | Exemples d'informations à inclure dans les spécifications                                                                                                                                                                                                                                                                                       | Applicable à                                              |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| De base                   | Règles du système d'assurance de la qualité<br>Règles de contrôle<br>Méthodes de mesures optiques<br>Méthodes d'essais d'environnement<br>Plans d'échantillonnage<br>Règle d'identification<br>Normes de marquage<br>Normes dimensionnelles<br>Normes de terminologie<br>Normes pour symboles<br>Séries numériques préférentielles<br>Unités SI | Deux ou plusieurs familles ou sous-familles de composants |
| Générique                 | Terminologie spécifique<br>Symboles spécifiques<br>Unités spécifiques<br>Valeurs préférentielles<br>Marquage<br>Procédures d'assurance de la qualité<br>Sélection des essais<br>Procédures d'homologation et/ou agrément de savoir-faire                                                                                                        | Famille de composants                                     |
| Particulière cadre        | Programme d'essais de conformité de la qualité<br>Exigences de contrôle<br>Informations communes à un certain nombre de types                                                                                                                                                                                                                   | Groupes de types ayant un programme d'essais commun       |
| Particulière              | Valeurs individuelles<br>Informations spécifiques<br>Programmes d'essais de conformité de la qualité achevés                                                                                                                                                                                                                                    | Type individuel                                           |

#### 4.2.2.2 Spécifications particulières cadres

Les spécifications particulières cadres ne correspondent pas, seules, à un niveau de spécification. Elles sont associées à la spécification générique.

Chaque spécification particulière cadre doit être limitée à une seule catégorie environnementale.

Chaque spécification particulière cadre doit contenir:

- les programmes d'essais minimaux obligatoires et les exigences de qualité de fonctionnement;
- un ou plusieurs niveaux d'assurance de la qualité;
- le format préférentiel pour indiquer les informations nécessaires dans la spécification particulière;

- en cas de composants hybrides incluant des connecteurs, un ajout des domaines d'entrée appropriés pour montrer le document normatif de référence, le titre du document et la date de publication.

#### **4.2.2.3 Spécifications particulières**

Un dispositif de couplage spécifique ne dépendant pas de la longueur d'onde est décrit par une spécification particulière correspondante, qui est rédigée en remplissant les parties à compléter de la spécification particulière cadre. Sous réserve des contraintes imposées par cette spécification générique, la spécification particulière cadre peut être complétée par tout comité national de la CEI, définissant ainsi en tant que norme de la CEI, une conception particulière de dispositif de couplage ne dépendant pas de la longueur d'onde.

Les spécifications particulières doivent stipuler les informations suivantes, selon ce qui est applicable:

- type (voir 4.1.2);
- modèle (voir 4.1.3);
- variante(s) (voir 4.1.4);
- niveau d'assurance de la qualité (voir 4.1.5);
- numéro d'identification de la partie pour chaque variante (voir 4.7.2);
- plans, dimensions requises (voir 4.2.3);
- programmes d'essais d'assurance de la qualité (voir 4.1.4);
- exigences de qualité de fonctionnement (voir 4.6).

### **4.2.3 Plans**

#### **4.2.3.1 Généralités**

Les plans et dimensions indiqués dans les spécifications particulières ne doivent ni se limiter aux détails de construction, ni être utilisés en tant que plans de fabrication.

#### **4.2.3.2 Système de projection**

La projection du premier trièdre ou la projection du troisième trièdre doit être utilisée pour les plans présentés dans les documents couverts par la présente spécification. Tous les plans contenus dans un document doivent utiliser le même système de projection et les plans doivent spécifier le système employé.

#### **4.2.3.3 Système dimensionnel**

Toutes les dimensions doivent être données conformément à l'ISO 129-1, à l'ISO 286-1 et à l'ISO 1101.

Le système métrique doit être utilisé dans toutes les spécifications.

Les dimensions ne doivent pas comporter plus de cinq chiffres significatifs.

Lorsque des unités sont converties, une note doit être ajoutée à chaque spécification applicable, et la conversion entre des systèmes d'unités doit se faire selon un facteur de conversion de 25,4 mm pour 1 pouce.

## **4.2.4 Mesures**

### **4.2.4.1 Méthode de mesure**

La méthode de mesure pour les caractéristiques optiques, mécaniques, climatiques et environnementales des dispositifs de couplage à utiliser, doit être définie et sélectionnée de préférence à partir de la série CEI 61300.

La méthode de mesure des dimensions à utiliser doit être spécifiée dans la spécification particulière pour toutes les dimensions qui sont spécifiées dans une zone de tolérance totale ne dépassant pas 0,01 mm.

### **4.2.4.2 Composants de référence**

Les composants de référence utilisés pour les mesures, si nécessaire, doivent être spécifiés, dans la spécification applicable.

### **4.2.4.3 Calibres**

Les calibres doivent, si nécessaire, être spécifiés dans la spécification particulière.

### **4.2.5 Fiches techniques d'essais**

Les fiches techniques d'essais doivent être élaborées pour chaque essai effectué conformément à une spécification particulière. Les fiches techniques doivent être incluses dans le rapport de qualification et dans le rapport de contrôle périodique.

Les fiches techniques doivent, au minimum, contenir les informations suivantes:

- le titre et la date de l'essai;
- la description de l'éprouvette, y compris le type de fibre et le numéro d'identification de la variante (voir 4.7.2);
- le matériel d'essai utilisé et la date du dernier étalonnage;
- toutes les précisions quant aux essais applicables;
- toutes les valeurs des mesures et les observations;
- une documentation suffisamment détaillée pour fournir toutes les informations nécessaires à la recherche et à l'analyse des défaillances.

### **4.2.6 Instructions d'utilisation**

Les instructions d'utilisation doivent, si nécessaire, être fournies par le fabricant et doivent être constituées des données suivantes:

- instructions d'assemblages et de raccordements;
- méthode de nettoyage;
- aspects de sécurité;
- informations complémentaires, si nécessaire.

## **4.3 Système de normalisation**

### **4.3.1 Normes d'interface**

Les normes d'interface contiennent toutes les informations nécessaires au fabricant et à l'utilisateur pour fabriquer ou utiliser un produit conforme aux caractéristiques physiques de cette norme d'interface. Les normes d'interface donnent les définitions et les dimensions complètes des caractéristiques essentielles pour l'accouplement et le désaccouplement des