

INTERNATIONAL STANDARD



**Touch and interactive displays –
Part 12-10: Measurement methods of touch displays – Touch and electrical
performance**

IECNORM.COM : Click to view the full PDF of IEC 62908-12-10:2017



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2017 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IECNORM.COM : Click to view the full text of IEC 60948-12:2017

INTERNATIONAL STANDARD



**Touch and interactive displays –
Part 12-10: Measurement methods of touch displays – Touch and electrical
performance**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 31.120

ISBN 978-2-8322-4394-7

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	5
1 Scope.....	7
2 Normative references	7
3 Terms and definitions	7
4 Measuring conditions.....	7
4.1 Standard measuring environmental conditions	7
4.2 Standard atmospheric conditions for reference measurements and tests	8
4.3 Standard positioning equipment and setup.....	8
4.4 Human operator alternative to standard positioning equipment	9
4.5 Test bar size, shape and material parameters.....	10
5 Touch performance measuring methods	11
5.1 General.....	11
5.2 Accuracy test.....	11
5.2.1 Purpose.....	11
5.2.2 Test procedure	11
5.2.3 Report	15
5.3 Repeatability/jitter test	15
5.3.1 Purpose.....	15
5.3.2 Test procedure	15
5.3.3 Report	17
5.4 Linearity test.....	18
5.4.1 Purpose.....	18
5.4.2 Test procedure	18
5.4.3 Report	20
5.5 Reproducibility test	20
5.5.1 Purpose.....	20
5.5.2 Test procedure	21
5.5.3 Report	22
5.6 Signal-to-noise ratio (SNR) test	23
5.6.1 Purpose.....	23
5.6.2 Test procedure	24
5.6.3 Report	25
5.7 Report rate test.....	25
5.7.1 Purpose.....	25
5.7.2 Test procedure	25
5.7.3 Report	26
5.8 Latency test.....	26
5.8.1 Purpose.....	26
5.8.2 Test procedure	26
5.8.3 Report	27
5.9 Electrical noise immunity test.....	27
5.9.1 Purpose.....	27
5.9.2 Test procedure	27
5.9.3 Report	28
5.10 Water droplet immunity test	28
5.10.1 Purpose.....	28
5.10.2 Test procedure	29

5.10.3	Report	29
5.11	Optical noise immunity test	29
5.11.1	Purpose	29
5.11.2	Test procedure	30
5.11.3	Report	30
5.12	Power consumption test	30
5.12.1	Purpose	30
5.12.2	Test procedure	30
5.12.3	Report	30
5.13	Perpendicular touch/hover distance test	30
5.13.1	Purpose	30
5.13.2	Test procedure	30
5.13.3	Report	31
Annex A	(informative) Electrical performance measuring methods of touch sensor	32
A.1	Resistance	32
A.1.1	General	32
A.1.2	Test samples	32
A.1.3	Measurement equipment	32
A.1.4	Procedures	32
A.1.5	Data analysis	33
A.1.6	Report	33
A.2	Trans-capacitance	33
A.2.1	General	33
A.2.2	Test samples	33
A.2.3	Measurement equipment	33
A.2.4	Procedure	33
A.2.5	Data analysis	34
A.2.6	Report	34
Figure 1	– Composition of test equipment	9
Figure 2	– Concept of performance measurement	9
Figure 3	– Example of manual test tool (left), positioning without triggering a touch event (middle) and recording a touch event (right)	10
Figure 4	– Examples of test bars	10
Figure 5	– Location of edge area and centre area	12
Figure 6	– Point grid	12
Figure 7	– Accuracy definition	13
Figure 8	– Example of measurement result and calculation of accuracy	15
Figure 9	– Repeatability in touch sensor module	16
Figure 10	– Example of measurement result for repeatability	17
Figure 11	– Dragging line for linearity test	18
Figure 12	– Linearity definition	19
Figure 13	– Example of measurement and calculation of linearity	20
Figure 14	– Example of reproducibility test results	21
Figure 15	– Reproducibility test procedure	22
Figure 16	– Examples of measurements of reproducibility – Velocity dependence	23
Figure 17	– SNR definition concept	24

Figure 18 – Dragging direction for reporting time measurement	25
Figure 19 – Reporting time interval measurement	26
Figure 20 – Latency measurement	26
Figure 21 – Example of the effect of external noise	27
Figure 22 – External noise injection	28
Figure 23 – Report of external noise immunity	28
Figure 24 – Example of water drop effect	29
Figure 25 – Water droplet test procedure	29
Figure 26 – Perpendicular touch/hover distance measurement	31
Figure A.1 – Diagrammatic representation of measurement of resistance	33
Figure A.2 – Diagrammatic representation of measurement of capacitance	34
Table 1 – Standard conditions for reference measurements and tests	8
Table A.1 – Specification of LCR impedance meter	32

IECNORM.COM : Click to view the full PDF of IEC 62908-12-10:2017

INTERNATIONAL ELECTROTECHNICAL COMMISSION

TOUCH AND INTERACTIVE DISPLAYS –

**Part 12-10: Measurement methods of touch displays –
Touch and electrical performance**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62908-12-10 has been prepared by IEC technical committee 110: Electronic display devices.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
110/861/FDIS	110/872/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62908 series, published under the general title *Touch and interactive displays*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

The contents of the corrigendum of Novembre 2018 have been included in this copy.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

IECNORM.COM : Click to view the full PDF of IEC 62908-12-10:2017

TOUCH AND INTERACTIVE DISPLAYS –

Part 12-10: Measurement methods of touch displays – Touch and electrical performance

1 Scope

This part of IEC 62908 specifies the standard measuring conditions and methods for determining touch performance of a touch sensor module. This document is applicable to touch sensor modules, where the structural relationship between touch sensor, touch controller, touch sensor module, display panel, touch display panel, and touch display module is defined in IEC 62908-1-2.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-1, *Environmental testing – Part 1: General and guidance*

IEC 62908-1-2¹, *Touch and interactive displays – Part 1-2: Generic – Terminology and letter symbols*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60068-1 and IEC 62908-1-2 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 Measuring conditions

4.1 Standard measuring environmental conditions

Measurements shall be carried out under the standard environmental conditions:

- temperature: 25 °C ± 3 °C,
- relative humidity: 25 % RH to 85 % RH,
- atmospheric pressure: 86 kPa to 106 kPa.

When different environmental conditions are used, they shall be noted in the measurement report.

¹ Under preparation. Stage at the time of publication: IEC/AFDIS 62908-1-2:2017.

4.2 Standard atmospheric conditions for reference measurements and tests

If the parameters to be measured depend on temperature, pressure and humidity and their dependence on temperature, pressure and humidity is unknown, the atmospheres to be specified shall be selected from the following values, as shown in Table 1. The selected values shall be noted in the relevant specifications.

Table 1 – Standard conditions for reference measurements and tests

Temperature ^a °C	Relative humidity ^{a, b} % RH	Air pressure ^a kPa
20, 25, 30, and 35 ± 3	45 to 75	86 to 106
^a Including extreme values.		
^b Absolute humidity ≤ 22 g/m ³ .		

4.3 Standard positioning equipment and setup

Standard positioning equipment for touch performance shall be the positioning machine equipped with a test bar, a moving arm, and a stage onto which the touch sensor module is placed, as shown in Figure 1. The positioning machine shall move its arm and stage to place the test bar on the touch sensor module.

There are three types of positions associated with a given test: target, actual and reported positions. The target position is a desired measurement location in physical space referenced to a fixed datum on the touch sensor module surface. The actual position is the actual location of contact during test, referenced to the same fixed datum, which may differ from the target position due to test bar placement error. The reported position is the location reported by the touch controller.

As shown in Figure 2, the reported positions from the touch controller are analysed to define performance measures with respect to the target positions.

The touch sensor module and the stage shall be aligned correctly while setting up the measurement equipment, because a misalignment between them may introduce coordinate shifts or rotation between the actual touch positions and target positions; each positioning machine has its inherent accuracy, which means that an actual touched position does not coincide with its target position. The performance measurements based on target positions may include errors due to the accuracy of the positioning machine. The touch sensor module under test shall be attached to the stage and connected to the electrical interface. The test bar of the selected diameter shall be attached to the moving arm.

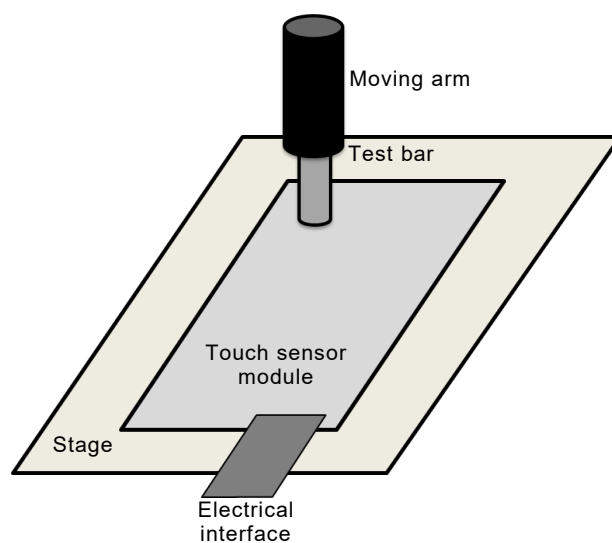


Figure 1 – Composition of test equipment

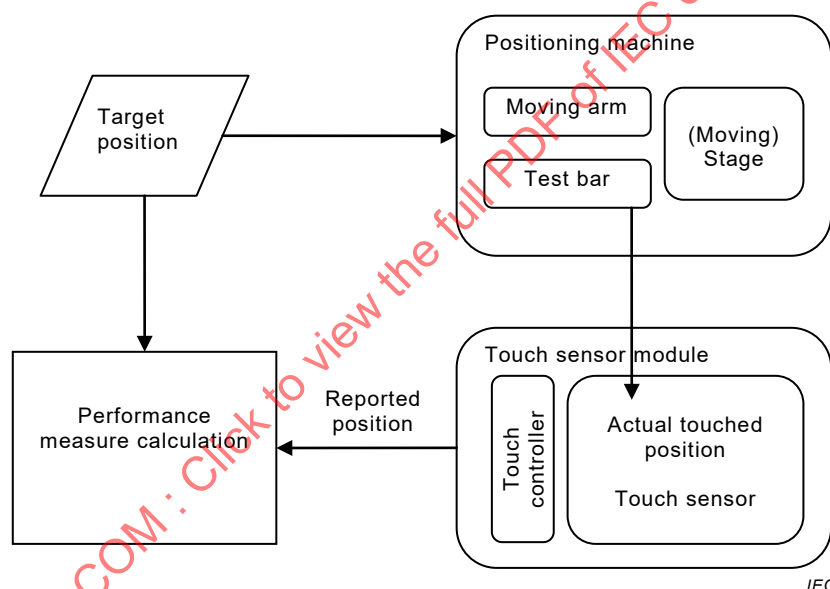


Figure 2 – Concept of performance measurement

4.4 Human operator alternative to standard positioning equipment

Under certain circumstances, for example if the display under test is too large for suitable positioning equipment to be available, a suitably designed test arm may be manually positioned to enable completion of a subset of the tests described in this document. In this situation, the test arm needs to be designed carefully to minimise the reasonable achievable error between actual and target positions when conducting measurements. An example of such a test arm may consist of a rod with a sliding tip (Figure 3, left), whose materials are chosen so that contact between the rod and the display does not trigger a touch event (Figure 3, middle), whereas contact between the sliding tip and the display does trigger a touch event (Figure 3, right). Such a test arm may be placed accurately and reliably by the human operator with the sliding tip away from the display, subsequent to which a measurement may be made by sliding the tip into contact with the display.

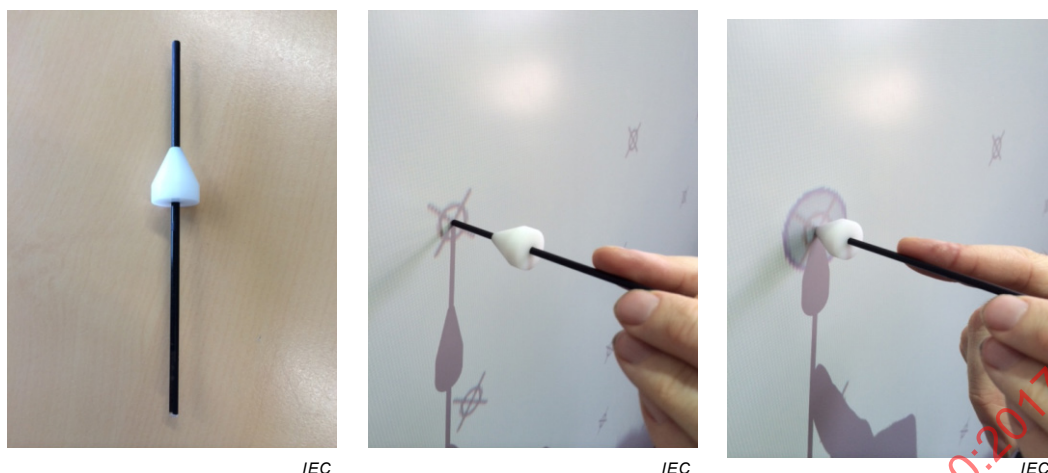


Figure 3 – Example of manual test tool (left), positioning without triggering a touch event (middle) and recording a touch event (right)


4.5 Test bar size, shape and material parameters

The parameters of the test bar shall be size, shape, and material. Examples of suitable sizes and shapes of the test bar are shown in Figure 4. Care shall be taken to ensure that material parameters for the test bar are appropriately chosen given the device category under test.

When the touch sensor module is a capacitive touch system, the test bar shall be electrically conductive and shall additionally be grounded in order to avoid potential performance degradation due to electrical noise, unless otherwise stated. A test bar may have an insulating layer on the base to model the effect of a gloved finger.

For reflection-based optical systems, the reflectivity of the contact end of the test bar shall be chosen to be spectrally representative of human skin.

In all cases, the appropriate properties (including size, shape and material) of the test bar shall be reported.

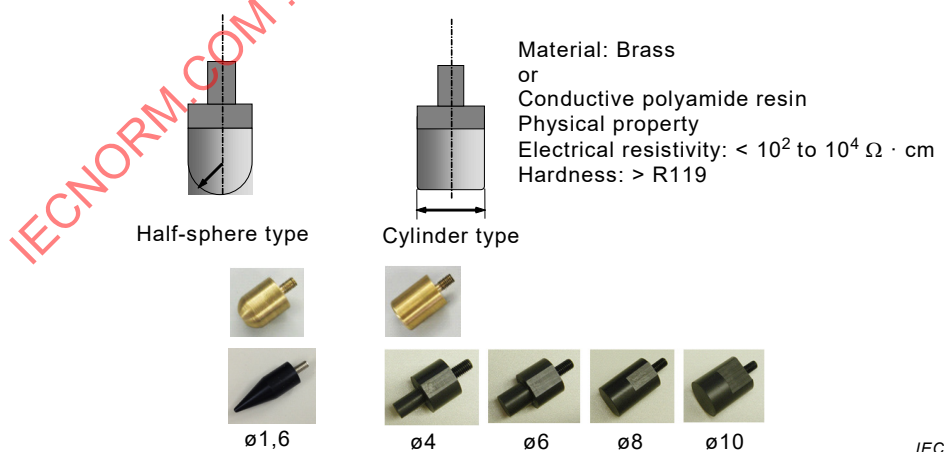

NOTE ø (test bar diameter) = 4 mm, 6 mm, 7 mm, 9 mm, or 12 mm.

Figure 4 – Examples of test bars

5 Touch performance measuring methods

5.1 General

Fundamental touch performance measuring methods are described in this clause. They shall be taken into account during characterisation of a touch sensor module to realize a good user experience.

5.2 Accuracy test

5.2.1 Purpose

The purpose of this test is to measure the ability of touch sensors and modules to indicate how close touch positions are reported relative to their target positions.

5.2.2 Test procedure

5.2.2.1 General

For the accuracy measurement, one of the following two methods can be selected. The first method is a straightforward method to evaluate the distance between each target point and its corresponding reported point. The second method is an indirect method where target grid points are estimated from reported points. This method can tolerate coordinate shifts which are caused by a misalignment between the touch sensor module and the stage while setting up the measurement equipment.

5.2.2.2 Method 1

The active area is defined as the area where touch is recognized. The centre area is defined as the rest of the active area without the edge area as shown in Figure 5. The edge area is defined as an area with the width of W from the edge of the active area. The origin and axis direction shall be defined.

The touch sensor module under test shall be attached to the stage and connected to the electrical interface. The test bar of the selected diameter size, shape and material shall be attached to the moving arm. For a precise measurement of the accuracy, the test equipment should be set up properly. The measurement points in the test grid are evenly spaced along both X and Y axes, away from the origin and spanning the whole active area of the touch sensor panel as shown in Figure 6.


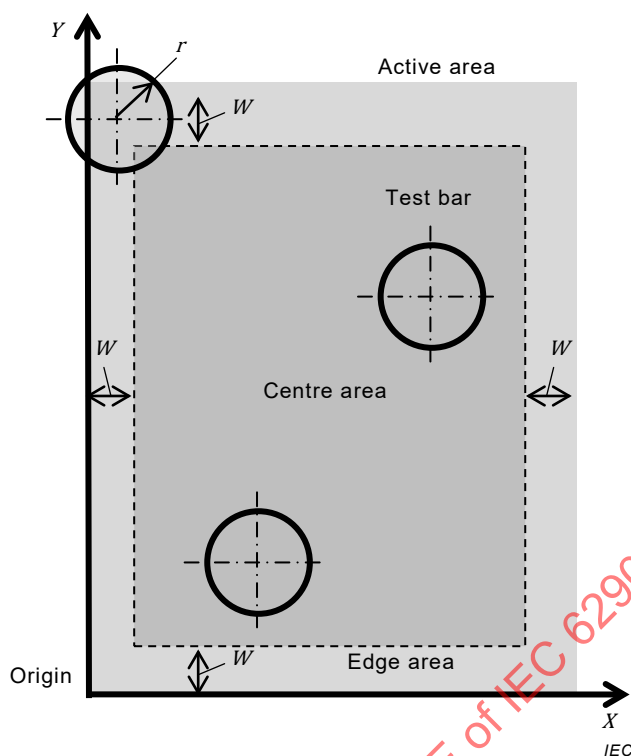


Figure 5 – Location of edge area and centre area

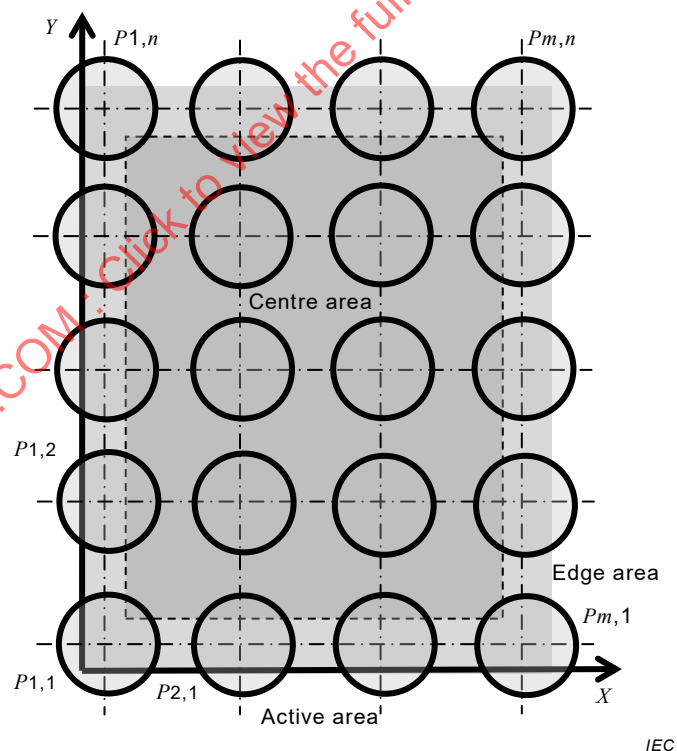

NOTE m, n : number of points in X and Y direction.

Figure 6 – Point grid

At each target grid point (i, j) , lift the test bar down and up, and collect the touch reports p times. As shown in Figure 7, the accuracy is defined as the distance between the target coordinate and the mean reported coordinate.

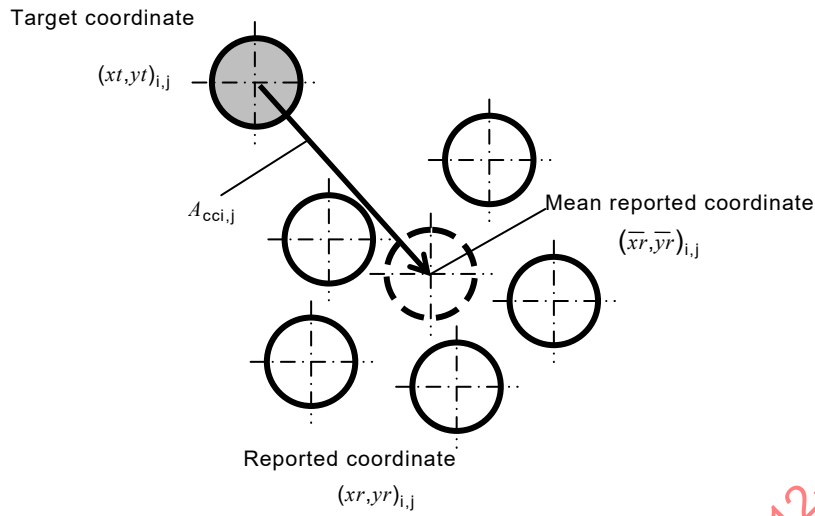


Figure 7 – Accuracy definition

In the centre area, calculate the accuracy, that is, the maximum of accuracy, the standard deviation of accuracy and the average of accuracy, as shown below. In the edge area, the accuracy is calculated in the same manner.

$$A_{ccmax} = \max(A_{cci,j}) \quad (1)$$

$$A_{cc\sigma} = \sqrt{\frac{\sum_{j=1}^n \sum_{i=1}^m (A_{cci,j} - A_{ccmean})^2}{q}} \quad (2)$$

$$A_{ccmean} = \frac{\sum_{j=1}^n \sum_{i=1}^m (A_{cci,j})}{q} \quad (3)$$

$$A_{cci,j} = \sqrt{(\overline{xr}_{i,j} - xt_{i,j})^2 + (\overline{yr}_{i,j} - yt_{i,j})^2} \quad (4)$$

$$\overline{xr}_{i,j} = \frac{\sum_{k=1}^p xr_{i,j,k}}{p}, \quad \overline{yr}_{i,j} = \frac{\sum_{k=1}^p yr_{i,j,k}}{p} \quad (5)$$

where

- p is the number of reports at a target point (1,2,...);
- q is the number of measurement points = $m \times n$;
- i, j, k is the k -th data in number of reports(p) at a target point(i, j);
- $A_{cci,j}$ is the distance between the target coordinate and the mean reported coordinate;
- A_{ccmax} is the maximum of accuracy;
- $A_{cc\sigma}$ is the standard deviation of accuracy; and
- A_{ccmean} is the average of accuracy.

5.2.2.3 Method 2

The test bar shall be placed at $m \times n$ target grid points equally spaced by a distance d in both horizontal and vertical directions. When the touch sensor module is a capacitive touch system, d shall be smaller than or equal to one fourth of the sensor channel pitch, and $m \times d$ and $n \times d$ are greater than or equal to the sensor channel pitch. At each target grid point (i, j) , collect the touch reports 50 to 100 times in one of the following two ways.

- 1) Lift the test bar down and up for each report at each target.
- 2) Keep the test bar stationary at each target.

The data from 1) and 2) is used in the calculation of repeatability.

Calculate the mean point $(\bar{x}_{i,j}, \bar{y}_{i,j})$ of the reported points at (i, j) .

Then find the best fitted grid

$$(X_{i,j}, Y_{i,j}) = ((i-1)d + x_{\text{best}}, (j-1)d + y_{\text{best}}) \quad (i = 1, \dots, m, j = 1, \dots, n) \quad (6)$$

which minimizes the mean square distance

$$\sum_{\substack{i=1,2,\dots,m, \\ j=1,2,\dots,n}} \{(X_{i,j} - \bar{x}_{i,j})^2 + (Y_{i,j} - \bar{y}_{i,j})^2\} \quad (7)$$

from

$$(\bar{x}_{i,j}, \bar{y}_{i,j}) \quad (i = 1, \dots, m, j = 1, \dots, n) \quad (8)$$

The shifts $(x_{\text{best}}, y_{\text{best}})$ for the best grid are obtained by equating the derivatives of the distance by x_{best} and y_{best} to zero, and are calculated as

$$(x_{\text{best}}, y_{\text{best}}) = \left(\frac{\sum_{\substack{i=1,2,\dots,m, \\ j=1,2,\dots,n}} \bar{x}_{i,j}}{mn} - \frac{(n-1)d}{2}, \frac{\sum_{\substack{i=1,2,\dots,m, \\ j=1,2,\dots,n}} \bar{y}_{i,j}}{mn} - \frac{(m-1)d}{2} \right) \quad (9)$$

The accuracy at (i, j) is defined as the distance between the grid point $(X_{i,j}, Y_{i,j})$ and the mean point $(\bar{x}_{i,j}, \bar{y}_{i,j})$.

$$A_{\text{cci},j} = \sqrt{(X_{i,j} - \bar{x}_{i,j})^2 + (Y_{i,j} - \bar{y}_{i,j})^2} \quad (10)$$

An example of a measurement result and the corresponding calculation of accuracy is shown in Figure 8.

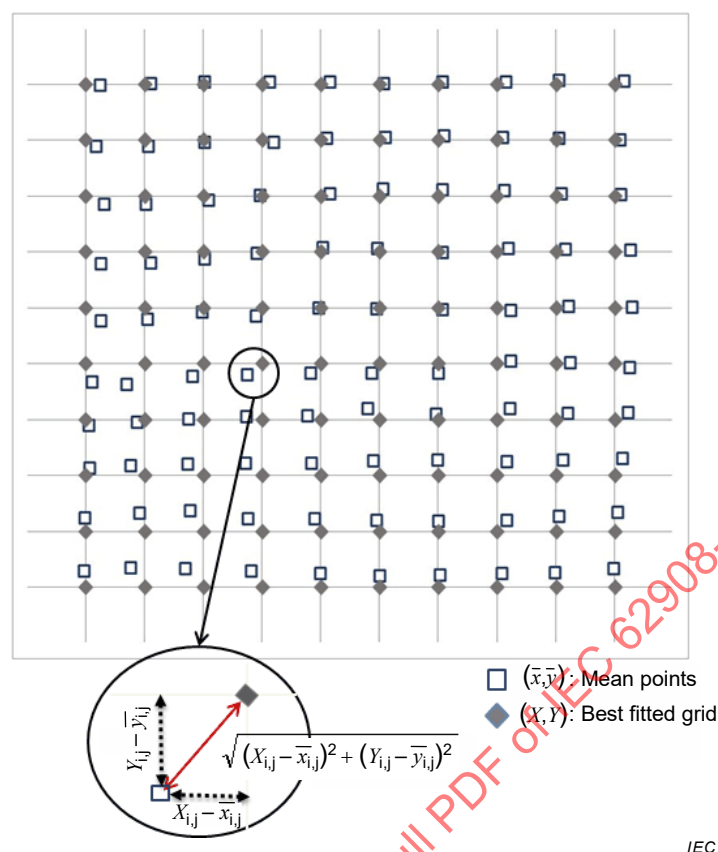


Figure 8 – Example of measurement result and calculation of accuracy

5.2.3 Report

The following items shall be reported:

- the selected measurement method;
- the selected size, shape and material of test bar;
- the width of edge area W ;
- the target position;
- the number of measurements at each point;
- the maximum of accuracy for all points in each area;
- the average of accuracy for all points in each area; and
- the standard deviation of accuracy for all points in each area.

5.3 Repeatability/jitter test

5.3.1 Purpose

The purpose of this test is to measure the ability of touch sensors and modules to indicate how precisely touch positions are reported, given a sequence of touches in the same target position, where “precise” means that the reported positions are “close to each other”.

5.3.2 Test procedure

5.3.2.1 General

For the repeatability/jitter measurement, one of the following two methods can be selected, as in the case of accuracy measurement.

The repeatability is defined with the same reported data collected for accuracy measurement at target grid point (i, j) by lifting the test bar down and up for each report. The jitter is defined with the reported data collected by keeping the test bar stationary at target grid point (i, j) . The repeatability measurement is applicable to the jitter measurement.

5.3.2.2 Method 1

The touch sensor module under test shall be attached to the stage and connected to the electrical interface. The test bar of the selected diameter shall be attached to the moving arm.

At each target grid point (i, j) , lift the test bar down and up, and collect the touch reports p times, As shown in Figure 9, the repeatability is defined as the distance between the target coordinate and the mean reported coordinate.

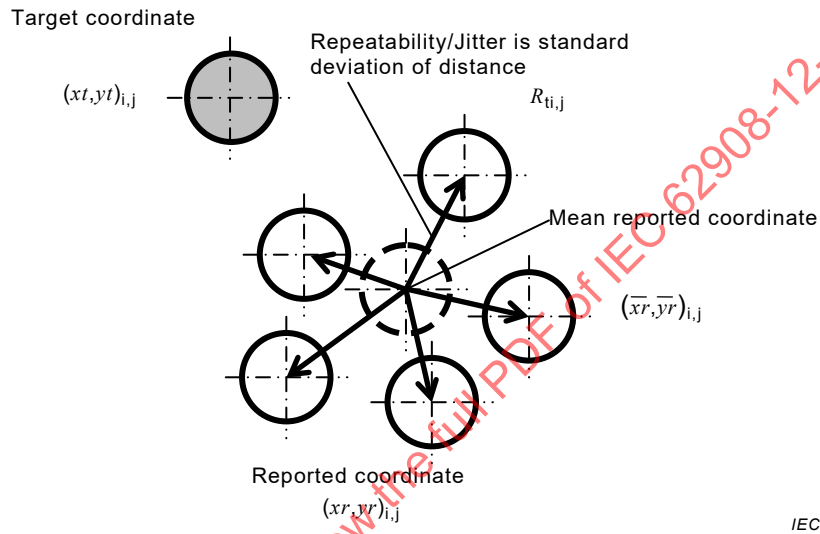


Figure 9 – Repeatability in touch sensor module

In the centre area, calculate the repeatability, that is, the maximum, standard deviation, and the average, as shown below. In the edge area, the repeatability is calculated in the same manner.

$$R_{t\max} = \max(R_{ti,j}) \quad (11)$$

$$R_{t\sigma} = \sqrt{\frac{\sum_{j=1}^n \sum_{i=1}^m (R_{ti,j} - R_{t\text{mean}})^2}{q}} \quad (12)$$

$$R_{t\text{mean}} = \frac{\sum_{j=1}^n \sum_{i=1}^m (R_{ti,j})}{q} \quad (13)$$

$$R_{ti,j} = \sqrt{(\overline{xr_{i,j}} - \overline{xr_{i,j}})^2 + (\overline{yr_{i,j}} - \overline{yr_{i,j}})^2} \quad (14)$$

$$\overline{xr_{i,j}} = \frac{\sum_{k=1}^p xr_{i,j,k}}{p}, \quad \overline{yr_{i,j}} = \frac{\sum_{k=1}^p yr_{i,j,k}}{p} \quad (15)$$

where

- p is the number of reports at a target point (1,2,...);
 q is the number of measurement points = $m \times n$;
 i, j, k is the k -th data in number of reports(p) at a target point(i,j);
 $R_{ti,j}$ is the distance between the target coordinate and the mean reported coordinate;
 R_{tmax} is the maximum of repeatability;
 $R_{t\sigma}$ is the standard deviation of repeatability; and
 R_{tmean} is the average of repeatability.


5.3.2.3 Method 2

The repeatability is defined with the same reported data collected for the accuracy measurement at target grid point (i, j) by lifting the test bar down and up for each report. Calculate the standard deviation $\sigma_{i,j}$ as the root mean square distance between the reported points at target grid point (i, j) and their mean point $(\bar{x}_{i,j}, \bar{y}_{i,j})$.

The repeatability is defined as

$$R_t = \max_{i,j}(\sigma_{i,j}) \quad (16)$$

An example of a measurement result for repeatability is shown in Figure 10.

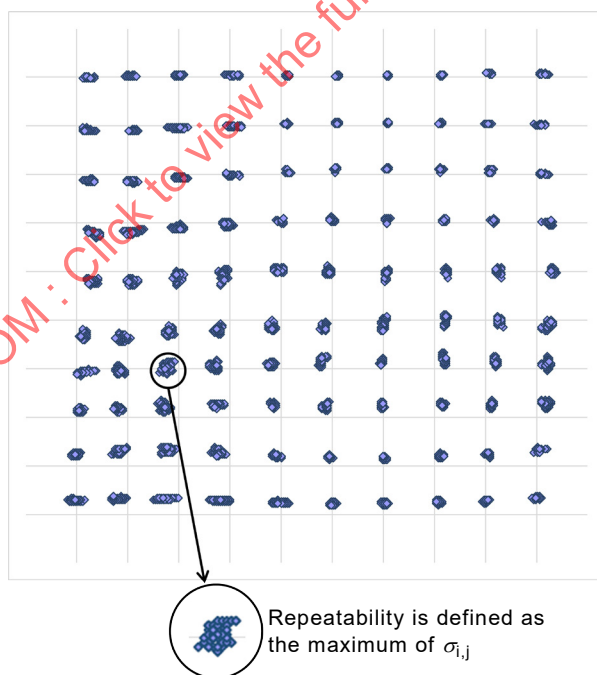

IEC

Figure 10 – Example of measurement result for repeatability

5.3.3 Report

The following items shall be reported:

- the selected measurement method;
- the selected size, shape and material of test bar;

- the width of edge area W ;
- the target position;
- the number of measurements at each point;
- the maximum of repeatability/jitter for all points in each area; and
- the average of repeatability/jitter for all points in each area.

5.4 Linearity test

5.4.1 Purpose

The purpose of this test is to measure the ability of touch sensors and modules to indicate how precisely straight lines can be drawn.


5.4.2 Test procedure

5.4.2.1 General

For the linearity measurement, one of the following two methods can be selected as in the previous cases.

5.4.2.2 Method 1

The touch sensor module under test shall be attached to the stage and connected to the electrical interface. The test bar of the selected diameter shall be attached to the moving arm. The test bar touches and drags from one edge of the panel to the opposite edge. The dragging speed is in the range 5 mm/s to 50 mm/s. The path of the dragging operation is chosen to be horizontal, vertical or diagonal across the panel.

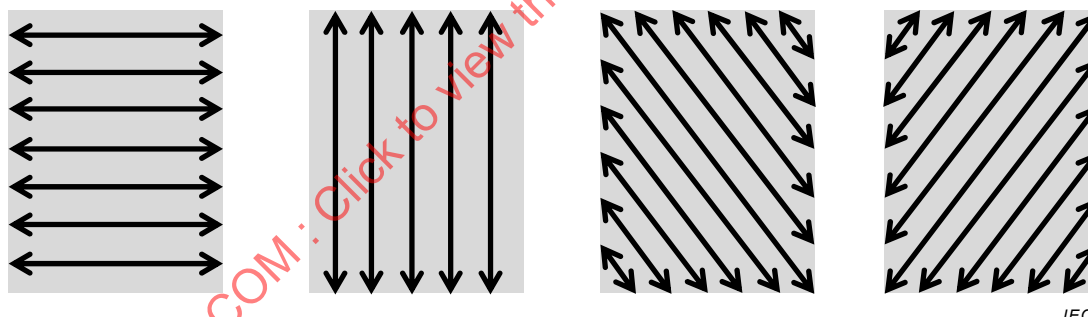

IEC

Figure 11 – Dragging line for linearity test

The distance between the centre of the reported point and straight line is calculated by the formula in Figure 12. The edge measurement start point for the line is positioned in the same way as shown in Figure 6.

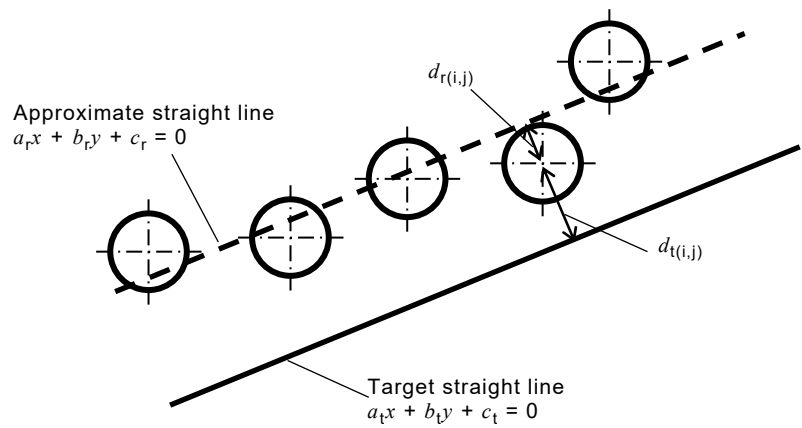


Figure 12 – Linearity definition

The distance between the target line and the reported line is measured and determines the linearity of the touch sensor module, and is calculated as follows:

$$d_{r(i,j)} = \frac{|a_r x_{r(i,j)} + b_r y_{r(i,j)} + c_r|}{\sqrt{a_r^2 + b_r^2}} \quad (17)$$

$$d_{t(i,j)} = \frac{|a_t x_{r(i,j)} + b_t y_{r(i,j)} + c_t|}{\sqrt{a_t^2 + b_t^2}} \quad (18)$$

$$L_r = \max(d_{r(i,j)}) \quad (19)$$

$$L_t = \max(d_{t(i,j)}) \quad (20)$$

5.4.2.3 Method 2

Draw m parallel lines in a chosen direction (vertical, horizontal or diagonal) of equal spacing d with a touch object at a speed S in the range 5 mm/s to 50 mm/s. When the touch sensor module is a capacitive touch system, the length of each line shall be greater than or equal to three times the sensor channel pitch, d is smaller than or equal to one fourth of the sensor channel pitch, and $m \times d$ is greater than or equal to the sensor channel pitch. For each drawn line, calculate the linearity of the reported data (x_i, y_i) , $i=1, \dots, n$ as the maximum distance between the reported points and the best fitted line. If the best fitted line is represented as ' $ax+by+c=0$ ', then the coefficients a , b , c and the linearity are calculated as in the following formulae.

$$\begin{aligned}
 a &= S_{xy} \\
 b &= \lambda - S_{xx} \\
 c &= -a\bar{x} - b\bar{y} \\
 \bar{x} &= \frac{1}{n} \sum_{i=1}^n x_i \\
 \bar{y} &= \frac{1}{n} \sum_{i=1}^n y_i \\
 S_{xx} &= \sum_{i=1}^n (x_i - \bar{x})^2
 \end{aligned}
 \tag{21}$$

$$\begin{aligned}
 S_{yy} &= \sum_{i=1}^n (y_i - \bar{y})^2 \\
 S_{xy} &= \sum_{i=1}^n (x_i - \bar{x})(y_i - \bar{y}) \\
 \lambda &= \frac{S_{xx} + S_{yy} - \sqrt{D}}{2} \\
 D &= (S_{xx} - S_{yy})^2 + 4S_{xy}^2 \\
 L &= \text{Max}_{i=1,2,\dots,n} \left(\frac{|ax_i + by_i + c|}{\sqrt{a^2 + b^2}} \right)
 \end{aligned}
 \tag{22}$$

The linearity of the touch sensor module is defined as the maximum of the linearity of the m lines drawn in a direction. Diagonal, horizontal and vertical drawing directions shall be tested.

An example of measurement and calculation of linearity is shown in Figure 13.

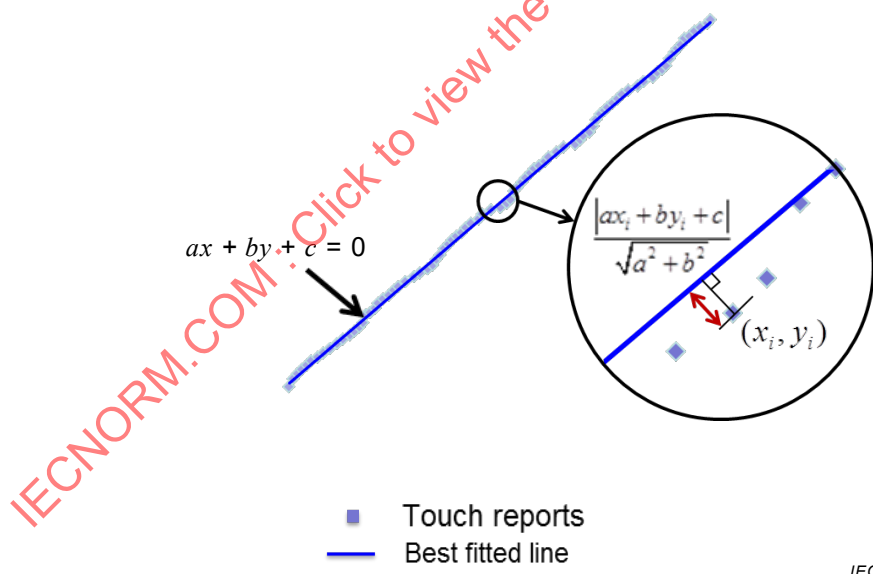


Figure 13 – Example of measurement and calculation of linearity

5.4.3 Report

The following items shall be reported:


- the selected measurement method;
- the selected size, shape and material of test bar;
- the chosen slide pattern and measuring line position;
- the width of edge area W ;
- the maximum of linearity for all points in each area;

- the average of linearity for all points in each area; and
- the standard deviation of linearity for all points in each area.

5.5 Reproducibility test

5.5.1 Purpose

The purpose of this test is to measure the ability of touch sensors and modules to indicate how exactly the reported touch traces coincide with the actual user's touch traces. An example showing difference in reproducibility for two available touch systems is shown in Figure 14, where the characters are written by a person in the same way for both systems.

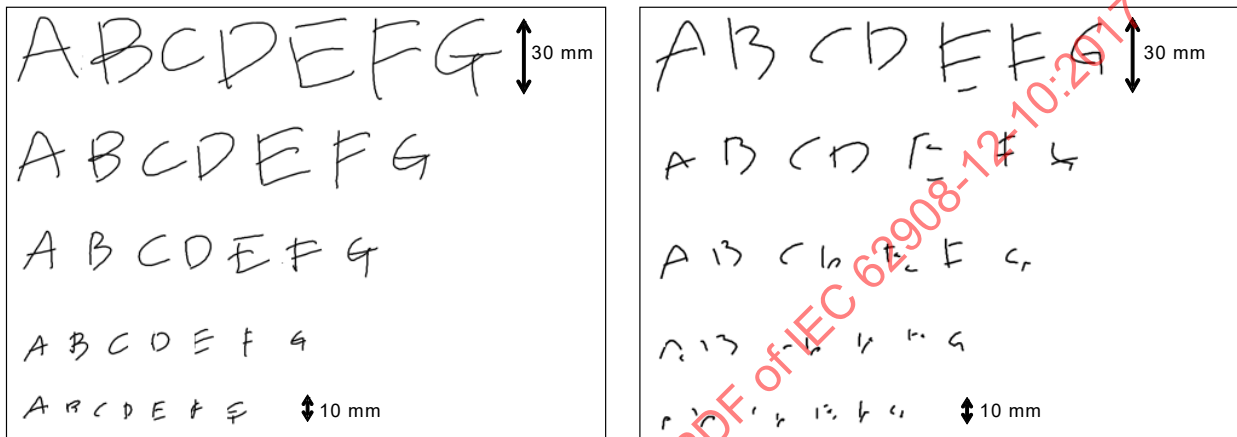

a) Handwriting with touch system A

b) Handwriting with touch system B

Figure 14 – Example of reproducibility test results

5.5.2 Test procedure

5.5.2.1 General

For the reproducibility measurement, an arm capable of moving the test bar in a circular trajectory with variable radius and velocity is required. A minimum radius is typically half of the sensor channel pitch under test and a typical angular velocity is 1 080 degree/second.

5.5.2.2 Preparation

Collect the touch report data at equally spaced target points on a reference circle by using the arm. Then determine the radius R_{ref} and the centre of the reference circle from the reported touch data by calculating the best fitted circle $x^2 + y^2 + AX + BY + C = 0$ with the following formulae, where (x_i, y_i) ($i=1, \dots, m$) are the reported touch coordinates.

$$\begin{pmatrix} A \\ B \\ C \end{pmatrix} = \begin{pmatrix} \sum_{i=1}^m x_i^2 & \sum_{i=1}^m x_i y_i & \sum_{i=1}^m x_i \\ \sum_{i=1}^m x_i y_i & \sum_{i=1}^m y_i^2 & \sum_{i=1}^m y_i \\ \sum_{i=1}^m x_i & \sum_{i=1}^m y_i & \sum_{i=1}^m 1 \end{pmatrix}^{-1} \begin{pmatrix} -\sum_{i=1}^m (x_i^3 + x_i y_i^2) \\ -\sum_{i=1}^m (x_i^2 y_i + y_i^3) \\ -\sum_{i=1}^m (x_i^2 + y_i^2) \end{pmatrix} \quad (23)$$



$$R_{\text{ref}} = \sqrt{\frac{A^2 + B^2}{4} - C} \quad (24)$$

$$P_{\text{centre}} = \left(\frac{-A}{2}, \frac{-B}{2} \right) \quad (25)$$


5.5.2.3 Analysis

Collect touch reports with the arm while rotating 30 times, and find $R_{\min}$, $R_{\max}$ as the distances to the nearest and farthest points from the centre of the reference circle, respectively. The reproducibility is then defined with the following formula.

$$R_d = \frac{|R_{\max} - R_{\text{ref}}| + |R_{\min} - R_{\text{ref}}|}{R_{\text{ref}}} \times 100 \quad (26)$$

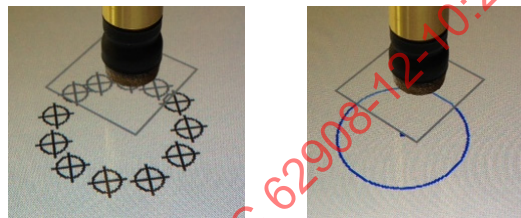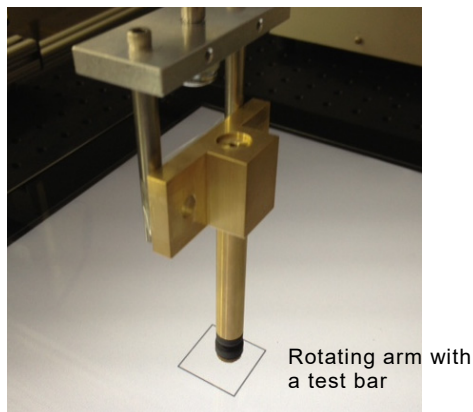

Estimation of a reference circle by least square method

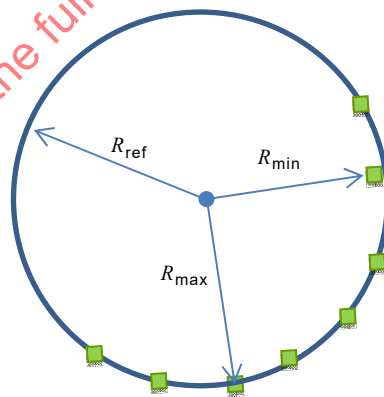


IEC

Figure 15 – Reproducibility test procedure


5.5.3 Report

The value of reproducibility is reported along with the size, shape and material of the test bar, the radius of the rotation and the angular velocity.


Examples of reproducibility measurements showing the dependence on rotation radius and angular velocity are shown in Figure 16.

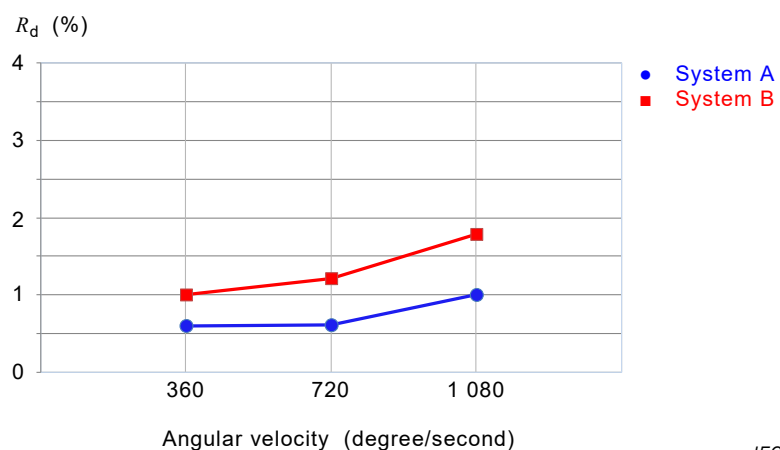

a) radius 25 mm

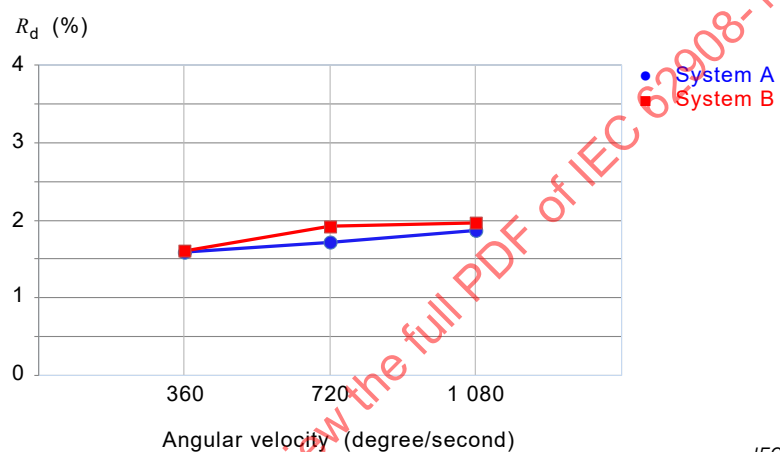

b) radius 40 mm

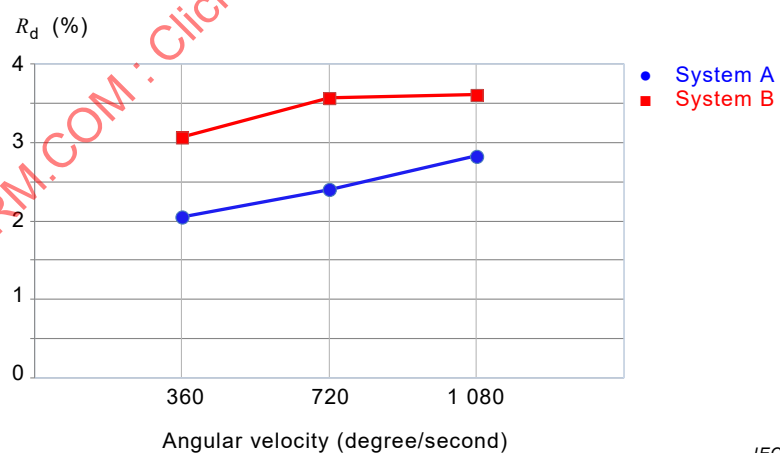

c) radius 80 mm

Figure 16 – Examples of measurements of reproducibility – Velocity dependence

5.6 Signal-to-noise ratio (SNR) test

5.6.1 Purpose

The purpose of this test is to measure the ability of touch sensors and modules to indicate the ratio of signal level to noise level from the touch controller as defined in Figure 17.

NOTE This test may not be applicable to some touch technologies.

5.6.2 Test procedure

The touch sensor module under test shall be attached to a stage and connected to the electrical interface. Without any touch contact, the signal from the touch controller is collected. The signal is again collected, this time with the touch contact. The SNR value is then calculated as follows.

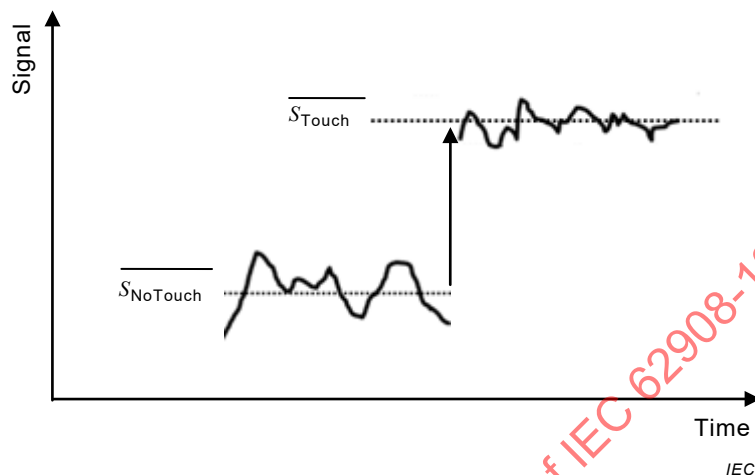


Figure 17 – SNR definition concept

$$\overline{S_{NoTouch}} = \frac{\sum_{k=1}^{k=m} S_{NoTouch}[k]}{m} \quad (27)$$

$$\overline{S_{Touch}} = \frac{\sum_{k=1}^{k=n} (S_{Touch}[k] - \overline{S_{NoTouch}})}{n} \quad (28)$$

$$N_{NoTouch} = \sqrt{\frac{\sum_{k=1}^{k=m} (S_{NoTouch}[k] - \overline{S_{NoTouch}})^2}{m}} \quad (29)$$

$$N_{Touch} = \sqrt{\frac{\sum_{k=1}^{k=n} (S_{Touch}[k] - \overline{S_{Touch}})^2}{n}} \quad (30)$$

$$SNR_{NoTouch} = \frac{\overline{S_{Touch}}}{N_{NoTouch}} \quad (31)$$

$$SNR_{Touch} = \frac{\overline{S_{Touch}}}{N_{Touch}} \quad (32)$$

$$SNR_{NoTouch}[\text{dB}] = 20\log(SNR_{NoTouch}) \quad (33)$$

$$SNR_{Touch}[\text{dB}] = 20\log(SNR_{Touch}) \quad (34)$$

where

m is the number of reports when not touched;

n is the number of reports when touched;

S_{touch} is the signal level when touched;

$S_{\text{No Touch}}$ is the signal level when not touched;

N_{Touch} is the noise level when touched; and

$N_{\text{No Touch}}$ is the noise level when not touched.

5.6.3 Report

The following items shall be reported:

- the selected size, shape and material of test bar;
- the width of edge area W ;
- the measurement positions; and
- the minimum SNR among the points.


5.7 Report rate test

5.7.1 Purpose

The purpose of this test is to measure the ability of touch sensors and modules to indicate the interval between the touch events interrupt signals from the touch controller. The touch controller senses and reports the touched coordinates periodically. The shorter the reported coordinates interval, the more reported the coordinates are during a given period, which corresponds to an increased update rate and a more fluid user experience.

5.7.2 Test procedure


The touch display under test shall be attached to a stage and connected to the electrical interface. The selected test bar shall be attached to the moving arm. The test bar touches and drags from one edge of the top to the opposite edge of the bottom diagonally (see Figure 18). The dragging speed is selected as being between 5 mm/s and 50 mm/s.

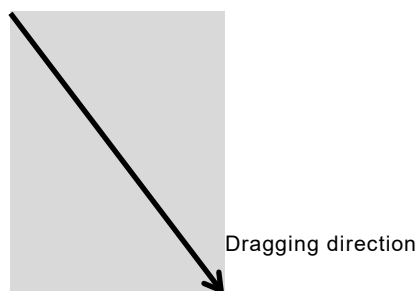

IEC

Figure 18 – Dragging direction for reporting time measurement

During the dragging, touch event interrupt signals are generated from the touch controller, and the reciprocal of the time between the interrupt signals is measured as the report rate (see Figure 19).

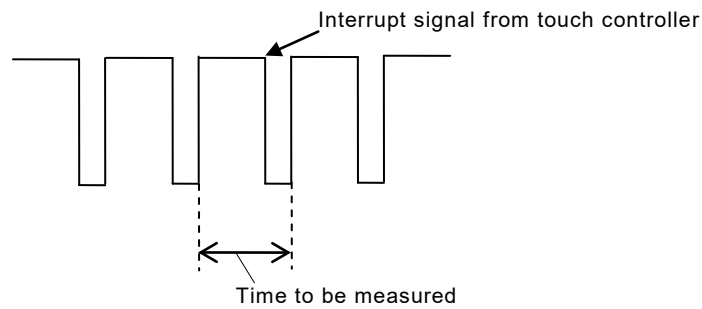

IEC

Figure 19 – Reporting time interval measurement

5.7.3 Report

The minimum value, mean value and maximum value among the measured report rate values, the selected size, shape and material of the test bar and the selected dragging speed shall be reported.


5.8 Latency test

5.8.1 Purpose

The purpose of this test is to measure the ability of touch sensors and modules to indicate the response time between the actual and reported touch.

5.8.2 Test procedure

The touch sensor module under test shall be attached to a stage and connected to the electrical interface. The selected test bar shall be attached to the moving arm. The test bar touches the target points on the touch sensor module in idle mode. The time between the actual touch signal generated from the moving arm and the interrupt signal from the touch controller are measured. The onset of the touch signal represents the time when the test bar touches the surface of the touch module as shown in Figure 20. For example, the touch signal should be generated by an image processing, sound processing, or electrical method.

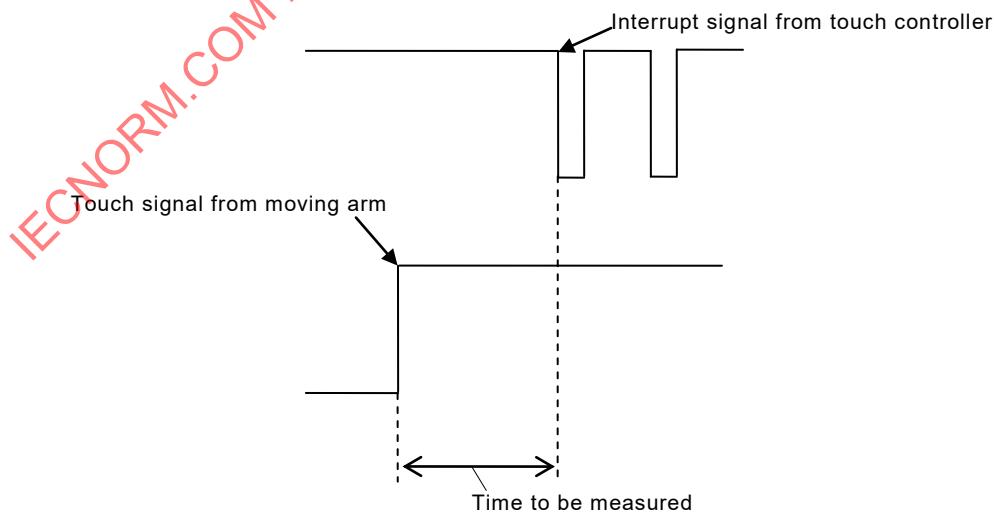

IEC

Figure 20 – Latency measurement

5.8.3 Report

The worst-case (maximum) value, median value and minimum value for each contact point and the selected size, shape and material of the test bar shall be reported.

5.9 Electrical noise immunity test

5.9.1 Purpose

The purpose of this test is to indicate the tolerance of touch sensors and modules against any external noise that couples into them. Touch systems are often used under electrically noisy environments such as with fluorescent lamps, AC adapters and chargers. An example of the effect of external noise on touch performance is shown in Figure 21.

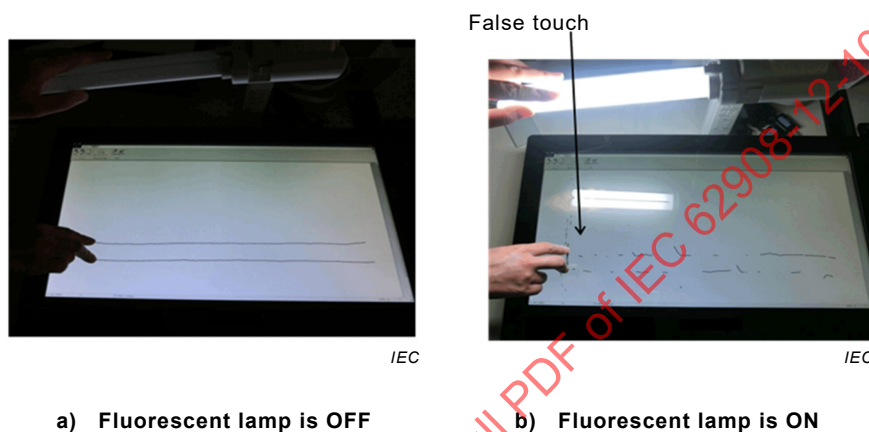


Figure 21 – Example of the effect of external noise

5.9.2 Test procedure

Inject sinusoidal noise from a signal generator into a test bar on a touch sensor module as shown in Figure 22 with the test conditions stated below. Measure the maximum tolerated amplitude (V) at each noise frequency, where “tolerated” means that the pass criteria below are met for any voltage level in $[0, V]$. Classify the noise amplitude into the following two classes.

Class-A: Pass criterion is met throughout the test period.

Class-B: Pass criterion is met after the first touch is reported, where the missing touch between the start of the noise injection and the first touch is neglected.

a) Test conditions:

Amplitude: $1 V_{p-p}$ to $50 V_{p-p}$

Wave form: Sinusoidal

Frequency Range: 5 kHz ~ 500 kHz

Frequency steps: 5 kHz for 5 kHz ~ 100 kHz

5 kHz or $\leq 5\%$ of the frequency for 100 kHz ~ 500 kHz


Test bar size: 9 mm diameter

Position: at the intersection of both direction channels near the centre of the touch sensor

Test period: 200 ms or greater touch time per frequency/amplitude pair

b) Pass criterion:

No “false” touch is reported or there is no missing touch, where “false” touch is a touch whose position is more than D mm away from the reported position without noise injection. A typical value of D is “accuracy” + “repeatability” or 1.

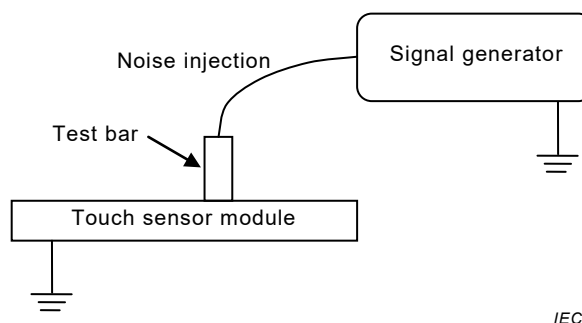


IEC

Figure 22 – External noise injection

5.9.3 Report

Plot the maximum tolerated amplitudes for class A and B versus the injected frequency as shown in Figure 23.

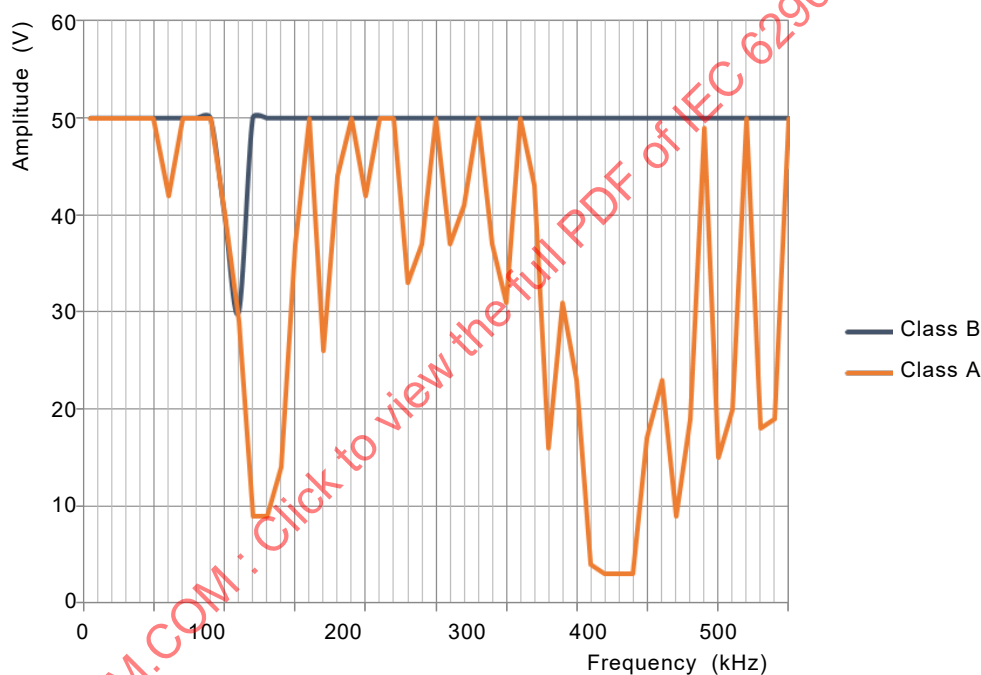

IEC

Figure 23 – Report of external noise immunity

5.10 Water droplet immunity test

5.10.1 Purpose

The purpose of this test is to indicate the tolerance of touch sensors and modules against any water droplet that couples into them (see Figure 24).