

INTERNATIONAL STANDARD



**Semiconductor devices – Flexible and stretchable semiconductor devices –
Part 1: Bending test method for conductive thin films on flexible substrates**

IECNORM.COM : Click to view the full PDF of IEC 62951-1:2017



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2017 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IECNORM.COM : Click to view the full PDF of IEC 60751-1:2017

INTERNATIONAL STANDARD



**Semiconductor devices – Flexible and stretchable semiconductor devices –
Part 1: Bending test method for conductive thin films on flexible substrates**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 31.080.99

ISBN 978-2-8322-3896-7

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references	5
3 Terms, definitions and symbols.....	5
3.1 Terms and definitions.....	5
3.2 Symbols and designations	6
4 Test piece	7
4.1 Design of test piece	7
4.2 Preparation of a test piece	7
4.3 Measurement of dimensions	7
4.4 Storage prior to testing	8
5 Testing method and test apparatus.....	8
5.1 General.....	8
5.2 Test apparatus.....	8
5.3 Measurement of electrical resistance	8
5.4 Test procedure.....	9
5.5 Observation of cracks in test piece	9
5.6 Data analysis	9
5.7 Test environment	9
6 Test report.....	10
Annex A (informative) X-Y- θ bending test method.....	11
Annex B (informative) Data analysis: Calculation of bending radius and bending strain.....	13
B.1 Calculation of bending radius	13
B.2 Calculation of bending strain of the film	13
Bibliography.....	15
Figure 1 – Shape of a test piece	7
Figure 2 – Bending test apparatus	8
Figure A.1 – X-Y- θ bending test method.....	11
Figure A.2 – Schematic of the bending geometry in X-Y- θ system.....	12
Figure B.1 – Geometrical shape of bent test piece	13
Table 1 – Symbols and designations of a test piece	7

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**SEMICONDUCTOR DEVICES – FLEXIBLE AND
STRETCHABLE SEMICONDUCTOR DEVICES –****Part 1: Bending test method for conductive
thin films on flexible substrates**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62951-1 has been prepared by IEC technical committee 47: Semiconductor devices.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
47/2369/FDIS	47/2384/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62951 series, published under the general title *Semiconductor devices – Flexible and stretchable semiconductor devices*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

IECNORM.COM : Click to view the full PDF of IEC 62951-1:2017

SEMICONDUCTOR DEVICES – FLEXIBLE AND STRETCHABLE SEMICONDUCTOR DEVICES –

Part 1: Bending test method for conductive thin films on flexible substrates

1 Scope

This part of IEC 62951 specifies a bending test method to measure the electromechanical properties or flexibility of conductive thin films deposited or bonded on flexible non-conductive substrates. Conductive thin films on flexible substrates are extensively used in flexible electronic devices and flexible semiconductors. Conductive thin films include any films deposited or bonded onto a non-conductive flexible substrate such as thin metal film, transparent conducting electrode, and thin silicon film. The electrical and mechanical behaviours of thin films on flexible substrates differ from those of freestanding films and substrates due to their interfacial interactions and adhesion between the film and substrate. The object of this standard is to establish simple and repeatable test methods for evaluating the electromechanical properties or flexibility of conductive thin films on flexible substrate. The bending test methods include outer bending test and inner bending test.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62047-2:2006, *Semiconductor devices – Micro-electromechanical devices – Part 2: Tensile testing method of thin film materials*

IEC 62047-22:2014, *Semiconductor devices – Micro-electromechanical devices – Part 22: Electromechanical tensile test method for conductive thin films on flexible substrates*

3 Terms, definitions and symbols

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1.1

bending radius of curvature

r

radius of curvature that the test piece shows in bending test

3.1.2

critical bending radius

bending radius at which the electrical resistance starts to exceed a predefined limit, and/or fracture of the film caused by delamination or initiation of the cracks occurs

Note 1 to entry: It is the minimum bending radius that conductive thin films can tolerate.

3.1.3

nominal bending strain

ϵ

strain in the center of the bent test piece in the bending direction

Note 1 to entry: Generally it is referred to the strain at the top of the bent film on flexible substrate.

3.1.4

flexible substrate

substrate with flexibility onto which conductive thin films will be deposited, bonded or attached

3.1.5

gauge factor

G_F

ratio of the change in electrical resistance divided by the original resistance (R_0 , resistance in the undeformed configuration) to nominal bending strain (ϵ)

Note 1 to entry: Gauge factor is expressed as $G_F = (R - R_0) / R_0 \epsilon$, where R is the electrical resistance in the deformed configuration.

[SOURCE: IEC 62047-22: 2014, 3.1.1, modified – The word "engineering" has been replaced by "nominal bending" in the definition.]

3.1.6

outer bending test

outward bending test

face-out bending test

convex bending test

test, where the test piece is bent into a convex shape ($\cap$) which may also be considered as an outward bending test, face-out bending test or convex bending-test

3.1.7

inner bending test

inward bending test


face-in bending test

concave bending test

test, where the test piece is bent into a concave shape ($\cup$) which may also be considered as an inward bending test, face-in bending test or concave bending-test

3.2 Symbols and designations

The shape of the test piece and symbols are presented in Figure 1 and Table 1, respectively. The overall shape of the test piece is similar to the shape shown in 3.2 of IEC 62047-22:2014 for tensile tests. But the shape of the test piece can be rectangular or square. The test pieces has a flexible substrate and the conductive thin film deposited on the flexible substrate.

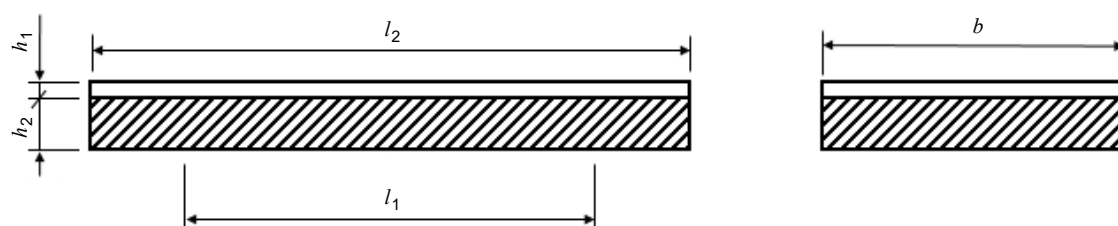

IEC

Figure 1 – Shape of a test piece

Table 1 – Symbols and designations of a test piece

Symbol	Unit	Designation
l_1	mm	Gauge length for strain and resistance change measurements
l_2	mm	Overall length
h_1	μm	Thickness of the conductive thin film
h_2	μm	Thickness of the flexible substrate
b	mm	Width

4 Test piece

4.1 Design of test piece

In order to minimize the influence of geometric size the test piece shall be reasonably similar to the final product. In particular, the size effect of the thin brittle films on failure is substantial due to the randomly distributed cracks or defects on the test piece. Therefore, the dimension of the test piece should be as much as possible of the same order as that of the objective device component. The shape of a test piece is shown in Figure 1. For uniform strain distribution, the shape of the test piece is a rectangular or square strip.

4.2 Preparation of a test piece

The test piece shall be prepared using the same fabrication process as the real device fabricated for flexible electronics and flexible semiconductor devices, because the mechanical and electrical properties depend on the fabrication processes. Both the film thickness and substrate thickness should be uniform and small compared with the lateral dimensions. The flexible substrate and film have also the uniform material properties. Thin conductive film shall be carefully prepared to prevent formation of cracks or flaws and delamination from the substrate.

4.3 Measurement of dimensions

The thickness and width of the conductive thin film and flexible substrate shall be accurately measured respectively, because the dimensions are used to determine the mechanical and electrical properties of test materials. Each test piece should be measured directly. Both the dimension of the test piece shall be specified within the maximum error of $\pm 1\%$ for the thickness and $\pm 5\%$ for the width, respectively. Thickness measurement shall be performed according to Clause 4 and Annex C of IEC 62047-2:2006. There can be some combinations of thin film and substrate where it is difficult to fulfil the tolerance of thickness measurement. In this case, the average and the standard deviation of the thickness measurement should be reported.

4.4 Storage prior to testing

In the case of conductive thin films, the storage environment can affect the electromechanical properties of the film. For example, oxidation on the test piece surface will deteriorate the electrical and mechanical properties of the test piece. If there is an interval between final preparation and testing, particular care should be taken in storing the test pieces, and the specimens should be examined by appropriate means to ensure that the surface has not deteriorated during the storage period. If any deterioration is observed that was not present after the specimens were prepared, testing shall not be performed. However, if the damage was introduced during the preparation processes, the test shall be performed.

5 Testing method and test apparatus

5.1 General

The test is performed by bending a test piece. The bending strain induced by the tensile load shall be uniform in a pre-defined gauge section in the elastic region of the substrate or the thin conductive film. To measure the change in electrical resistance along with the change in mechanical strain, carefully select the gauge section. The gauge section for measuring mechanical strain shall be coincident with or scalable to that for measuring electrical resistance. There are several types of bending test equipments to measure the electromechanical property of conductive thin films. It is not necessary that a certain type of bending test method be preferred. As an example, X-Y- θ bending test equipment is described in Annex A.

5.2 Test apparatus

As shown in Figure 2, the bending tester includes the test piece holder to place a test piece, and control system in which separation distance is controlled by an actuator or motor. Use of an optical microscope is recommended to observe the existence of cracks on surface of the test piece during the test. The control system regulates the moving distance and moving speed while testing. One holder is fixed, and other holder is free to move using an actuator. For a material sensitive to stress concentration and local plastic deformation such as brittle films of inorganic and thin silicon film, it is recommended that the film should not be tightly clamped in order to prevent the local stress concentration in the clamped region. The stress concentration in the clamped region will generate the cracks or any damage on the film, resulting in film failure.

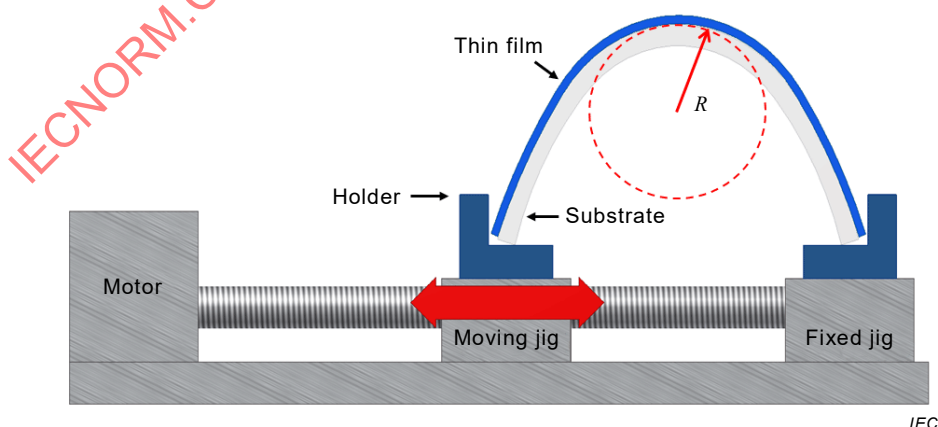


Figure 2 – Bending test apparatus

5.3 Measurement of electrical resistance

Since the change in electrical resistance is related to strain or stress, the electrical resistance shall be measured in a region of nearly uniform strain. To measure electrical resistance,

attach lead wires to the conductive thin film of the test piece. The electrical measurement circuit can be a 2-wire or 4-wire method depending on the magnitude of the electrical resistance of the test piece. For a test piece with an electrical resistance greater than 1 k Ω , a 2-wire method can be utilized for ease of measurement. For a test piece with an electrical resistance less than 1 k Ω , the 4-wire method (Kelvin method) shall be utilized to eliminate contact and lead wire resistance. In a bending tester to measure the electromechanical property of conductive thin film, change rate of electrical resistance during/after the bending test is more important than the absolute value of the resistance. Therefore, 2-wire method is acceptable if the contact and lead wire resistance do not significantly influence the test results.

5.4 Test procedure

The test procedure is as follows:

- a) Place the test piece into the holder. The longitudinal direction of the test piece shall be aligned with the actuating direction of the test apparatus, and the deviation angle shall be less than 5°. In case of outer bending test, the sample is facing upward to apply tensile stress, and in case of inner bending test, the sample is facing downward to apply the compressive stress.
- b) Measure the electrical resistance of the test piece.
- c) The test piece is bent with a decreasing bending radius by controlling the moving distance from flat surface to a designated bending radius. The test is performed under a constant bending stroke speed depending on the material system of the test piece and the actual usage condition of the customer. Change in electrical resistance should be measured in real time at different bending radii.
- d) Unload the test piece when electrical failure occurs in the test piece or when fracture of the film caused by initiation of the cracks or delamination occurs.

NOTE In conductive thin film on flexible substrate, electromechanical property of outer bending test is generally different from that of inner bending test. That is, the critical outer bending radius is different from the critical inner bending radius for the same test piece. The difference is attributed to the internal residual stress, microstructure, and adhesion property of the film. Therefore, the outer bending test and inner bending test will be performed separately to determine the electromechanical property of the film.

5.5 Observation of cracks in test piece

It is recommended that the existence of cracks in the surface of test piece shall be monitored in real time or periodically with an optical microscope. Observation of the cracking on the surface during the test is important. In some cases, cracking of the film during the bending test do not lead to the electrical failure of the film. The difference between the points of cracking and electrical failure is attributed to existence of the conduction path when film debris and overlapping film due to the fracture of the film form the conduction path in the film. Therefore, the electromechanical property of the film should be evaluated not only by the electrical resistance change but also by actual occurrence of cracking, because any mechanical failure of the film can significantly deteriorate the real device performance.

5.6 Data analysis

To obtain the bending radius and bending strain, several compensations may be required depending on the bending test apparatus. As an example, the calculation of bending radius and bending strain for this bending test method are described in Annex B. The actual bending radius also can be measured by fitting circles to images taken using an optical camera mounted.

5.7 Test environment

It is recommended to perform a test under constant temperature and humidity. As the environmental conditions such as temperature and humidity affect the electrical and mechanical properties of thin films, the testing temperature and humidity shall be monitored during testing. Fluctuations in temperature during the test shall be controlled to be less than ± 2 °C. Flexible substrates made of certain polymeric materials can be sensitive to humidity;

thus, the change in relative humidity (RH) in the testing laboratory shall be controlled to be less than $\pm 5\%$ RH for such materials. When the tests are completed, the environmental conditions should be recorded.

6 Test report

The test report shall contain the following information:

a) Mandatory

- 1) reference to this international standard;
- 2) test piece identification number;
- 3) test piece material and substrate material;
- 4) test piece preparation procedures;
- 5) multilayered structure of the test piece;
- 6) test piece dimensions and their measurement method;
- 7) description of the testing apparatus;
- 8) measured properties and results: critical bending radius and bending strain at failure;
- 9) gauge factor, change in electrical resistance versus strain (or bending radius) curve.

b) Optional

- 1) internal residual stress;
- 2) surface roughness of test piece;
- 3) failure mechanism of the test piece.

IECNORM.COM : Click to view the full PDF of IEC 62951-1:2017

Annex A (informative)

X-Y- θ bending test method

In the X-Y- θ system as shown Figure A.1, the test piece is clamped in a flat position between a fixed plate and a co-planar plate mounted on top of a stack of two linear and one rotary motorized actuator. These actuators control the spatial coordinates of the specimen end in X-Y- θ space in such a way that the specimen end is positioned on the coordinates of a circumference. The details on the test method can be found in [1]¹. The angle θ is defined as the angle between the tangent to the test piece end and the X-axis. In order to have the specimen bent to a radius r , the coordinates of the moving end is described in Figure A.2, and the bending radius (r) of the test piece is calculated as follows:

$$\theta = L_0/r \quad (\text{A.1})$$

$$X = (L/\theta) \sin(\theta) \quad (\text{A.2})$$

$$Y = (L_0/\theta)[1 - \cos(\theta)] \quad (\text{A.3})$$

where θ is the bending angle, L_0 is the length of the sample that is being bent or the initial distance between the clamps.

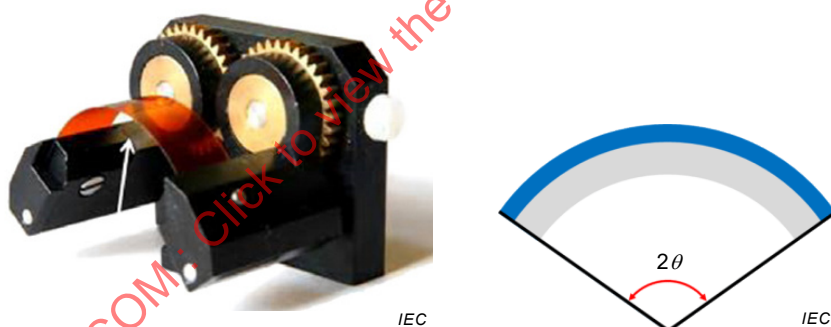
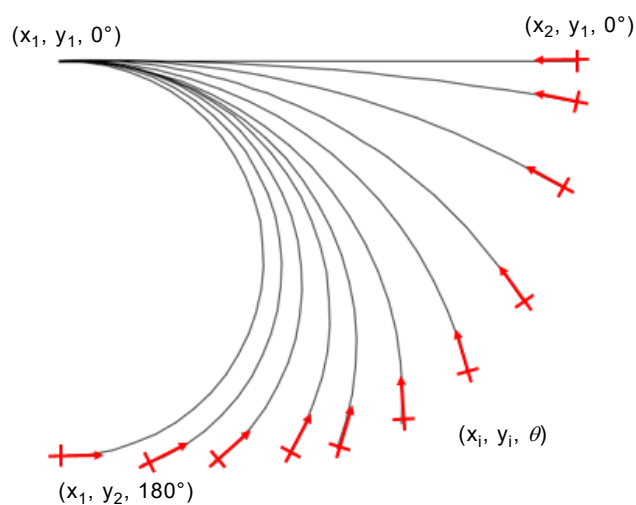


Figure A.1 – X-Y- θ bending test method

¹ Numbers in square brackets refer to the bibliography.



**Figure A.2 – Schematic of the bending geometry
in X-Y-θ system**

IECNORM.COM : Click to view the full PDF of IEC 62951-1:2017

Annex B (informative)

Data analysis: Calculation of bending radius and bending strain

B.1 Calculation of bending radius

This bending test is closer to a buckling case. The radius of curvature in the specimen is not constant, thus the condition of uniform curvature cannot be available as shown in Figure B.1. Here, the configuration of the buckling beam of the film is regarded as a sinusoidal shape [2]. No volume change during bending is assumed. Therefore, the actual bending radius (r) of the center of the bent specimen can be approximately calculated using Equation (B.1) [3].

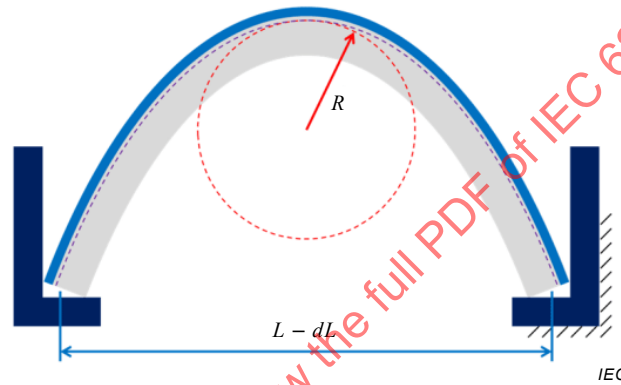


Figure B.1 – Geometrical shape of bent test piece

$$r = \frac{L}{2\pi \sqrt{\frac{dL}{L} - \frac{\pi^2 h^2}{12L^2}}} \quad (\text{B.1})$$

where L and dL/L denote the initial length of the specimen, rate of change of the length, and h is the summation of the film thickness, h_1 , and the substrate thickness, h_2 , respectively. The formula has been extensively used in the literature to calculate the bending radius during the bending test.

B.2 Calculation of bending strain of the film

In case of stiff film on a more compliant substrate, the strain at the top of the stiff film deposited on the substrate can be calculated by Equation (B.2) [4].

$$\varepsilon_{\text{top}} = \left(\frac{h_1 + h_2}{2r} \right) \frac{(1 + 2\eta + \chi\eta^2)}{(1 + \eta)(1 + \chi\eta)} \quad (\text{B.2})$$

where $\eta = h_1/h_2$ and $\chi = E_2/E_1$. E_1 is Young's modulus of the film, and E_2 is Young's modulus of the substrate.

In case where the film thickness is much smaller than the substrate thickness ($h_1 \ll h_2$), which is the common case of transparent conducting electrode and any metal film deposited on the flexible substrate, Equation (B.2) is approximately described as follows.

$$\cong \frac{h_1 + h_2}{2r} \cong \frac{h_2}{2r} \quad (\text{B.3})$$

IECNORM.COM : Click to view the full PDF of IEC 62951-1:2017