

TECHNICAL SPECIFICATION

IEC
TS 62367

Pre-Standard

First edition
2004-01

**Safety aspects for xDSL signals on circuits
connected to telecommunication networks
(DSL: Digital Subscriber Line)**



Reference number
IEC/TS 62367:2004(E)

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site** (www.iec.ch)

- **Catalogue of IEC publications**

The on-line catalogue on the IEC web site (http://www.iec.ch/searchpub/cur_fut.htm) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

- **IEC Just Published**

This summary of recently issued publications (http://www.iec.ch/online_news/justpub/jp_entry.htm) is also available by email. Please contact the Customer Service Centre (see below) for further information.

- **Customer Service Centre**

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

TECHNICAL SPECIFICATION

IEC
TS 62367

Pre-Standard

First edition
2004-01

**Safety aspects for xDSL signals on circuits
connected to telecommunication networks
(DSL: Digital Subscriber Line)**

IECNORM.COM : Click to view the full PDF of IEC TS 62367:2004

© IEC 2004 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE

M

For price, see current catalogue

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references	6
3 Terms, definitions and abbreviations	6
4 xDSL signals on circuits connected to telecommunication networks.....	7
Annex A (informative) xDSL telecommunication systems	8
A.1 Introduction	8
A.2 General description	8
A.3 Peak-to average ratio and CF	9
A.4 CF distribution	10
A.5 Line termination impedance.....	12
A.6 Measurement of xDSL parameters.....	12
Bibliography.....	13
Figure A.1 – Typical configuration of an xDSL system.....	8
Figure A.2 – Typical xDSL (VDSL) signal in the time-domain	9
Figure A.3 – Probability of symbol with CF >x	11
Figure A.4 – Inter-arrival time of symbol with CF > x (DMT-symbol rate = 4 kHz)	11

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**SAFETY ASPECTS FOR XDSL SIGNALS ON CIRCUITS
CONNECTED TO TELECOMMUNICATION NETWORKS
(DSL: DIGITAL SUBSCRIBER LINE)**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. In exceptional circumstances, a technical committee may propose the publication of a technical specification when

- the required support cannot be obtained for the publication of an International Standard, despite repeated efforts, or
- the subject is still under technical development, or where, for any other reason, there is the future but no immediate possibility of an agreement on an International Standard.

Technical specifications are subject to review within three years of publication to decide whether they can be transformed into International Standards.

IEC-TS 62367, which is a technical specification, has been prepared by IEC technical committee 108: Safety of electronic equipment within the field of audio/video, information technology and communication technology.

This technical specification is a pre-standard publication which may be updated in the future as an International Standard.

The text of this technical specification is based on the following documents:

Enquiry draft	Report on voting
108/61/DTS	108/90/RVC

Full information on the voting for the approval of this technical specification can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

In this standard, terms defined in 1.2 of IEC 60950-1 are printed in SMALL CAPITALS.

The committee has decided that the contents of this publication will remain unchanged until 2007. At this date, the publication will be

- transformed into an International Standard;
- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

IECNORM.COM : Click to view the full PDF of IEC TS 62367:2004

INTRODUCTION

xDSL signals are high-speed telecommunication signals that may be present on a telecommunication line, together with:

- analogue PSTN (Public Switched Telephone Network);
- ISDN (Integrated Services Digital Network) signals; or
- a d.c. power-feeding component.

An xDSL signal is characterised by an amplitude of the order of 3 V r.m.s. with superimposed spikes having very short duration (about 1 μ s) and peak values not exceeding 30 V.

When combined with other services as above, the peak voltage can very occasionally exceed the limits for a TNV-3 CIRCUIT. However the excursions above these limits consist of these very short duration spikes.

There are no published documents from IEC on the effect of such spikes on the human body, but experience with xDSL is that the safety risk, if any, is very small because of:

- the low power of the spikes; and
- the limited accessibility of TNV circuits.

The amplitude and probability of the spikes have been calculated as follows:

- amplitude up to 15V/1 μ s with a probability of occurrence of one every few seconds to every few minutes;
- amplitude up to 20V/1 μ s with a probability of occurrence of one every few hours;
- amplitude up to 27V/1 μ s with a probability of occurrence of one every few years.

Annex A gives more detail on the operation of xDSL telecommunication systems.

SAFETY ASPECTS FOR XDSL SIGNALS ON CIRCUITS CONNECTED TO TELECOMMUNICATION NETWORKS (DSL: DIGITAL SUBSCRIBER LINE)

1 Scope

This technical specification addresses the safety implications of having xDSL signals on circuits in equipment connected to a TELECOMMUNICATION NETWORK, and gives rules for dealing with such equipment in the context of the IEC 60950 series.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60950 (all parts), *Information technology equipment – Safety*

IEC 60950-1 (all parts), *Information technology equipment – Safety – Part 1: General requirements*

3 Terms and definitions, and abbreviations

For the purposes of this document, the terms and definitions in the IEC 60950 series and the following abbreviations apply.

ADSL	Asymmetric Digital Subscriber Line
CF	Crest Factor
CO	Central Office
CPE	Customer Premises Equipment
DMT	Discrete Multi Tone
DSL	Digital Subscriber Line
HDSL	High Speed Digital Subscriber Line
IEC	International Electrotechnical Commission
ISDN	Integrated Services Digital Network
ITU	International Telecommunication Union
ITU-T	Telecommunication Standardization Sector of ITU
NT	Network Termination
PAR	Peak to Average Ratio
PSTN	Public Switched Telephone Network
QAM	Quadrature Amplitude Modulation
RSS	Remote Signal Source
SDSL	Symmetric Digital Subscriber Line
TNV	Telecommunication Network Voltage
VDSL	Very-high-bit-rate Digital Subscriber Line

4 xDSL signals on circuits connected to telecommunication networks

Based on the information presented in Annex A, it is recommended that for equipment within the scope of the IEC 60950 series of standards, the following rules be applied for xDSL signals on circuits connected to telecommunication networks.

Rule 1: Circuits carrying xDSL signals are classified as either TNV-1 CIRCUITS or TNV-3 CIRCUITS, depending on the normal operating voltage of the circuit.

Rule 2: When

- a) assessing the voltages in circuits carrying xDSL signals with respect to the limits in 2.3.1 of IEC 60950-1, and when
 - b) determining the WORKING VOLTAGE of insulation in accordance with the IEC 60950 series,
- the voltage of xDSL signals is regarded as zero and has no impact on the classification of the circuits.

IECNORM.COM : Click to view the full PDF of IEC TS 62367:2004


Annex A (informative)

xDSL telecommunication systems

A.1 Introduction

This annex describes the structure of xDSL signals, and explains why it is considered that there is no shock hazard associated with xDSL signals.

xDSL is a general expression for high-speed telecommunication signals such as ADSL (Asymmetric Digital Subscriber Line), VDSL (Very-high-bit-rate DSL), HDSL (High-Speed-DSL), SDSL (Symmetric DSL), etc. (see Figure A.1). xDSL signals are generally transmitted between the CO (Central Office) or RSS (Remote Signal Sources, such as repeaters and optical network units in street cabinets) and the CPE (customer premises equipment). These signals are transmitted over existing wires and cables. ADSL and VDSL signals may be transmitted in combination with existing telephone services such as PSTN and ISDN. In other cases the telecommunication line only carries the xDSL signal together with d.c. to power the CPE from the CO.

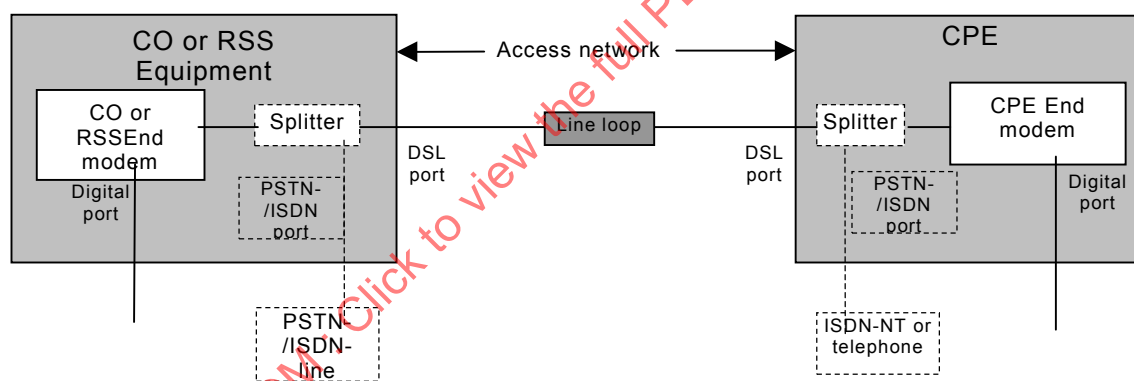

IEC 029/04

Figure A.1 – Typical configuration of an xDSL system

A.2 General description

An xDSL signal consists of an a.c. waveform with complex amplitude and frequency behaviour due to the use of special modulation techniques. Although xDSL signals are functional communication signals within a broadband frequency spectrum, their appearance on an oscilloscope is like “white-noise”, for example, a small average or r.m.s. value with occasional spikes (see Figure A.2).

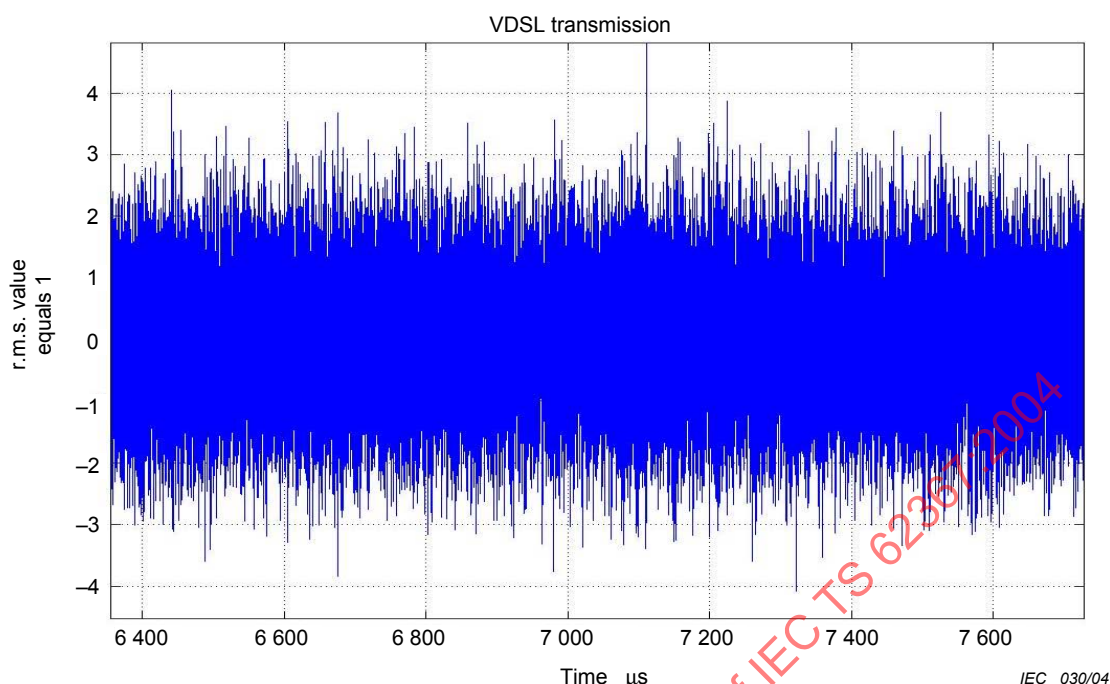


Figure A.2 – Typical xDSL (VDSL) signal in the time-domain

The magnitude of an xDSL signal is defined in the relevant functional standard by its mean power into a resistive load, within a specified frequency band. This mean power, in dBm, can be expressed as a well defined r.m.s. voltage value, in general in the order of a few volts. Of all xDSL signals, the worst case value, for ADSL combined with PSTN (ITU-T Recommendation G.992.1- Annex A), is 20,4 dBm into 100 Ω or 3,31 V r.m.s. in the downstream direction (from CO to CPE), and 12,5 dBm into 100 Ω or 1,33 V r.m.s. in the upstream direction (from CPE to CO).

The peak voltage however can be higher and depends on:

- peak-to average ratio (PAR) or crest factor (CF);
- CF distribution;
- real line-termination impedance, which is not purely resistive.

In A.3 and A.4 below, an explanation is given to show that:

- the value of the peak voltage is limited and
- the higher the value of the peak voltage, the lower probability of its occurrence.

A.3 Peak-to average ratio and CF

As the name indicates, the PAR of a symbol is the ratio of the maximum instantaneous power in the symbol to the average power. Without giving detailed information about a symbol, it is an indication for the occurrence of peaks in that symbol.

A large PAR value indicates that somewhere in the signal at least one sample takes on a (power) value that is large with respect to the average sample power. A small PAR value on the other hand indicates that the symbol varies evenly around the average power, without making any large excursions.

The CF is mostly used in standardization documents instead of the PAR. The CF is defined as the square root of the PAR (or half the PAR when the value is expressed in dB). In practice, ADSL systems are designed to cope with a CF of about 5 to 6. The probability of peak voltages above a certain threshold can be estimated by using the CF distribution. The relation is given by:

$$V_{\text{peak}} = CF \times V_{\text{r.m.s.}}$$

Since the CF is stochastic in the xDSL multi-carrier modulation, the same will be true for the peak voltage of the signal (evaluated over a limited period of time).

Given the worst case signal type, which is ADSL, and the assumption that upstream and downstream ADSL signals are cumulative on the telecommunication lines, the signal can theoretically go up to $27,8 V_{\text{peak}}$, with a CF of 6. However, this peak voltage has only a very low probability of occurrence.

A.4 CF distribution

Figure A.3 shows the CF distribution of xDSL signals using two different modulation techniques, namely a Quadrature Amplitude Modulation (QAM) and a multi-carrier Discrete MultiTone (DMT). The figure is based on a Gaussian distribution and shows the relation between the probability (value in y-axis) that an xDSL signal has a CF larger than x (value in x-axis). The simulation was done with a non-resistive line impedance termination and shows a simulation for 24, 256 and 4 096 carriers or tones.

The figure shows that, if the number of carriers increases in a multi carrier DMT system, the probability that a signal with a higher CF occurs is more likely. However, differences between DMT and single carrier modulation are minimal.

As an example, the probability that the voltage value of a sample of the xDSL signal exceeds 6 times the r.m.s. value is about 10^{-6} for DMT (256 tones).

It must also be remarked that for a lower number of carriers, the upper limit is looser (for example, for 24 carriers, Figure A.3 gives an overestimation of the probability).

Figure A.4 shows the lower limit on the inter-arrival time (in seconds) of a symbol with a CF larger than x. The relation between Figure A.3 and Figure A.4 is determined by the sample rate of the symbol that equals 4 kHz. Again, for 24 carriers, the inter-arrival time of the lower limit is much worse than the inter-arrival time in reality.

In general, it can be concluded that the CF will be higher if the number of carriers increases. This number of carriers may be different for each type of xDSL and the actual operating conditions.

In the determination of the peak voltage, one must consider the combination of the CF and the r.m.s. voltage value, which is different for each type of xDSL.