

# TECHNICAL SPECIFICATION



**Nanomanufacturing – Key control characteristics –  
Part 5-1: Thin-film organic/nano electronic devices – Carrier transport  
measurements**

IECNORM.COM : Click to view the full PDF of IEC TS 62607-5-1:2014



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2014 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
Fax: +41 22 919 03 00  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

#### IEC Catalogue - [webstore.iec.ch/catalogue](http://webstore.iec.ch/catalogue)

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

#### IEC publications search - [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 14 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

#### IEC Glossary - [std.iec.ch/glossary](http://std.iec.ch/glossary)

More than 55 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

#### IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [csc@iec.ch](mailto:csc@iec.ch).

IECNORM.COM : Click to view the full text of IEC 60715-1:2014

# TECHNICAL SPECIFICATION



**Nanomanufacturing – Key control characteristics –  
Part 5-1: Thin-film organic/nano electronic devices – Carrier transport  
measurements**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

PRICE CODE

P

ICS 07.030

ISBN 978-2-8322-1812-9

**Warning! Make sure that you obtained this publication from an authorized distributor.**

## CONTENTS

|                                                                                                                              |    |
|------------------------------------------------------------------------------------------------------------------------------|----|
| FOREWORD.....                                                                                                                | 3  |
| INTRODUCTION.....                                                                                                            | 5  |
| 1 Scope.....                                                                                                                 | 6  |
| 2 Normative references .....                                                                                                 | 6  |
| 3 Terms, definitions and abbreviations .....                                                                                 | 6  |
| 3.1 Terms and definitions.....                                                                                               | 6  |
| 3.2 Symbols and abbreviated terms .....                                                                                      | 7  |
| 4 Sample structures of OTFTs .....                                                                                           | 8  |
| 4.1 Typical device structures of OTFTs.....                                                                                  | 8  |
| 4.2 Contact-area-limited doping in OTFTs.....                                                                                | 8  |
| 5 Appropriate data format.....                                                                                               | 9  |
| Annex A (informative) Experimental studies on contact-area-limited doping in OTFTs.....                                      | 11 |
| A.1 Contact-area-limited doping in bottom-gate, top-contact OTFTs.....                                                       | 11 |
| A.2 Contact-area-limited doping in bottom-gate, bottom-contact OTFTs .....                                                   | 13 |
| Bibliography.....                                                                                                            | 15 |
| Figure 1 – Typical device structures of OTFTs .....                                                                          | 8  |
| Figure 2 – Contact-area-limited doping in OTFTs.....                                                                         | 9  |
| Figure 3 – Summary of this Technical Specification.....                                                                      | 9  |
| Figure A.1 – Sample preparation of bottom-gate, top-contact (BGTC) pentacene OTFTs using contact-area-limited doping.....    | 12 |
| Figure A.2 – Contact-area-limited doping effect in bottom-gate, top-contact (BGTC) pentacene OTFTs .....                     | 12 |
| Figure A.3 – Sample preparation of bottom-gate, bottom-contact (BGBC) p-channel OTFTs using contact-area-limited doping..... | 13 |
| Figure A.4 – Contact-area-limited doping effect in bottom-gate, bottom-contact (BGBC) pentacene OTFTs.....                   | 14 |
| Figure A.5 – Contact-area-limited doping effect in bottom-gate, bottom-contact (BGBC) oligothiophene OTFTs .....             | 14 |
| Table 1 – Possible data format to be given together with carrier transport properties of OTFTs.....                          | 10 |

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

**NANOMANUFACTURING –  
KEY CONTROL CHARACTERISTICS –****Part 5-1: Thin-film organic/nano electronic devices –  
Carrier transport measurements**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. In exceptional circumstances, a technical committee may propose the publication of a technical specification when

- the required support cannot be obtained for the publication of an International Standard, despite repeated efforts, or
- the subject is still under technical development or where, for any other reason, there is the future but no immediate possibility of an agreement on an International Standard.

Technical specifications are subject to review within three years of publication to decide whether they can be transformed into International Standards.

IEC TS 62607-5-1, which is a technical specification, has been prepared by IEC technical committee 113: Nanotechnology standardization for electrical and electronic products and systems.

The text of this technical specification is based on the following documents:

|               |                  |
|---------------|------------------|
| Enquiry draft | Report on voting |
| 113/212/DTS   | 113/221/RVC      |

Full information on the voting for the approval of this technical specification can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62607 series, published under the general title *Nanomanufacturing key control characteristics*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- transformed into an International standard,
- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

**IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

A bilingual version of this publication may be issued at a later date.

## INTRODUCTION

Organic/nano thin-film devices have many attractive features such as being light-weight and flexible, and having a low-cost, low-temperature fabrication process. Organic/nano electronic devices have been widely researched by academic institutions, research institutes, and materials and device industries. One of their possible applications is therefore expected to be in flexible and rollable devices. Many thin-film transistors based on organic semiconductor materials, called organic thin-film transistors (OTFTs), are expected to be mounted on organic electroluminescence display to drive each organic light-emitting diode pixel circuit. These OTFTs are also promising candidates for molecular nanoelectronics.

OTFTs show a relatively smaller carrier mobility (thin-film mobility: at most  $10 \text{ cm}^2/\text{Vs}$ , but usually less than  $1 \text{ cm}^2/\text{Vs}$ ) compared with other thin-film transistors based on inorganic semiconductors (silicon, III-V compounds, metal oxides). Carrier transport properties such as thin-film mobility and thin-film carrier concentration in OTFTs are usually measured by simply applying the device physics of silicon metal-oxide-semiconductor transistors to OTFTs. Both the intrinsic bulk mobility of organic semiconductors and extrinsic effects such as contact resistance, carrier trap, interface, and surface state can limit thin-film mobility in OTFTs. Therefore, reliable methods of evaluating carrier transport properties for nanometer-scale thin-film materials have not yet been established and urgently need to be developed.

IECNORM.COM : Click to view the full PDF of IEC TS 62607-5-1:2014

## **NANOMANUFACTURING – KEY CONTROL CHARACTERISTICS –**

### **Part 5-1: Thin-film organic/nano electronic devices – Carrier transport measurements**

#### **1 Scope**

This part of IEC 62607, which is a Technical Specification, provides a standardized sample structure for characterizing charge transport properties in thin-film organic/nano electronic devices and a format to report details of the structure which shall be provided with the measurement results. The standardized OTFT testing structure with a contact-area-limited doping can mitigate contact resistance and enable reliable measurement of the charge carrier mobility. The purpose of this Technical Specification is to provide test sample structures for determining the intrinsic charge transport properties of organic thin-film devices. The intention is to provide reliable materials information for OTFTs and to set guidelines for making test sample structures so that materials information is clear and consistent throughout the research community and industry.

#### **2 Normative references**

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050 (all parts), *International Electrotechnical Vocabulary* (available at <http://www.electropedia.org/>)

IEC 62860, *Test methods for the characterization of organic transistors and materials*

#### **3 Terms, definitions and abbreviations**

For the purposes of this document, the terms and definitions given in IEC 60050-521 as well as the following apply.

##### **3.1 Terms and definitions**

###### **3.1.1 organic thin-film transistor OTFT**

field-effect transistor that has a conduction channel made of thin films consisting of organic compounds

###### **3.1.2 thin-film mobility**

charge carrier mobility of the conduction channel (the semiconductor layer) in an OTFT

###### **3.1.3 contact-area-limited doping**

doping at around interface regions between the source and drain electrodes and the conduction channel in an OTFT

### 3.1.4

#### **channel resistance**

electrical resistance which comes from the conduction channel induced by applying gate voltages in a field-effect transistor

### 3.1.5

#### **contact resistance**

electrical resistance obtained by subtracting the channel resistance from the total electrical resistance between the source and drain electrodes in a field-effect transistor

Note 1 to entry: Main components of the contact resistance are electrical leads and carrier injection barriers at the interface between the source electrode and the semiconductor layer.

### 3.1.6

#### **bottom-gate, bottom-contact device**

field-effect transistor with the following structures:

- the gate electrode is located between the gate dielectric and the substrate;
- the source and drain electrodes are located directly on top of the substrate, and adjacent to the conduction channel-gate dielectric interface

### 3.1.7

#### **bottom-gate, top-contact device**

field-effect transistor with the following structures:

- the gate electrode is located between the gate dielectric and the substrate;
- the source and drain electrodes are located on top of the semiconductor layer

### 3.1.8

#### **top-gate, bottom-contact device**

field-effect transistor with the following structures:

- the gate electrode is located farthest away from the substrate;
- the gate dielectric is located between the gate electrode and the semiconductor layer;
- the source and drain electrodes are located directly on top of the substrate, and adjacent to the conduction channel-gate dielectric interface

### 3.1.9

#### **top-gate, top-contact device**

field-effect transistor with the following structures:

- the gate electrode is located farthest away from the substrate;
- the gate dielectric is located between the gate electrode and the semiconductor layer;
- the source and drain electrodes are located on top of the semiconductor layer

## 3.2 Symbols and abbreviated terms

|        |                                                      |
|--------|------------------------------------------------------|
| OTFT   | organic thin-film transistor                         |
| BGBC   | bottom-gate, bottom-contact                          |
| BGTC   | bottom-gate, top-contact                             |
| TGBC   | top-gate, bottom-contact                             |
| TGTC   | top-gate, top-contact                                |
| F4TCNQ | 2,3,5,6-tetrafluoro-7,7,8,8-tetracyanoquinodimethane |

## 4 Sample structures of OTFTs

### 4.1 Typical device structures of OTFTs

Several different device structures on OTFTs are possible, depending on the position of the source-drain and gate electrodes. Figure 1 illustrates two typical device structures: a bottom-gate, top-contact (BGTC) structure and a bottom-gate, bottom-contact (BGBC) structure. BGTC devices usually show better performance in comparison with BGBC devices. In comparison, the BGBC structure is more suitable for high-density device integration. However, high contact resistance is a common and serious problem in OTFTs regardless of the device structure, because the high contact resistance leads to the underestimation of the intrinsic field-effect channel mobility in OTFTs [1],[2]<sup>1</sup>.


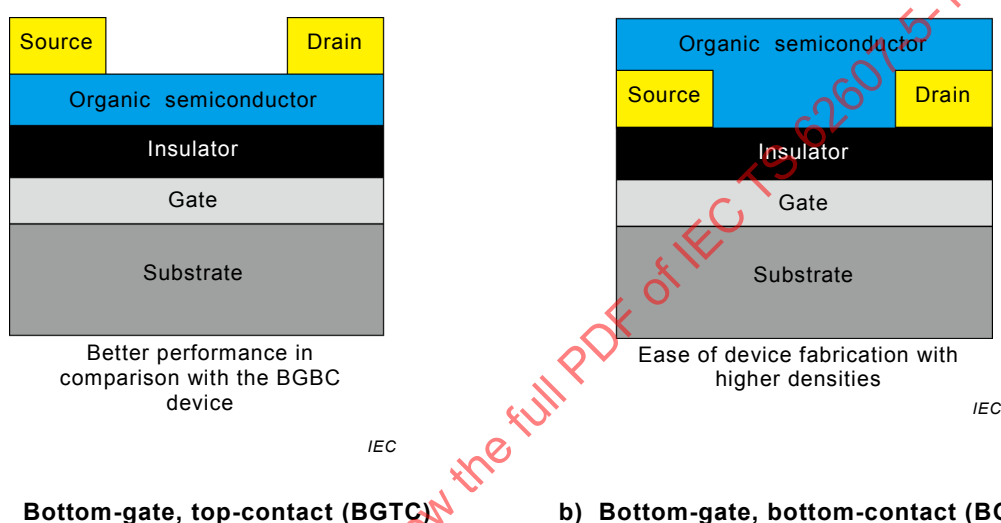


Figure 1 – Typical device structures of OTFTs

### 4.2 Contact-area-limited doping in OTFTs

Contact-area-limited doping is effective for increasing the drain current in OTFTs [2], [3], [4], [5], [6], [7]. In this type of doping, as shown in Figure 2, acceptor (or donor) doped layers are formed at the interface regions between the active semiconductor layer and the contact electrode. These doped layers cause a decrease in the contact resistance, resulting in an increase in the drain current.

<sup>1</sup> Figures in square brackets refer to the Bibliography.

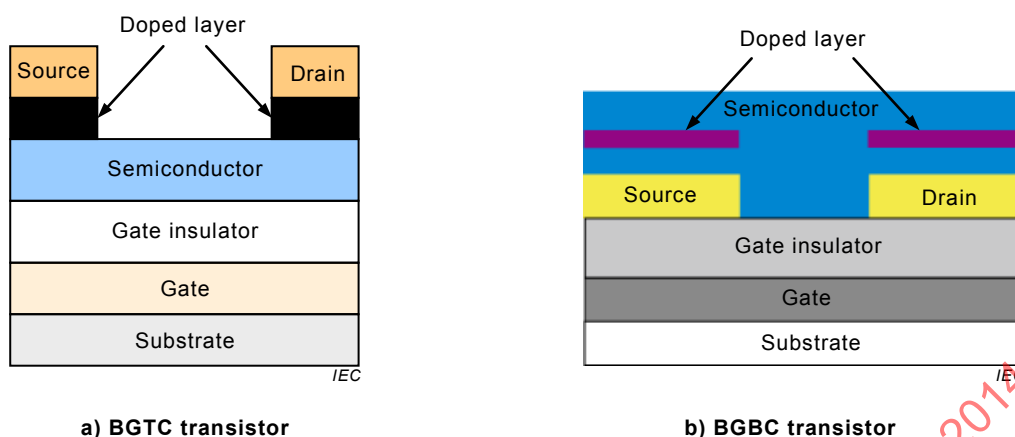


**Figure 2 – Contact-area-limited doping in OTFTs**

Contact-area-limited doping is a versatile method for improving the device performance of OTFTs. In other words, the effective thin-film mobility in the channel regions of OTFTs greatly depends on extrinsic effects such as structure and the electronic properties of the contact electrode area. Therefore, materials information on organic semiconductor films is not consistent throughout the research community and industry at present. This fact has led to this technical specification proposal for standard test sample structures. Namely, highly doped layers around contact electrodes are indispensable for reliably evaluating carrier mobility and concentration in organic semiconductor devices (see Figure 3).

Contact-area-limited doping is a versatile method for improving the device performance of OTFTs.

(Standard test sample structures)

Highly-doped layers around contact electrodes are indispensable for realizing the reliable evaluation for carrier mobility and concentration in organic semiconductor devices

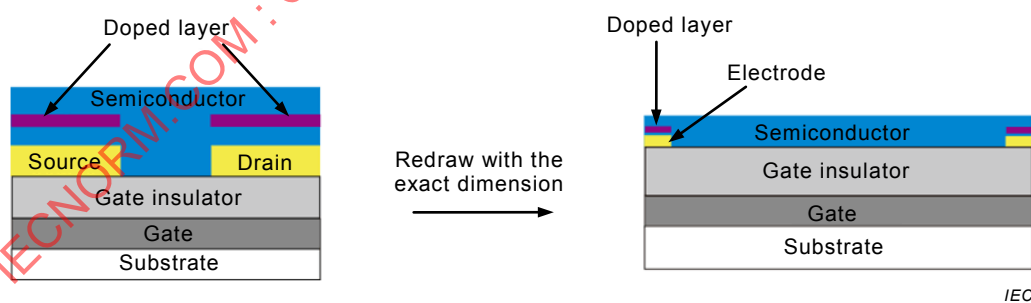

**Figure 3 – Summary of this Technical Specification**

## 5 Appropriate data format

A blank detail specification for OTFT test samples is an appropriate form for this Technical Specification (see Table 1). Items such as contact structure and contact electrode materials should be included in this Technical Specification.

**Table 1 – Possible data format to be given together with carrier transport properties of OTFTs**

| Item                                         | Specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Contact structure                            | <input type="checkbox"/> Bottom-gate, bottom-contact (BGBC) <input type="checkbox"/> Bottom-gate, bottom-contact (BGTC)<br><input type="checkbox"/> Top-gate, bottom-contact (TGBC) <input type="checkbox"/> Top-gate, top-contact (TGTC)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Conditions of contact electrode<br>Materials | Materials:<br><input type="checkbox"/> Noble metals <input type="checkbox"/> Transition metals<br><input type="checkbox"/> Transparent conducting oxides <input type="checkbox"/> Nano-carbon materials<br><input type="checkbox"/> Conducting polymers <input type="checkbox"/> Others<br>Thickness of electrode: <input type="checkbox"/> nm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Surface treatment of contact electrode       | <input type="checkbox"/> Doping with donor or acceptor materials<br>(Carrier concentration of doped layers: <input type="checkbox"/> $\text{cm}^{-3}$ )<br>Thickness of doped layers: <input type="checkbox"/> nm<br><input type="checkbox"/> Self-assembled monolayers (e.g. thiol, etc.)<br><input type="checkbox"/> No surface treatment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Device parameters                            | Thin-film mobility: <input type="checkbox"/> $\text{cm}^2/\text{Vs}$ ( <input type="checkbox"/> Saturation regime <input type="checkbox"/> Linear regime)<br>Gate threshold voltage: <input type="checkbox"/> V<br>Subthreshold-swing: <input type="checkbox"/> V/decade<br>Contact resistance at gate voltages ( $V_g$ ): <input type="checkbox"/> $\sim$ <input type="checkbox"/> $\Omega$ ( <input type="checkbox"/> $V < V_g < \text{[ ] V}$ )<br>Channel resistance at gate voltages ( $V_g$ ): <input type="checkbox"/> $\sim$ <input type="checkbox"/> $\Omega$ ( <input type="checkbox"/> $V < V_g < \text{[ ] V}$ )<br>Employed measurement method for contact and channel resistances:<br><input type="checkbox"/> 4 probe measurement <input type="checkbox"/> Transmission line method <input type="checkbox"/> Others<br>Gate capacitance: <input type="checkbox"/> $\text{nF}/\text{cm}^2$<br>Channel length and width (Length)/(Width): <input type="checkbox"/> $\mu\text{m}$ / <input type="checkbox"/> mm<br>Thickness of active semiconductor layer: <input type="checkbox"/> nm<br>Carrier concentration of active semiconductor layer: <input type="checkbox"/> $\text{cm}^{-3}$ |

## Annex A (informative)

### Experimental studies on contact-area-limited doping in OTFTs

#### A.1 Contact-area-limited doping in bottom-gate, top-contact OTFTs

Clause A.1 describes an example of contact-area-limited p-type doping in bottom-gate, top-contact (BGTC) OTFTs in which pentacene was used as the p-type semiconductor material and 2,3,5,6-tetrafluoro-7,7,8,8-tetracyanoquinodimethane (F4TCNQ) as the acceptor dopant. Both materials are common and commercially available. The acceptor-doped layer was prepared by co-evaporation of pentacene and F4TCNQ. The evaporation rates of pentacene and F4TCNQ were 0,45 nm/min and 0,15 nm/min, respectively. The parameters of the device structure are shown in Figure A.1. In addition, BGTC devices without doped layers were also fabricated.

Firstly, deposition of the active pentacene layer (thickness: 50 nm) onto SiO<sub>2</sub> insulator was performed at the same time for these two samples. After that, for the device with the acceptor-doped layers, a 5-nm-thick doped layer was prepared by co-evaporation of pentacene and F4TCNQ using a shadow mask pattern for source-drain electrode fabrication, followed by the physical vapor deposition of a 25-nm-thick gold contact electrodes.

Transistor characteristics of the prepared devices were evaluated according to an appropriate IEC standard procedure (IEC 62860). The measurements were carried out under a vacuum of  $1,0 \times 10^{-2}$  Pa. The effective field-effect mobility ( $\mu_{\text{eff}}$ ) and threshold voltage ( $V_{\text{th}}$ ) were obtained from transfer characteristics (drain current ( $I_d$ ) vs. gate voltage ( $V_g$ )) in the saturation regime according to the following equation;

$$I_d = WC_i \mu_{\text{eff}} (V_g - V_{\text{th}})^2 / (2L) \quad (1)$$


where

$C_i$  is the gate capacitance per unit area;


$L$  is the channel length (50  $\mu\text{m}$ );

$W$  is the channel width (1 mm), respectively.

Here, the dielectric constant for SiO<sub>2</sub> was regarded to be 3,9.

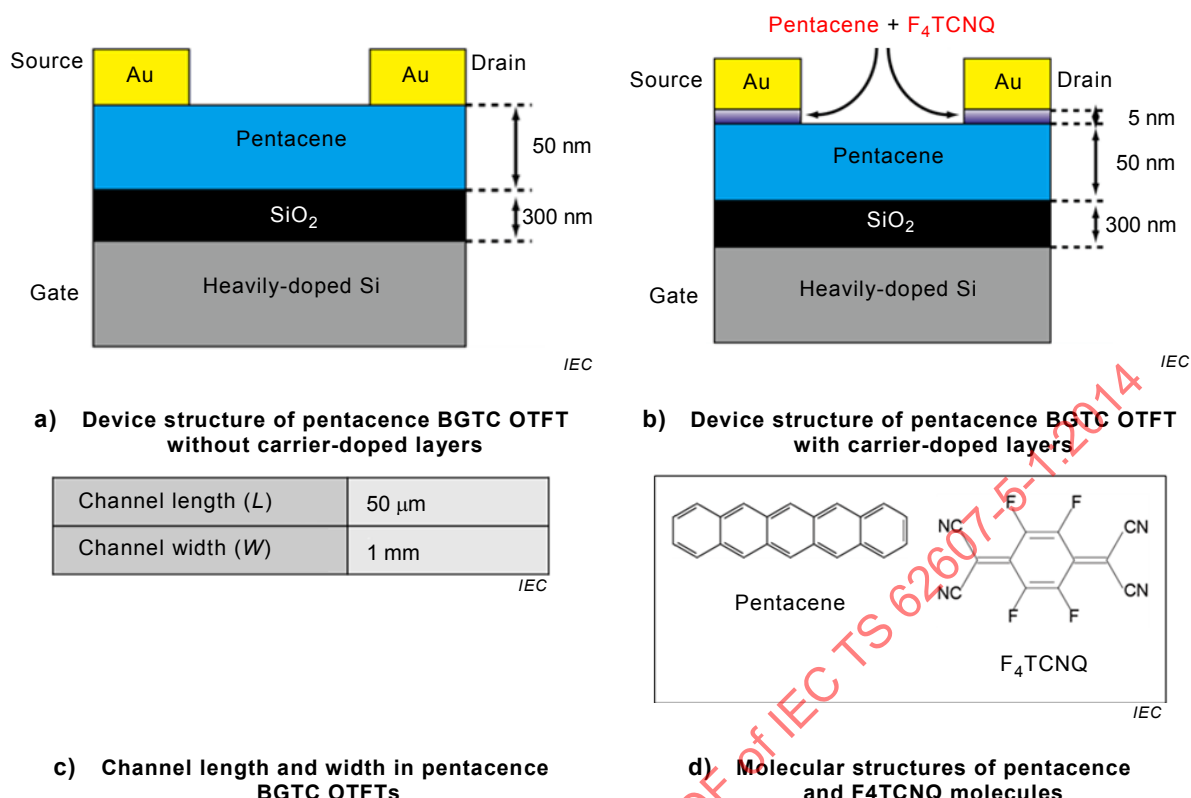

**Figure A.1 – Sample preparation of bottom-gate, top-contact (BGTC) pentacene OTFTs using contact-area-limited doping**

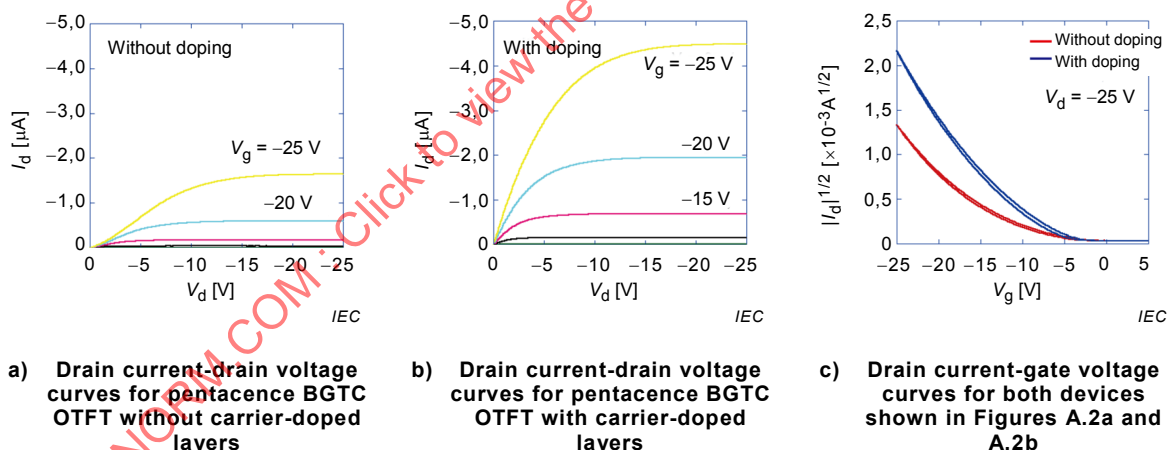

| $(V_g = -25 \text{ V})$ | Effective hole thin-film mobility $[\text{cm}^2/\text{Vs}]$ | Threshold voltage $[\text{V}]$ obtained from plots in Figure A.2c |
|-------------------------|-------------------------------------------------------------|-------------------------------------------------------------------|
| Without doping          | 0,12                                                        | -13,8                                                             |
| With doping             | 0,24                                                        | -11,9                                                             |

**Figure A.2 – Contact-area-limited doping effect in bottom-gate, top-contact (BGTC) pentacene OTFTs**


The drain current-drain voltage curves and drain current-gate voltage curves are plotted in Figure A.2. The graphs show that the drain current for the device with the doped layer was larger than that for the undoped device. The effective field-effect mobility for hole doubled from 0,12  $\text{cm}^2/\text{Vs}$  to 0,24  $\text{cm}^2/\text{Vs}$  with contact-area-limited doping. This result confirms that the drain current was enhanced due to contact-area-limited doping in top-contact OTFTs.

## A.2 Contact-area-limited doping in bottom-gate, bottom-contact OTFTs

Figure A.3 shows the sample preparation for a p-channel BGBC OTFT with doped layers. Pentacene and oligothiophene ( $\alpha$ -sexithiophene) were used as p-type semiconductor materials and F4TCNQ as the acceptor dopant. All materials used here are common and commercially available. The acceptor-doped layer was prepared by co-evaporation of pentacene (or oligothiophene) and F4TCNQ. The parameters of the device structure are also shown in Figure A.3. The evaporation rates of pentacene, oligothiophene, and F4TCNQ were 0,45 nm/min, 0,59 nm/min, and 0,15 nm/min, respectively. The distance between the doped layer and the contact electrode was set to be 10 nm. In addition, BGBC devices without doped layers were also fabricated.

Firstly, a 25-nm-thick gold layer was vacuum deposited onto SiO<sub>2</sub> insulator through a shadow mask to form source-drain electrodes. The channel length ( $L$ ) and width ( $W$ ) were 50  $\mu$ m and 1 mm, respectively. For devices with doped layers, a 10-nm-thick semiconductor layer was deposited onto the contact electrodes using the same shadow mask for electrode fabrication, followed by the deposition of a 5-nm-thick doped layer by co-evaporation of semiconductor and F4TCNQ molecules. Successively, after the removal of the shadow mask in air, deposition of the active semiconductor layer (thickness: 50 nm) was performed at the same time for undoped and doped BGBC devices.

Transistor characteristics of the prepared devices were evaluated according to an appropriate IEC standard procedure (see IEC 62860). The measurement procedure was similar to that described in Clause A.1.

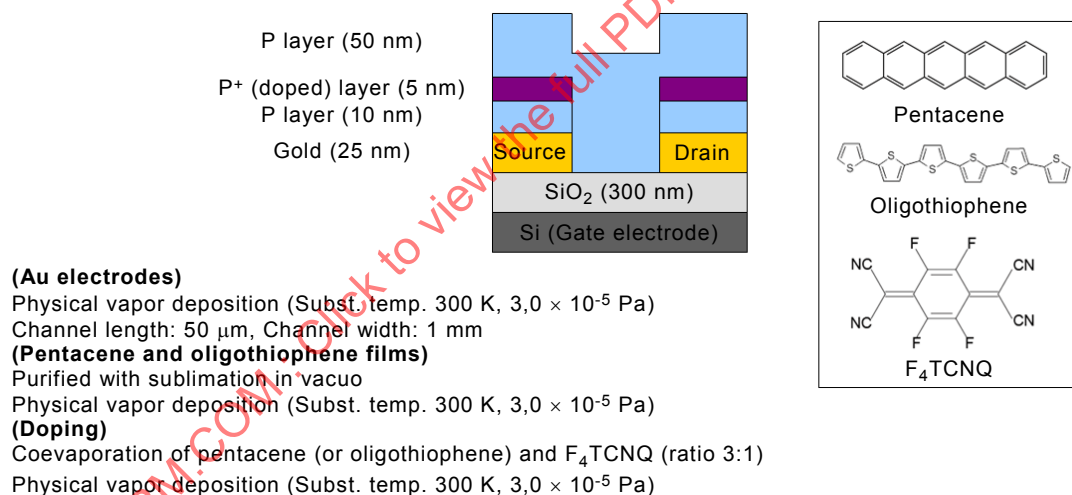


IEC

**Figure A.3 – Sample preparation of bottom-gate, bottom-contact (BGBC) p-channel OTFTs using contact-area-limited doping**

In bottom-gate, bottom-contact pentacene OTFTs, the drain current for the device with doped layers was larger than that for the undoped device, as shown in Figure A.4. The effective field-effect mobility for hole was raised from 0,003 cm<sup>2</sup>/Vs to 0,024 cm<sup>2</sup>/Vs with contact-area-limited doping. This result was also qualitatively confirmed with the device simulation [7].

In bottom-gate, bottom-contact oligothiophene OTFTs, the p-type doped layer increased the drain current, and the effective field-effect mobility for hole was raised from  $1,4 \times 10^{-4}$  to  $1,3 \times 10^{-3}$  cm<sup>2</sup>/Vs with contact-area-limited doping, as shown in Figure A.5. This result suggests that the device structure with p-type doped layers is useful for improving the performance of bottom-contact p-channel OTFTs with an oligothiophene active layer as well as pentacene. The versatility of this contact-area-limited doping in bottom-contact OTFTs was experimentally confirmed.

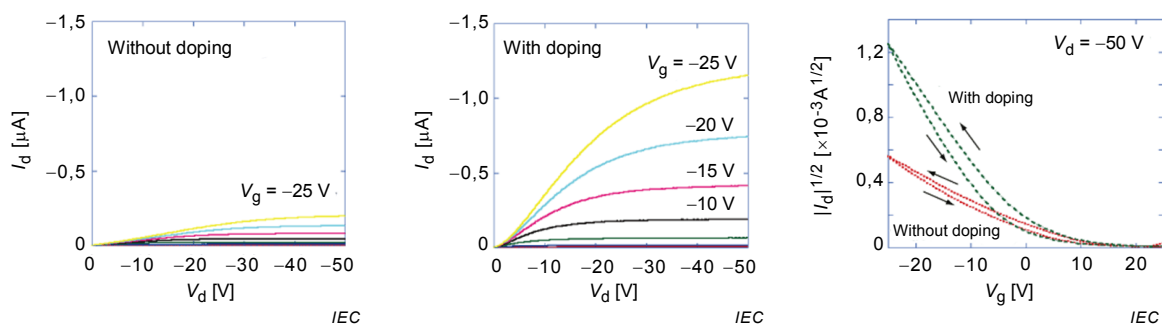


a) Drain current-drain voltage curves for pentacene BGBC OTFT without carrier-doped layers

b) Drain current-drain voltage curves for pentacene BGBC OTFT with carrier-doped layers

c) Drain current-gate voltage curves for both devices shown in Figures A.4a and A.4b

| $(V_g = -25 \text{ V})$ | Effective hole thin-film mobility [ $\text{cm}^2/\text{Vs}$ ] | Threshold voltage [V] obtained from plots in Figure A.4c |
|-------------------------|---------------------------------------------------------------|----------------------------------------------------------|
| Without doping          | $3,0 \times 10^{-3}$                                          | 3,1                                                      |
| With doping             | $2,4 \times 10^{-2}$                                          | -1,5                                                     |

**Figure A.4 – Contact-area-limited doping effect in bottom-gate, bottom-contact (BGBC) pentacene OTFTs**

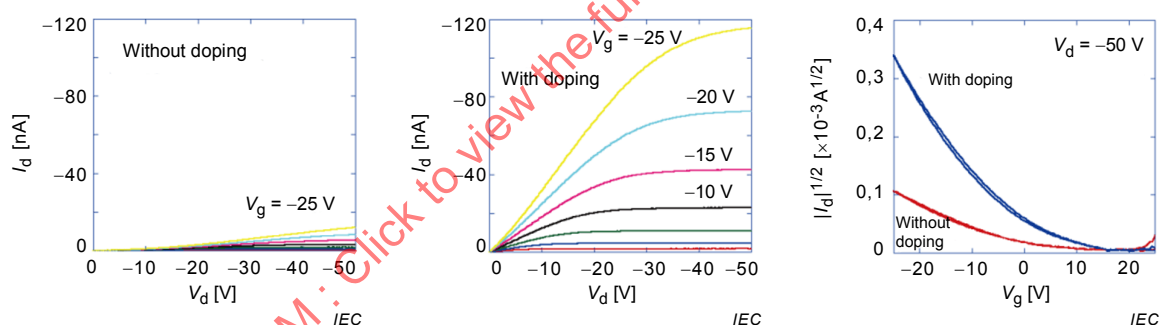

a) Drain current-drain voltage curves for oligothiophene BGBC OTFT without carrier-doped layers

b) Drain current-drain voltage curves for oligothiophene BGBC OTFT with carrier-doped layers

c) Drain current-gate voltage curves for both devices shown in Figures A.5a and A.5b

| $(V_g = -25 \text{ V})$ | Effective hole thin-film mobility [ $\text{cm}^2/\text{Vs}$ ] | Threshold voltage [V] obtained from plots in Figure A.5c |
|-------------------------|---------------------------------------------------------------|----------------------------------------------------------|
| Without doping          | $1,4 \times 10^{-4}$                                          | 0,1                                                      |
| With doping             | $1,3 \times 10^{-3}$                                          | 0,8                                                      |

**Figure A.5 – Contact-area-limited doping effect in bottom-gate, bottom-contact (BGBC) oligothiophene OTFTs**