

---

---

**Identification cards — Contactless  
integrated circuit cards — Vicinity  
cards —**

**Part 3:  
Anticollision and transmission protocol**

*Cartes d'identification — Cartes à circuit(s) intégré(s) sans contact —  
Cartes de voisinage —*

*Partie 3: Anticollision et protocole de transmission*

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15693-3:2009



**COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

|                                                                                                    |    |
|----------------------------------------------------------------------------------------------------|----|
| Foreword.....                                                                                      | v  |
| Introduction .....                                                                                 | vi |
| 1 Scope .....                                                                                      | 1  |
| 2 Normative references .....                                                                       | 1  |
| 3 Terms, definitions, symbols and abbreviated terms.....                                           | 2  |
| 3.1 Terms and definitions.....                                                                     | 2  |
| 3.2 Abbreviated terms .....                                                                        | 2  |
| 3.3 Symbols .....                                                                                  | 2  |
| 4 Definition of data elements .....                                                                | 3  |
| 4.1 Unique identifier (UID) .....                                                                  | 3  |
| 4.2 Application family identifier (AFI) .....                                                      | 3  |
| 4.3 Data storage format identifier (DSFID) .....                                                   | 6  |
| 4.4 CRC .....                                                                                      | 6  |
| 5 VICC memory organization.....                                                                    | 6  |
| 6 Block security status.....                                                                       | 7  |
| 7 Overall protocol description.....                                                                | 7  |
| 7.1 Protocol concept.....                                                                          | 7  |
| 7.2 Modes.....                                                                                     | 8  |
| 7.2.1 Addressed mode.....                                                                          | 8  |
| 7.2.2 Non-addressed mode .....                                                                     | 8  |
| 7.2.3 Select mode.....                                                                             | 8  |
| 7.3 Request format.....                                                                            | 9  |
| 7.3.1 Request flags .....                                                                          | 9  |
| 7.4 Response format.....                                                                           | 10 |
| 7.4.1 Response flags .....                                                                         | 11 |
| 7.4.2 Response error code.....                                                                     | 11 |
| 7.5 VICC states .....                                                                              | 12 |
| 7.5.1 Power-off state.....                                                                         | 12 |
| 7.5.2 Ready state.....                                                                             | 12 |
| 7.5.3 Quiet state.....                                                                             | 12 |
| 7.5.4 Selected state.....                                                                          | 12 |
| 8 Anticollision .....                                                                              | 14 |
| 8.1 Request parameters .....                                                                       | 14 |
| 8.2 Request processing by the VICC .....                                                           | 15 |
| 8.3 Explanation of an anticollision sequence .....                                                 | 17 |
| 9 Timing specifications .....                                                                      | 19 |
| 9.1 VICC waiting time before transmitting its response after reception of an EOF from the VCD..... | 19 |
| 9.2 VICC modulation ignore time after reception of an EOF from the VCD .....                       | 19 |
| 9.3 VCD waiting time before sending a subsequent request .....                                     | 19 |
| 9.4 VCD waiting time before switching to the next slot during an inventory process .....           | 20 |
| 9.4.1 When the VCD has started to receive one or more VICC responses .....                         | 20 |
| 9.4.2 When the VCD has received no VICC response .....                                             | 20 |
| 10 Commands .....                                                                                  | 21 |
| 10.1 Command types .....                                                                           | 21 |
| 10.1.1 Mandatory.....                                                                              | 21 |
| 10.1.2 Optional .....                                                                              | 21 |

|                                                                     |                                          |    |
|---------------------------------------------------------------------|------------------------------------------|----|
| 10.1.3                                                              | Custom .....                             | 21 |
| 10.1.4                                                              | Proprietary .....                        | 21 |
| 10.2                                                                | Command codes .....                      | 22 |
| 10.3                                                                | Mandatory commands .....                 | 22 |
| 10.3.1                                                              | Inventory .....                          | 22 |
| 10.3.2                                                              | Stay quiet .....                         | 23 |
| 10.4                                                                | Optional commands.....                   | 24 |
| 10.4.1                                                              | Read single block.....                   | 24 |
| 10.4.2                                                              | Write single block .....                 | 25 |
| 10.4.3                                                              | Lock block.....                          | 26 |
| 10.4.4                                                              | Read multiple blocks .....               | 26 |
| 10.4.5                                                              | Write multiple blocks .....              | 28 |
| 10.4.6                                                              | Select.....                              | 29 |
| 10.4.7                                                              | Reset to ready.....                      | 29 |
| 10.4.8                                                              | Write AFI.....                           | 30 |
| 10.4.9                                                              | Lock AFI.....                            | 31 |
| 10.4.10                                                             | Write DSFID command .....                | 32 |
| 10.4.11                                                             | Lock DSFID .....                         | 32 |
| 10.4.12                                                             | Get system information .....             | 33 |
| 10.4.13                                                             | Get multiple block security status ..... | 35 |
| 10.5                                                                | Custom commands.....                     | 36 |
| 10.6                                                                | Proprietary commands .....               | 37 |
| Annex A (informative) Compatibility with other card standards ..... |                                          | 38 |
| Annex B (informative) VCD pseudo-code for anticollision .....       |                                          | 39 |
| Annex C (informative) Cyclic Redundancy Check (CRC) .....           |                                          | 40 |
| C.1                                                                 | The CRC error detection method.....      | 40 |
| C.2                                                                 | CRC calculation example .....            | 41 |
| Bibliography .....                                                  |                                          | 43 |

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any of all such patent rights.

ISO/IEC 15693-3 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Cards and personal identification*.

This second edition cancels and replaces the first edition (ISO/IEC 15693-3:2001), Table 1 and 9.4.2 of which have been technically revised and Figure 10 redrawn for clarity.

ISO/IEC 15693 consists of the following parts, under the general title *Identification cards — Contactless integrated circuit cards — Vicinity cards*:

- *Part 1: Physical characteristics*
- *Part 2: Air interface and initialization*
- *Part 3: Anticollision and transmission protocol*

## Introduction

ISO/IEC 15693 is one of a series of International Standards describing the parameters for identification cards as defined in ISO/IEC 7810 and the use of such cards for international interchange.

This part of ISO/IEC 15693 describes the anticollision and transmission protocols.

This part of ISO/IEC 15693 does not preclude the incorporation of other standard technologies on the card.

Contactless card standards cover a variety of types as embodied in ISO/IEC 10536 (close-coupled cards), ISO/IEC 14443 (proximity cards) and ISO/IEC 15693 (vicinity cards). These are intended for operation when very near, nearby and at a longer distance from associated coupling devices, respectively.

The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draw attention to the fact that it is claimed that compliance with this document may involve the use of patents.

ISO and IEC take no position concerning the evidence, validity and scope of these patent rights.

The holders of these patent rights have assured ISO and IEC that they are willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statements of the holders of these patent rights are registered with ISO and IEC. Information may be obtained from:

JP 2561051 - Circuit Structure of Inductive  
Contactless Responding Unit

OMRON Corporation  
Intellectual Property Group  
20 Igadera, Shimokaiinji  
Nagaokakyo-City  
Kyoto 617-8510  
Japan

JP 2981517, JP 2129209 – Read to Verify Written  
Data

US5793324

Texas Instruments Deutschland GMBH  
TIRIS  
Haggarty Strasse 1  
8050 Freising  
Germany

EP831618

EP837412

EP845751

The subject matter of these patents is anticollision, affecting Clause 8 of this part of ISO/IEC 15693.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

# Identification cards — Contactless integrated circuit cards — Vicinity cards

## Part 3: Anticollision and transmission protocol

### 1 Scope

This part of ISO/IEC 15693 specifies:

- protocol and commands,
- other parameters required to initialize communications between a vicinity integrated circuit card and a vicinity coupling device,
- methods to detect and communicate with one card among several cards ("anticollision"),
- optional means to ease and speed up the selection of one among several cards based on application criteria.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 7816-6:2004, *Identification cards — Integrated circuit cards — Part 6: Interindustry data elements for interchange*

ISO/IEC 13239, *Information technology — Telecommunications and information exchange between systems — High-level data link control (HDLC) procedures*

ISO/IEC 15693-1, *Identification cards — Contactless integrated circuit(s) cards — Vicinity cards — Part 1: Physical characteristics*

ISO/IEC 15693-2, *Identification cards — Contactless integrated circuit cards — Vicinity cards — Part 2: Air interface and initialization*

### 3 Terms, definitions, symbols and abbreviated terms

#### 3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 15693-1, ISO/IEC 15693-2 and the following apply.

##### 3.1.1

##### **anticollision loop**

algorithm used to prepare for and handle a dialogue between a VCD and one or more VICCs from several in its energizing field

##### 3.1.2

##### **byte**

string that consists of 8 bits of data designated b1 to b8, from the most significant bit (MSB, b8) to the least significant bit (LSB, b1)

#### 3.2 Abbreviated terms

|        |                                  |
|--------|----------------------------------|
| AFI    | application family identifier    |
| CRC    | cyclic redundancy check          |
| DSFID  | data storage format identifier   |
| EOF    | end of frame                     |
| LSB    | least significant bit            |
| LSByte | least significant byte           |
| MSB    | most significant bit             |
| MSByte | most significant byte            |
| RFU    | reserved for future use          |
| SOF    | start of frame                   |
| UID    | unique identifier                |
| VCD    | vicinity coupling device         |
| VICC   | vicinity integrated circuit card |

#### 3.3 Symbols

|       |                                                  |
|-------|--------------------------------------------------|
| $f_c$ | frequency of operating field (carrier frequency) |
|-------|--------------------------------------------------|



## 4 Definition of data elements

### 4.1 Unique identifier (UID)

The VICCs are uniquely identified by a 64 bits unique identifier (UID). This is used for addressing each VICC uniquely and individually, during the anticollision loop and for one-to-one exchange between a VCD and a VICC.

The UID shall be set permanently by the IC manufacturer in accordance with figure 1.

| MSB  |    |             |    | LSB                           |   |
|------|----|-------------|----|-------------------------------|---|
| 64   | 57 | 56          | 49 | 48                            | 1 |
| 'E0' |    | IC Mfg code |    | IC manufacturer serial number |   |

Figure 1 — UID format

The UID comprises

- The MSByte (bits 64 – 57) shall be 'E0',
- The IC manufacturer code (bits 56 – 49) according to ISO/IEC 7816-6:2004,
- A unique serial number (bits 48 – 1) assigned by the IC manufacturer.

### 4.2 Application family identifier (AFI)

AFI (Application family identifier) represents the type of application targeted by the VCD and is used to extract from all the VICCs present only the VICCs meeting the required application criteria.

It may be programmed and locked by the respective commands.

AFI is coded on one byte, which constitutes 2 nibbles of 4 bits each.

The most significant nibble of AFI is used to code one specific or all application families, as defined in table 1.

The least significant nibble of AFI is used to code one specific or all application sub-families. Sub-family codes different from 0 are proprietary.

Table 1 — AFI coding


| AFI most significant nibble | AFI least significant nibble | Meaning<br>VICCs respond from                | Examples / note                |
|-----------------------------|------------------------------|----------------------------------------------|--------------------------------|
| '0'                         | '0'                          | All families and subfamilies                 | No applicative preselection    |
| X                           | '0'                          | All sub-families of family X                 | Wide applicative preselection  |
| X                           | Y                            | Only the Yth sub-family of family X          |                                |
| '0'                         | Y                            | Proprietary sub-family Y only                |                                |
| '1'                         | '0', Y                       | Transport                                    | Mass transit, Bus, Airline     |
| '2'                         | '0', Y                       | Financial                                    | IEP, Banking, Retail           |
| '3'                         | '0', Y                       | Identification                               | Access control                 |
| '4'                         | '0', Y                       | Telecommunication                            | Public telephony, GSM          |
| '5'                         | '0', Y                       | Medical                                      |                                |
| '6'                         | '0', Y                       | Multimedia                                   | Internet services              |
| '7'                         | '0', Y                       | Gaming                                       |                                |
| '8'                         | '0', Y                       | Data storage                                 | Portable files                 |
| '9'                         | '0', Y                       | EAN-UCC system for Application Identifiers   | Managed by ISO/IEC JTC 1/SC 31 |
| 'A'                         | '0', Y                       | Data Identifiers as defined in ISO/IEC 15418 | Managed by ISO/IEC JTC 1/SC 31 |
| 'B'                         | '0', Y                       | UPU                                          | Managed by ISO/IEC JTC 1/SC 31 |
| 'C'                         | '0', Y                       | IATA                                         | Managed by ISO/IEC JTC 1       |
| 'D'                         | '0', Y                       | RFU                                          | Managed by ISO/IEC JTC 1/SC 17 |
| 'E'                         | '0', Y                       | RFU                                          | Managed by ISO/IEC JTC 1/SC 17 |
| 'F'                         | '0', Y                       | RFU                                          | Managed by ISO/IEC JTC 1/SC 17 |

NOTE X = '1' to 'F', Y = '1' to 'F'.

The support of AFI by the VICC is optional.

If AFI is not supported by the VICC and if the AFI flag is set, the VICC shall not answer whatever the AFI value is in the request.

If AFI is supported by the VICC, it shall answer according to the matching rules described in table 1.

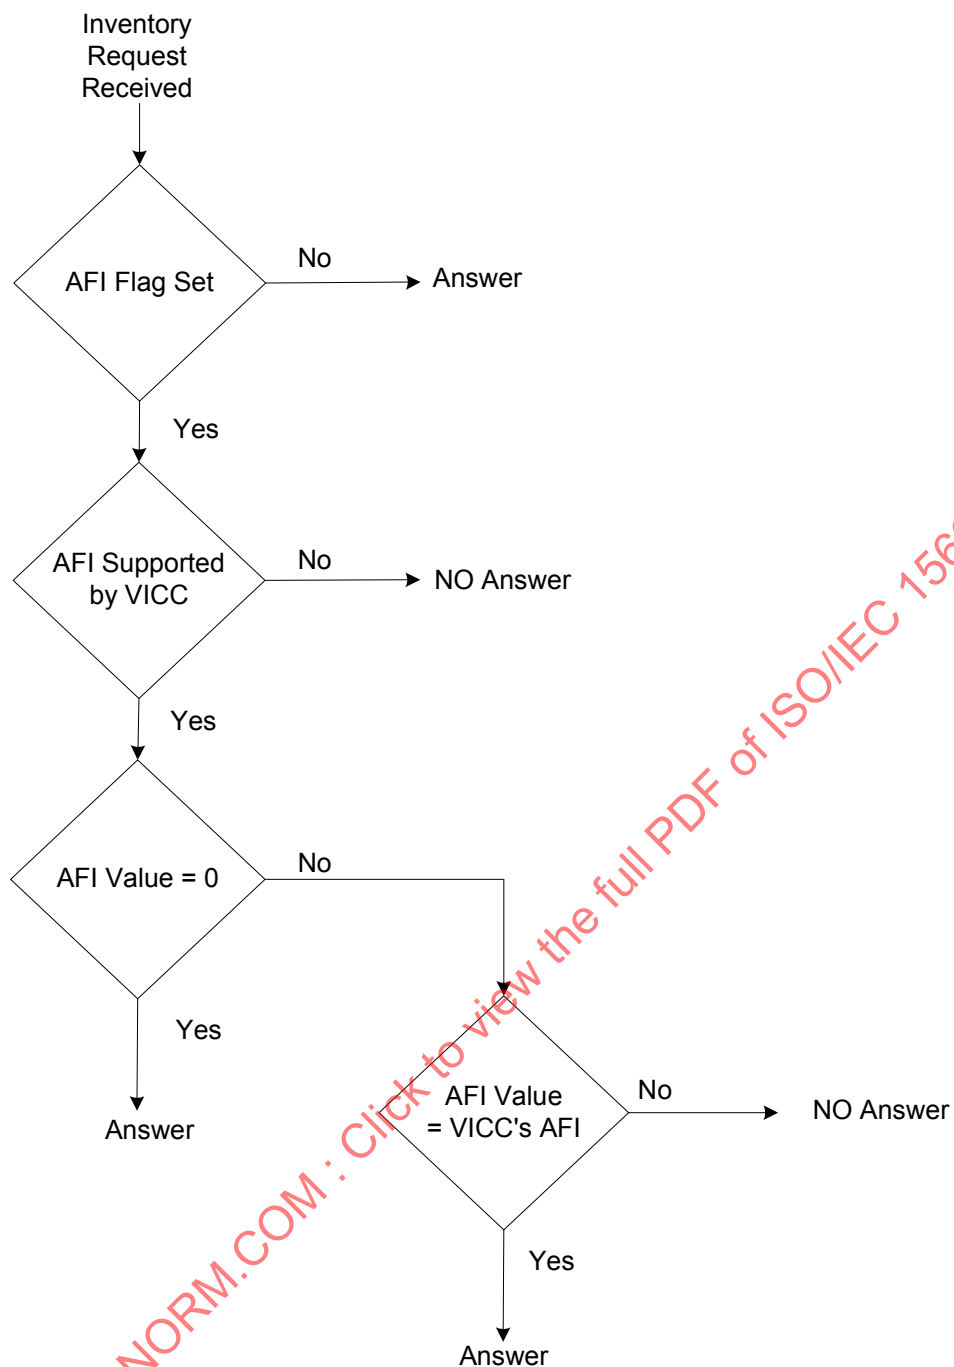

NOTE "Answer" means that the VICC shall answer to the Inventory request.

Figure 2 — VICC decision tree for AFI

4.3 Data storage format identifier (DSFID)

The Data storage format identifier indicates how the data is structured in the VICC memory.

It may be programmed and locked by the respective commands. It is coded on one byte. It allows for instant knowledge on the logical organisation of the data.

If its programming is not supported by the VICC, the VICC shall respond with the value zero ('00').

4.4 CRC

The CRC shall be calculated in accordance with ISO/IEC 13239.

The initial register content shall be all ones: 'FFFF'.

The two bytes CRC are appended to each request and each response, within each frame, before the EOF. The CRC is calculated on all the bytes after the SOF up to but not including the CRC field.

Upon reception of a request from the VCD, the VICC shall verify that the CRC value is valid. If it is invalid, it shall discard the frame and shall not answer (modulate).

Upon reception of a response from the VICC, it is recommended that the VCD verifies that the CRC value is valid. If it is invalid, actions to be performed are left to the responsibility of the VCD designer.

The CRC is transmitted least significant byte first.

Each byte is transmitted least significant bit first.

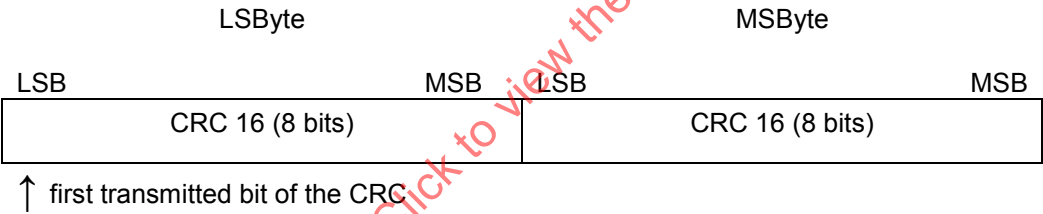


Figure 3 — CRC bits and bytes transmission rules

5 VICC memory organization

The commands specified in this part of ISO/IEC 15693 assume that the physical memory is organized in blocks (or pages) of fixed size.

- Up to 256 blocks can be addressed.
- Block size can be of up to 256 bits.
- This leads to a maximum memory capacity of up to 8 kBytes (64 kBits).

NOTE The structure allows for future extension of the maximum memory capacity.

The commands described in this part of ISO/IEC 15693 allow the access (read and write) by block(s). There is no implicit or explicit restriction regarding other access method (e.g. by byte or by logical object in future revision(s) of this part of ISO/IEC 15693 or in custom commands).

## 6 Block security status

The block security status is sent back by the VICC as a parameter in the response to a VCD request as specified in clause 10 (e.g. Read single block). It is coded on one byte.

It is an element of the protocol. There is no implicit or explicit assumption that the 8 bits are actually implemented in the physical memory structure of the VICC.

**Table 2 — Block security status**

| Bit      | Flag name | Value | Description |
|----------|-----------|-------|-------------|
| b1       | Lock_flag | 0     | Not locked  |
|          |           | 1     | Locked      |
| b2 to b8 | RFU       | 0     |             |

## 7 Overall protocol description

### 7.1 Protocol concept

The transmission protocol (or protocol) defines the mechanism to exchange instructions and data between the VCD and the VICC, in both directions.

It is based on the concept of "VCD talks first".

This means that any VICC shall not start transmitting (i.e. modulating according to ISO/IEC 15693-2) unless it has received and properly decoded an instruction sent by the VCD.

- a) the protocol is based on an exchange of
  - a request from the VCD to the VICC
  - a response from the VICC(s) to the VCD

The conditions under which the VICC sends a response are defined in clause 10.

- b) each request and each response are contained in a frame. The frame delimiters (SOF, EOF) are specified in ISO/IEC 15693-2.
- c) each request consists of the following fields:
  - Flags
  - Command code
  - Mandatory and optional parameters fields, depending on the command
  - Application data fields
  - CRC

d) each response consists of the following fields:

- Flags
- Mandatory and optional parameters fields, depending on the command
- Application data fields
- CRC

e) the protocol is bit-oriented. The number of bits transmitted in a frame is a multiple of eight (8), i.e. an integer number of bytes.

f) a single-byte field is transmitted least significant bit (LSBit) first.

g) a multiple-byte field is transmitted least significant byte (LSByte) first, each byte is transmitted least significant bit (LSB) first.

h) the setting of the flags indicates the presence of the optional fields. When the flag is set (to one), the field is present. When the flag is reset (to zero), the field is absent.

i) RFU flags shall be set to zero (0).

## 7.2 Modes

The term mode refers to the mechanism to specify in a request the set of VICC's that shall answer to the request.

### 7.2.1 Addressed mode

When the Address\_flag is set to 1 (addressed mode), the request shall contain the unique ID (UID) of the addressed VICC.

Any VICC receiving a request with the Address\_flag set to 1 shall compare the received unique ID (address) to its own ID.

If it matches, it shall execute it (if possible) and return a response to the VCD as specified by the command description.

If it does not match, it shall remain silent.

### 7.2.2 Non-addressed mode

When the Address\_flag is set to 0 (non-addressed mode), the request shall not contain a unique ID.

Any VICC receiving a request with the Address\_flag set to 0 shall execute it (if possible) and shall return a response to the VCD as specified by the command description.

### 7.2.3 Select mode

When the Select\_flag is set to 1 (select mode), the request shall not contain a VICC unique ID.

The VICC in the selected state receiving a request with the Select\_flag set to 1 shall execute it (if possible) and shall return a response to the VCD as specified by the command description.

Only the VICC in the selected state shall answer to a request having the select flag set to 1.

### 7.3 Request format

The request consists of the following fields:

- Flags
- Command code (see clause 10)
- Parameters and data fields
- CRC (see 4.4)

|     |       |              |            |      |     |     |
|-----|-------|--------------|------------|------|-----|-----|
| SOF | Flags | Command code | Parameters | Data | CRC | EOF |
|-----|-------|--------------|------------|------|-----|-----|

**Figure 4 — General request format**

#### 7.3.1 Request flags

In a request, the field "flags" specifies the actions to be performed by the VICC and whether corresponding fields are present or not.

It consists of eight bits.

**Table 3 — Request flags 1 to 4 definition**

| Bit | Flag name               | Value | Description                                              |
|-----|-------------------------|-------|----------------------------------------------------------|
| b1  | Sub-carrier_flag        | 0     | A single sub-carrier frequency shall be used by the VICC |
|     |                         | 1     | Two sub-carriers shall be used by the VICC               |
| b2  | Data_rate_flag          | 0     | Low data rate shall be used                              |
|     |                         | 1     | High data rate shall be used                             |
| b3  | Inventory_flag          | 0     | Flags 5 to 8 meaning is according to table 4             |
|     |                         | 1     | Flags 5 to 8 meaning is according to table 5             |
| b4  | Protocol Extension_flag | 0     | No protocol format extension                             |
|     |                         | 1     | Protocol format is extended. Reserved for future use     |

NOTE 1 Sub-carrier\_flag refers to the VICC-to-VCD communication as specified in ISO/IEC 15693-2.

NOTE 2 Data\_rate\_flag refers to the VICC-to-VCD communication as specified in ISO/IEC 15693-2.

**Table 4 — Request flags 5 to 8 definition when inventory flag is not set**

| Bit | Flag name    | Value | Description                                                                                                                                          |
|-----|--------------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| b5  | Select_flag  | 0     | Request shall be executed by any VICC according to the setting of Address_flag                                                                       |
|     |              | 1     | Request shall be executed only by VICC in selected state. The Address_flag shall be set to 0 and the UID field shall not be included in the request. |
| b6  | Address_flag | 0     | Request is not addressed. UID field is not included. It shall be executed by any VICC.                                                               |
|     |              | 1     | Request is addressed. UID field is included. It shall be executed only by the VICC whose UID matches the UID specified in the request.               |
| b7  | Option_flag  | 0     | Meaning is defined by the command description. It shall be set to 0 if not otherwise defined by the command.                                         |
|     |              | 1     | Meaning is defined by the command description.                                                                                                       |
| b8  | RFU          | 0     |                                                                                                                                                      |

**Table 5 — Request flags 5 to 8 definition when inventory flag is set**

| Bit | Flag name     | Value | Description                                                                                                  |
|-----|---------------|-------|--------------------------------------------------------------------------------------------------------------|
| b5  | AFI_flag      | 0     | AFI field is not present                                                                                     |
|     |               | 1     | AFI field is present                                                                                         |
| b6  | Nb_slots_flag | 0     | 16 slots                                                                                                     |
|     |               | 1     | 1 slot                                                                                                       |
| b7  | Option_flag   | 0     | Meaning is defined by the command description. It shall be set to 0 if not otherwise defined by the command. |
|     |               | 1     | Meaning is defined by the command description.                                                               |
| b8  | RFU           | 0     |                                                                                                              |

#### 7.4 Response format

The response consists of the following fields:

- Flags
- one or more parameter fields
- Data
- CRC (see 4.4)

|     |       |            |      |     |     |
|-----|-------|------------|------|-----|-----|
| SOF | Flags | Parameters | Data | CRC | EOF |
|-----|-------|------------|------|-----|-----|

**Figure 5 — General response format**



### 7.4.1 Response flags

In a response, it indicates how actions have been performed by the VICC and whether corresponding fields are present or not.

It consists of eight bits.

**Table 6 — Response flags 1 to 8 definition**

| Bit | Flag name      | Value | Description                                           |
|-----|----------------|-------|-------------------------------------------------------|
| b1  | Error_flag     | 0     | No error                                              |
|     |                | 1     | Error detected. Error code is in the "Error" field.   |
| b2  | RFU            | 0     |                                                       |
| b3  | RFU            | 0     |                                                       |
| b4  | Extension_flag | 0     | No protocol format extension.                         |
|     |                | 1     | Protocol format is extended. Reserved for future use. |
| b5  | RFU            | 0     |                                                       |
| b6  | RFU            | 0     |                                                       |
| b7  | RFU            | 0     |                                                       |
| b8  | RFU            | 0     |                                                       |

### 7.4.2 Response error code

When the Error\_flag is set by the VICC, the error code field shall be included and provides information about the error that occurred. Error codes are defined in table 7.

If the VICC does not support specific error code(s) listed in table 7, it shall answer with the error code '0F' ("Error with no information given").

**Table 7 — Response error code definition**

| Error code  | Meaning                                                                    |
|-------------|----------------------------------------------------------------------------|
| '01'        | The command is not supported, i.e. the request code is not recognized.     |
| '02'        | The command is not recognized, for example: a format error occurred.       |
| '03'        | The command option is not supported.                                       |
| '0F'        | Error with no information given or a specific error code is not supported. |
| '10'        | The specified block is not available (doesn't exist).                      |
| '11'        | The specified block is already locked and thus cannot be locked again.     |
| '12'        | The specified block is locked and its content cannot be changed.           |
| '13'        | The specified block was not successfully programmed.                       |
| '14'        | The specified block was not successfully locked.                           |
| 'A0' – 'DF' | Custom command error codes.                                                |
| all others  | RFU                                                                        |

## 7.5 VICC states

A VICC can be in one of the 4 following states:

- Power-off
- Ready
- Quiet
- Selected

The transition between these states is specified in figure 6.

The support of power-off, ready and quiet states is mandatory.

The support of selected state is optional.

### 7.5.1 Power-off state

The VICC is in the power-off state when it cannot be activated by the VCD.

### 7.5.2 Ready state


The VICC is in the Ready state when it is activated by the VCD. It shall process any request where the select flag is not set.

### 7.5.3 Quiet state

When in the quiet state, the VICC shall process any request where the Inventory\_flag is not set and where the Address\_flag is set.

### 7.5.4 Selected state

Only a VICC in the selected state shall process requests having the Select\_flag set.

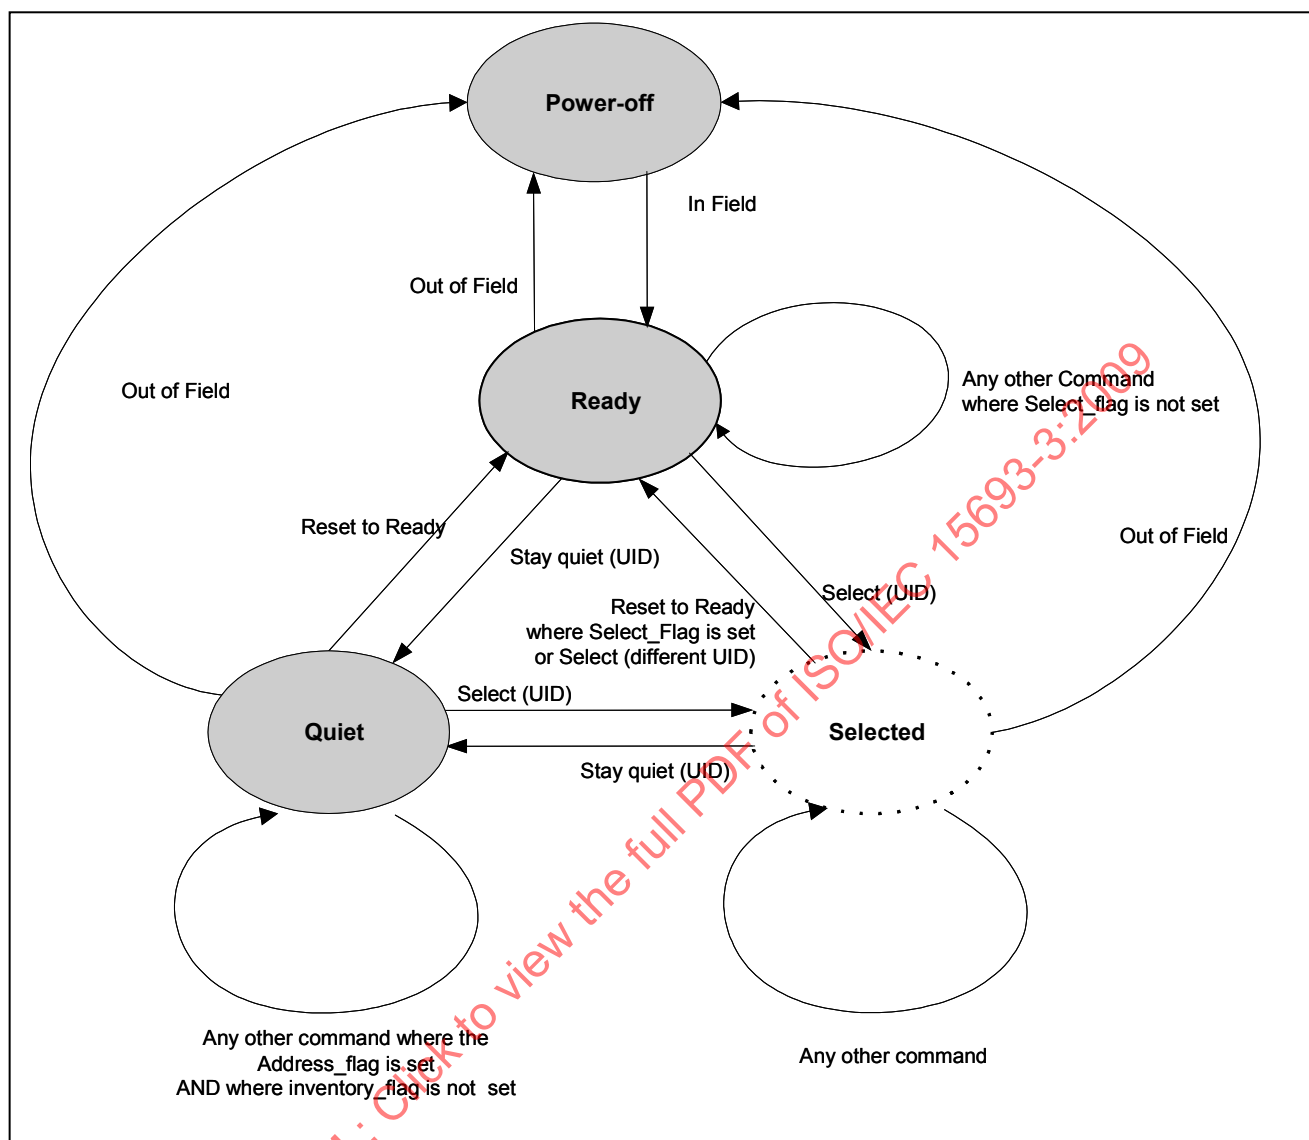

NOTE 1 The intention of the state transition method is that only one VICC should be in the Selected state at a time.

NOTE 2 The VICC state transition diagram shows only valid transitions. In all other cases the current VICC state remains unchanged. When the VICC cannot process a VCD request (e.g. CRC error, etc.), it shall stay in its current state.

NOTE 3 The Selected state is represented with a dotted line to show its support by the VICC is optional.

**Figure 6 — VICC state transition diagram**

## 8 Anticollision

The purpose of the anticollision sequence is to make an inventory of the VICCs present in the VCD field by their unique ID (UID).

The VCD is the master of the communication with one or multiple VICCs. It initiates card communication by issuing the inventory request.

The VICC shall send its response in the slot determined or shall not respond, according to the algorithm described in clause 8.2.

### 8.1 Request parameters

When issuing the inventory command, the VCD shall set the Nb\_slots\_flag to the desired setting and add after the command field the mask length and the mask value.

The mask length indicates the number of significant bits of the mask value. It can have any value between 0 and 60 when 16 slots are used and any value between 0 and 64 when 1 slot is used. LSB shall be transmitted first.

The mask value is contained in an integer number of bytes. LSB shall be transmitted first.

If the mask length is not a multiple of 8 (bits), the mask value MSB shall be padded with the required number of null (set to 0) bits so that the mask value is contained in an integer number of bytes.

The next field starts on the next byte boundary.

| SOF | Flags  | Command | Mask length | Mask value   | CRC16   | EOF |
|-----|--------|---------|-------------|--------------|---------|-----|
|     | 8 bits | 8 bits  | 8 bits      | 0 to 8 bytes | 16 bits |     |

**Figure 7 — Inventory request format**

| MSB  | LSB            |
|------|----------------|
| 0000 | 0100 1100 1111 |
| Pad  | Mask value     |

**Figure 8 — Example of the padding of the mask**

In the example of figure 8, the mask length is 12 bits. The mask value MSB is padded with four bits set to 0.

The AFI field shall be present if the AFI\_flag is set.

The pulse shall be generated according to the definition of the EOF in ISO/IEC 15693-2.

The first slot starts immediately after the reception of the request EOF.

To switch to the next slot, the VCD sends an EOF. The rules, restrictions and timing are specified in clause 9.

## 8.2 Request processing by the VICC

Upon reception of a valid request, the VICC shall process it by executing the operation sequence specified in the following text in italics. The step sequence is also graphically represented in figure 9.

*NbS is the total number of slots (1 or 16)*

*SN is the current slot number (0 to 15)*

*SN\_length is set to 0 when 1 slot is used and set to 4 when 16 slots are used*

*LSB (value, n) function returns the n less significant bits of value*

*"&" is the concatenation operator*

*Slot\_Frame is either a SOF or an EOF*

*SN= 0*

*if Nb\_slots\_flag then*

*NbS =1 SN\_length=0*

*else NbS = 16 SN\_length=4*

*endif*

*label1: if LSB(UID, SN\_length + Mask\_length) = LSB(SN, SN\_length)&LSB(Mask, Mask\_length) then*

*transmit response to inventory request*

*endif*

*wait (Slot\_Frame)*

*if Slot\_Frame= SOF then*

*Stop anticollision and decode/process request*

*exit*

*endif*

*if SN<NbS-1 then*


*SN = SN +1*

*goto label1*

*exit*

*endif*

*exit*

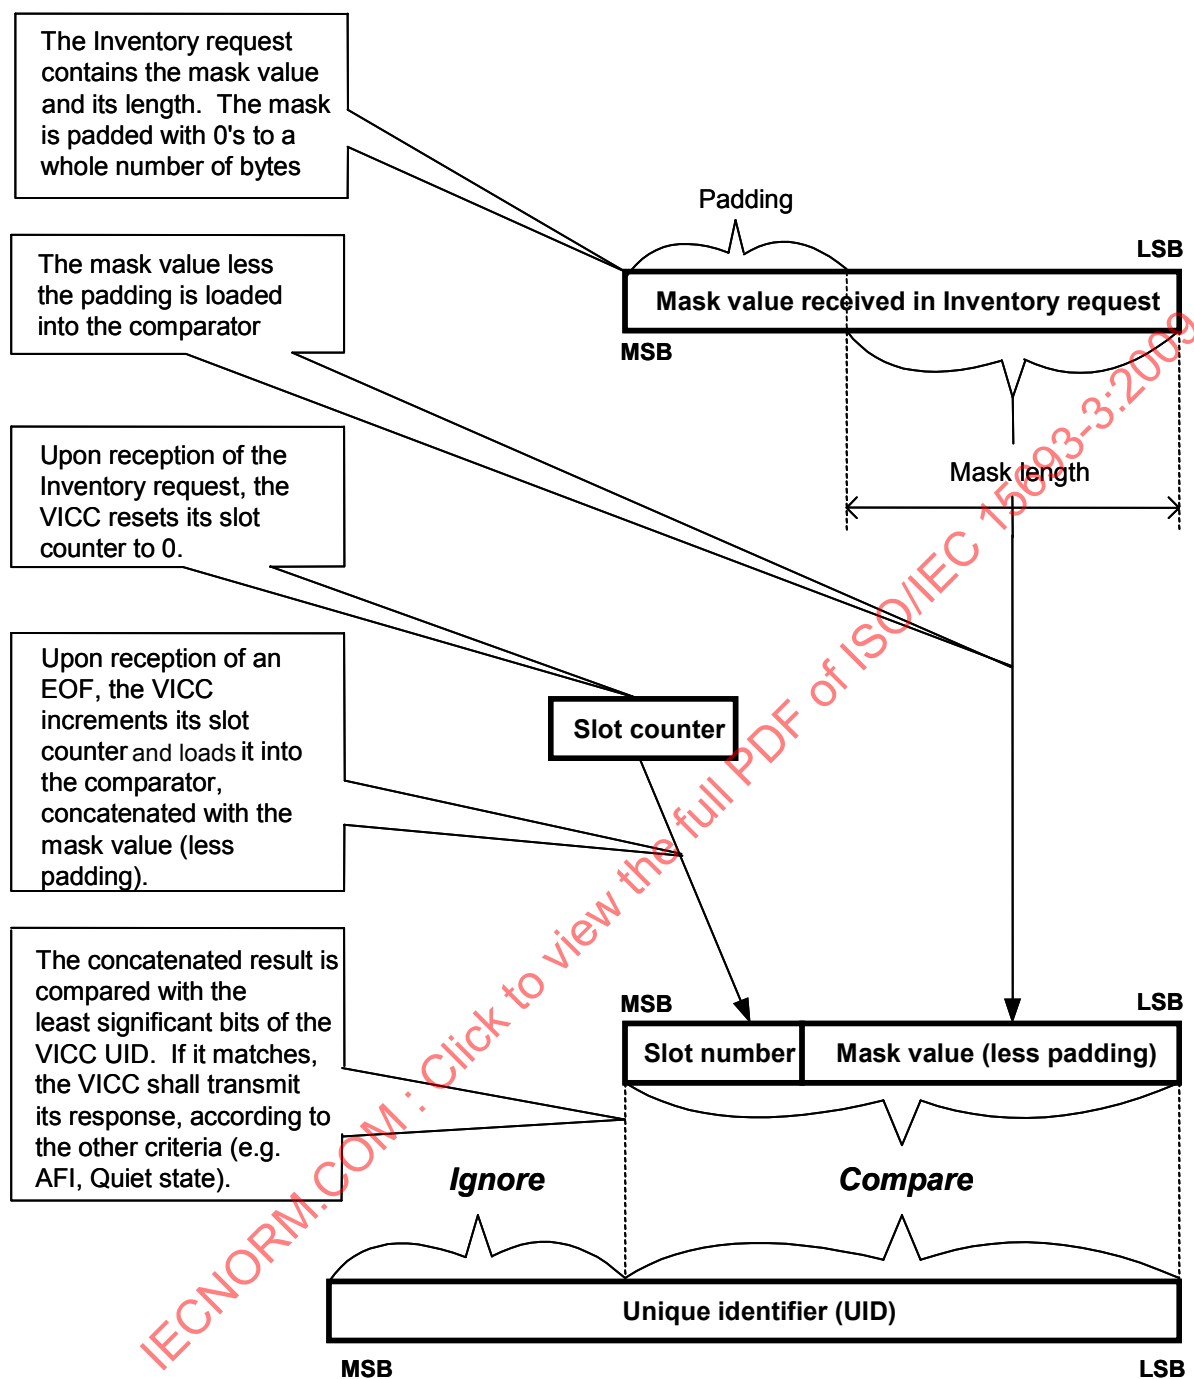

NOTE When the slot number is 1 (Nb\_slots\_flag is set to 1), the comparison is made only on the mask (without padding).

Figure 9 — Principle of comparison between the mask value, slot number and UID


### 8.3 Explanation of an anticollision sequence

Figure 10 summarises the main cases that can occur during a typical anticollision sequence where the number of slots is 16.

The different steps are:

- a) the VCD sends an inventory request, in a frame, terminated by a EOF. The number of slots is 16.
- b) VICC 1 transmits its response in slot 0. It is the only one to do so, therefore no collision occurs and its UID is received and registered by the VCD;
- c) the VCD sends an EOF, meaning to switch to the next slot.
- d) in slot 1, two VICCs 2 and 3 transmits their response, this generates a collision. The VCD detects it and remembers that a collision was detected in slot 1.
- e) the VCD sends an EOF, meaning to switch to the next slot.
- f) in slot 2, no VICC transmits a response. Therefore the VCD does not detect a VICC SOF and decides to switch to the next slot by sending a EOF.
- g) in slot 3, there is another collision caused by responses from VICC 4 and 5
- h) the VCD then decides to send an addressed request (for instance a Read Block) to VICC 1, which UID was already correctly received.
- i) all VICCs detect a SOF and exit the anticollision sequence. They process this request and since the request is addressed to VICC 1, only VICC1 transmit its response.
- j) all VICCs are ready to receive another request. If it is an inventory command, the slot numbering sequence restarts from 0.

**NOTE** The decision to interrupt the anticollision sequence is up to the VCD. It could have continued to send EOF's till slot 15 and then send the request to VICC 1.

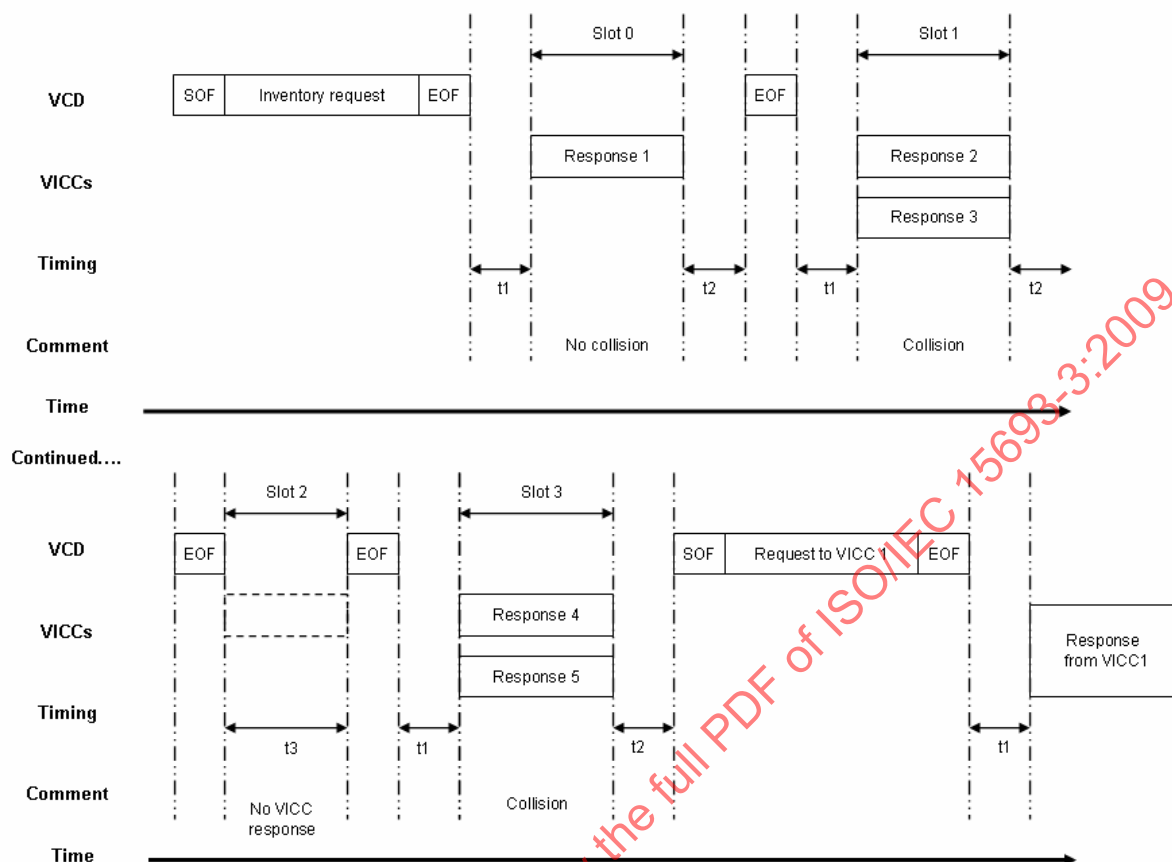

NOTE  $t_1$ ,  $t_2$  and  $t_3$  are specified in clause 9.

**Figure 10 — Description of a possible anticollision sequence**



## 9 Timing specifications

The VCD and the VICC shall comply with the following timing specifications.

### 9.1 VICC waiting time before transmitting its response after reception of an EOF from the VCD

When the VICC has detected an EOF of a valid VCD request or when this EOF is in the normal sequence of a valid VCD request, it shall wait for a time  $t_1$  before starting to transmit its response to a VCD request or before switching to the next slot when in an inventory process (see 8.2 and 8.3).

$t_1$  starts from the detection of the rising edge of the EOF received from the VCD (see ISO/IEC 15693-2).

NOTE The synchronisation on the rising edge of the VCD-to-VICC EOF is needed for ensuring the required synchronization of the VICC responses.

The minimum value of  $t_1$  is  $t_{1\min} = 4320/f_c$  (318,6  $\mu\text{s}$ )

The nominal value of  $t_1$  is  $t_{1\text{nom}} = 4352/f_c$  (320,9  $\mu\text{s}$ )

The maximum value of  $t_1$  is  $t_{1\max} = 4384/f_c$  (323,3  $\mu\text{s}$ )

$t_{1\max}$  does not apply for Write alike requests. Timing conditions for Write alike requests are defined in the command descriptions.

If the VICC detects a carrier modulation during this time  $t_1$ , it shall reset its  $t_1$  timer and wait for a further time  $t_1$  before starting to transmit its response to a VCD request or to switch to the next slot when in an inventory process.

### 9.2 VICC modulation ignore time after reception of an EOF from the VCD

When the VICC has detected an EOF of a valid VCD request or when this EOF is in the normal sequence of a valid VCD request, it shall ignore any received 10 % modulation during a time  $t_{\text{mit}}$ .

$t_{\text{mit}}$  starts from the detection of the rising edge EOF received from the VCD (see ISO/IEC 15693-2).

The minimum value of  $t_{\text{mit}}$  is  $t_{\text{mit}\min} = 4384/f_c$  (323,3  $\mu\text{s}$ ) +  $t_{\text{nrt}}$

Where

—  $t_{\text{nrt}}$  is the nominal response time of a VICC.

$t_{\text{nrt}}$  is dependent on the VICC-to-VCD data rate and subcarrier modulation mode (see ISO/IEC 15693-2).

NOTE The synchronisation on the rising edge of the VCD-to-VICC EOF is needed for ensuring the required synchronization of the VICC responses.

### 9.3 VCD waiting time before sending a subsequent request

- When the VCD has received a VICC response to a previous request other than Inventory and Quiet, it shall wait a time  $t_2$  before sending a subsequent request.  $t_2$  starts from the time the EOF has been received from the VICC.
- When the VCD has sent a Quiet request (which causes no VICC response), it shall wait a time  $t_2$  before sending a subsequent request.  $t_2$  starts from the end of the Quiet request EOF (rising edge of the EOF plus 9,44  $\mu\text{s}$ , see ISO/IEC 15693-2).

The minimum value of  $t_2$  is  $t_{2min} = 4192/f_c$  (309,2  $\mu$ s).

NOTE 1 This ensures that the VICCs are ready to receive this subsequent request (see ISO/IEC 15693-2).

NOTE 2 The VCD should wait at least 1 ms after it activated the powering field before sending the first request, to ensure that the VICCs are ready to receive it (see ISO/IEC 15693-2).

c) When the VCD has sent an Inventory request, it is in an inventory process. See 9.4.

#### 9.4 VCD waiting time before switching to the next slot during an inventory process

An inventory process is started when the VCD sends an Inventory request. (See 8.2, 8.3, 10.3.1),

To switch to the next slot, the VCD may send either a 10 % or a 100 % modulated EOF independent of the modulation index it used for transmitting its request to the VICC, after waiting a time specified in 9.3.a and 9.3.b.

##### 9.4.1 When the VCD has started to receive one or more VICC responses

During an inventory process, when the VCD has started to receive one or more VICC responses (i.e. it has detected a VICC SOF and/or a collision), it shall

- wait for the complete reception of the VICC responses (i.e. when a VICC EOF has been received or when the VICC nominal response time  $t_{nrt}$  has elapsed),
- wait an additional time  $t_2$
- and then send a 10 % or 100 % modulated EOF to switch to the next slot.

$t_2$  starts from the time the EOF has been received from the VICC (see ISO/IEC 15693-2).

The minimum value of  $t_2$  is  $t_{2min} = 4192/f_c$  (309,2  $\mu$ s).

$t_{nrt}$  is dependent on the VICC-to-VCD data rate and subcarrier modulation mode (see ISO/IEC 15693-2).

##### 9.4.2 When the VCD has received no VICC response

During an inventory process, when the VCD has received no VICC response, it shall wait a time  $t_3$  before sending a subsequent EOF to switch to the next slot.

$t_3$  starts from the time the VCD has generated the rising edge of the last sent EOF.

a) the VCD sends a 100 % modulated EOF,

the minimum value of  $t_3$  is  $t_{3min} = 4384/f_c$  (323,3  $\mu$ s) +  $t_{sof}$

b) If the VCD sends a 10 % modulated EOF,

the minimum value of  $t_3$  is  $t_{3min} = 4384/f_c$  (323,3  $\mu$ s) +  $t_{nrt}$  +  $t_{2min}$

where

- $t_{sof}$  is the time duration for a VICC to transmit an SOF to the VCD.
- $t_{nrt}$  is the nominal response time of a VICC.

$t_{nrt}$  and  $t_{sof}$  are dependent on the VICC-to-VCD data rate and subcarrier modulation mode (see ISO/IEC 15693-2).

## 10 Commands

### 10.1 Command types

Four sets of commands are defined: mandatory, optional, custom, proprietary.

All VICCs with the same IC manufacturer code and same IC version number shall behave the same.

#### 10.1.1 Mandatory

The command codes range from '01' to '1F'.

All VICCs shall support them.

#### 10.1.2 Optional

The command codes range from '20' to '9F'.

VICCs may support them, at their option. If supported, request and response formats shall comply with the definition given in this part of ISO/IEC 15693.

If the VICC does not support an optional command and if the Address\_flag or the Select\_flag is set, it may return an error code ("Not supported") or remain silent. If neither the Address\_flag nor the Select\_flag is set, the VICC shall remain silent.

If a command has different options they may be supported by the VICC otherwise an error code shall be returned.

#### 10.1.3 Custom

The command codes range from 'A0' to 'DF'.

VICCs support them, at their option, to implement manufacturer specific functions. The function of flags (including reserved bits) shall not be modified except the Option\_flag. The only fields that can be customized are the parameters and the data fields.

Any custom command contains as its first parameter the IC manufacturer code. This allows IC manufacturers to implement custom commands without risking duplication of command codes and thus misinterpretation.

If the VICC does not support a custom command and if the Address\_flag or the Select\_flag is set, it may return an error code ("Not supported") or remain silent. If neither the Address\_flag nor the Select\_flag is set, the VICC shall remain silent.

If a command has different options they may be supported by the VICC otherwise an error code shall be returned.

#### 10.1.4 Proprietary

The command codes range from 'E0' to 'FF'.

These commands are used by IC and VICC manufacturers for various purposes such as tests, programming of system information, etc. They are not specified in this part of ISO/IEC 15693. The IC manufacturer may at its option document them or not. It is allowed that these commands are disabled after IC and/or VICC manufacturing.

## 10.2 Command codes

Table 8 — Command codes

| Command code | Type        | Function                           |
|--------------|-------------|------------------------------------|
| '01'         | Mandatory   | Inventory                          |
| '02'         | Mandatory   | Stay quiet                         |
| '03' – '1F'  | Mandatory   | RFU                                |
| '20'         | Optional    | Read single block                  |
| '21'         | Optional    | Write single block                 |
| '22'         | Optional    | Lock block                         |
| '23'         | Optional    | Read multiple blocks               |
| '24'         | Optional    | Write multiple blocks              |
| '25'         | Optional    | Select                             |
| '26'         | Optional    | Reset to ready                     |
| '27'         | Optional    | Write AFI                          |
| '28'         | Optional    | Lock AFI                           |
| '29'         | Optional    | Write DSFID                        |
| '2A'         | Optional    | Lock DSFID                         |
| '2B'         | Optional    | Get system information             |
| '2C'         | Optional    | Get multiple block security status |
| '2D' – '9F'  | Optional    | RFU                                |
| 'A0' – 'DF'  | Custom      | IC Mfg dependent                   |
| 'E0' – 'FF'  | Proprietary | IC Mfg dependent                   |

## 10.3 Mandatory commands

### 10.3.1 Inventory

**Command code = '01'**

When receiving the Inventory request, the VICC shall perform the anticollision sequence.

The request contains:

- The flags,
- The Inventory command code
- The AFI if the AFI flag is set
- The mask length
- The mask value
- The CRC

The Inventory\_flag shall be set to 1.

The meaning of flags 5 to 8 is according to table 5.

| SOF | Flags  | Inventory | Optional AFI | Mask length | Mask value  | CRC16   | EOF |
|-----|--------|-----------|--------------|-------------|-------------|---------|-----|
|     | 8 bits | 8 bits    | 8 bits       | 8 bits      | 0 - 64 bits | 16 bits |     |

**Figure 11 — Inventory request format**

The response shall contain:

- The DSFID
- The unique ID

If the VICC detects an error, it shall remain silent.

| SOF | Flags  | DSFID  | UID     | CRC16   | EOF |
|-----|--------|--------|---------|---------|-----|
|     | 8 bits | 8 bits | 64 bits | 16 bits |     |

**Figure 12 — Inventory response format**

### 10.3.2 Stay quiet

**Command code = '02'**

When receiving the Stay quiet command, the VICC shall enter the quiet state and shall NOT send back a response. There is NO response to the Stay quiet command

When in quiet state:

- the VICC shall not process any request where Inventory\_flag is set,
- the VICC shall process any addressed request

The VICC shall exit the quiet state when:

- reset (power off),
- receiving a Select request. It shall then go to the selected state if supported or return an error if not supported,
- receiving a Reset to ready request. It shall then go to the Ready state.

| SOF | Flags  | Stay quiet | UID     | CRC16   | EOF |
|-----|--------|------------|---------|---------|-----|
|     | 8 bits | 8 bits     | 64 bits | 16 bits |     |

**Figure 13 — Stay quiet request format**

**Request parameter:**

UID (mandatory)

The Stay quiet command shall always be executed in Addressed mode (Select\_flag is set to 0 and Address\_flag is set to 1).

## 10.4 Optional commands

### 10.4.1 Read single block

Command code = '20'

When receiving the Read single block command, the VICC shall read the requested block and send back its value in the response.

If the Option\_flag is set in the request, the VICC shall return the block security status, followed by the block value.

If it is not set, the VICC shall return only the block value.

| SOF | Flags  | Read single block | UID     | Block number | CRC16   | EOF |
|-----|--------|-------------------|---------|--------------|---------|-----|
|     | 8 bits | 8 bits            | 64 bits | 8 bits       | 16 bits |     |

Figure 14 — Read single block request format

Request parameter:

(Optional) UID

Block number

| SOF | Flags  | Error code | CRC16   | EOF |
|-----|--------|------------|---------|-----|
|     | 8 bits | 8 bits     | 16 bits |     |

Figure 15 — Read single block response format when Error\_flag is set

| SOF | Flags  | Block security status | Data         | CRC16   | EOF |
|-----|--------|-----------------------|--------------|---------|-----|
|     | 8 bits | 8 bits                | Block length | 16 bits |     |

Figure 16 — Read single block response format when Error\_flag is NOT set

Response parameter:

Error\_flag (and Error code if Error\_flag is set)

if Error\_flag is not set

Block security status (if Option\_flag is set in the request)

Block data

### 10.4.2 Write single block

#### Command code = '21'

When receiving the Write single block command, the VICC shall write the requested block with the data contained in the request and report the success of the operation in the response.

If the Option\_flag is not set, the VICC shall return its response when it has completed the write operation starting after:

$t_{1nom}$   $[4352/f_c (320,9 \mu s), \text{ see 9.1.1}] + \text{a multiple of } 4096/f_c (302 \mu s)$  with a total tolerance of  $\pm 32/f_c$  and latest after 20 ms upon detection of the rising edge of the EOF of the VCD request.

If it is set, the VICC shall wait for the reception of an EOF from the VCD and upon such reception shall return its response.

|     |        |                    |         |              |              |         |     |
|-----|--------|--------------------|---------|--------------|--------------|---------|-----|
| SOF | Flags  | Write single block | UID     | Block number | Data         | CRC16   | EOF |
|     | 8 bits | 8 bits             | 64 bits | 8 bits       | Block length | 16 bits |     |

Figure 17 — Write single block request format

#### Request parameter:

(Optional) UID

Block number

Data

|     |        |            |         |     |
|-----|--------|------------|---------|-----|
| SOF | Flags  | Error code | CRC16   | EOF |
|     | 8 bits | 8 bits     | 16 bits |     |

Figure 18 — Write single block response format when Error\_flag is set

|     |        |         |     |
|-----|--------|---------|-----|
| SOF | Flags  | CRC16   | EOF |
|     | 8 bits | 16 bits |     |

Figure 19 — Write single block response format when Error\_flag is NOT set

#### Response parameter:

Error\_flag (and Error code if Error\_flag is set)

### 10.4.3 Lock block

#### Command code = '22'

When receiving the Lock block command, the VICC shall lock permanently the requested block.

If the Option\_flag is not set, the VICC shall return its response when it has completed the lock operation starting after:

$t_{1nom} [4352/f_c (320,9 \mu s), \text{ see 9.1.1}] + \text{a multiple of } 4096/f_c (302 \mu s) \text{ with a total tolerance of } \pm 32/f_c \text{ and latest after 20 ms upon detection of the rising edge of the EOF of the VCD request.}$

If it is set, the VICC shall wait for the reception of an EOF from the VCD and upon such reception shall return its response.

| SOF | Flags  | Lock block | UID     | Block number | CRC16   | EOF |
|-----|--------|------------|---------|--------------|---------|-----|
|     | 8 bits | 8 bits     | 64 bits | 8 bits       | 16 bits |     |

Figure 20 — Lock single block request format

#### Request parameter:

(Optional) UID

Block number

| SOF | Flags  | Error code | CRC16   | EOF |
|-----|--------|------------|---------|-----|
|     | 8 bits | 8 bits     | 16 bits |     |

Figure 21 — Lock block response format Error\_flag is set

| SOF | Flags  | CRC16   | EOF |
|-----|--------|---------|-----|
|     | 8 bits | 16 bits |     |

Figure 22 — Lock block response format when Error\_flag is NOT set

#### Response parameter:

Error\_flag (and Error code if Error\_flag is set)

### 10.4.4 Read multiple blocks

#### Command code = '23'

When receiving the Read multiple blocks command, the VICC shall read the requested block(s) and send back their value in the response.

If the Option\_flag is set in the request, the VICC shall return the block security status, followed by the block value sequentially block by block.

If the Option\_flag is not set in the request, the VICC shall return only the block value.



The blocks are numbered from '00' to 'FF' (0 to 255).

The number of blocks in the request is one less than the number of blocks that the VICC shall return in its response.

EXAMPLE A value of '06' in the "Number of blocks" field requests to read 7 blocks. A value of '00' requests to read a single block.

| SOF | Flags  | Read multiple block | UID     | First block number | Number of blocks | CRC16   | EOF |
|-----|--------|---------------------|---------|--------------------|------------------|---------|-----|
|     | 8 bits | 8 bits              | 64 bits | 8 bits             | 8 bits           | 16 bits |     |

Figure 23 — Read multiple blocks request format

**Request parameter:**

(Optional) UID

First block number

Number of blocks

| SOF | Flags  | Error code | CRC16   | EOF |
|-----|--------|------------|---------|-----|
|     | 8 bits | 8 bits     | 16 bits |     |

Figure 24 — Read multiple blocks response format when Error\_flag is set

| SOF                | Flags  | Block security status | Data         | CRC16   | EOF |
|--------------------|--------|-----------------------|--------------|---------|-----|
|                    | 8 bits | 8 bits                | Block length | 16 bits |     |
| Repeated as needed |        |                       |              |         |     |

Figure 25 — Read multiple block response format when Error\_flag is NOT set

**Response parameter:**

Error\_flag (and Error code if Error\_flag is set)

if Error\_flag is not set (the following order shall be respected in the VICC response)

Block security status N (if Option\_flag is set in the request)

Block value N

Block security status N+1 (if Option\_flag is set in the request)

Block value N+1

etc.

where N is the first requested (and returned) block.

#### 10.4.5 Write multiple blocks

##### Command code = '24'

When receiving the Write multiple blocks command, the VICC shall write the requested block(s) with the data contained in the request and report the success of the operation in the response.

If the Option\_flag is not set, the VICC shall return its response when it has completed the write operation starting after:

$t_{1nom} [4352/f_c (320,9 \mu s), \text{ see 9.1.1}] + \text{a multiple of } 4096/f_c (302 \mu s) \text{ with a total tolerance of } \pm 32/f_c \text{ and latest after 20 ms upon detection of the rising edge of the EOF of the VCD request.}$

If it is set, the VICC shall wait for the reception of an EOF from the VCD and upon such reception shall return its response.

The blocks are numbered from '00' to 'FF' (0 to 255).

The number of blocks in the request is one less than the number of blocks that the VICC shall write.

EXAMPLE A value of '06' in the "Number of blocks" field requests to write 7 blocks. The "Data" field shall contain 7 blocks. A value of '00' in the "Number of blocks" field requests to write 1 block. The "Data" field shall contain 1 block.

| SOF | Flags  | Write multiple block | UID     | First block number | Number of blocks | Data               | CRC16   | EOF |
|-----|--------|----------------------|---------|--------------------|------------------|--------------------|---------|-----|
|     | 8 bits | 8 bits               | 64 bits | 8 bits             | 8 bits           | Block length       | 16 bits |     |
|     |        |                      |         |                    |                  | Repeated as needed |         |     |

Figure 26 — Write multiple blocks request format

##### Request parameter:

(Optional) UID

First block number

Number of blocks

Block data (repeated as defined in figure 26)

| SOF | Flags  | Error code | CRC16   | EOF |
|-----|--------|------------|---------|-----|
|     | 8 bits | 8 bits     | 16 bits |     |

Figure 27 — Write multiple blocks response format when Error\_flag is set

| SOF | Flags  | CRC16   | EOF |
|-----|--------|---------|-----|
|     | 8 bits | 16 bits |     |

Figure 28 — Write multiple block response format when Error\_flag is NOT set

##### Response parameter:

Error\_flag (and Error code if Error\_flag is set)

#### 10.4.6 Select

**Command code = '25'**

When receiving the Select command:

- if the UID is equal to its own UID, the VICC shall enter the selected state and shall send a response.
- if the UID is different to its own and in selected state, the VICC shall return to the Ready state and shall not send a response. The Select command shall always be executed in Addressed mode. (The Select\_flag is set to 0. The Address\_flag is set to 1.)
- if the UID is different to its own and not in selected state, the VICC shall remain in its state and shall not send a response.

| SOF | Flags  | Select | UID     | CRC16   | EOF |
|-----|--------|--------|---------|---------|-----|
|     | 8 bits | 8 bits | 64 bits | 16 bits |     |

**Figure 29 — Select request format**

**Request parameter:**

UID (mandatory)

| SOF | Flags  | Error code | CRC16   | EOF |
|-----|--------|------------|---------|-----|
|     | 8 bits | 8 bits     | 16 bits |     |

**Figure 30 — Select response format when Error\_flag is set**

| SOF | Flags  | CRC16   | EOF |
|-----|--------|---------|-----|
|     | 8 bits | 16 bits |     |

**Figure 31 — Select response format when Error\_flag is NOT set**

**Response parameter:**

Error\_flag (and Error code if Error\_flag is set)

#### 10.4.7 Reset to ready

**Command code = '26'**

When receiving a Reset to ready command, the VICC shall return to the Ready state.

| SOF | Flags  | Reset to ready | UID     | CRC16   | EOF |
|-----|--------|----------------|---------|---------|-----|
|     | 8 bits | 8 bits         | 64 bits | 16 bits |     |

**Figure 32 — Reset to ready request format**

**Request parameter:**

(Optional) UID

| SOF | Flags  | Error code | CRC16   | EOF |
|-----|--------|------------|---------|-----|
|     | 8 bits | 8 bits     | 16 bits |     |

Figure 33 — Reset to ready response format when Error\_flag is set

| SOF | Flags  | CRC16   | EOF |
|-----|--------|---------|-----|
|     | 8 bits | 16 bits |     |

Figure 34 — Reset to ready response format when Error\_flag is NOT set

**Response parameter:**

Error\_flag (and Error code if Error\_flag is set)

**10.4.8 Write AFI****Command code = '27'**

When receiving the Write AFI request, the VICC shall write the AFI value into its memory.

If the Option\_flag is not set, the VICC shall return its response when it has completed the write operation starting after:

$t_{1nom} [4352/f_c (320,9 \mu s), \text{ see 9.1.1}] + \text{a multiple of } 4096/f_c (302 \mu s) \text{ with a total tolerance of } \pm 32/f_c \text{ and latest after 20 ms upon detection of the rising edge of the EOF of the VCD request.}$

If it is set, the VICC shall wait for the reception of an EOF from the VCD and upon such reception shall return its response.

| SOF | Flags  | Write AFI | UID     | AFI    | CRC16   | EOF |
|-----|--------|-----------|---------|--------|---------|-----|
|     | 8 bits | 8 bits    | 64 bits | 8 bits | 16 bits |     |

Figure 35 — Write AFI request format

**Request parameter:**

(Optional) UID

AFI

| SOF | Flags  | Error code | CRC16   | EOF |
|-----|--------|------------|---------|-----|
|     | 8 bits | 8 bits     | 16 bits |     |

Figure 36 — Write AFI response format when Error\_flag is set

|     |        |         |     |
|-----|--------|---------|-----|
| SOF | Flags  | CRC16   | EOF |
|     | 8 bits | 16 bits |     |

Figure 37 — Write AFI response format when Error\_flag is NOT set

**Response parameter:**

Error\_flag (and Error code if Error\_flag is set)

**10.4.9 Lock AFI****Command code = '28'**

When receiving the Lock AFI request, the VICC shall lock the AFI value permanently into its memory.

If the Option\_flag is not set, the VICC shall return its response when it has completed the lock operation starting after:

$t_{1nom} [4352/f_c (320,9 \mu s), \text{ see 9.1.1}] + \text{a multiple of } 4096/f_c (302 \mu s) \text{ with a total tolerance of } \pm 32/f_c \text{ and latest after 20 ms upon detection of the rising edge of the EOF of the VCD request.}$

If it is set, the VICC shall wait for the reception of an EOF from the VCD and upon such reception shall return its response.

|     |        |          |         |         |     |
|-----|--------|----------|---------|---------|-----|
| SOF | Flags  | Lock AFI | UID     | CRC16   | EOF |
|     | 8 bits | 8 bits   | 64 bits | 16 bits |     |

Figure 38 — Lock AFI request format

**Request parameter:**

(Optional) UID

|     |        |            |         |     |
|-----|--------|------------|---------|-----|
| SOF | Flags  | Error code | CRC16   | EOF |
|     | 8 bits | 8 bits     | 16 bits |     |

Figure 39 — Lock AFI response format when Error\_flag is set

|     |        |         |     |
|-----|--------|---------|-----|
| SOF | Flags  | CRC16   | EOF |
|     | 8 bits | 16 bits |     |

Figure 40 — Lock AFI response format when Error\_flag is NOT set

**Response parameter:**

Error\_flag (and Error code if Error\_flag is set)

#### 10.4.10 Write DSFID command

Command code = '29'

When receiving the Write DSFID request, the VICC shall write the DSFID value into its memory.

If the Option\_flag is not set, the VICC shall return its response when it has completed the write operation starting after:

$t_{1nom} [4352/f_c (320,9 \mu s), \text{ see 9.1.1}] + \text{a multiple of } 4096/f_c (302 \mu s) \text{ with a total tolerance of } \pm 32/f_c \text{ and latest after 20 ms upon detection of the rising edge of the EOF of the VCD request.}$

If it is set, the VICC shall wait for the reception of an EOF from the VCD and upon such reception shall return its response.

| SOF | Flags  | Write DSFID | UID     | DSFID  | CRC16   | EOF |
|-----|--------|-------------|---------|--------|---------|-----|
|     | 8 bits | 8 bits      | 64 bits | 8 bits | 16 bits |     |

Figure 41 — Write DSFID request format

Request parameter:

(Optional) UID

DSFID

| SOF | Flags  | Error code | CRC16   | EOF |
|-----|--------|------------|---------|-----|
|     | 8 bits | 8 bits     | 16 bits |     |

Figure 42 — Write DSFID response format when Error\_flag is set

| SOF | Flags  | CRC16   | EOF |
|-----|--------|---------|-----|
|     | 8 bits | 16 bits |     |

Figure 43 — Write DSFID response format when Error\_flag is NOT set

Response parameter:

Error\_flag (and Error code if Error\_flag is set)

#### 10.4.11 Lock DSFID

Command code = '2A'

When receiving the Lock DSFID request, the VICC shall lock the DSFID value permanently into its memory.

If the Option\_flag is not set, the VICC shall return its response when it has completed the lock operation starting after:

$t_{1nom} [4352/f_c (320,9 \mu s), \text{ see 9.1.1}] + \text{a multiple of } 4096/f_c (302 \mu s) \text{ with a total tolerance of } \pm 32/f_c \text{ and latest after 20 ms upon detection of the rising edge of the EOF of the VCD request.}$

If it is set, the VICC shall wait for the reception of an EOF from the VCD and upon such reception shall return its response.

|     |        |            |                |         |     |
|-----|--------|------------|----------------|---------|-----|
| SOF | Flags  | Lock DSFID | <b>UID</b>     | CRC16   | EOF |
|     | 8 bits | 8 bits     | <b>64 bits</b> | 16 bits |     |

Figure 44 — Lock DSFID request format

**Request parameter:**

(Optional) UID

|     |        |            |         |     |
|-----|--------|------------|---------|-----|
| SOF | Flags  | Error code | CRC16   | EOF |
|     | 8 bits | 8 bits     | 16 bits |     |

Figure 45 — Lock DSFID response format when Error\_flag is set

|     |        |         |     |
|-----|--------|---------|-----|
| SOF | Flags  | CRC16   | EOF |
|     | 8 bits | 16 bits |     |

Figure 46 — Lock DSFID response format when Error\_flag is NOT set

**Response parameter:**

Error\_flag (and Error code if Error\_flag is set)

#### 10.4.12 Get system information

**Command code = '2B'**

This command allows for retrieving the system information value from the VICC.

|     |        |                 |                |         |     |
|-----|--------|-----------------|----------------|---------|-----|
| SOF | Flags  | Get system info | <b>UID</b>     | CRC16   | EOF |
|     | 8 bits | 8 bits          | <b>64 bits</b> | 16 bits |     |

Figure 47 — Get system information request format

**Request parameter:**

(Optional) UID

|     |        |            |         |     |
|-----|--------|------------|---------|-----|
| SOF | Flags  | Error code | CRC16   | EOF |
|     | 8 bits | 8 bits     | 16 bits |     |

Figure 48 — Get system information response when Error\_flag is set

| SOF | Flags  | Info flags | UID     | DSFID  | AFI    | Other fields | CRC16   | EOF |
|-----|--------|------------|---------|--------|--------|--------------|---------|-----|
|     | 8 bits | 8 bits     | 64 bits | 8 bits | 8 bits | See below    | 16 bits |     |

Figure 49 — Get system information response format when Error\_flag is NOT set

**Response parameter:**

Error\_flag (and Error code if Error\_flag is set)

if Error\_flag is not set

Information flag

UID (mandatory)

Information fields, in the order of their corresponding flag, as defined in figure 49 and table 9, if their corresponding flag is set.

Table 9 — Information flags definition

| Bit | Flag name        | Value | Description                                                                         |
|-----|------------------|-------|-------------------------------------------------------------------------------------|
| b1  | DSFID            | 0     | DSFID is not supported. DSFID field is not present                                  |
|     |                  | 1     | DSFID is supported. DSFID field is present                                          |
| b2  | AFI              | 0     | AFI is not supported. AFI field is not present                                      |
|     |                  | 1     | AFI is supported. AFI field is present                                              |
| b3  | VICC memory size | 0     | Information on VICC memory size is not supported. Memory size field is not present. |
|     |                  | 1     | Information on VICC memory size is supported. Memory size field is present.         |
| b4  | IC reference     | 0     | Information on IC reference is not supported. IC reference field is not present.    |
|     |                  | 1     | Information on IC reference is supported. IC reference field is present.            |
| b5  | RFU              | 0     |                                                                                     |
| b6  | RFU              | 0     |                                                                                     |
| b7  | RFU              | 0     |                                                                                     |
| b8  | RFU              | 0     |                                                                                     |

Table 10 — VICC memory size information

| MSB |    |                     |   | LSB              |   |
|-----|----|---------------------|---|------------------|---|
| 16  | 14 | 13                  | 9 | 8                | 1 |
| RFU |    | Block size in bytes |   | Number of blocks |   |