

INTERNATIONAL STANDARD

**ISO
1007**

Second edition
1995-11-01

Photography — 135-size film and magazine — Specifications

Photographie — Film et cartouche de format 135 — Spécifications



Reference number
ISO 1007:1995(E)

Contents

	Page
1 Scope	1
2 Normative references	1
3 Conditions for measurement of dimensions	1
4 Film and perforating dimensions	2
5 Latent-image frame numbering	2
6 Latent-image digital bar-codes	2
7 Magazine dimensions	4
8 Magazine bar-code requirements	4
9 Camera auto-sensing (CAS) areas	5
10 Information panel	6
11 Film pull-out force	6
12 Film-spool attachment strength	6

Annexes

A Methods for measurement of key characteristics of 135-size film magazines and film	25
B Historical dimensions used to design magazines and cameras	29
C Assignment of combination code numbers	30

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 1007 was prepared by Technical Committee ISO/TC 42, *Photography*.

This second edition cancels and replaces the first edition (ISO 1007:1979), which has been technically revised as explained below.

This edition of ISO 1007 includes the following significant additions and changes.

- a) Addition of product features which are now referred to as "DX":
 - a latent-image digital bar-code, which can be used by photofinishers to optimize colour printing of developed colour negative films; to include optional frame number bar-code systems;
 - specifications for a bar-code on the magazine; this feature facilitates the photofinisher's presort operations by identifying the product and the number of exposures contained within the magazine;
 - specifications for an electrically readable binary code on the magazine (CAS code) to encode speed, number of exposures and exposure latitude;
 - specifications for an information panel on the magazine. The photographer can read the panel through a window on the camera, thereby identifying the camera's contents.
- b) The manner of describing magazine dimensions has been reworked completely to a series of references from datum planes. A number of new dimensions have been added.

- c) The film dimensions have also been referenced to a magazine datum plane:
 - a new dimension, Y_7 , has been added to figure 1; this specifies the amount of film extending from the magazine when the film is in its initial position;
 - several new dimensions define corner-rounding requirements for the tip of the tongue;
 - all dimensions are in millimetres only. Both inch references and “number of perforation pitches” have been removed.
- d) The specification for film pull-out force has been improved.
- e) A new specification for film-spool attachment strength has been added.
- f) The informative annexes have been expanded and improved.

Annexes A, B and C of this International Standard are for information only.

STANDARDSISO.COM : Click to view the full PDF of ISO 1007:1995

Photography — 135-size film and magazine — Specifications

1 Scope

This International Standard specifies the following.

- a) Dimensions of four standard film lengths normally supplied. The film lengths provide, respectively, a nominal number of twelve, twenty, twenty-four or thirty-six 24 mm × 36 mm full-frame exposures or twenty-four, forty, forty-eight or seventy-two 18 mm × 24 mm half-frame exposures.
- b) Latent-image frame numbering.
- c) Latent-image digital bar-codes to identify the film product class and the individual film product, in the case of colour negative films.
- d) Dimensions of daylight-loading film magazines for use in 35-mm still-picture cameras.
- e) Magazine bar-codes to identify the film product and the nominal number of exposures in the roll.
- f) Camera autosensing areas, which provide an electrically readable encodement of ISO speed, number of exposures and recommended exposure latitude setting for appropriately designed cameras.
- g) Information panel on which the film identification, ISO speed and number of exposures are visible through a window in the back of the camera.
- h) Film pull-out force specification.
- i) Film-spool attachment strength specification.

This International Standard is not intended to apply to "bulk" 35-mm film for reloading into 135-magazines nor to the reloadable magazines themselves.

NOTE 1 It is not intended in this International Standard to specify the actual location of photographic images on film.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 1:1975, *Standard reference temperature for industrial length measurements*.

ISO 554:1976, *Standard atmospheres for conditioning and/or testing — Specifications*.

ISO 897:1988, *Photography — Roll films, 126, 110 and 135 size films — Identification of the image-bearing side*.

3 Conditions for measurement of dimensions

The dimensions and tolerances specified in this International Standard apply at the time of manufacture (except where specifically stated otherwise),

measured under atmospheric conditions of $(23 \pm 2) ^\circ\text{C}$ and $(50 \pm 5) \%$ relative humidity, as specified in ISO 554¹⁾.

4 Film and perforating dimensions

4.1 Film dimensions

The film shall conform to the dimensions shown in figure 1 and given in table 1 as well as figure 2 and table 2.

4.1.1 Leader

The leader length dimension ($Y_1 + Y_4$) is that part of the film that precedes full-frame number 1 and includes the tongue. It is used for threading the camera and protecting the picture area from unintentional exposure. The film manufacturer may utilize the portion of the leader extending from the magazine for identification purposes, provided that the identification technique causes no functional problems.

4.1.2 Tongue

The tongue is the narrow part of the leader, dimension Y_5 in width and dimension Y_4 in length, shaped to facilitate threading the camera. The profile at the corners of the extreme end of the film tongue shall be rounded within the limits shown in figure 1 b) and given in table 1. The corners shall have no stepped or sharp features. The cut across the end of the tongue shall not have steps that exceed 1,27 mm.

4.1.3 Trailer

The trailer, dimension Y_3 in length, is that part of the film that extends from the last full-frame number to the B datum plane when the film has been pulled out as far as possible from the magazine. The trailer shall be composed entirely of full-width film to assure proper rewinding into the magazine.

4.1.4 Width and perforating dimensions

The film width and perforations shall conform to the dimensions shown in figure 2 and given in table 2.

5 Latent-image frame numbering

Two sets of frame-number sequences, together with their location and orientation, are shown in figure 1 c).

1) All measuring instrument calibrations should be referred to a temperature of $20 ^\circ\text{C}$ (as specified in ISO 1) and a relative humidity of 50 %.

The first set shall be provided on the edge nearest to the C datum plane (see figure 4). It shall be numbered in a half-frame series (1, 1A, 2, 2A, ..., 36, 36A), which increases in sequence from 1 to 12A (or 20A, 24A, 36A) interspersed at four-perforation intervals. A second set may be provided on the edge opposite the first set. If provided, it may be numbered either in a full-frame series (1, 2, ..., 36) which increases in sequence from 1 to 12 (or 20, 24, 36) at intervals of eight perforations or, if provided as part of the optional single-track latent-image frame number bar-code (see 6.2), it may be numbered in a half-frame series (1, 1A, 2, 2A, ..., etc.).

The image-bearing side of colour negative films shall be designated by an arrow, placed adjacent to each half-frame character (1A, 2A, 3A, etc.) and shall be oriented as shown in figure 1 c) in accordance with ISO 897. Use of the arrow for other than colour negative films is preferred, but not required.

Portions of the leader, the trailer, or both may be identified at full-frame or half-frame intervals, or both, at the manufacturer's discretion.

The numerals shall read correctly from the non-image-bearing side.

The position of the frame number is defined as the centre of each full-frame or half-frame identification (1, 1A, 2, 2A, etc.).

6 Latent-image digital bar-codes

A 23-bit, dual-track, latent-image bar-code, which identifies the manufacturer/film type, shall be located on the edge nearest the C datum plane adjacent to each full-frame and half-frame number on films designed for colour negative processing. After the film has been processed, the bar-code is visible. When processed film is used with an appropriate film code reader and an automatic printer, colour printing can be optimized for each specific film so identified.

Frame-number information may also be incorporated in different ways. One method is to expand the basic 23-bit, dual-track latent-image code by adding eight more bits for frame-number information. Another method would be to print a 13-bit single-track, modified 3-of-9 latent-image code on the film edge opposite the 23-bit (or expanded 31-bit) dual-track code.

Use of latent-image bar-codes on films other than colour negative films is optional.

The latent-image bar codes shall have the locations and the dimensions shown in figure 1, c) to h).

6.1 Dual-track latent-image bar-code

The dual-track bar-code consists of adjacent data and clock tracks, each with 23 equal-width bar elements (31 in the expanded code). Each bar element represents a digital binary bit, with exposed bars representing a 1 bit and unexposed bars representing a 0 (zero) bit.

6.1.1 Description of data track

6.1.1.1 Entry pattern

The 6-bit entry pattern is used by a bar-code reader to detect the beginning of a code sequence.

6.1.1.2 Identification array for film-product-class

This 7-bit array shall encode the specific combination code number specified in table 3 that has been assigned to the film-product-class under the procedure described in annex C. Any *individual* location assigned as part of the combination code number shall represent an exposed bar. A dash (—) in table 3 represents an unexposed bar. A manufacturer may use a single combination code number to identify several individual film products which may be developed in the same photographic process.

For convenience in referencing, the 128 possible combinations of the film-product-class array are systematically arranged in an ascending binary sequence in table 3. Bar position number 1 is part of the entry pattern and always remains unexposed. In the binary sequence, an exposed bar represents a 1-bit, with bar position number 2 representing the most significant bit, and bar position number 8 representing the least significant bit. Bar position number 1, since it is always unexposed, is not included in the binary bit string.

6.1.1.3 Unassigned bit

This unassigned bit shall be an unexposed bar.

6.1.1.4 Identification array for film specifier

This 4-bit array shall encode the specific combination code number in table 4 that has been assigned to the product under the procedure described in annex C. Any *individual* location assigned as part of the combination code number shall represent an exposed bar. A dash (—) in table 4 represents an unexposed bar.

The 16 possible combinations of the specifier array are coded as a 4-bit binary number, with bar position number 9 representing the most significant bit, and bar position number 12 representing the least significant bit.

The film-product-class array may be used independently, without employing the specifier array. The specifier array codes, however, shall not be used unless accompanied by the film-product-class array, because this could cause bar-code readers to misinterpret the array. Therefore, a specifier combination code number will not be assigned unless the manufacturer has already obtained an appropriate film-product-class code number for the film.

CAUTION — It is possible that the same specifier array may be combined with different film-product-class arrays to represent film products of different manufacturers. Therefore, it is the **combination** of the two arrays that is unique to any given product.

6.1.1.5 Identification array for frame number

This optional 7-bit array may be added to encode whole and half-frame numbers in accordance with the patterns specified in table 6. Bar positions 13 to 18 are a 6-bit binary representation of the frame number, with position number 13 representing the most significant bit, and position number 18 representing the least significant bit. Frame numbers prior to the zero frame number are derived by successive binary subtraction. Bar position number 19 is exposed in those arrays that encode half-frame numbers (half-frame flag).

6.1.1.6 Second unassigned bit

A second unassigned bit shall be included only if the optional frame number array is included. This second unassigned bit shall be an unexposed bar.

6.1.1.7 Parity bit

This shall be provided, using an exposed bar, to create even parity with data bits 1 to 12 inclusive. (The total number of exposed bars in data positions 1 to 12, plus the parity position, shall be an even number.) Under the optional, dual-track, frame numbering system, the parity bit is used to create even parity with data bits 1 to 19 inclusive.

6.1.1.8 Exit pattern

The 4-bit exit pattern is used by a bar-code reader to detect the end of a code sequence.

6.1.2 Description of clock track

The clock track shall be comprised of 23 bits if the data track does not contain optional frame number encoding, or 31 bits if frame number encoding is included in the data track. Each change in clock track density signifies the location of a data bit in the data track. [See figure 1 e) and f).]

6.1.3 Description of quiet zones

Quiet zones shall be provided on both ends of the bar-code, as shown in figure 1 d) and given in table 1.

6.2 Single-track latent-image frame number bar-code

The optional single-track frame number bar-code consists of seven bar elements interleaved with six space elements. Bar and space elements are either wide or narrow. Each element represents a digital binary bit, with wide elements representing a 1 bit and narrow elements representing a 0 bit.

6.2.1 Definition of data patterns

6.2.1.1 Entry pattern

The entry pattern consists of one wide bar followed by one narrow space. It is used by a bar-code reader to detect the beginning of a code sequence.

6.2.1.2 Frame number sequence

The frame number sequence consists of five bar elements interleaved with four space elements. There are three wide elements (3-of-9) and six narrow elements in each of the valid frame number sequences. The pattern of each of the valid frame number sequences is given in tables 5 and 6, where a number in the bit column designates a 1 bit (wide element) and a dash (—) designates a 0 bit (narrow element).

An optional end of roll sequence is provided for use at a location one full-frame pitch beyond the last full-frame number bar-code sequence (frame number E in table 5).

Alternative frame number sequences are provided for the last full-frame and half-frame numbers to indicate end of roll in 12, 20 and 24 exposure lengths. These alternative codes are marked with asterisks in table 5.

6.2.1.3 Exit pattern

The exit pattern consists of one narrow space followed by one narrow bar. It is used by a bar-code reader to detect the end of a code sequence.

6.2.2 Definition of quiet zones

Quiet zones shall be provided on both ends of the bar-code, as shown in figure 1 g) and given in table 1.

6.3 Density specifications

The status M red (640 nm) density of the unexposed bars ($D_{\min}$) shall not exceed 0,50 and the delta density between an unexposed bar and an exposed bar shall be a minimum of 0,50.

The 690 nm density of the unexposed bars ($D_{\min}$) shall not exceed 0,65 and the delta density between an unexposed bar and an exposed bar shall be a minimum of 0,90.

These conditions apply at the time of photofinishing, assuming the product has been kept under the manufacturer's recommended storage conditions and that the expiration date has not been exceeded.

7 Magazine dimensions

Magazine dimensions shall conform to those shown in figure 3 and given in table 7.

8 Magazine bar-code requirements

This is a machine-readable, interleaved 2-of-5 bar-code pattern, which provides a unique product identification number and the number of full-frame exposures contained within the magazine. This information is helpful, particularly to the photofinisher in presort operations.

8.1 Magazine bar-code requirements

The bar-code shall have the locations and the dimensions shown in figure 4 and given in table 8. The bar height is specified by dimensions W_5 and W_6 , and the total bar-code width is specified by dimension W_4 .

Quiet zones shall be provided on either side of the bar-code as shown in figure 4. The quiet zone is the area immediately preceding the start character and following the stop character. These quiet zones shall contain no markings.

The human-readable interpretation of the bar-code shall be located between the lip of the magazine and the edge of the magazine bar-code. It shall be nominally centred on the bar-code.

8.2 Bar-code print requirements

8.2.1 Reflectance

The minimum reflectance of the spaces shall be 35 %. The maximum allowable reflectance of the dark bars is related to the reflectance of the bar-code spaces and should be calculated from the following:

$$R_D = R_L/4$$

where

R_D is the maximum bar reflectance;

R_L is the space reflectance.

8.2.2 Contrast

The minimum print contrast signal (PCS) is 75 %. Symbol aberrations are acceptable if all or part of one imperfection is included in the following tests.

- Print contrast:** Minimum contrast specification shall be met.
- Space reflectance:** If the imperfection lies in a space, the minimum space reflectance specification shall be met.

8.3 Bar-code identification system

The bar-code provides six digits of information which identify the film and the number of exposures contained in the magazine.

Digit 1 is always 0.

Digits 2 to 5 yield a number which is the "film-product-class identification combination code number" multiplied by 16, plus the "film-specifier identification combination code number", as described in clause 6.

Digit 6 is the numerical equivalent assigned to correlate with the number of exposures (table 9).

CAUTION — New lengths not listed in table 9 are becoming more popular. Coding of digit 6 may vary in order to accommodate these new lengths.

9 Camera auto-sensing (CAS) areas

Camera auto-sensing utilizes a set of electrical probes, in an appropriately designed 135-size camera, that contacts a pattern of conductive or insulated areas on the magazine. The arrangement of these areas provides an electrically readable encodement of ISO speed or manufacturer's recommended exposure index, number of exposures and recommended exposure latitude.

9.1 Dimensions

Dimensions of the camera auto-sensing areas and the limits of the camera probe locations shall conform to the values shown in figure 5 and given in table 10. The areas limiting probe locations ($X_7 \times X_{14}$) are much smaller than the sensing areas on the magazine. This allows for variations in

- dimensions of the magazine chamber in the camera,
- dimensions of magazines from different manufacturers, and
- alternative systems of seating magazines in different cameras.

Without this factor of safety, it would be possible for a probe to read the wrong block in the CAS area.

9.2 Location and code assignments

These are identified in figure 5 by the view "Typical magazine sensing area" and by tables 10 to 13. In each table, a number under the sensing area represents a conducting area; a dash (—) represents an insulated area. Numbers 1 and 7 are common/return contact areas. Sensing areas 2 to 6 encode the ISO speed or manufacturer's recommended exposure index, as assigned in table 11. Sensing areas 8 to 10 encode the number of exposures, as shown in table 12. Sensing areas 11 and 12 encode exposure latitude, as described in table 13.

9.3 DC electrical characteristics

Conductive areas are defined by the potential drop (V_{OL}) across the series combination of the common contacts and any other contact (see figure 6).

Insulated areas are defined by the insulation resistance (R_i). The insulation resistance is calculated as

$$R_i = V_{OL}/I_{DC}$$

where I_{DC} is the measured current through the contact series combination of the common contacts and any other contact.

Open current voltage is

$$V_{DC} = 1,5 \text{ V min. and } 9,0 \text{ V max.}$$

Limited current is

$$V_{DC}/R_{CL} = 15 \text{ } \mu\text{A min. and } 10 \text{ mA max.}$$

where

V_{DC} is the DC voltage used in the power supply of the test circuit;

R_{CL} is the resistance of a current-limiting resistor used to limit current flow in the test circuit.

10 Information panel

This area displays key information about the film contained within the magazine. It is visible through a window in the back of any appropriately designed camera.

10.1 Location and dimensions

The information panel area shall be located on the magazine surface and shall have the dimensions shown in figure 7 and given in table 14.

10.2 Contents of the information panel

The human-readable data located within the information panel shall contain the following:

- film identification;
- ISO speed or manufacturer's recommended exposure index;
- number of exposures.

If the ISO speed or exposure index is included in the film identification a), it need not be repeated to fulfil b).

11 Film pull-out force

The initial force to begin pulling the film out of the magazine lip shall be 5,0 N max. After 100 mm of film has been extracted from the magazine, this force shall not exceed 2,5 N throughout the balance of the roll. These specifications apply both at the time of manufacture and throughout the manufacturer's specified product life (when stored according to the manufacturer's recommendations for storage).

12 Film-spool attachment strength

A pulling force of 40 N on the film shall not break the film-spool attachment. The 40 N specification applies both at the time of manufacture and throughout the manufacturer's specified product life (when stored according to the manufacturer's recommendations for storage).

Table 1 — Dimensions of 135-size film and latent-image identification (see figure 1)

Dimensions in millimetres

Symbol	Min.	Basic	Max.	Remarks
Y_1	161,5		185,25	See note 1
Y_2				See note 2
		418		12 exposures
		722		20 exposures
		874		24 exposures
		1 330		36 exposures
Y_3	72,41		—	See note 3
Y_4	38,10		40,77	See note 4
Y_5	—		23	See note 5
Y_6				See note 6
	689,91		—	12 exposures
	993,91		—	20 exposures
	1 145,91		—	24 exposures
	1 601,91		—	36 exposures
Y_7	43,91		71,76	See note 7
Y_8	—		5	—
Y_9		3		—
Y_{10}	—		1,3	—
Y_{11}	0,8		—	—
Y_{12}	—		0,2	—
Y_{13}	6,35		—	See note 8
Y_{14}		11,43		See note 8
Y_{15}		38		See note 9
Y_{16}		19		See note 9
Y_{17}				See note 10
Y_{18}				See note 10
Y_{19}			0,5	See note 11
T_1	0,38		0,53	See note 12
T_2	0,75		1,26	—

Symbol	Min.	Basic	Max.	Remarks
T_3	2,06		2,60	—
T_4	0,38		—	Quiet zone
T_5	1,5		—	Quiet zone
T_6	0,95		1,11	Wide element
T_7	0,38		0,54	Narrow element

NOTES

- Reference point for the dimensions is the full-frame number 1 (see clause 5).
- Distance from the first designated full-frame number to the last designated full-frame number.
- Distance from the last designated full-frame number to the B datum plane.
- Distance from the end of the film to the leading edge of the first perforation in the full-width portion of the film.
- The measurement of tongue width is made at the extreme end. The shape of the rest of the tongue is optional.
- Reference dimension is the minimum total film length from the end of the tongue to the B datum plane when the film is fully extended from the magazine.
- Distance from the end of the tongue to the B datum plane when the film is in initial position.
- Dimensions Y_{13} and Y_{14} refer to dual-track latent-image bar-codes. Y_{14} includes quiet zones. Y_{13} is not specified under the optional frame-number bar-code system.
- Full-frame (Y_{15}) and half-frame (Y_{16}) pitch are basic dimensions.
- Y_{17} and Y_{18} are used to define the centreline of the eye-readable frame number.
- Y_{19} is always a positive number.
- T_1 is the width of any bar (exposed or unexposed) in the clock track or data track, or both. In order to enhance the effectiveness of some bar-code readers, the edge of any bar in the data track should be linear with an edge of a bar in the clock track.

CAUTION — The measurement method for element width is critical. Technical experts are contemplating initiation of a study to improve the recommendations for element-width measurement and are considering modification to the specification for the minimum element width, such that narrower elements may be allowed.


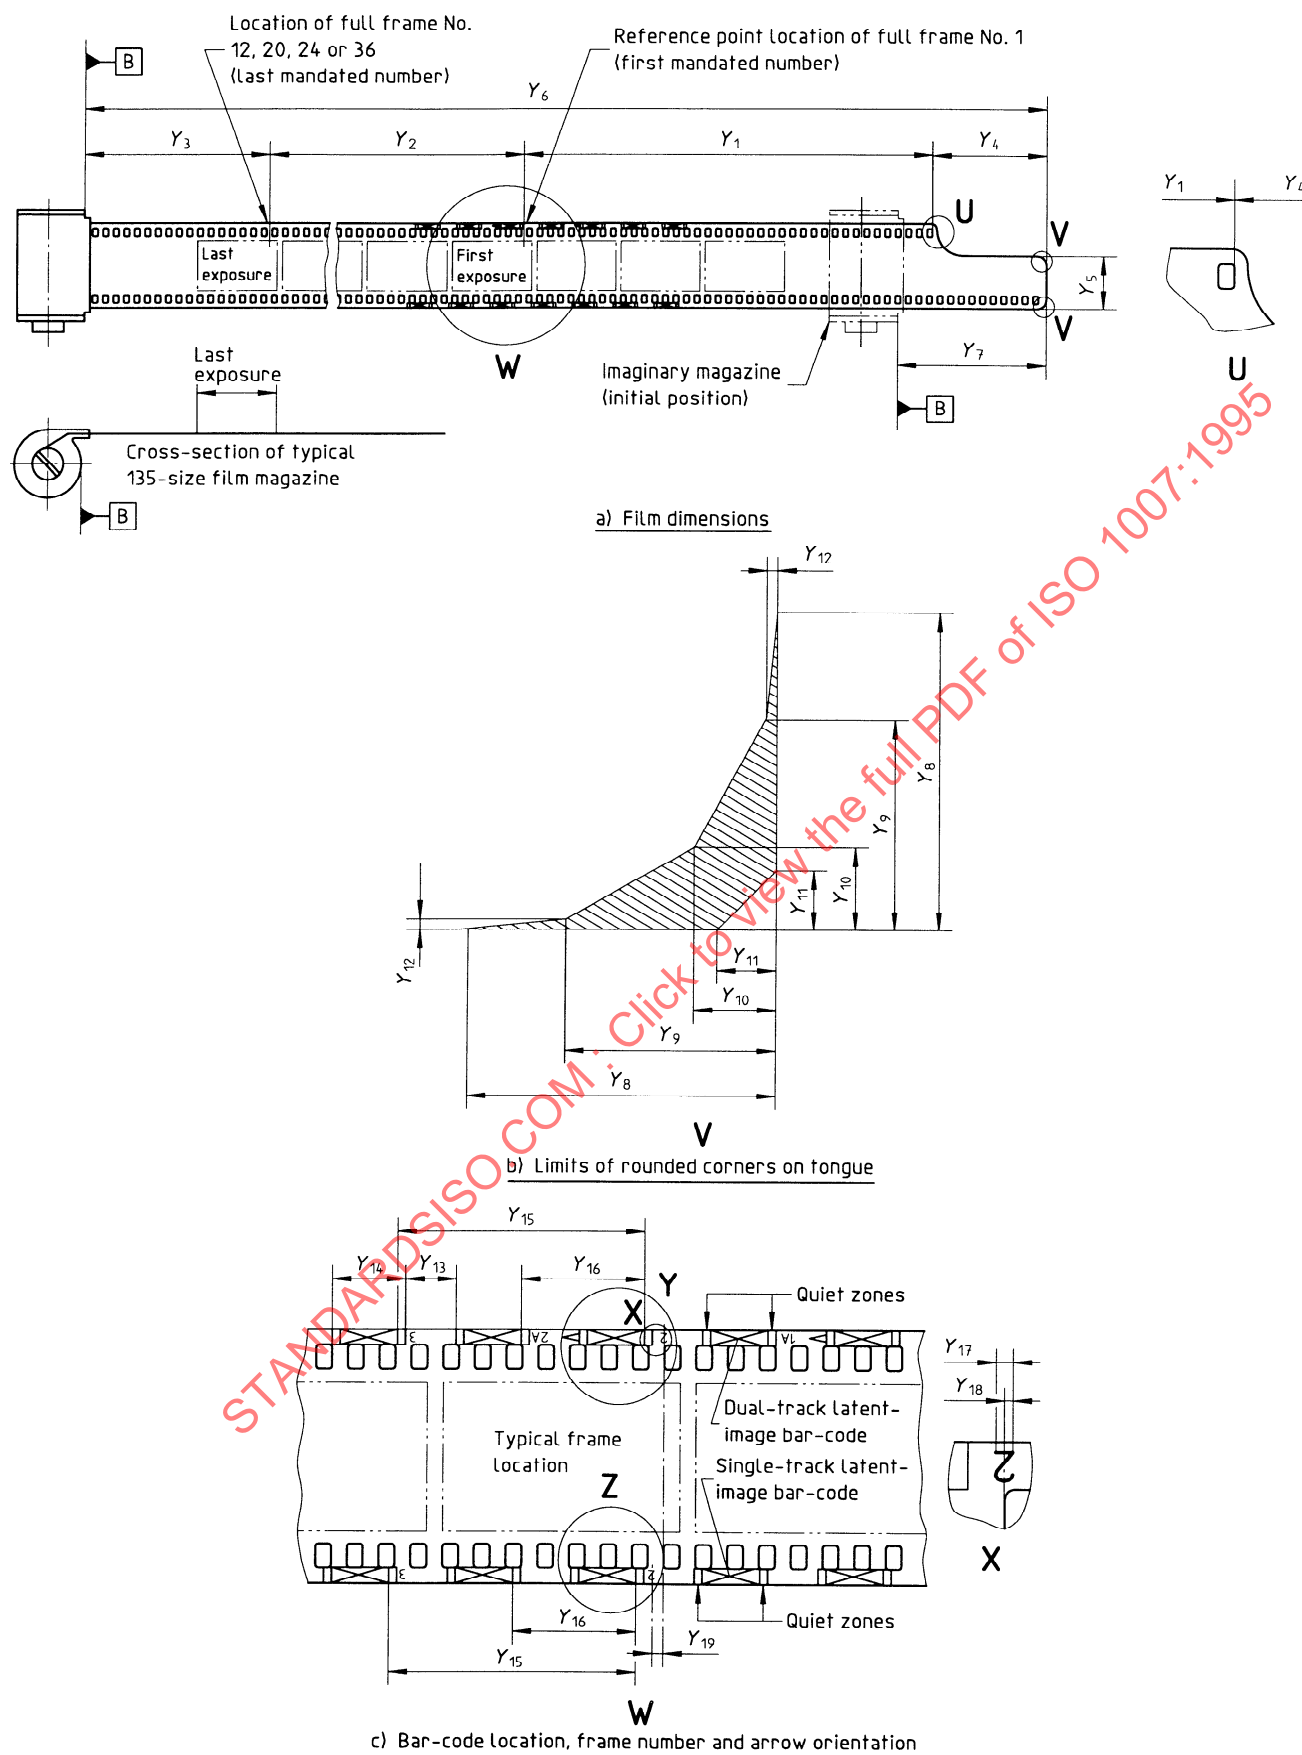


Figure 1 — Dimensions of 135-size film and latent image bar-codes (continued)

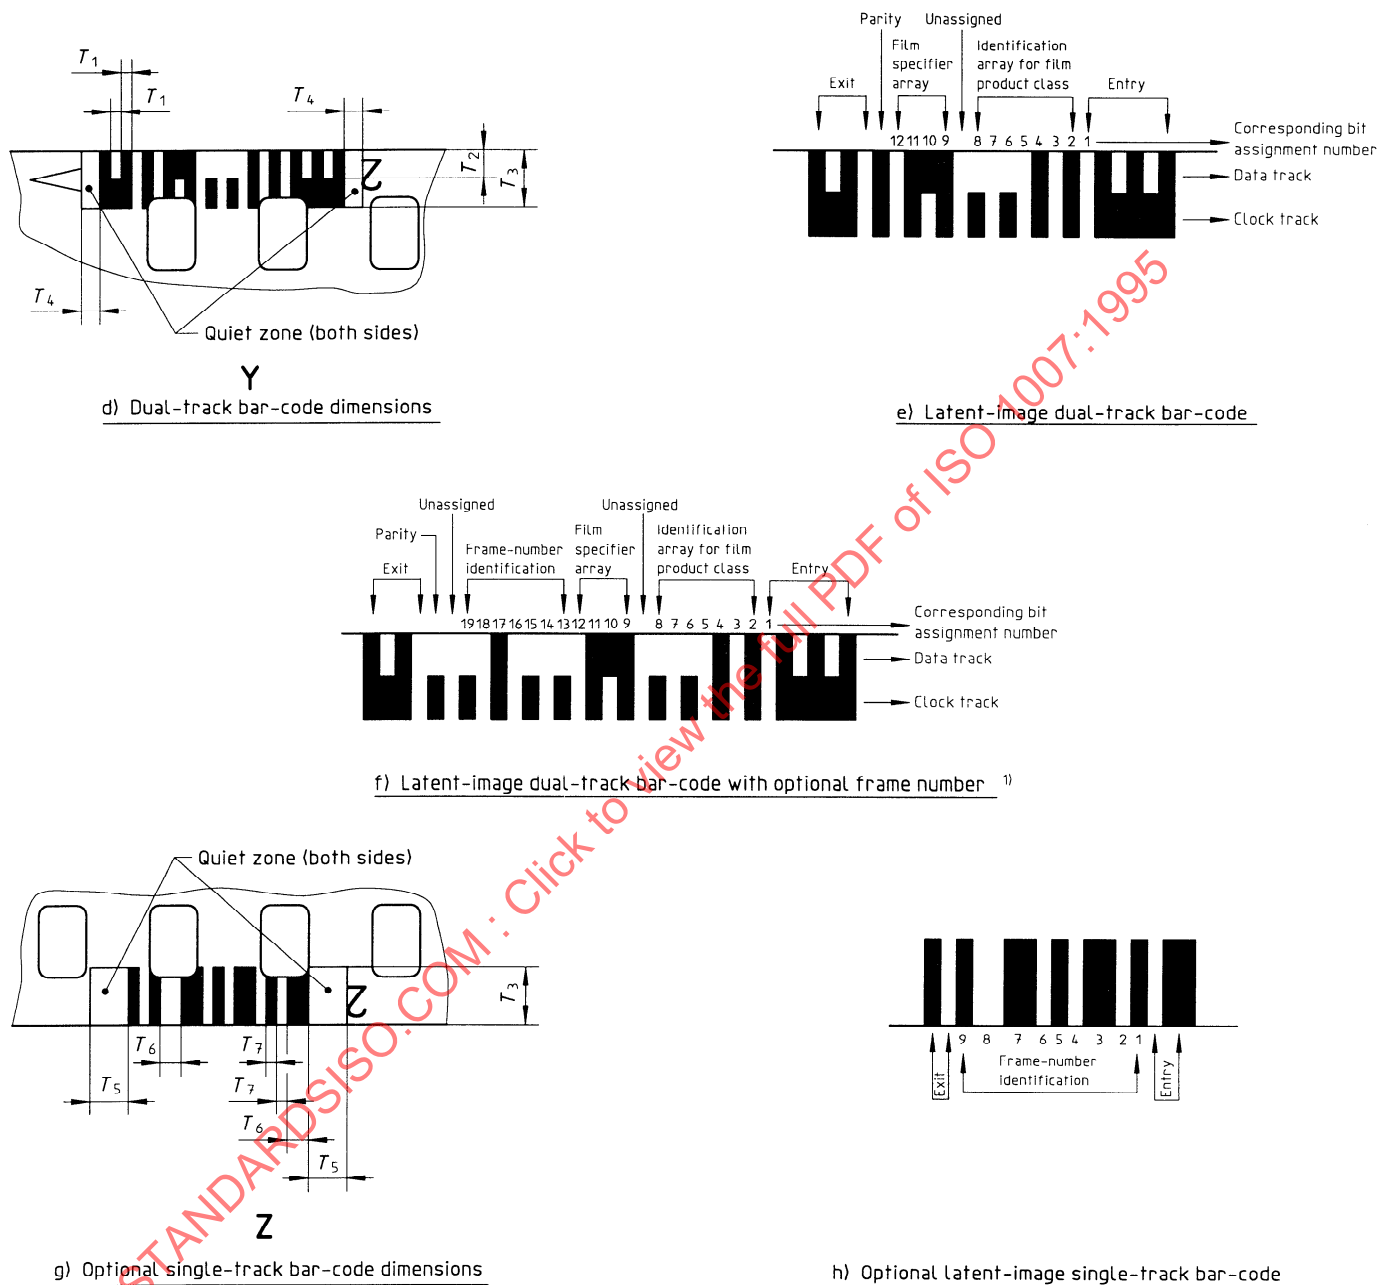

¹⁾ Bar-code dimensions are specified in d) by T_1 , T_2 , T_3 and T_4 .

Figure 1 — Dimensions of 135-size film and latent image bar-codes (Film shown with image-bearing side away from observer; see table 1) (concluded)

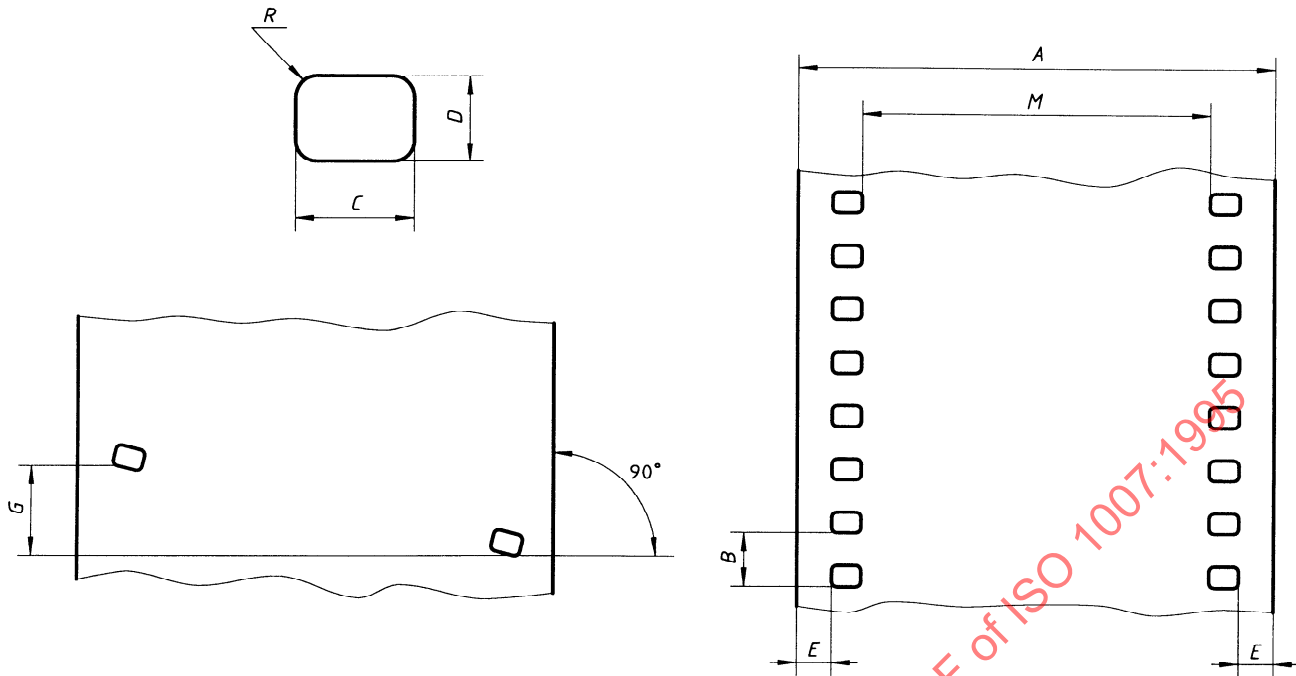


Figure 2 — Perforating dimensions for 135-size film (see table 2)

Table 2 — Width and perforating dimensions for 135-size film (see figure 2)

Dimensions in millimetres

Symbol	Dimension
A	$34,95 \pm 0,05$
B	$4,75 \pm 0,03$
C	$2,80 \pm 0,03$
D	$1,98 \pm 0,03$
E	$2,00 \pm 0,15$
G	$0 \pm 0,10$
R	0,50 nominal
L ¹⁾	$475 \pm 0,4$
M ²⁾	—

1) L represents the length of any 100 consecutive perforation intervals.
2) $M = A - 2(C + E)$

Table 3 — Identification array for film-product-class — Exposed bar combination code numbers

Combination code No.	Bar position No.							
	1	2	3	4	5	6	7	8
0	—	—	—	—	—	—	—	—
1	—	—	—	—	—	—	—	8
2	—	—	—	—	—	—	7	—
3	—	—	—	—	—	—	7	8
4	—	—	—	—	—	6	—	—
5	—	—	—	—	—	6	—	8
6	—	—	—	—	—	6	7	—
7	—	—	—	—	—	6	7	8
8	—	—	—	—	5	—	—	—
9	—	—	—	—	5	—	—	8
10	—	—	—	—	5	—	7	—
11	—	—	—	—	5	—	7	8
12	—	—	—	—	5	6	—	—
13	—	—	—	—	5	6	—	8
14	—	—	—	—	5	6	7	—
15	—	—	—	—	5	6	7	8
16	—	—	—	4	—	—	—	—
17	—	—	—	4	—	—	—	8
18	—	—	—	4	—	—	7	—
19	—	—	—	4	—	—	7	8
20	—	—	—	4	—	6	—	—
21	—	—	—	4	—	6	—	8
22	—	—	—	4	—	6	7	—
23	—	—	—	4	—	6	7	8
24	—	—	—	4	5	—	—	—
25	—	—	—	4	5	—	—	8
26	—	—	—	4	5	—	7	—
27	—	—	—	4	5	—	7	8
28	—	—	—	4	5	6	—	—
29	—	—	—	4	5	6	—	8
30	—	—	—	4	5	6	7	—
31	—	—	—	4	5	6	7	8
32	—	—	3	—	—	—	—	—
33	—	—	3	—	—	—	—	8
34	—	—	3	—	—	—	7	—
35	—	—	3	—	—	—	7	8
36	—	—	3	—	—	6	—	—
37	—	—	3	—	—	6	—	8
38	—	—	3	—	—	6	7	—
39	—	—	3	—	—	6	7	8
40	—	—	3	—	5	—	—	—
41	—	—	3	—	5	—	—	8
42	—	—	3	—	5	—	7	—
43	—	—	3	—	5	—	7	8
44	—	—	3	—	5	6	—	—
45	—	—	3	—	5	6	—	8
46	—	—	3	—	5	6	7	—
47	—	—	3	—	5	6	7	8
48	—	—	3	4	—	—	—	—
49	—	—	3	4	—	—	—	8
50	—	—	3	4	—	—	7	—
51	—	—	3	4	—	—	7	8
52	—	—	3	4	—	6	—	—
53	—	—	3	4	—	6	—	8
54	—	—	3	4	—	6	7	—
55	—	—	3	4	—	6	7	8
56	—	—	3	4	5	—	—	—
57	—	—	3	4	5	—	—	8
58	—	—	3	4	5	—	7	—
59	—	—	3	4	5	—	7	8
60	—	—	3	4	5	6	—	—
61	—	—	3	4	5	6	—	8
62	—	—	3	4	5	6	7	—
63	—	—	3	4	5	6	7	8
64	—	2	—	—	—	—	—	—
65	—	2	—	—	—	—	—	8
66	—	2	—	—	—	—	7	—
67	—	2	—	—	—	—	7	8
68	—	2	—	—	—	6	—	—
69	—	2	—	—	—	6	—	8
70	—	2	—	—	—	6	7	—
71	—	2	—	—	—	6	7	8
72	—	2	—	—	5	—	—	—
73	—	2	—	—	5	—	—	8
74	—	2	—	—	5	—	7	—
75	—	2	—	—	5	—	7	8
76	—	2	—	—	5	6	—	—
77	—	2	—	—	5	6	—	8
78	—	2	—	—	5	6	7	—
79	—	2	—	—	5	6	7	8
80	—	2	—	4	—	—	—	—
81	—	2	—	4	—	—	—	8

Table 3 (concluded)

Combination code No.	Bar position No.							
	1	2	3	4	5	6	7	8
82	—	2	—	4	—	—	7	—
83	—	2	—	4	—	—	7	8
84	—	2	—	4	—	6	—	—
85	—	2	—	4	—	6	—	8
86	—	2	—	4	—	6	7	—
87	—	2	—	4	—	6	7	8
88	—	2	—	4	5	—	—	—
89	—	2	—	4	5	—	—	8
90	—	2	—	4	5	—	7	—
91	—	2	—	4	5	—	7	8
92	—	2	—	4	5	6	—	—
93	—	2	—	4	5	6	—	8
94	—	2	—	4	5	6	7	—
95	—	2	—	4	5	6	7	8
96	—	2	3	—	—	—	—	—
97	—	2	3	—	—	—	—	8
98	—	2	3	—	—	—	7	—
99	—	2	3	—	—	—	7	8
100	—	2	3	—	—	6	—	—
101	—	2	3	—	—	6	—	8
102	—	2	3	—	—	6	7	—
103	—	2	3	—	—	6	7	8
104	—	2	3	—	5	—	—	—

Combination code No.	Bar position No.							
	1	2	3	4	5	6	7	8
105	—	2	3	—	5	—	—	8
106	—	2	3	—	5	—	7	—
107	—	2	3	—	5	—	7	8
108	—	2	3	—	5	6	—	—
109	—	2	3	—	5	6	—	8
110	—	2	3	—	5	6	7	—
111	—	2	3	—	5	6	7	8
112	—	2	3	4	—	—	—	—
113	—	2	3	4	—	—	—	8
114	—	2	3	4	—	—	7	—
115	—	2	3	4	—	—	7	8
116	—	2	3	4	—	6	—	—
117	—	2	3	4	—	6	—	8
118	—	2	3	4	—	6	7	—
119	—	2	3	4	—	6	7	8
120	—	2	3	4	5	—	—	—
121	—	2	3	4	5	—	—	—
122	—	2	3	4	5	—	7	—
123	—	2	3	4	5	—	7	8
124	—	2	3	4	5	6	—	—
125	—	2	3	4	5	6	—	8
126	—	2	3	4	5	6	7	—
127	—	2	3	4	5	6	7	8

Table 4 — Identification array for film specifier

Film specifier code No.	Bar position No.			
	9	10	11	12
0	—	—	—	—
1	—	—	—	12
2	—	—	11	—
3	—	—	11	12
4	—	10	—	—
5	—	10	—	12
6	—	10	11	—
7	—	10	11	12
8	9	—	—	—
9	9	—	—	12
10	9	—	11	—
11	9	—	11	12
12	9	10	—	—
13	9	10	—	12
14	9	10	11	—
15	9	10	11	12

Table 5 — Single-track latent-image frame number code

Frame No.	Code element									Remarks
	B 1	S 2	B 3	S 4	B 5	S 6	B 7	S 8	B 9	
00	—	—	—	4	—	6	—	8	—	See note 1
00A	—	2	—	—	—	6	—	8	—	See note 1
0	1	—	3	—	—	—	—	8	—	See note 1
0A	1	—	—	—	5	—	—	8	—	See note 1
1	—	—	3	—	5	—	—	8	—	
1A	1	—	—	—	—	—	7	8	—	
2	—	—	3	—	—	—	7	8	—	
2A	—	—	—	—	5	—	7	8	—	
3	1	—	3	—	—	6	—	—	—	
3A	1	—	—	—	5	6	—	—	—	
4	—	—	3	—	—	5	6	—	—	
4A	1	—	3	4	—	—	—	—	—	
5	1	2	3	—	—	—	—	—	—	
5A	1	—	—	4	5	—	—	—	—	
6	—	—	3	4	5	—	—	—	—	
6A	1	2	—	—	5	—	—	—	—	
7	—	2	3	—	5	—	—	—	—	
7A	1	—	—	—	—	6	7	—	—	
8	—	—	3	—	—	6	7	—	—	
8A	—	—	—	—	5	6	7	—	—	
9	1	—	—	4	—	—	7	—	—	
9A	—	—	3	4	—	—	7	—	—	
10	1	2	—	—	—	—	7	—	—	
10A	—	2	3	—	—	—	7	—	—	
11	—	—	—	4	5	—	7	—	—	
11A	—	2	—	—	5	—	7	—	—	
12*	1	—	3	—	—	—	—	9	—	See note 2
12A*	1	—	—	—	5	—	—	9	—	See note 2
12	1	—	—	—	—	—	—	8	9	
12A	—	—	3	—	—	—	—	8	9	
13	—	—	—	—	5	—	—	8	9	
13A	—	—	—	—	—	7	8	9	—	
14	1	—	—	—	—	6	—	—	9	
14A	—	—	3	—	—	6	—	—	9	
15	—	—	—	—	5	6	—	—	9	
15A	1	—	—	4	—	—	—	—	9	
16	—	—	3	4	—	—	—	—	9	
16A	1	2	—	—	—	—	—	—	9	
17	—	2	3	—	—	—	—	—	9	
17A	—	—	—	4	5	—	—	—	9	
18	—	2	—	—	5	—	—	—	9	
18A	—	—	—	—	—	6	7	—	9	
19	—	—	—	4	—	—	7	—	9	
19A	—	2	—	—	—	—	7	—	9	
20*	—	—	3	—	5	—	—	—	9	See note 3
20A*	1	—	—	—	—	—	7	—	9	See note 3
20	1	—	—	—	—	6	—	8	—	
20A	—	—	3	—	—	6	—	8	—	
21	—	—	—	—	5	6	—	8	—	
21A	1	—	—	4	—	—	—	8	—	
22	—	—	3	4	—	—	—	8	—	
22A	1	2	—	—	—	—	—	8	—	
23	—	2	3	—	—	—	—	8	—	
23A	—	—	—	4	5	—	—	8	—	
24*	—	—	3	—	—	—	7	—	9	See note 4
24A*	—	—	—	—	5	—	7	—	9	See note 4
24	—	2	—	—	5	—	—	8	—	
24A	—	—	—	—	—	6	7	8	—	
25	—	—	—	4	—	—	7	8	—	
25A	—	2	—	—	—	—	7	8	—	
26	1	—	—	4	6	—	—	—	—	
26A	—	—	3	4	6	—	—	—	—	
27	1	2	—	—	6	—	—	—	—	
27A	—	2	3	—	6	—	—	—	—	
28	—	—	—	4	5	6	—	—	—	
28A	—	2	—	—	5	6	—	—	—	
29	1	2	—	4	—	—	—	—	—	
29A	—	2	3	4	—	—	—	—	—	
30	—	2	—	4	5	—	—	—	—	
30A	—	—	—	4	—	6	7	—	—	
31	—	2	—	—	—	6	7	—	—	
31A	—	2	—	4	—	7	—	—	—	
32	—	—	—	—	6	—	8	9	—	
32A	—	—	—	4	—	—	8	9	—	
33	—	2	—	—	—	—	8	9	—	
33A	—	—	—	4	—	6	—	9	—	
34	—	2	—	—	6	—	—	9	—	
34A	—	2	—	4	—	—	—	9	—	
35	1	—	3	—	5	—	—	—	—	
35A	1	—	3	—	—	7	—	—	—	
36	1	—	—	—	5	—	7	—	—	
36A	—	—	3	—	5	—	7	—	—	
E	—	2	—	4	—	6	—	—	—	See note 5

NOTES

1 Frame number bar-codes for frames 00, 00A, 0, and 0A should print only if the eye-readable frame number is printed. Frame number 1 is the first mandated number [see figure 1 a)].

2 For the last full and half-frame numbers on a 12 exposure roll, use special codes 12* and 12A* instead.

3 For the last full and half-frame numbers on a 20 exposure roll, use special codes 20* and 20A* instead.

4 For the last full and half-frame numbers on a 24 exposure roll, use special codes 24* and 24A* instead.

5 Special end of roll sequence.

Table 6 — Dual-track latent-image frame number code

Frame No. ¹⁾	8 Bit pattern							
	13	14	15	16	17	18	19	20 ²⁾
XX	13	14	15	16	—	18	—	
XXA	13	14	15	16	—	18	19	
X	13	14	15	16	17	—	—	
XA	13	14	15	16	17	—	19	
00	13	14	15	16	17	18	—	
00A	13	14	15	16	17	18	19	
0	—	—	—	—	—	—	—	
0A	—	—	—	—	—	—	19	
1	—	—	—	—	—	18	—	
1A	—	—	—	—	—	18	19	
2	—	—	—	—	17	—	—	
2A	—	—	—	—	17	—	19	
3	—	—	—	—	17	18	—	
3A	—	—	—	—	17	18	19	
4	—	—	—	16	—	—	—	
4A	—	—	—	16	—	—	19	
5	—	—	—	16	—	18	—	
5A	—	—	—	16	—	18	19	
6	—	—	—	16	17	—	—	
6A	—	—	—	16	17	—	19	
7	—	—	—	16	17	18	—	
7A	—	—	—	16	17	18	19	
8	—	—	15	—	—	—	—	
8A	—	—	15	—	—	—	19	
9	—	—	15	—	—	18	—	
9A	—	—	15	—	—	18	19	
10	—	—	15	—	17	—	—	
10A	—	—	15	—	17	—	19	
11	—	—	15	—	17	18	—	
11A	—	—	15	—	17	18	19	
12	—	—	15	16	—	—	—	
12A	—	—	15	16	—	—	19	
13	—	—	15	16	—	18	—	
13A	—	—	15	16	—	18	19	
14	—	—	15	16	17	—	—	
14A	—	—	15	16	17	—	19	
15	—	—	15	16	17	18	—	
15A	—	—	15	16	17	18	19	
16	—	14	—	—	—	—	—	
16A	—	14	—	—	—	—	19	
17	—	14	—	—	—	18	—	
17A	—	14	—	—	—	18	19	
18	—	14	—	—	17	—	—	
18A	—	14	—	—	17	—	19	

Frame No. ¹⁾	8 Bit pattern							
	13	14	15	16	17	18	19	20 ²⁾
19	—	14	—	—	17	18	—	
19A	—	14	—	—	17	18	19	
20	—	14	—	16	—	—	—	
20A	—	14	—	16	—	—	19	
21	—	14	—	16	—	18	—	
21A	—	14	—	16	—	18	19	
22	—	14	—	16	17	—	—	
22A	—	14	—	16	17	—	19	
23	—	14	—	16	17	18	—	
23A	—	14	—	16	17	18	19	
24	—	14	15	—	—	—	—	
24A	—	14	15	—	—	—	19	
25	—	14	15	—	—	18	—	
25A	—	14	15	—	—	18	19	
26	—	14	15	—	17	—	—	
26A	—	14	15	—	17	—	19	
27	—	14	15	—	17	18	—	
27A	—	14	15	—	17	18	19	
28	—	14	15	16	—	—	—	
28A	—	14	15	16	—	—	19	
29	—	14	15	16	—	18	—	
29A	—	14	15	16	—	18	19	
30	—	14	15	16	17	—	—	
30A	—	14	15	16	17	—	19	
31	—	14	15	16	17	18	—	
31A	—	14	15	16	17	18	19	
32	13	—	—	—	—	—	—	
32A	13	—	—	—	—	—	19	
33	13	—	—	—	—	18	—	
33A	13	—	—	—	—	18	19	
34	13	—	—	—	17	—	—	
34A	13	—	—	—	17	—	19	
35	13	—	—	—	17	18	—	
35A	13	—	—	—	17	18	19	
36	13	—	—	16	—	—	—	
36A	13	—	—	16	—	—	19	

NOTE — A number in the table indicates an exposed bar.

1) Frame number 1 is the first mandated number [see figure 1 a)].

2) Bit 20 is reserved for future use.

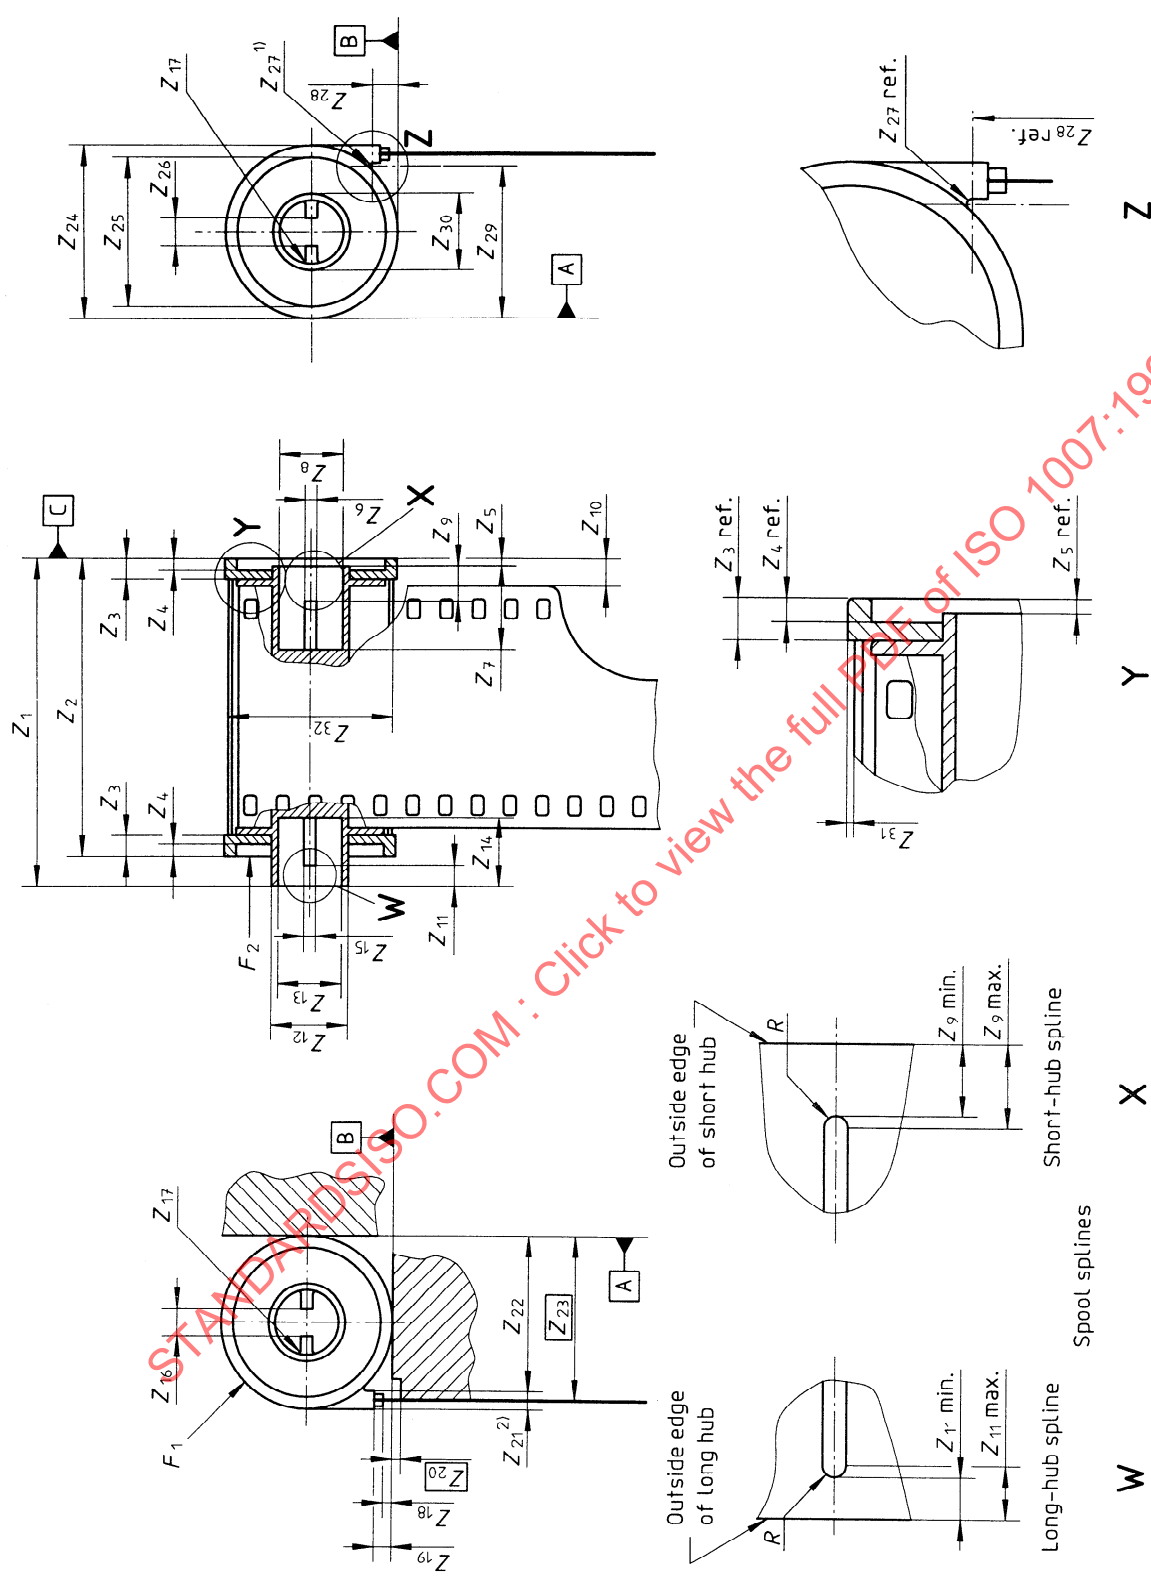


Figure 3 — Dimensions of 135-size film magazine (see table 7)

1) See note 7 of table 7.
2) See note 4 of table 7.

Table 7 — Dimensions of 135-size film magazine (see figure 3)

Dimensions in millimetres, forces in newtons

Symbol	Min.	Basic	Max.	Remarks
Dimension				
Z_1	46,89		48,00	See note 1
Z_2	42,39		43,80	
Z_3	—		3,30	
Z_4	0,79		1,55	
Z_5	0,28		—	See note 1
Z_6	1,00		2,06	
Z_7	9,65		—	
Z_8	9,19		—	
Z_9	4,00		5,56	See note 2
Z_{10}	2,80		5,10	See note 1
Z_{11}	2,01		3,91	See note 2
Z_{12}	—		11,40	
Z_{13}	9,19		—	
Z_{14}	10,00		—	
Z_{15}	—		2,11	
Z_{16}	0,00		1,50	See note 3
Z_{17}	—		0,41	
Z_{18}	− 0,51 ^{*)}		3,59	See note 4
Z_{19}	1,39		3,59	See note 4
Z_{20}		1,27		
Z_{21}	—		3,53	See note 4
Z_{22}	21,49		—	
Z_{23}		23,4 basic		See note 5
Z_{24}	24,89		25,30	See note 6
Z_{25}	18,19		—	
Z_{26}	4,50		5,00	
Z_{27}		1 nom.		See note 7
Z_{28}		1 nom.		See note 7
Z_{29}		20,50 nom.		See note 7
Z_{30}	11,51		—	
Z_{31}	0,00		0,90	
Z_{32}	23,40		—	
Spool float (SF)	0,03		1,00	See note 8
$Z_1 + \text{SF}$	47,15		48,05	See note 9
$Z_1 - Z_{11}$	43,11		—	See note 9
$Z_1 - Z_{11} + \text{SF}$	—		45,78	See note 9
$Z_1 - Z_{14}$	14,87		—	See note 9
$Z_1 - Z_{14} + \text{SF}$	—		36,50	See note 9
$Z_5 + Z_7$	11,30		—	See note 9
$Z_5 + Z_{27} + \text{SF}$	11,62		—	See note 9
$Z_5 + Z_9$	5,18		—	See note 9
$Z_5 + Z_9 + \text{SF}$	—		7,16	See note 9

Symbol	Min.	Basic	Max.	Remarks
Force				
F_1		4		See note 10
F_2		4		See note 10

*) Min. is "below" B datum plane.

NOTES

1 Dimensions Z_1 , Z_5 , Z_{10} min. shall be measured when the magazine and spool are assembled and the spool is pushed so that the short-hub end is against the magazine end; that is, toward the short-hub end. Z_{10} max. applies when the spool is forced against the long-hub end of the magazine. The spool shall "float" axially within the magazine, so that the film is capable of exiting the magazine at $Z_{10} = 3,79$ mm without significant buckling or deformation in the focal plane (see clause 6 of annex A).

2 In order to facilitate engagement with the camera key, the ends of the spool splines may be rounded. However, such rounding should be accomplished within the maximums and minimums established for Z_9 and Z_{11} (see rounded spool splines).

3 The rewind splines in the short-hub end of the spool may be either a solid or a split spline with the two members separated by the distance Z_{16} .

4 The tangent lip of DX magazines shall be oriented parallel to the A datum plane to assure proper angular orientation within the camera. This is preferred (but not mandatory) for non-DX magazines.

5 Dimension Z_{23} is measured to the face of a gauge block, which contacts the emulsion side of the film. In practice, the magazine exit slot should be designed to present the film at this dimension. In no case shall the film be presented less than 22,50 mm from the A datum plane by the time the film reaches the exposure gate of the camera.

6 Dimension Z_{24} needs to be observed strictly only at both ends of the magazine, in order to guarantee a radial guidance inside the camera. In the other area of the magazine wall, a smaller dimension, limited by Z_{32} , is allowed. The perimeter of the end cap shall have no sharp features that might damage the CAS probes of the camera during loading; bottom-loading cameras are especially vulnerable.

7 Radius Z_{27} can only be specified in terms of the maximum profile where the centre of this radius is at $Z_{28} = 1,50$ mm, $Z_{29} = 20,50$ mm and $Z_{27} = 1,00$ mm radius. These values, together with Z_{22} min. and Z_{24} max., are the dimensions for the hole in the profile gauge for checking magazines.

8 The term "spool axial float" applies to any given magazine. It is the distance that the spool can move when it is forced first against one end cap and then against the other.

9 The tolerance on this combination of dimensions is less than the sum of the tolerances on the individual dimensions to assure proper interface with the camera. Combination dimensions that include spool axial float (SF) are taken with the spool forced against the long-hub end of the magazine; those without SF are made with the spool forced in the opposite direction.

10 Forces F_1 and F_2 describe sufficient forces necessary to hold the magazine against a measuring fixture when the magazine is positioned by A-B, C.

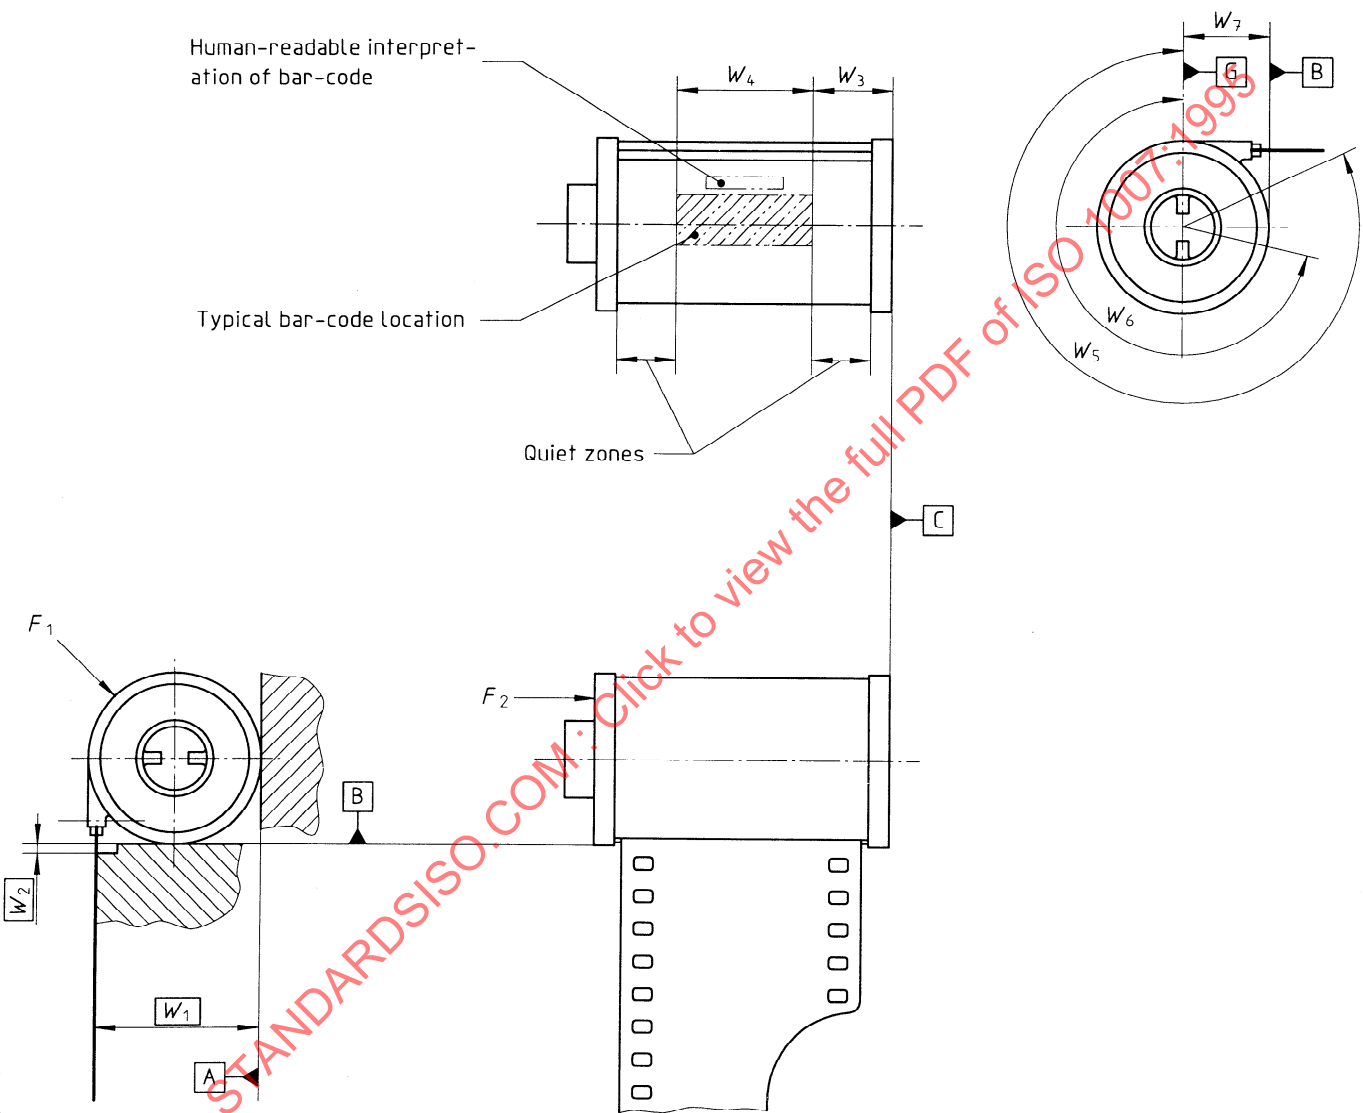


Figure 4 — Dimensions of magazine bar-code area (see table 8)

Table 8 — Dimensions of the magazine bar-code area (see figure 4)

Symbol		Min.	Basic or nominal	Max.
Dimension				
W_1 ¹⁾	mm	—	23,4 basic	—
W_2	mm	—	1,27 basic	—
W_3	mm	9,40	—	13,21
W_4	mm	—	—	20,80
W_5 ²⁾	degrees	294	—	—
W_6 ²⁾	degrees	—	—	257
W_7 ³⁾	mm	12,45	—	12,65
Force				
F_1 ⁴⁾	N	—	4	—
F_2 ⁴⁾	N	—	4	—
Bar space width ⁵⁾				
Narrow	mm	0,25	0,33	0,41
Wide	mm	0,91	0,99	1,07

NOTE — Datum plane G is parallel to datum plane B and coincides with the centreline of the magazine.

- 1) Measured from datum plan A to the sensitized side of the film.
- 2) Dimensions W_5 and W_6 define the height of the magazine bar-code.
- 3) $W_7 = \frac{Z_{24}}{2}$ (see figure 3).
- 4) Forces F_1 and F_2 describe sufficient forces necessary to hold the magazine and film against a measuring fixture when the magazine is positioned by A-B, C.
- 5) Nominal ratio of wide to narrow elements equals 3,00.

Table 9 — Code assignment for number of exposures

Numerical equivalent	Number of exposures
1	12
2	20
3	24
4	36

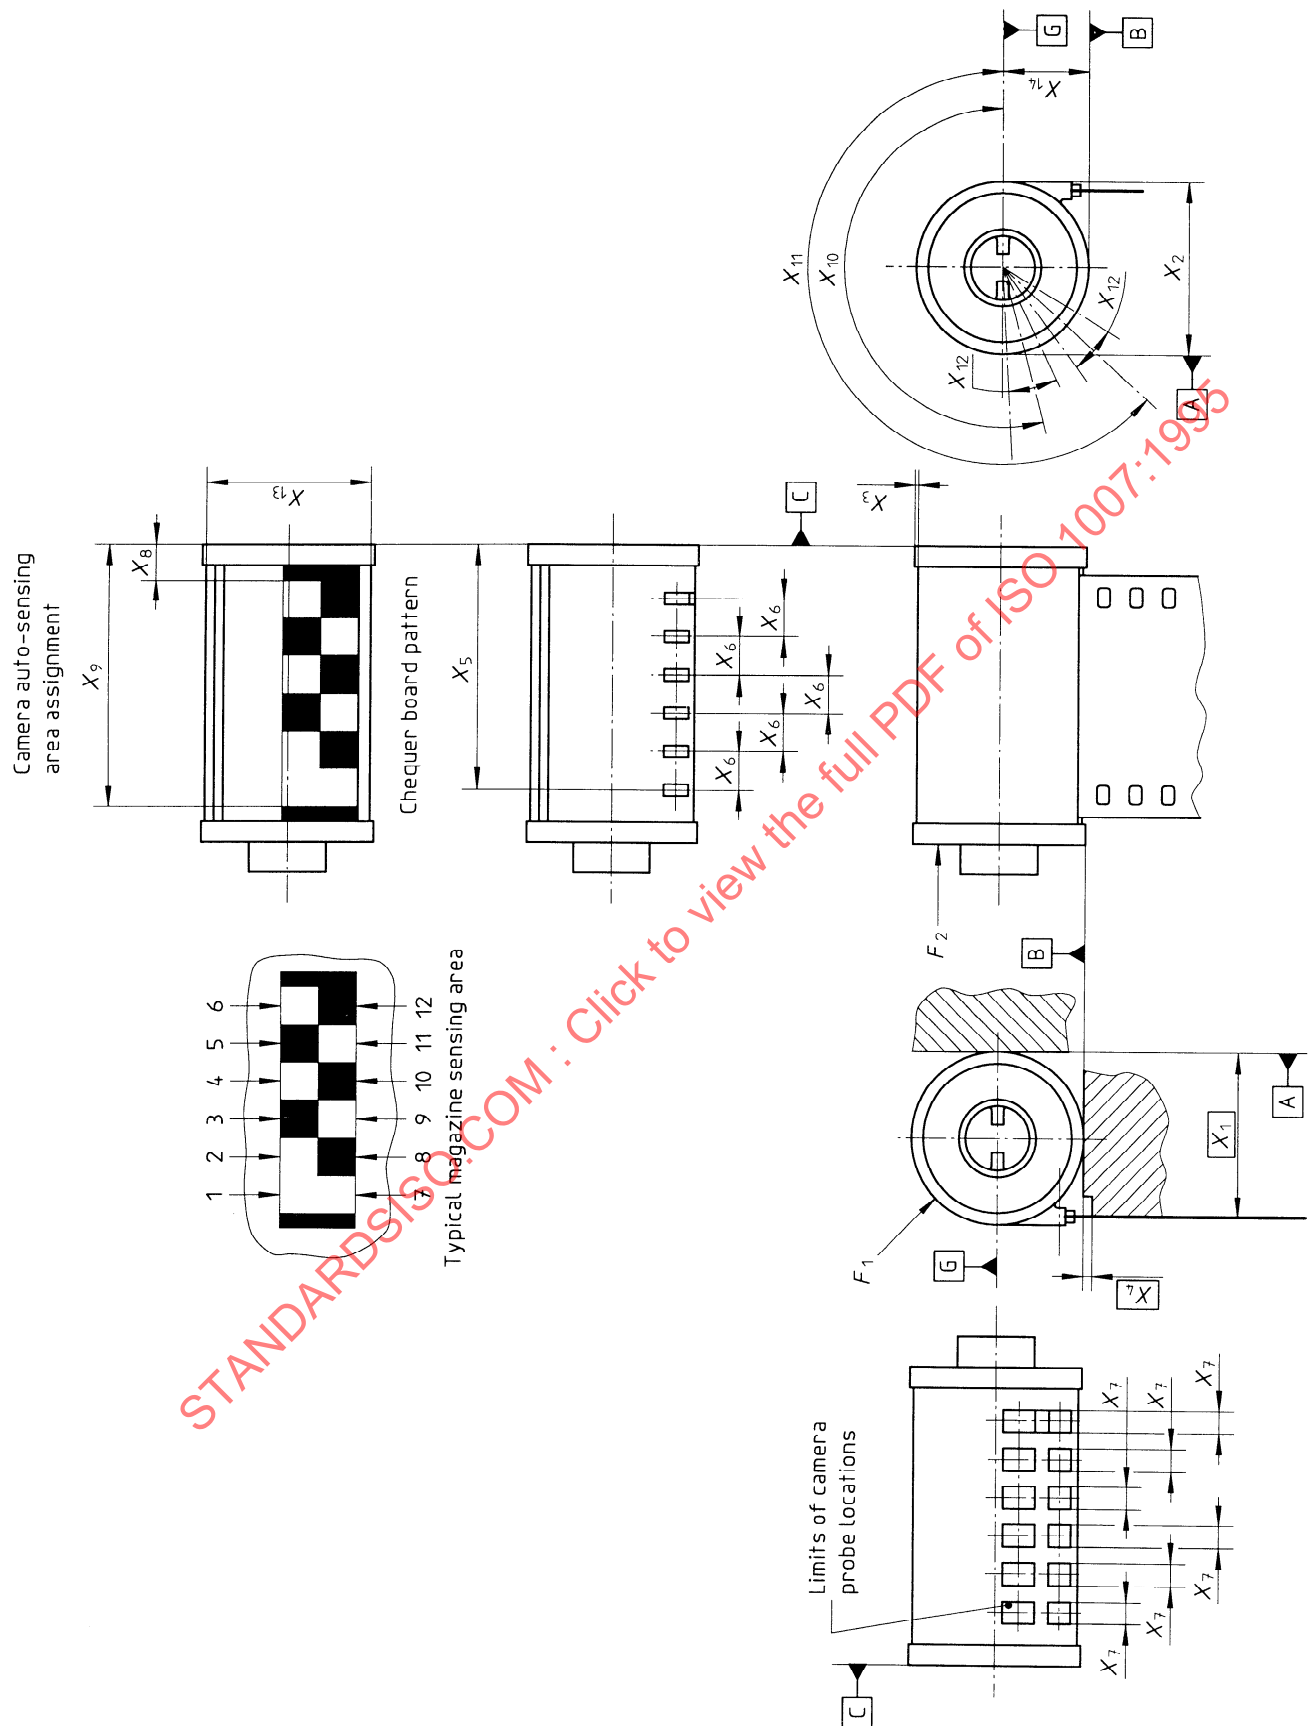


Figure 5 — Dimensions of magazine auto-sensing areas and related camera probe locations
(see table 10)

Table 10 — Dimensions of the magazine auto-sensing areas and related camera probe locations
(see figure 5)

Dimensions in millimetres,
forces in newtons

Symbol	Min.	Basic or nominal	Max.	Remarks
Dimension				
X_1		23,4 basic		Measured from datum A to the sensitized side of the film
X_2	24,89		25,30	Measured at both ends of magazine See note 1
X_3	0,0		0,9	See notes 1 and 2
X_4		1,27 basic		—
X_5		35,50 basic		See note 3
X_6		5,51 basic		See note 3
X_7			3,12	See note 4
X_8			6,4	—
X_9	37,06			—
X_{10}		191,7 basic		See note 3
X_{11}		225,6 basic		See note 3
X_{12}			22,7	See note 4
X_{13}	23,4			See note 1
X_{14}	12,45		12,65	See note 5
Force				
F_1		4		See note 6
F_2		4		See note 6

NOTES

- Dimensions X_2 , X_3 and X_{13} are specified independently to allow for possible eccentricity between the slot in the magazine end cap and the perimeter of the end cap.
- Dimension X_3 describes the maximum recess of the camera auto-sensing area, when measured from a plane defined by the magazine end cap points of contact.
- Dimension X_5 , X_6 , X_{10} and X_{11} describe the theoretical centres of the camera probe locations that coincide with the centres of the CAS areas on the magazine.
- Dimensions X_7 and X_{12} describe the maximum permissible interface area within which camera contacts shall be confined. CAS areas numbers 1 and 7 shall form a single continuous area. All CAS areas shall be printed significantly larger, as shown in the sketch "Typical magazine sensing area" in figure 5, because of magazine manufacturing variability. The practical size of each CAS area approximates to a rectangle with edges equal to X_6 in width and $(X_{11} - X_{10})$ in arc. The basic position of the borderline between individual CAS blocks is midway between the adjacent CAS area centres. For the position of the CAS area centres on the magazine surface, see note 3 above.
- $X_{14} = X_2/2$
- F_1 and F_2 describe sufficient forces necessary to hold the magazine against a measuring fixture, when the magazine is positioned by A-B, C.

Table 11 — Code for ISO speed or exposure index

ISO speed		Sensing area				
Arithmetic	Logarithmic	2	3	4	5	6
1)		—	—	—	—	—
25	15°	—	—	—	5	—
32	16°	—	—	—	—	6
40	17°	—	—	—	5	6
50	18°	2	—	—	5	—
64	19°	2	—	—	—	6
80	20°	2	—	—	5	6
100	21°	—	3	—	5	—
125	22°	—	3	—	—	6
160	23°	—	3	—	5	6
200	24°	2	3	—	5	—
250	25°	2	3	—	—	6
320	26°	2	3	—	5	6
400	27°	—	—	4	5	—
500	28°	—	—	4	—	6
640	29°	—	—	4	5	6
800	30°	2	—	4	5	—
1 000	31°	2	—	4	—	6
1 250	32°	2	—	4	5	6
1 600	33°	—	3	4	5	—
2 000	34°	—	3	4	—	6
2 500	35°	—	3	4	5	6
3 200	36°	2	3	4	5	—
4 000	37°	2	3	4	—	6
5 000	38°	2	3	4	5	6
1) Magazine is not encoded.						

Table 12 — Code for number of exposures

Decimal equivalent	Number of exposures	Sensing area		
		8	9	10
1) 1 2 3 4	— 12 20 24 36	— 8 — 8 —	— — 9 9 —	— — — — 10
1) Any non-standard lengths.				

Table 13 — Code for exposure latitude

Exposure latitude (stops)	Sensing area	
	11	12
$\pm 1/2$ ± 1 +2 -1 +3 -1	— 11 — 11	— — 12 12

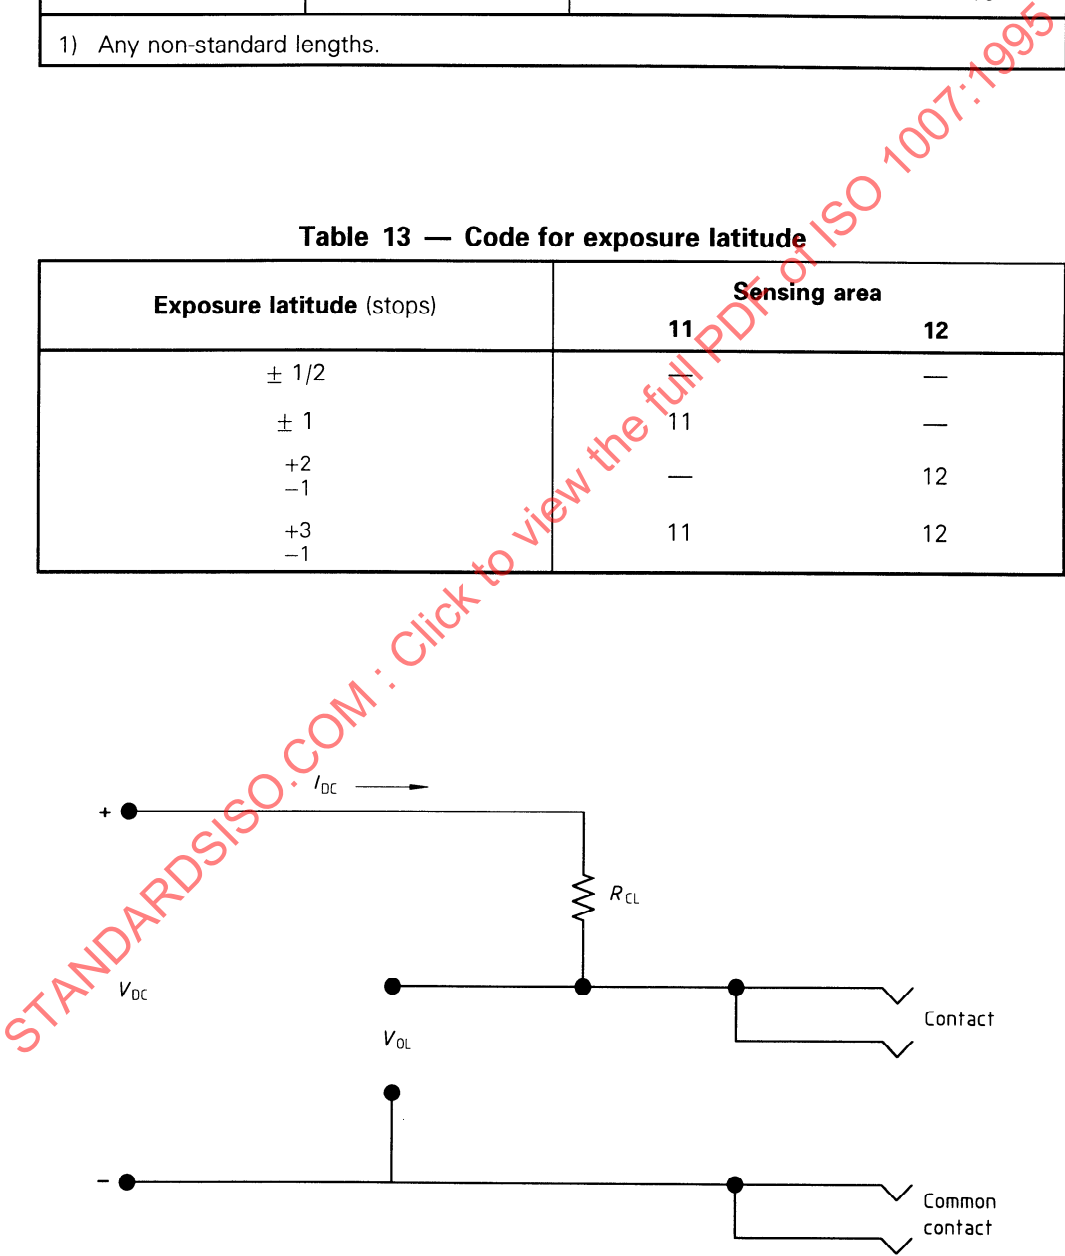


Figure 6 — DC electrical circuit for camera auto-sensing (CAS) system

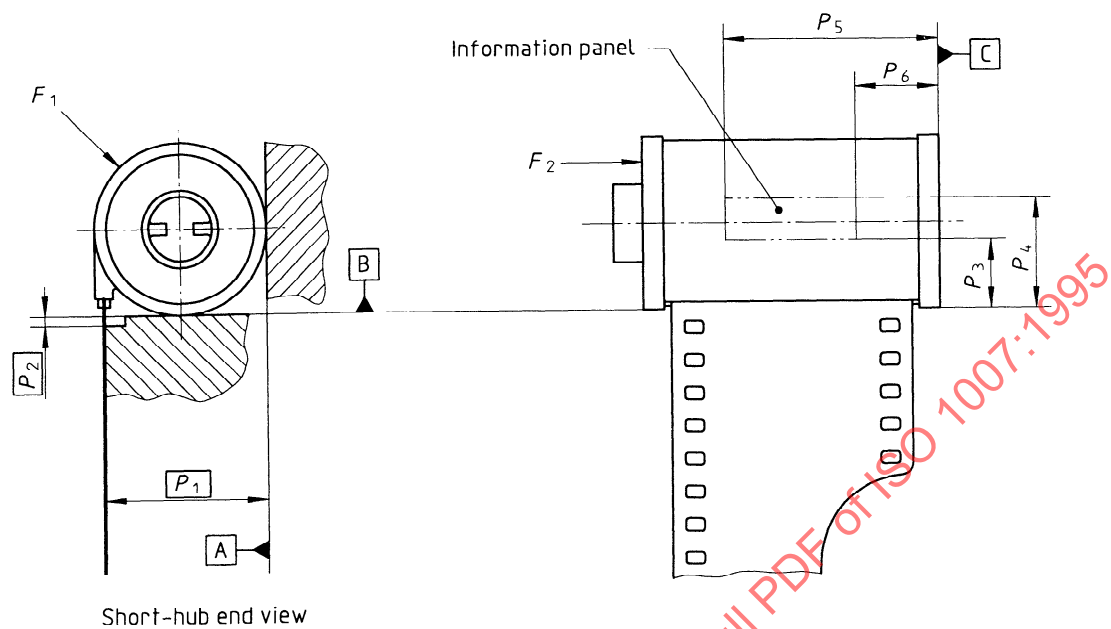


Figure 7 — Dimensions of information panel (see table 14)

Table 14 — Dimensions of information panel (see figure 7)
Dimensions in millimetres,
forces in newtons

Symbol	Min.	Basic	Max.
Dimension			
P_1 1)		23,4	
P_2		1,27	
P_3	12		
P_4			16
P_5			31
P_6	14		
Force			
F_1 2)		4	
F_2 2)		4	

1) Measured from datum A to the sensitized side of the film.
2) F_1 and F_2 describe sufficient forces necessary to hold the magazine against a measuring fixture, when the magazine is positioned by A-B, C.