

INTERNATIONAL STANDARD

IEC
61076-4-114

First edition
2003-02

Connectors for electronic equipment –

Part 4-114:

Printed board connectors –

Detail specification for two-part connector
with integrated shielding function having
a grid of 1 mm × 1,5 mm



Reference number
IEC 61076-4-114:2003(E)

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site** (www.iec.ch)

- **Catalogue of IEC publications**

The on-line catalogue on the IEC web site (http://www.iec.ch/searchpub/cur_fut.htm) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

- **IEC Just Published**

This summary of recently issued publications (http://www.iec.ch/online_news/justpub/jp_entry.htm) is also available by email. Please contact the Customer Service Centre (see below) for further information.

- **Customer Service Centre**

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

IEC 61076-4-114

First edition
2003-02

Connectors for electronic equipment –

Part 4-114:

Printed board connectors –

Detail specification for two-part connector with integrated shielding function having a grid of 1 mm × 1,5 mm

© IEC 2003 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE

X

For price, see current catalogue

CONTENTS

FOREWORD	4
1 General data	6
1.1 Recommended method of mounting	6
1.2 Ratings and characteristics	6
1.3 Normative references	7
1.4 Marking	7
1.5 IEC Type designation	8
1.6 Ordering information	8
2 Technical information	9
2.1 Abbreviations	9
2.2 Survey of styles and variants	9
2.3 Information on application	10
2.4 Contact arrangements	11
3 Dimensional information	12
3.1 General	12
3.2 Isometric view and common features	13
3.3 Engagement (mating) information	17
3.4 Fixed board connectors	19
3.5 Free board connectors	22
3.6 Accessories	25
3.7 Mounting information for fixed board connectors	25
3.8 Mounting information for free board connectors	26
3.9 Gauges	27
4 Characteristics	28
4.1 Climatic category	28
4.2 Electrical	28
4.3 Mechanical	30
5 Test schedule	31
5.1 General	31
5.2 Arrangement for dynamic stress tests	32
5.3 Test schedule tables	35
Annex A (normative) Requirements for application to mechanical structures	42
A.1 Scope	42
A.2 Requirements for use of connectors	42
Figure 1 – Free and fixed board connectors for modular arrangement	10
Figure 2 – Contact arrangements	11
Figure 3 – Contact arrangements	12
Figure 4 – Isometric view	13
Figure 5 – Height dimensions	14
Figure 6 – Width dimensions	15
Figure 7 – Depth dimensions	16
Figure 8 – Mating conditions	17
Figure 8a – First contact point	18

Figure 9 – Style A	19
Figure 10 – Style B	20
Figure 11 – Terminations	21
Figure 12 – Style A	22
Figure 13 – Details X, Y, Z	23
Figure 14 – Style B	24
Figure 15 – Hole pattern on backplane	25
Figure 16 – Hole pattern on printed boards	26
Figure 17 – Gauge dimensions	27
Figure 18 – Current carrying capacity	29
Figure 19 – Measuring points	29
Figure 20 – Arrangement for dynamic stress tests	32
Figure 21 – Wiring of specimen	32
Figure 22 – Arrangement for flammability test	33
Figure 23 – Test board for fixed and free board connectors	34
Figure A.1 – Plug-in unit dimension	43
Table 1 – Rated voltage	6
Table 2 – Contact arrangement and number of contacts	9
Table 3 – Styles of termination	9
Table 4 – Complete connectors	11
Table 5 – Isometric view and common features	14
Table 6 – Height dimensions	14
Table 7 – Width dimensions	15
Table 8 – Depth dimensions	16
Table 9 – Ranges of safe contact performance	17
Table 10 – Dimensions of terminations and printed board thickness	21
Table 11 – Hole pattern on backplane	26
Table 12 – Hole pattern on printed boards	26
Table 13 – Gauges	27
Table 14 – Climatic Category	28
Table 15 – Minimum creepage and clearance distances	28
Table 16 – Voltage proof	28
Table 17 – Number of mechanical operations	30
Table 18 – Insertion and withdrawal forces	30
Table 19 – Vibration severity	30
Table 20 – Number of specimens	31
Table 21 – Dynamic stress tests	32
Table 22 – Test board for fixed and free board connectors	34
Table A.1 – Dimensions required in accordance with IEC 60917-2-2	42

INTERNATIONAL ELECTROTECHNICAL COMMISSION

CONNECTORS FOR ELECTRONIC EQUIPMENT –**Part 4-114: Printed board connectors –
Detail specification for two-part connector with integrated
shielding function having a grid of 1 mm × 1,5 mm**

FOREWORD

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical specifications, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.
- 6) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. The IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61076-4-114 has been prepared by subcommittee 48B: Connectors, of IEC Technical Committee 48: Electromechanical components and mechanical structures for electronic equipment.

The text of this standard is based on the following documents:

FDIS	Report on voting
48B/1287/FDIS	48B/1307/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.


Future standards in this series will carry the new general title as cited above. Titles of existing standards in this series will be updated when new editions will be published.

The committee has decided that the contents of this publication will remain unchanged until 2005. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

CONNECTORS FOR ELECTRONIC EQUIPMENT –

Part 4-114: Printed board connectors –
Detail specification for two-part connector with integrated
shielding function having a grid of 1 mm × 1,5 mm

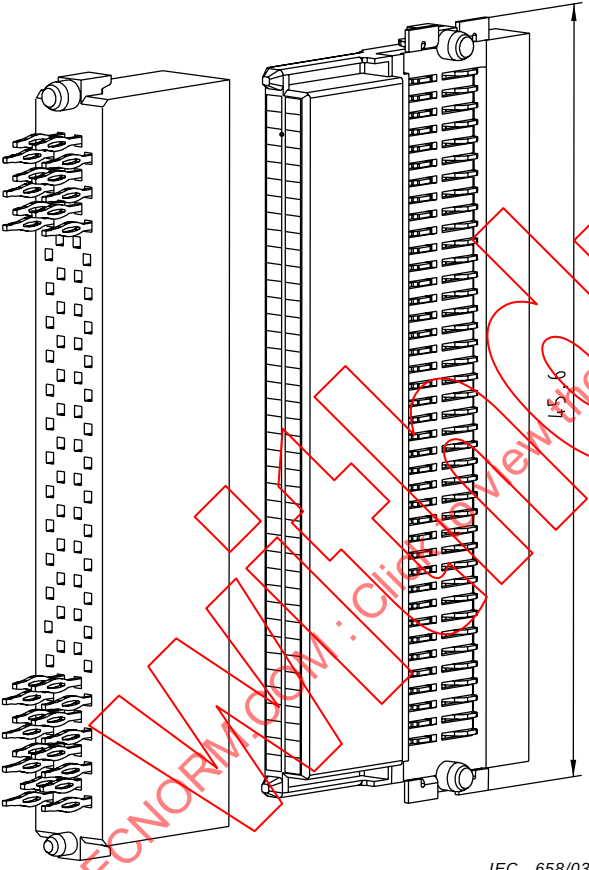IEC SC 48B: LF Connectors Specification available from: IEC Central Office or from the addresses shown on the inside cover. ELECTRONIC COMPONENTS OF ASSESSED QUALITY IN ACCORDANCE WITH: - GENERIC SPECIFICATION IEC 61076-1:1995	Draft IEC 61076-4-114 Blank detail specification number 61076-4-001
See Clause 3 for dimensions  IEC 658/03	Two-part connector for printed boards and backplanes, grid of 1 mm × 1,5 mm in accordance with IEC 60917-1.
Information on the availability of components qualified to this detail specification is given in the qualified product list.	

1 General data

This detailed specification contains modular two-part connectors with integrated shielded function having a grid of 1 mm × 1,5 mm in accordance with IEC 60917-1.

1.1 Recommended method of mounting

The free board connectors are provided with contacts for surface mounting technique. Guiding pivots support positioning of the free board connector. The terminations of the free board connectors shall fit on solder pads on printed boards having a grid of 1 mm × 4 mm.

The fixed board connectors are provided with contacts, either with press-in or surface mount terminations.

The connector is fixed by the press-in terminations or by surface mounted terminations. Provided holes in the printed board (diameter 1,4 mm and 1,8 mm) are used for correct positioning and polarisation and are not necessary for secure connector mounting.

1.2 Ratings and characteristics

Rated voltage: Contact/contact for fully loaded connector

Table 1 – Rated voltage

Material group	Pollution degree	Rated voltage V
I, II, IIIa/b	1	200
II, IIIa/b	2	20
NOTE Reference is made to Table 15: Minimum creepage and clearance distances, of this specification, and Table 4 of IEC 60664-1 listing the relation between creepage distances, pollution degree and material groups versus voltages r.m.s.		

Current rating: 1 A at 50 °C for fully loaded connector

Insulation resistance: 10⁴ MΩ min.

Climatic category: PL1: 55/125/56
PL2: 55/125/21

Printed board thickness: see Table 10

Contact spacing: 1 mm × 1,5 mm

1.3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-1:1988, *Environmental testing – Part 1: General and guidance*
Amendment 1 (1992)

IEC 60352-5:2001, *Solderless connections – Part 5: Solderless press-in connections – General requirements, test methods and practical guidance*

IEC 60512 (all parts), *Connectors for electronic equipment – Tests and measurements*

IEC 60512-1-100:2001, *Connectors for electronic equipment – Tests and measurements – Part 1-100: General – Applicable publications*

IEC 60664-1:2002, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

IEC 60917 (all parts), *Modular order for the development of mechanical structures for electronic equipment practices*

IEC 60917-1:1998, *Modular order for the development of mechanical structures for electronic equipment practices – Part 1: Generic standard*

IEC 60917-2-2:1994, *Modular order for the development of mechanical structures for electronic equipment practices – Part 2: Sectional specification – Interface co-ordination dimensions for the 25 mm equipment practice – Section 2: Detail specification – Dimensions for subracks, chassis, backplanes, front panels and plug-in units*

IEC 61076-1:1995, *Connectors with assessed quality, for use in d.c., low frequency analogue and in digital high speed data applications – Part 1: Generic specification*

IEC 61076-4:1995, *Connectors with assessed quality, for use in d.c., low-frequency analogue and in digital high-speed data applications – Part 4: Sectional specification – Printed board connectors*


ISO 1302:2002, *Geometrical product specifications (GPS) – Indication of surface texture in technical product documentation*

1.4 Marking

Marking of the connector and the package shall be in accordance with 2.6 of IEC 61076-4.

1.5 IEC Type designation

Connectors, connector bodies and contacts according to this standard shall be designated by the following system:

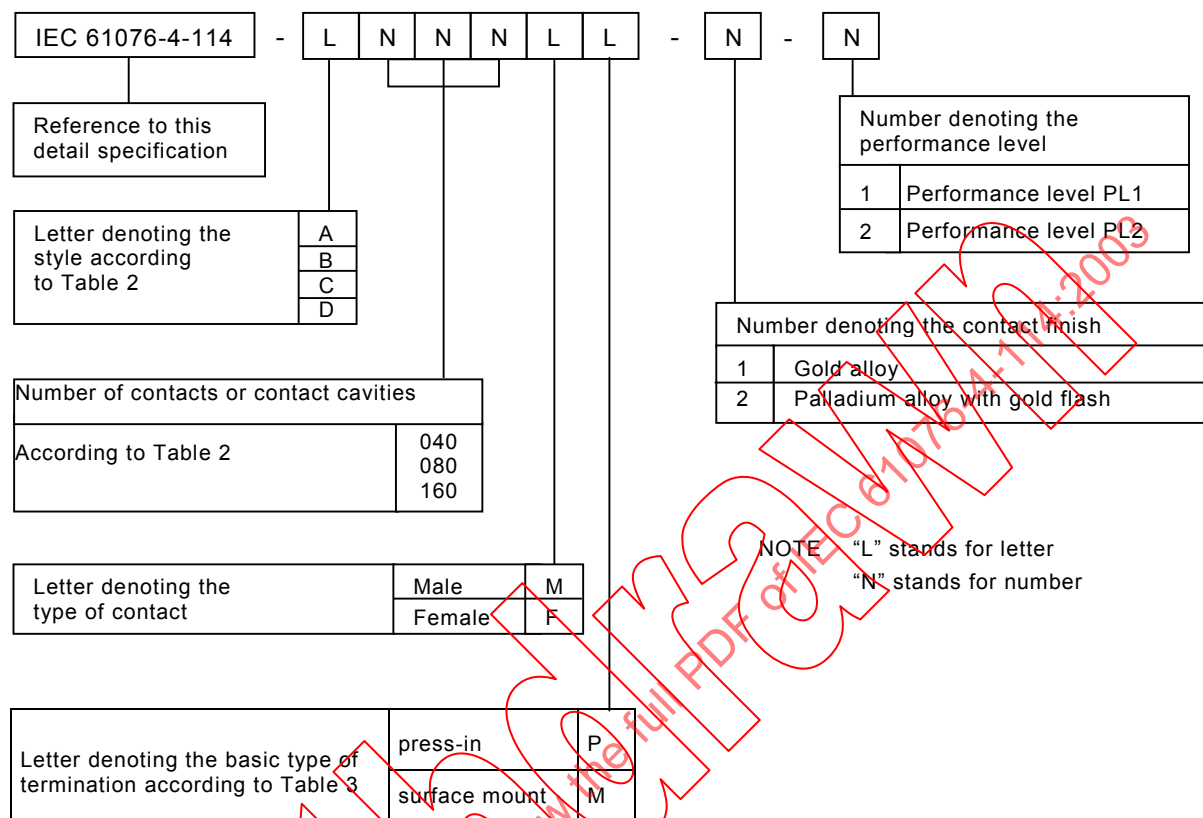

EXAMPLE Connector style B, having 80 male contacts with press-in terminations, with gold alloy contact finish and with performance level 2:

IEC 61076 – 4 – 114 – B 080 MP – 1 – 2

1.6 Ordering information

For ordering connectors according to this detail specification the type designation described in 1.5 shall be used.

2 Technical information

2.1 Abbreviations

SMT: Surface Mount Technology

FMLB contact: First Make Last Break contact

2.2 Survey of styles and variants

Fully loaded 2-row connectors and 4-row connectors are each available in two length (from 40 to 160 mated lines), for details see Table 2.

Table 2 – Contact arrangement and number of contacts

Style	A	B	C	D
Height of styles mm	27	47	27	47
Number of row	2	2	4	4
Number of contacts	40	80	80	160

Table 3 – Styles of termination


Identification letter for style of termination	Connector style	Free board connector	Fixed board connector
M	A, B	Termination for surface mounting to a printed and solder pads, according to 3.8	Termination for surface mounting on a fixed and solder pads, according to 3.7
M	C, D	Termination for surface mounting to a printed board with a thickness of 1,6 mm to 2,4 mm and solder pads, according to 3.8	
P	all styles		Termination for press-in with solid pin on fixed board connector to a printed board with a thickness of 1,6 mm min. and plated through holes diameter. 0,6 mm according to IEC 60352-5

2.3 Information on application

2.3.1 Complete connectors (pairs)

The arrangement of the free board connectors are normally the same as the arrangements of the fixed board connectors, other arrangements are possible.

Examples for arrangements of fixed and free board connectors.

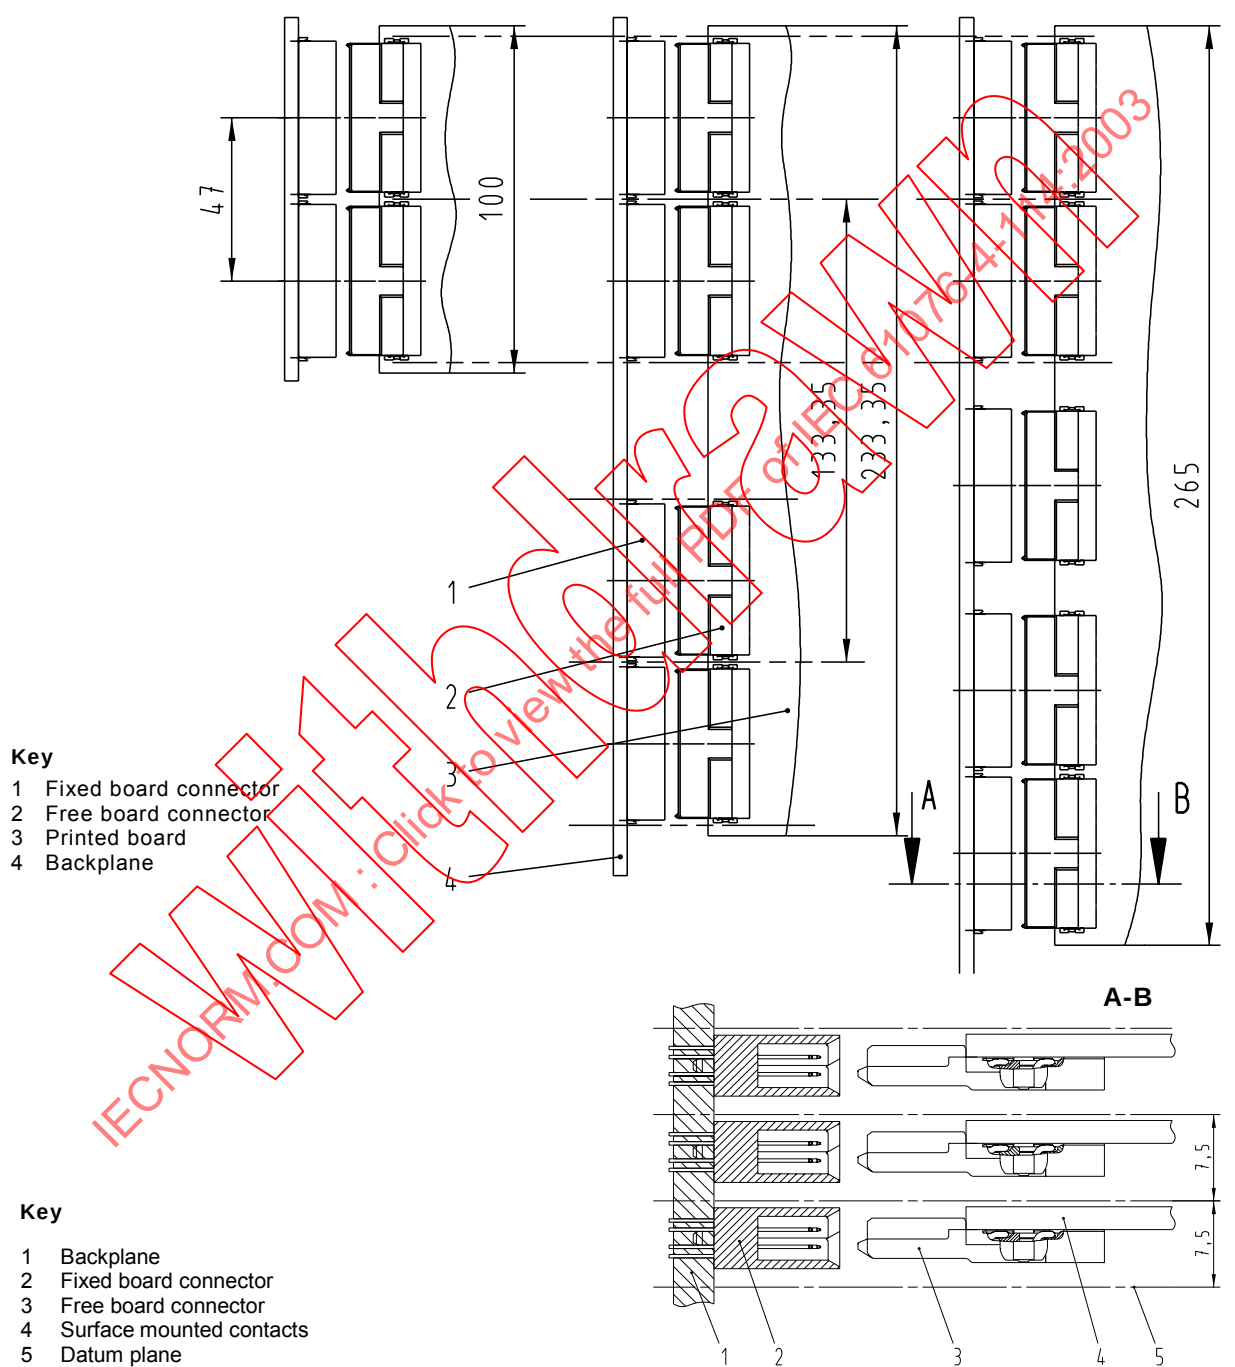

IEC 659/03

Figure 1 – Free and fixed board connectors for modular arrangement

Table 4 – Complete connectors

Card-height	100 mm	233,35 mm	265 mm
Number of connectors	2	4	5
Number of contacts	320	640	800

2.3.2 Fixed board connectors

To ensure contact safety the planarity of the connector before press-in or solder operation to backplane shall meet the requirements according to 3.4.1. After press-in or solder to backplane the connector shell meet the requirements according to 5.1.6.

2.3.3 Free board connectors

To ensure contact safety the planarity of the connector before solder operation to printed board shall meet the requirements according to 3.5.1. After solder to printed board the connector shell meet the requirements according to 5.1.6.

2.3.3.1 Accessories

Not applicable

2.3.4 Shielding/grounding

Under preparation

2.3.5 Basic type of termination

The fixed and free board connectors are provided with guiding pivots. This pivots are not used for connector fixing but they are necessary for guiding and alignment purposes under repair conditions.


Furthermore they have a polarisation function.

2.4 Contact arrangements

Fixed and free board connectors are always fully loaded – contact arrangement 1.

2.4.1 Fixed board connectors

2-row fixed board connector

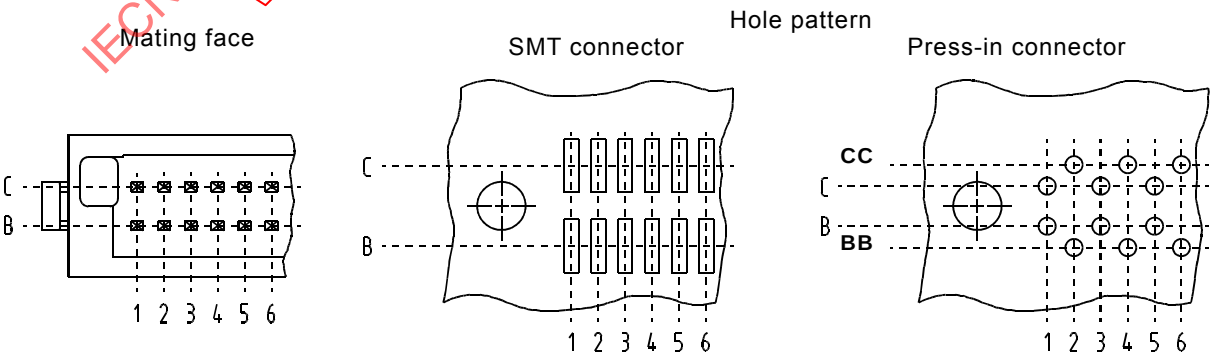

IEC 660/03

Figure 2 – Contact arrangements

NOTE For mounting information see 3.7.1 (hole pattern)

4-row fixed board connector under preparation

2.4.2 Free board connectors

2-row free-board connector

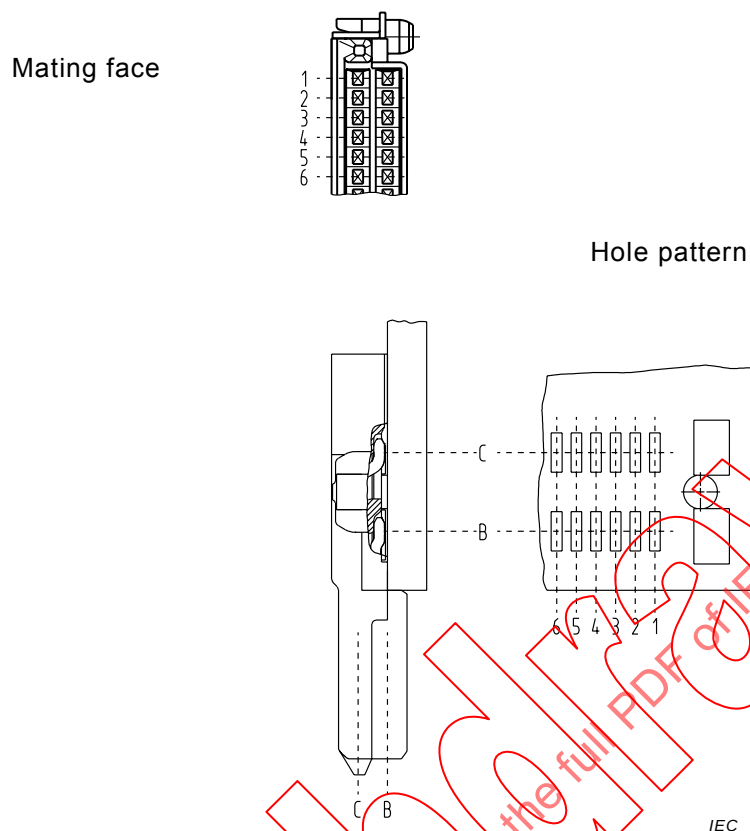


Figure 3 – Contact arrangements

NOTE For mounting information see 3.8.1 (hole pattern)

4-row free-board connector under preparation

3 Dimensional information

3.1 General

All dimensions in millimetres.

Drawings are shown in the first angle projection. The shape of the connectors may deviate from those given in the following figures as long as the specified dimensions are not influenced.

The information about the bending in 3.3.4 and 5.1.6 is valid for the condition of delivery. The permissible bending of the mounted connector is stated in 5.1.6.

Missing dimensions can be chosen according to the common characteristics and the intended use.

3.2 Isometric view and common features

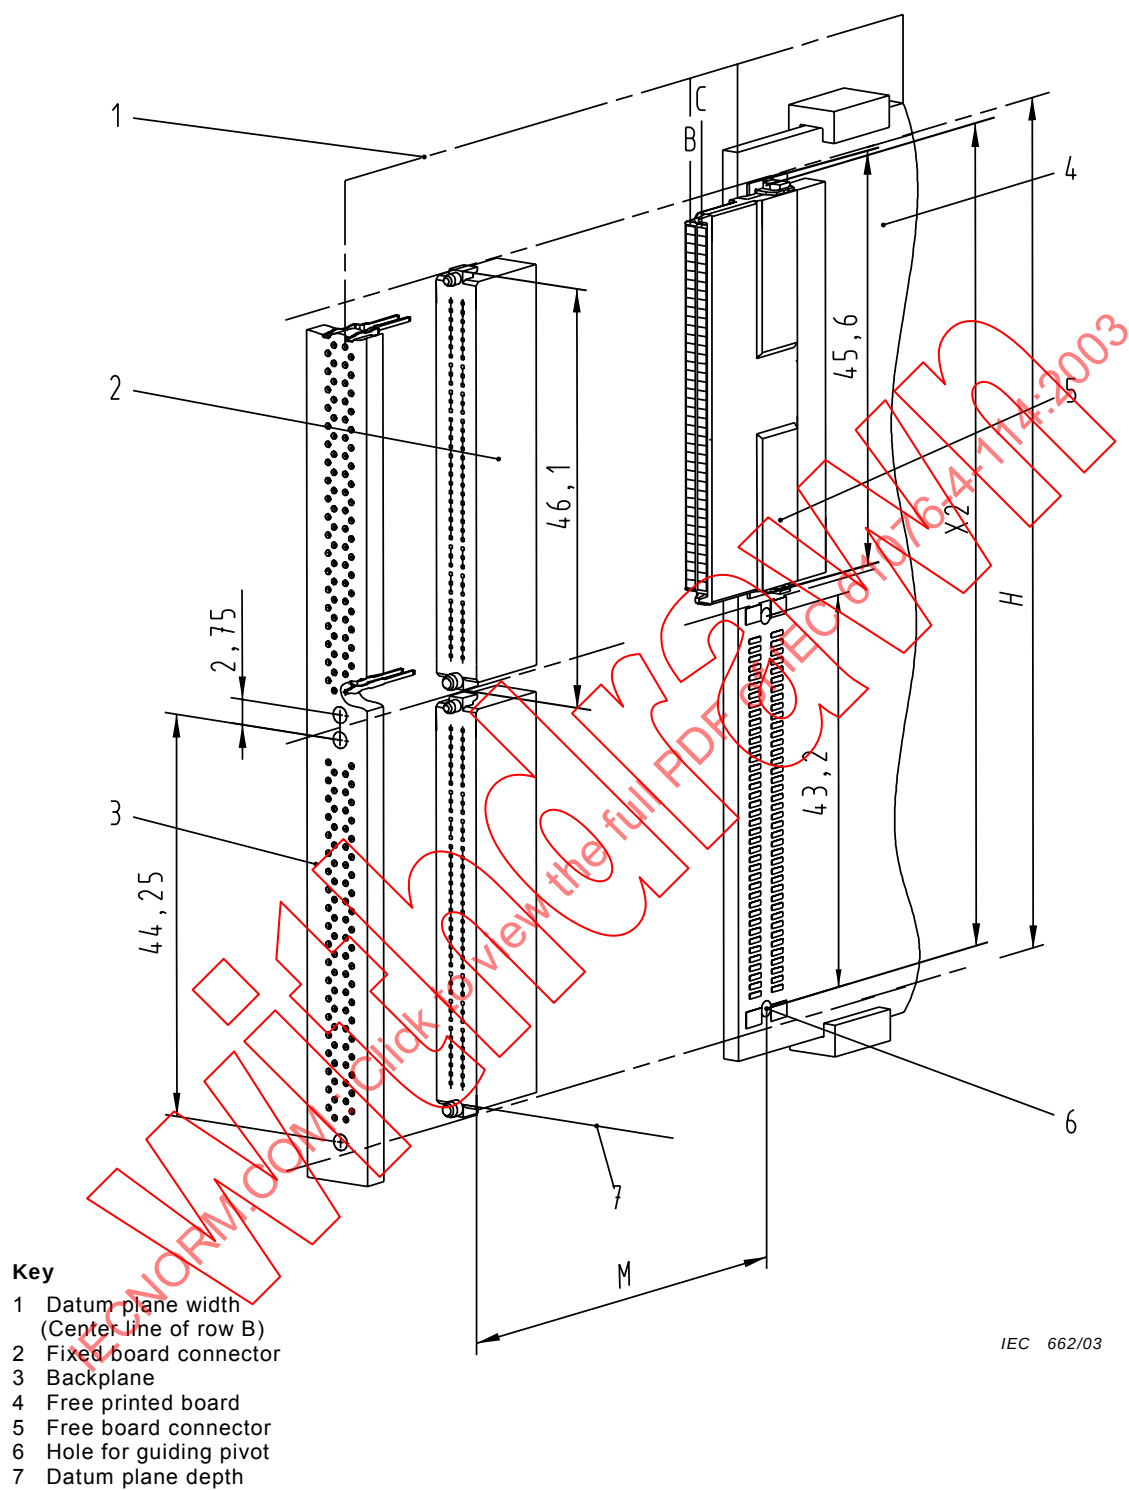


Figure 4 – Isometric view

Fixed board connectors are shown as press-in version.

Table 5 – Isometric view and common features

Reference letter	Dimensions mm	Legend
H	$n \times 47$	Maximum height of the fixed board connector with $n = 1, 2, 3, 4, 5$
M	17,5 – 20	Contact range in plug-in direction (see Figure 8) NOTE For information only see 3.3
X2	$H - 3,8$	Distance between centre lines of the guiding pivots of free board connector

3.2.1 Common features


Not applicable

3.2.2 Reference system

Co-ordination dimensions are dimensions without tolerances and indicate the max. dimension.

These co-ordination dimensions are based upon the 0,05 mm module specified in the series IEC 60917. The datum planes are indicated in 3.2.3, 3.2.4 and 3.2.5.

3.2.3 Height dimensions

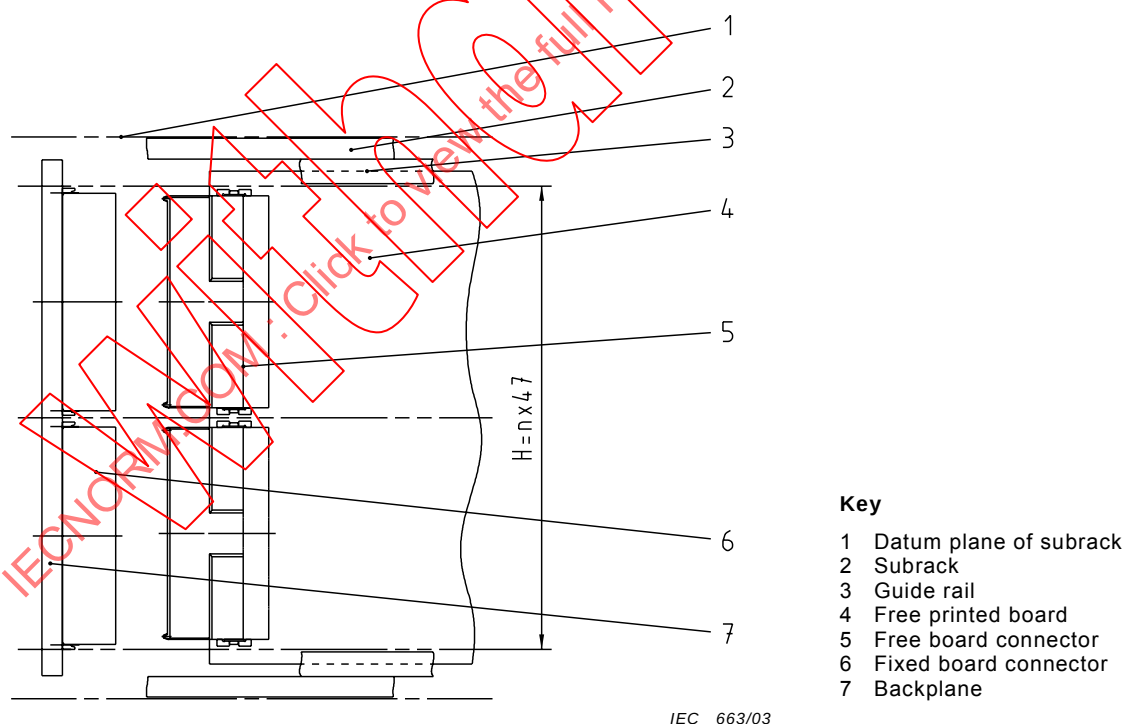


IEC 663/03

Figure 5 – Height dimensions

Table 6 – Height dimensions

Number of multi modules	1	2	3	4	5
H = connector height in mm	47	94	141	188	235

3.2.4 Width dimensions

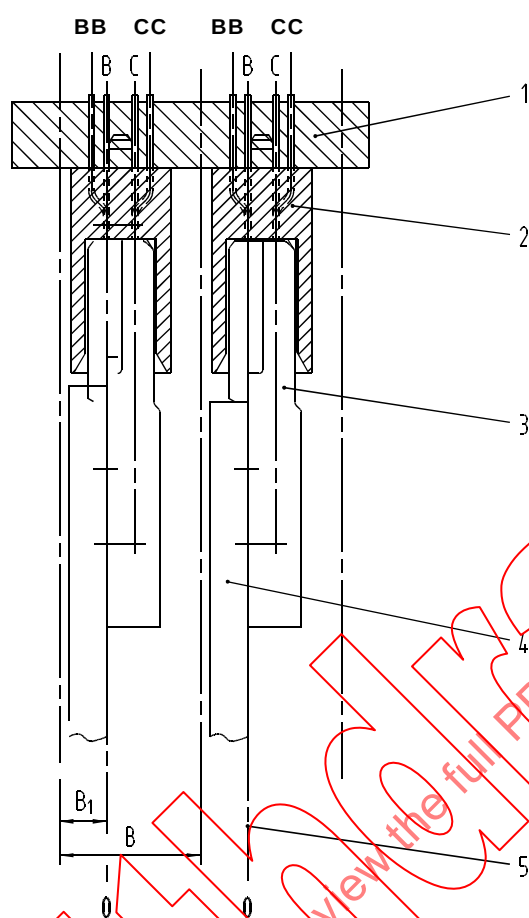

IEC 664/03

Key

- 1 Backplane
- 2 Fixed board connector
- 3 Free board connector
- 4 Free printed board
- 5 Datum plane width
(Centre line of row B)

Figure 6 – Width dimensions

Table 7 – Width dimensions

		Without coding
B =	connector width	$3 \times 2,5 \text{ mm} = 7,5 \text{ mm}$
B ₁ =	width reference to printed board	$1 \times 2,5 \text{ mm} = 2,5 \text{ mm}$

3.2.5 Depth dimensions

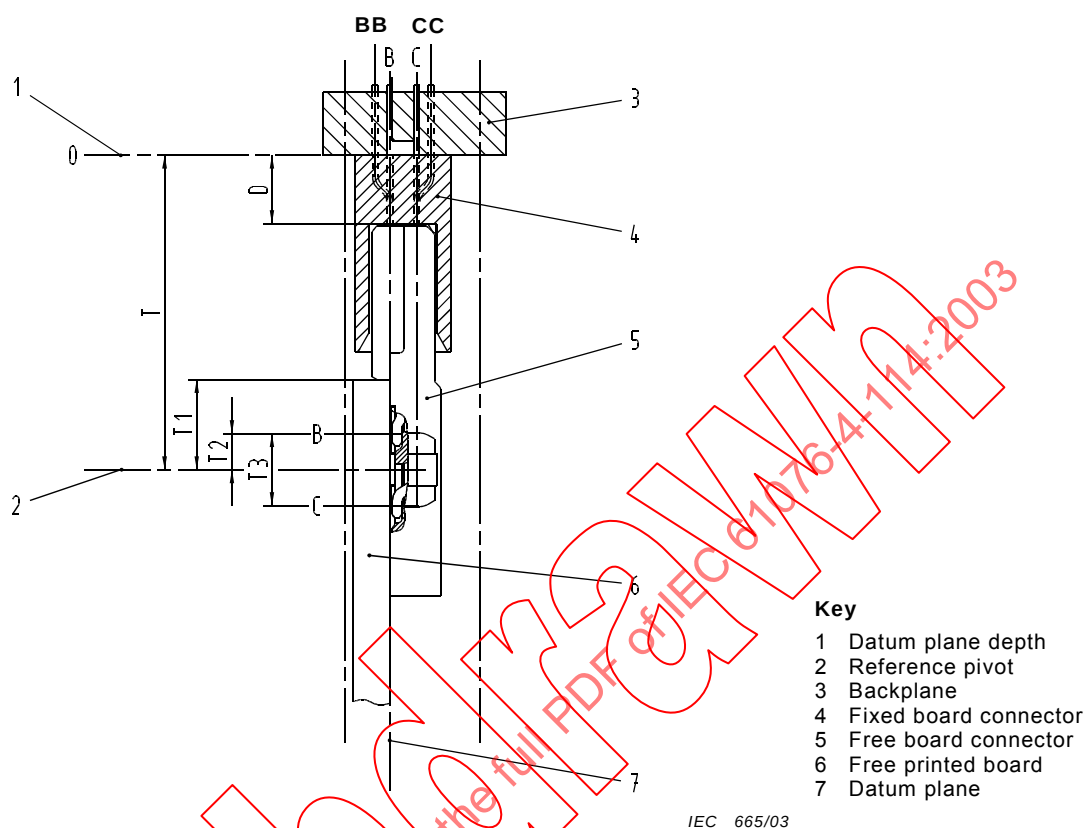


Figure 7 – Depth dimensions

Table 8 – Depth dimensions

$T =$	Centre line of guiding pivots of free board connector to mounting plane fixed board connector	$7 \times 2,5 \text{ mm} = 17,5 \text{ mm}$
$D =$	Thickness of connector bottom fixed board connector	3,8 mm
$T_1 =$	Distance between edge of printed board and centre line of guiding pivots for free board connector fixing	5 mm
$T_2 =$	Distance between centre line of pivot and first row of terminations free board connector	2,0 mm
$T_3 =$	Spacing of terminations free board connector	4,0 mm

3.3 Engagement (mating) information

3.3.1 Electrical engagement length

The specified contact resistance must be maintained on a mated pair, within the range of $M = 17,5 \text{ mm}$ to 20 mm .

If the connector could be engaged below dimension $M = 17,5 \text{ mm}$ the specified contact resistance must also be met.

The common requirements for FMLB contacts are also included in this specification. At worst case mating conditions and most unfavourable dimensions of mated pair the pre-mating of the FMLB contact is $0,15 \text{ mm}$.

The nominal pre-mating is $0,7 \text{ mm}$. Number and arrangement of the pre-mating contacts are to be agreed separately between user and producer.

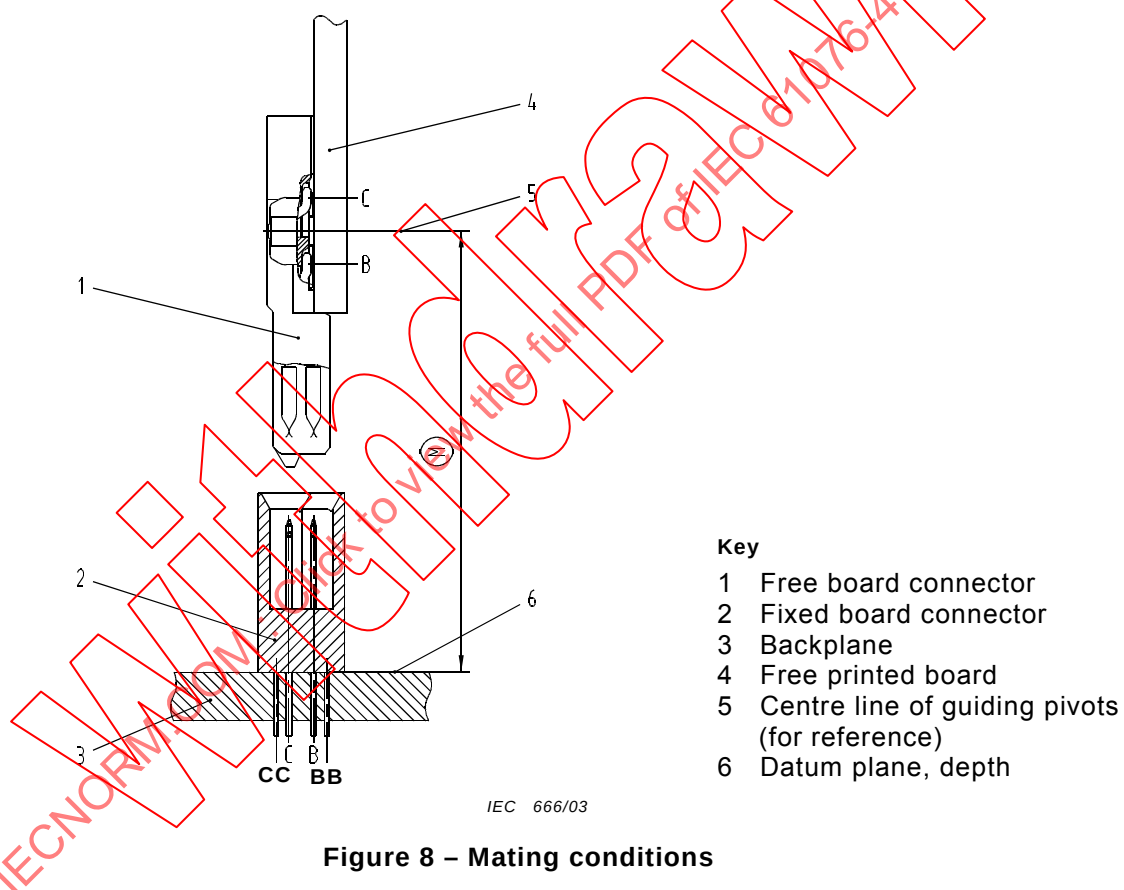



Figure 8 – Mating conditions

3.3.1.1 Contact levels and sequencing

Table 9 – Ranges of safe contact performance

Contact level	Standard male contact	FMLB contact
Electrical engagement length range (M)	17,5 mm – 20 mm	17,5 mm – 20,7 mm

3.3.1.2 First contact point

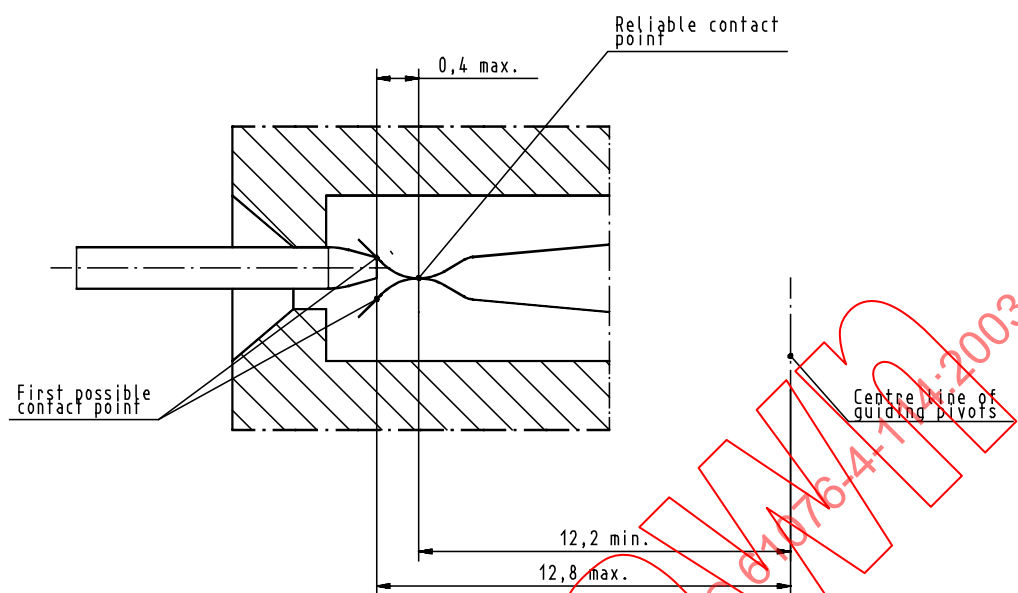

IEC 667/03

Figure 8a – First contact point

3.3.2 Perpendicular to engagement (mating) direction

The design of the free and fixed board connector must accept a misalignment of at least 1 mm in the longitudinal and transversal direction of the connectors. To achieve necessary alignment of both parts, one part of the connector pair is float mounted.

For fixed mounted connector pairs, the mounting tolerances must be kept accordingly in a sufficient small range.

3.3.3 Inclination

The design of the free and fixed board connector must accept an initial angular misalignment of $\pm 0,5^\circ$ in longitudinal and transverse axes.

In the mated position the condition according to 3.3.1 shall be met.

The permissible angular misalignment of $\pm 0,5^\circ$ is valid for 5 connectors maximum and includes the total deviation from racks to subracks considering the pre-mated contacts.

3.3.4 Planarity


Permissible warpage of mounted connectors is shown in 5.1.6.

In order to guarantee the function of the FMLB contact, the warpage of the mounted connector shall not exceed 0,1 mm.

3.4 Fixed board connectors

3.4.1 Dimensions

3.4.1.1 Style A

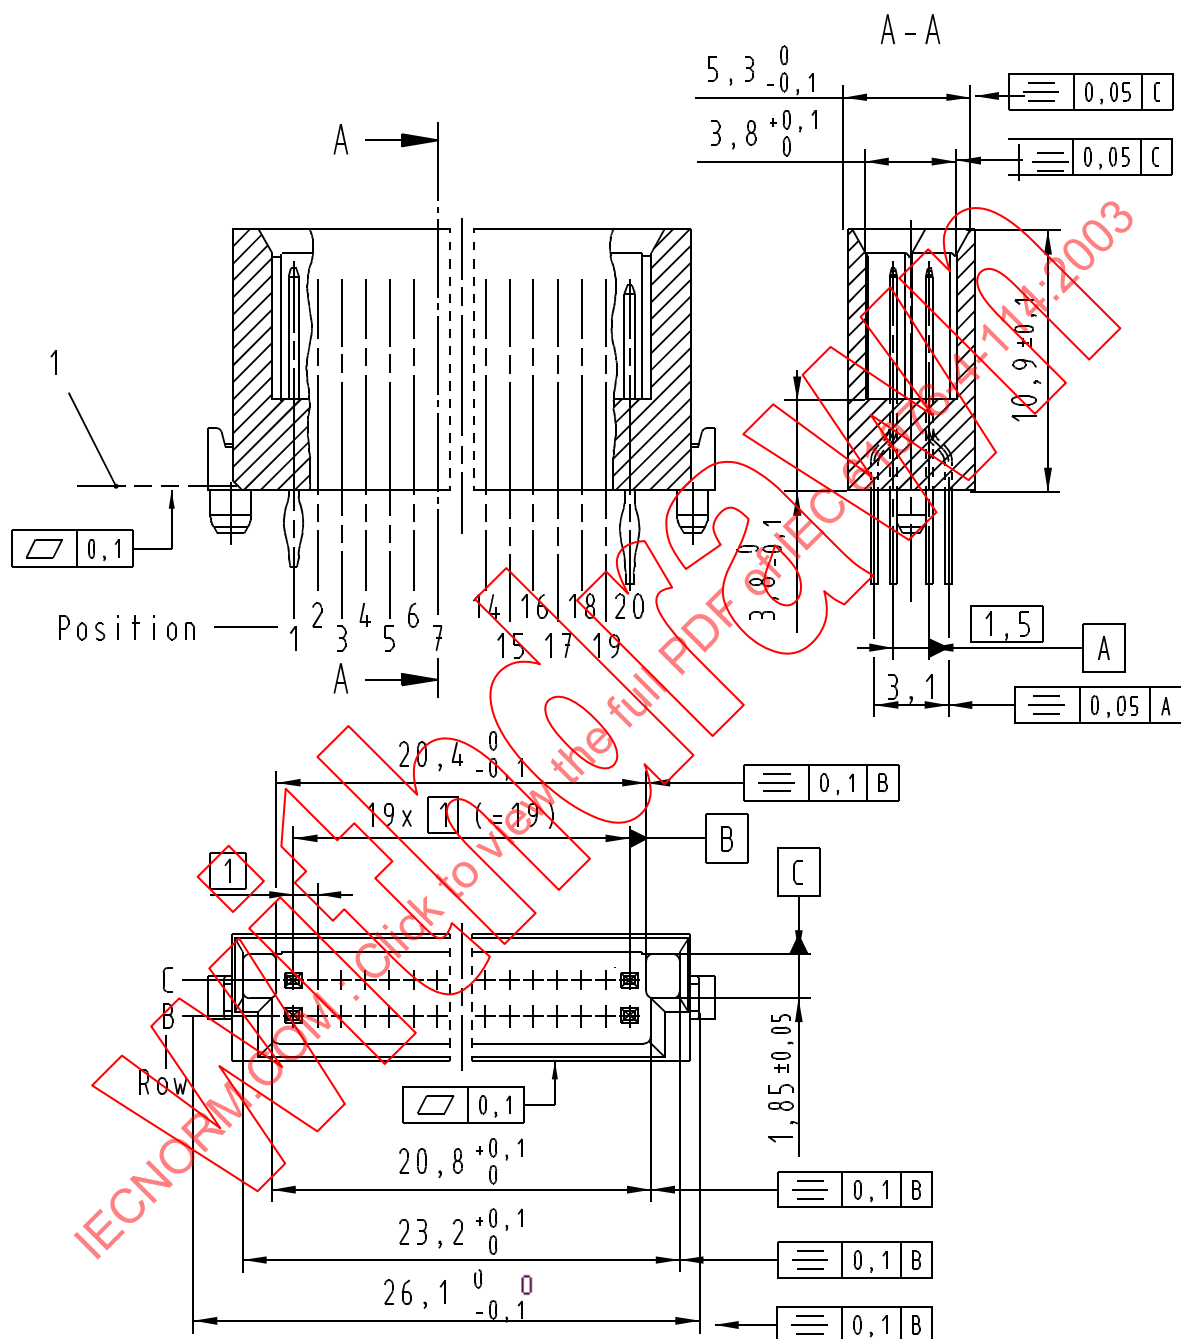

Key

1 Datum plane depth

NOTE All styles – for terminations see 3.4.2.

IEC 668/03

Figure 9 – Style A

3.4.1.3 Style C

Under preparation






Figure 10 – Style B

3.4.2 Terminations

Press-in terminations

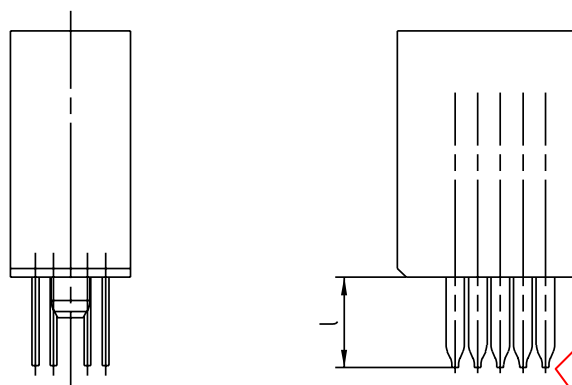

SMT terminations

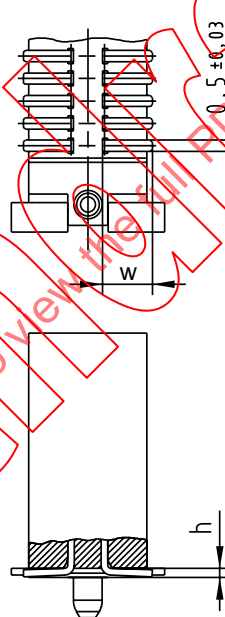


IEC 670/03

Figure 11 – Terminations

Table 10 – Dimensions of terminations and printed board thickness

Type of termination		M	P
Length	l	–	4,5 max
Width	w	$2,2 \pm 0,1$	–
Height	h	0,45 max	–
Backplane thickness		1,6 min	1,6 – 4,0
Plated through hole in backplane (see 3.8)			$\varnothing 0,6 \pm 0,05$
Plated land pattern for SMT on backplane (see 3.8)		$0,55 \pm 0,03$ x $2,5 \pm 0,05$	

Details X, Y, Z

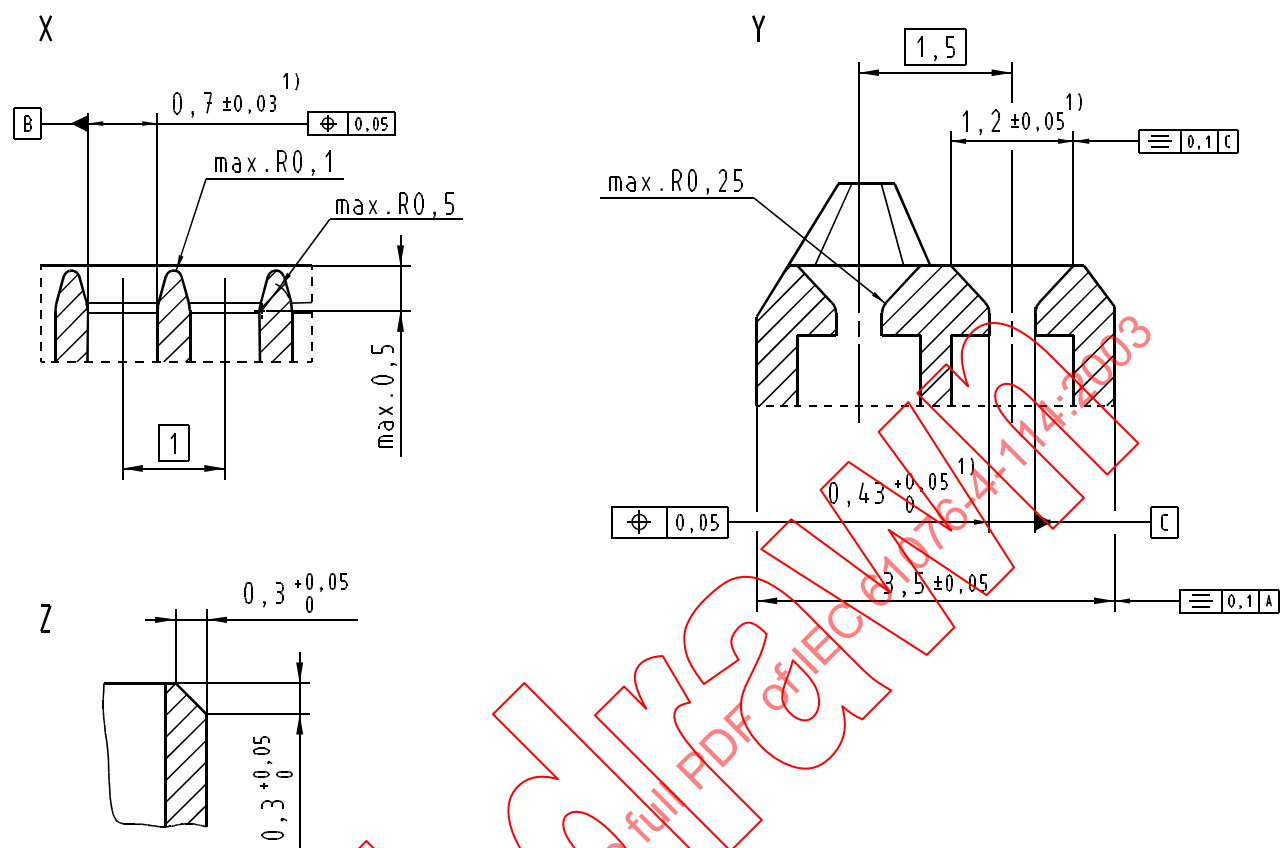


IEC 672/03

1) All orifices.

Figure 13 - Details X, Y, Z

3.5.1.2 Style B

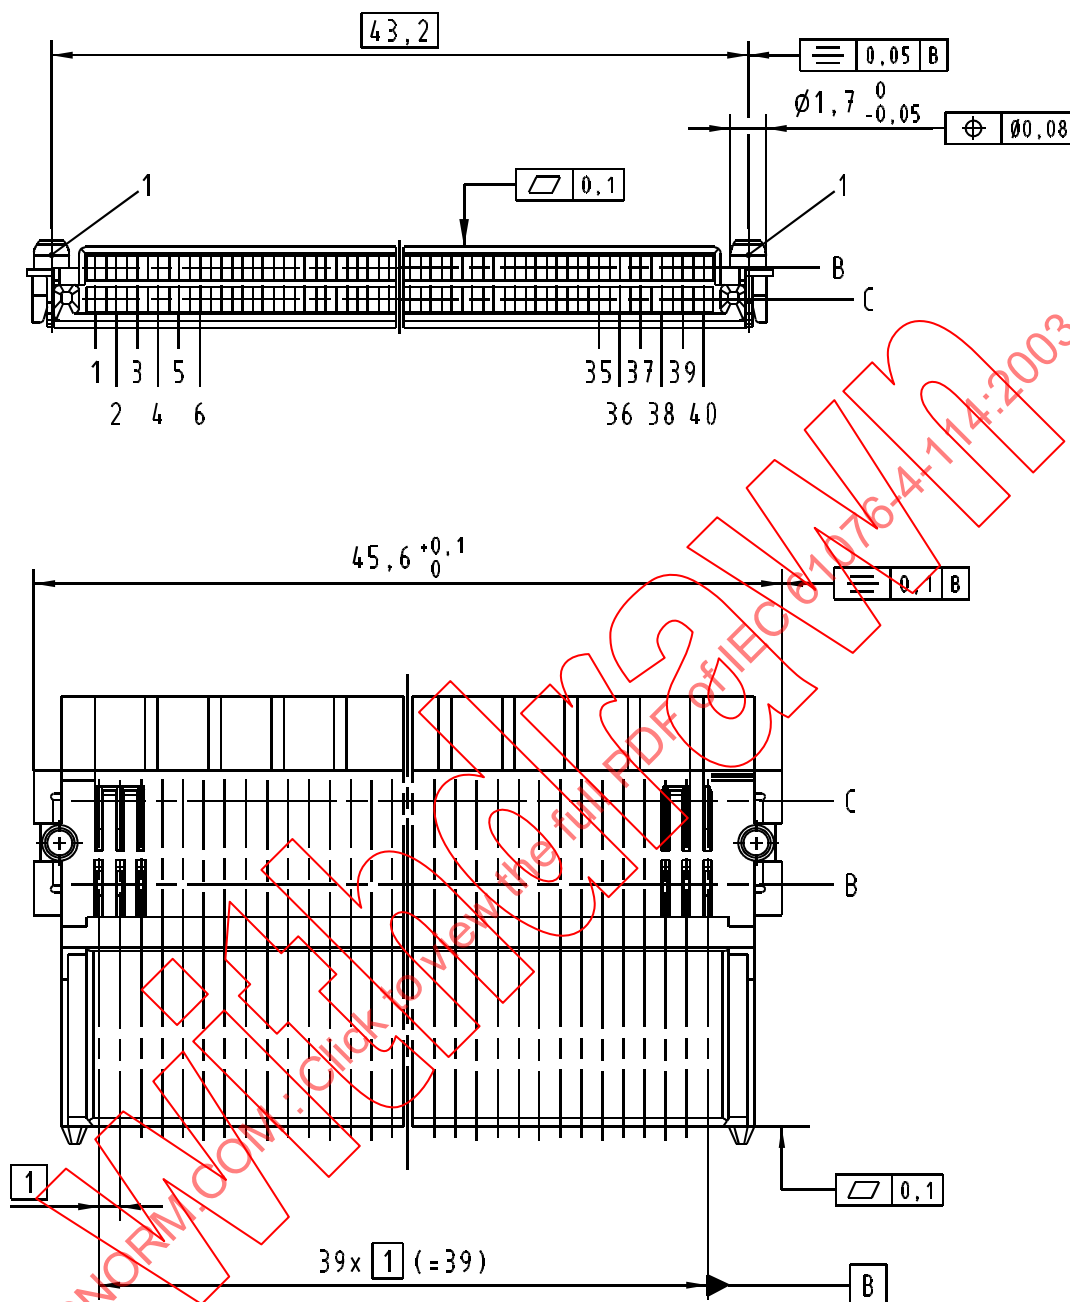

Key

1 Guiding pivots – missing dimensions see 3.5.1.1.

IEC 673/03

Figure 14 – Style B

3.5.1.3 Style C

Under preparation

3.5.1.4 Style D

Under preparation

3.5.2 Terminations

Under preparation

3.6 Accessories


Not applicable

3.7 Mounting information for fixed board connectors


3.7.1 Hole pattern on backplane

Drawings: View on components side of panel.
The letters on the right-hand designate the contact row.
The numbers below designate the position of the contact.
Plated through holes are recommended.

Press-in termination

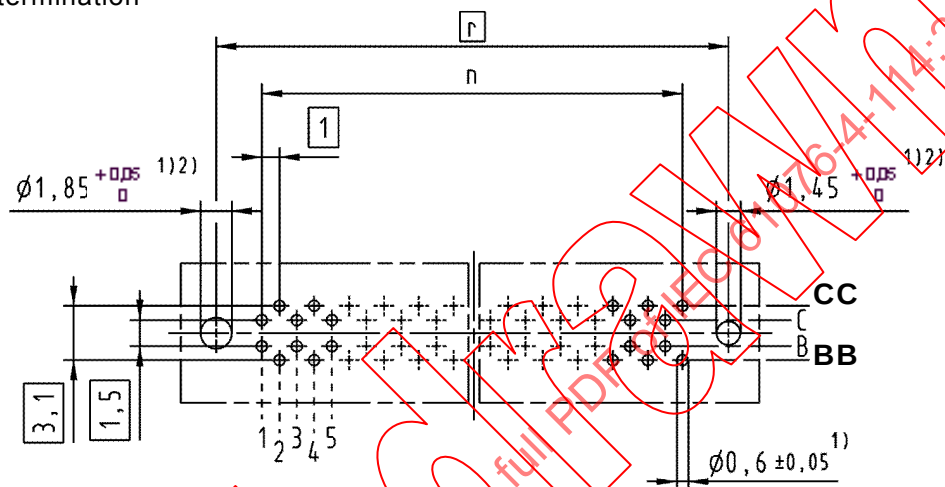

SMT termination

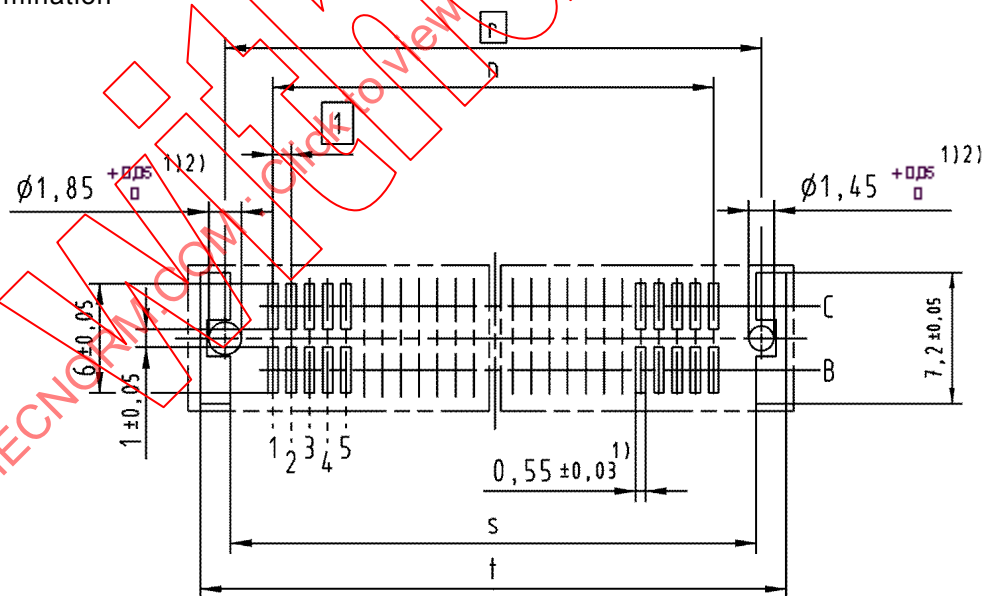

IEC 674/03

Figure 15 – Hole pattern on backplane

NOTE 1 $\phi 0,05$ all holes.

NOTE 2 Holes not through plated.

Table 11 – Hole pattern on backplane

Style	n	r	s	t
A	19	23,25	$23,6 \pm 0,05$	$26,95 \pm 0,05$
B	39	43,25	$43,6 \pm 0,05$	$46,95 \pm 0,05$


3.8 Mounting information for free board connectors

3.8.1 Hole pattern on printed boards

Drawings: View on components side of printed board.

The letters on the right-hand designate the contact row.
The numbers below designate the position of the contact.
Plated through holes are recommended.

SMT termination

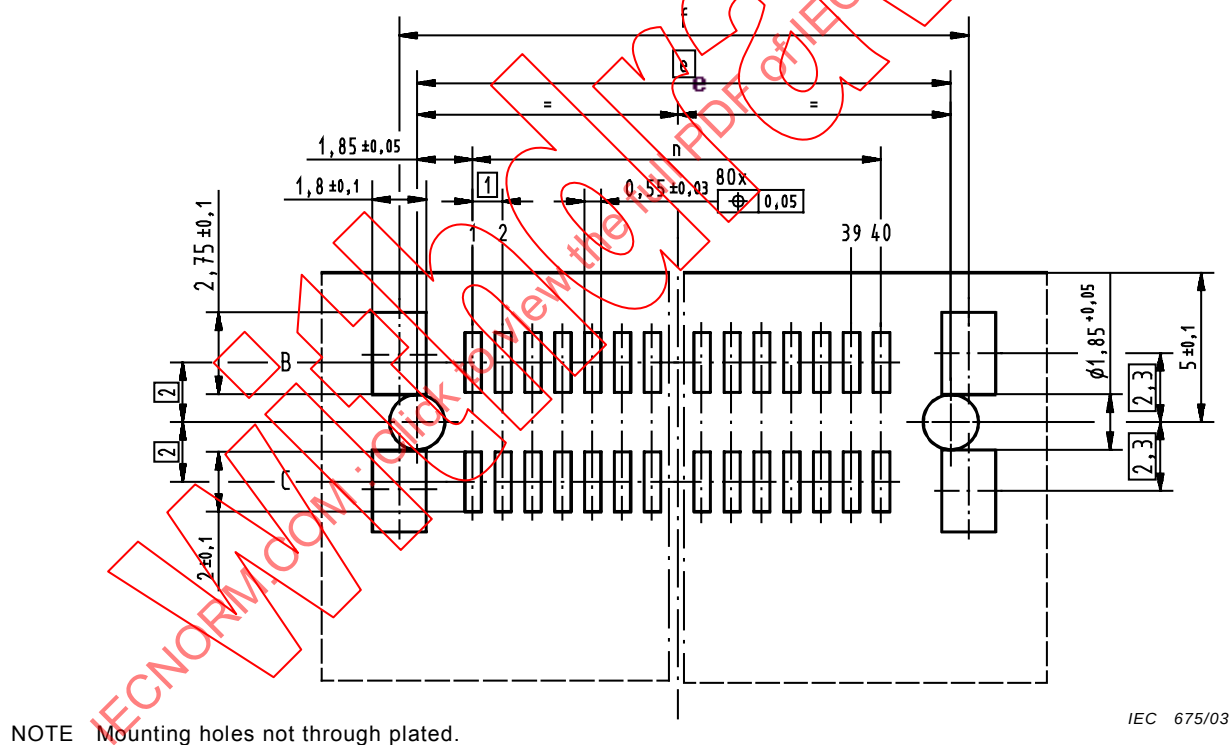

NOTE Mounting holes not through plated.

IEC 675/03

Figure 16 – Hole pattern on printed boards

Table 12 – Hole pattern on printed boards

Style	n	e	f
A	19	23,2	$24,4 \pm 0,1$
B	39	43,2	$44,4 \pm 0,1$

3.9 Gauges

3.9.1 Sizing gauges and retention force gauges

Material: tool steel, hardened.

✓ = surface roughness according to
ISO 1302: $R_a = 0,25 \mu\text{m}$ max.
 $0,15 \mu\text{m}$ min.

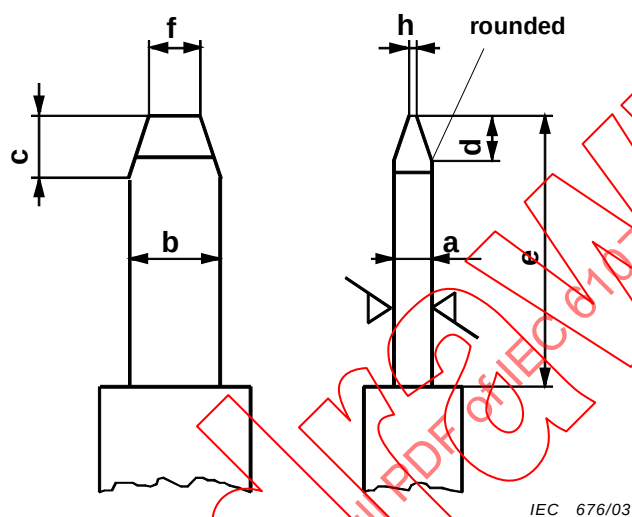


Figure 17 – Gauge dimensions

Table 13 – Gauges

Gauge	Mass g	Application	a mm	b mm	c mm	d mm
PA	–	Sizing	0,33 0,31	0,46	0,38	0,38
PM	12 ⁺¹	Retention force	0,29 0,28	0,44	0,32	0,32

Gauge	Application	e min. mm	f max. mm	h max. mm
PA	Sizing	6	0,2	0,15
PM	Retention force			

4 Characteristics

4.1 Climatic category

Table 14 – Climatic category

Performance level	Climatic category	Category temperature		Damp heat, steady state		Days
		Lower temperature °C	Upper temperature °C	Temperature °C	Relative humidity %	
1	55/125/56	–55	125	40	93	56
2	55/125/21	–55	125	40	93	21

4.2 Electrical

4.2.1 Creepage and clearance distances

The permissible operating voltages depend on the application and on the applicable or specified requirements.

Therefore the clearance and creepage distances are given as operating characteristics. In practice, reductions in creepage or clearance distances may occur due to the conductive pattern of the printed board or the wiring used and shall duly be taken into account.

Table 15 – Minimum creepage and clearance distances

Contact and termination arrangement	Between contact rows		Between contacts in the same row	
	Fixed board connector	Free board connector	Fixed board connector	Free board connector
1	0,8	0,6	0,48	0,6

4.2.2 Voltage proof


Conditions: IEC 60512, Test 4a
Standard atmospheric conditions
Mated connectors

Table 16 – Voltage proof

Contact arrangement	1
According to 2.4.2	Voltage proof
Contact/contact	500 V r.m.s.
Contact/test panel	Not applicable

4.2.3 Current carrying capacity

Conditions: IEC 60512, Test 5b
 Standard atmospheric conditions
 All contacts
 1 A at 50 °C for all styles

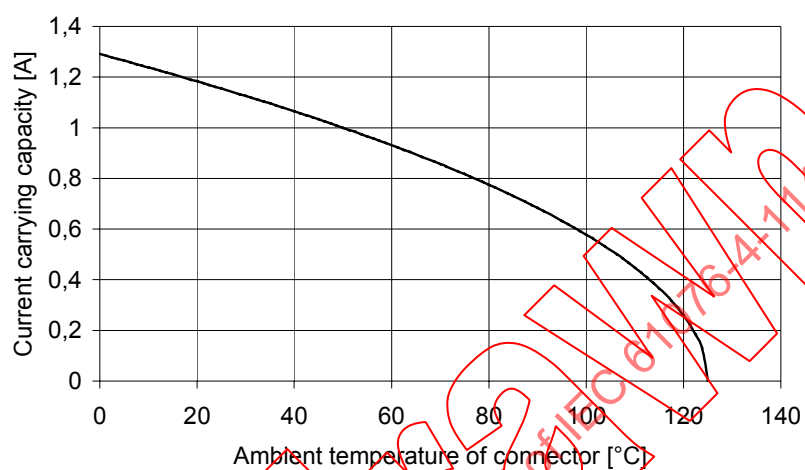


IEC 677/03

Figure 18 – Current carrying capacity

4.2.4 Contact resistance

Conditions: IEC 60512, Test 2a
 Standard atmospheric conditions
 Mated connectors
 15 mΩ max.

Connection points:

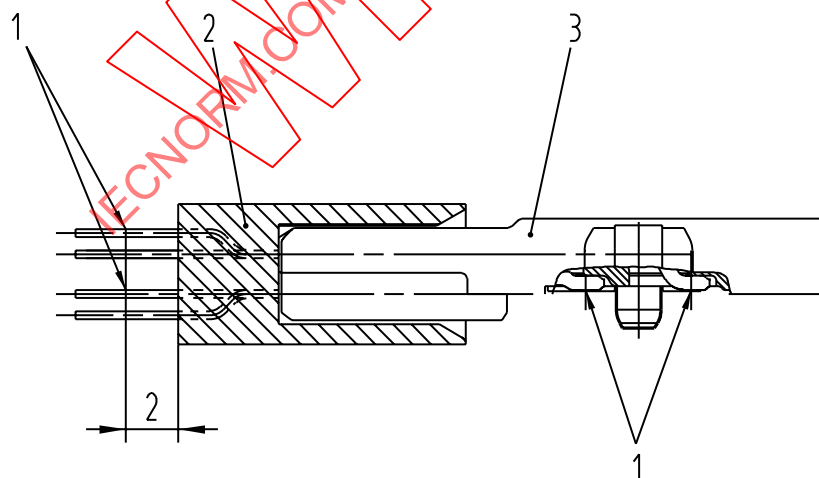

Key

- 1 Measuring points
- 2 Fixed board connector
- 3 Free board connector

IEC 678/03

Figure 19 – Measuring points

4.2.5 Insulation resistance

Conditions: IEC 60512, Test 3a: Method A
Standard atmospheric conditions
Test voltage 100 V ± 15 V d.c.
Mated connectors
Performance level P1 and P2: 10⁶ MΩ min.

4.3 Mechanical

4.3.1 Mechanical operation

Conditions: IEC 60512, Test 9a
Standard atmospheric conditions
Max. speed of operation: 10 mm/s

Table 17 – Number of mechanical operations

Performance level	1	2
Operations	500	250

4.3.2 Insertion and withdrawal forces

Conditions: IEC 60512, Test 13b
Standard atmospheric conditions
Max. speed 10 mm/min.

Table 18 – Insertion and withdrawal forces

Total insertion force	Total withdrawal force	
	min.	max.
n × 0,7 N max.	n × 0,15 N max.	n × 0,45 N max.
n = Number of contacts		

4.3.3 Contact retention in insert

Not applicable

4.3.4 Static load, axial

Not applicable

4.3.5 Vibration (sinusoidal)

Conditions: IEC 60512, Test 6d
Standard atmospheric conditions
Mated connectors
The fixed and free board connector shall be rigidly installed in a suitable fixture as specified in 5.1.2

Table 19 – Vibration severity

Performance level	Severity
1	10 Hz to 2000 Hz and 1,5 mm or 20 g
2	10 Hz to 500 Hz and 0,35 mm or 5 g

5 Test schedule

5.1 General

This test schedule shows all tests and the order in which they shall be carried out as well as the requirements to be met.

An “X” in the column “Requirements” of the following tables indicates that the test or conditioning shall be applied.

Unless otherwise specified, mated sets of connectors shall be tested. Care shall be taken to keep a particular combination of connectors together during the complete test sequence, i.e. when unmating is necessary for a certain test, the same connectors as before shall be mated for the subsequent tests.

In the following a mated set of connectors is called a “specimen”.

When the initial tests have been completed, all the specimens are divided up according to the test groups. Before testing commences, the connectors must have been stored for at least 24 h in the non-inserted state under normal climatic conditions for testing as per IEC 60068-1.

The following specimens are necessary for the entire inspection and test sequence according to the style and number of poles (styles without special contacts):

Table 20 – Number of specimens

Style	Initial test group		Test groups													
	P		AP		BP		CP		DP		EP		FP		GP	
	Performance levels															
	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2
A	25	25	4	4	4	4	4	4	4	4	4	4	4	4	4	4
B	25	25	4	4	4	4	4	4	4	4	4	4	4	4	4	4
C	25	25	4	4	4	4	4	4	4	4	4	4	4	4	4	4
D	25	25	4	4	4	4	4	4	4	4	4	4	4	4	4	4

5.1.1 Arrangement for contact resistance measurement

Conditions: IEC 60512, Test 2a

Points of connection: see 4.2.4

The measurement of contact resistance shall be carried out on the number of contacts specified. Any subsequent measurements of contact resistance shall be made on the same contacts.

5.2 Arrangement for dynamic stress tests

Conditions: IEC 60512, Test 6a; Test 6b; Test 6c and Test 6d

Fixed and free board connectors rigidly installed in fixture

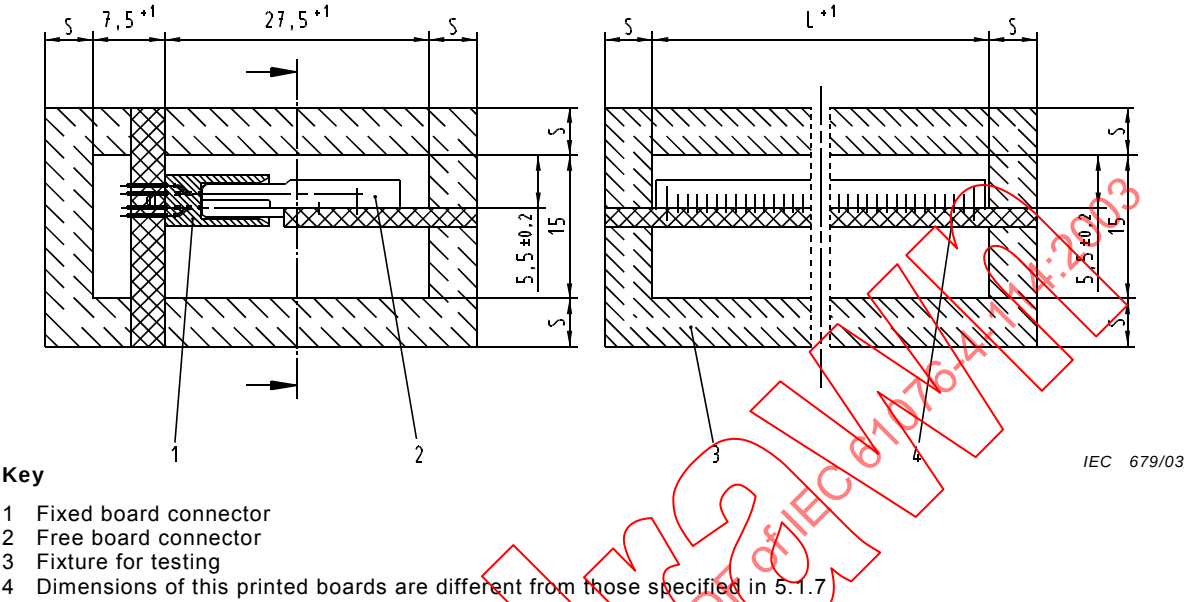


Figure 20 – Arrangement for dynamic stress tests

Table 21 – Dynamic stress tests

	Style			
	A	B	C	D
L mm	29	49	29	49
s mm	≥25			

5.2.1 Arrangement for testing static load, axial

Conditions: IEC 60512, Test 8b
Not applicable

5.2.2 Wiring arrangement for voltage proof and polarization voltage during damp heat test

Conditions: IEC 60512, Test 3a, Test 4a

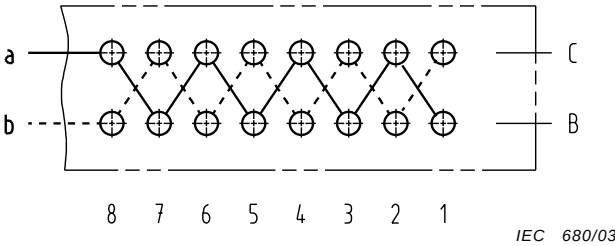


Figure 21 – Wiring of specimen

5.2.3 Arrangement for flammability test

Conditions: IEC 60512, Test 20a

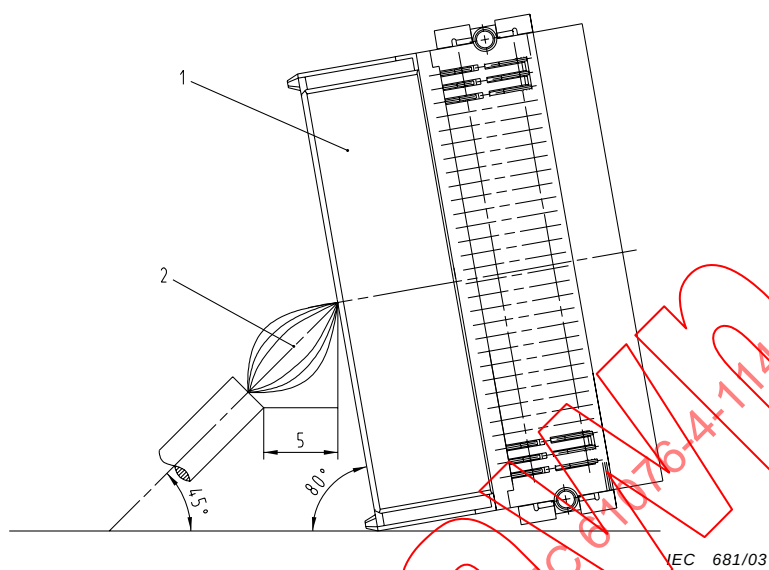



Figure 22 – Arrangement for flammability test

5.2.4 Planarity of mounted connectors

Under preparation

5.2.5 Test board for fixed and free board connectors

Hole pattern depends on style, contact- and termination arrangement

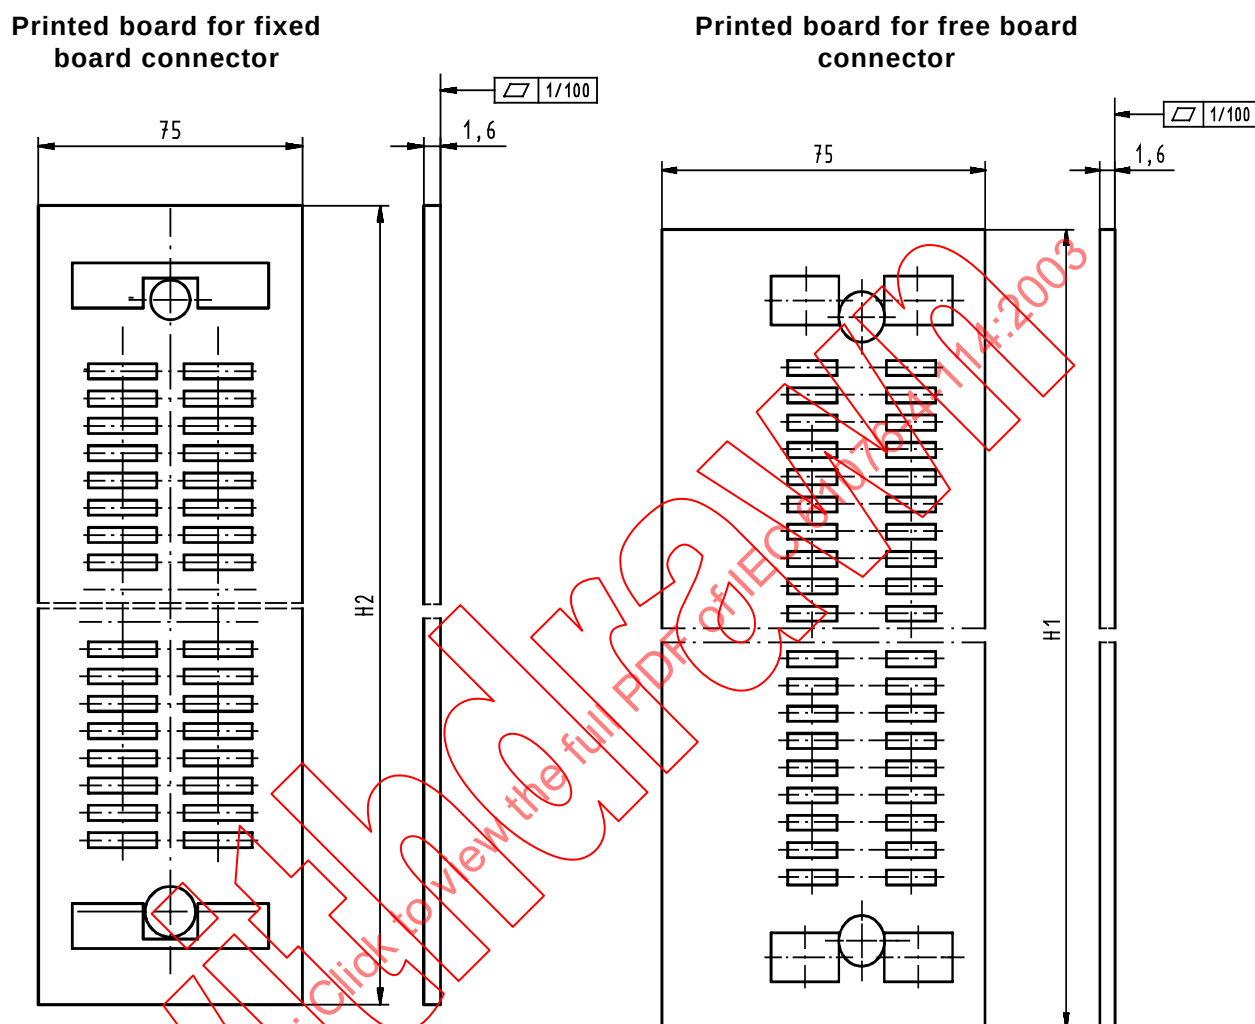

IEC 682/03

Figure 23 – Test board for fixed and free board connectors

Table 22 – Test board for fixed and free board connectors

			Style			
			A	B	C	D
H1	±2	mm	55	75	55	75
H2	±2	mm	40	60	40	60