

---

---

## Radio-frequency identification of animals — Code structure ultra high frequency transponders

*Identification par radiofréquence des animaux — Structure du code  
des transpondeurs à ultra haute fréquence*

STANDARDSISO.COM : Click to view the full PDF of ISO 6881:2023



STANDARDSISO.COM : Click to view the full PDF of ISO 6881:2023



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

|                                                     | Page      |
|-----------------------------------------------------|-----------|
| Foreword.....                                       | iv        |
| Introduction.....                                   | v         |
| <b>1 Scope.....</b>                                 | <b>1</b>  |
| <b>2 Normative references.....</b>                  | <b>1</b>  |
| <b>3 Terms and definitions.....</b>                 | <b>1</b>  |
| <b>4 Symbols (and abbreviated terms).....</b>       | <b>5</b>  |
| <b>5 General requirements.....</b>                  | <b>5</b>  |
| 5.1 General.....                                    | 5         |
| 5.2 Structure of Reserved Memory Bank (MB 00).....  | 6         |
| 5.3 Structure of TID Memory Bank (MB 10).....       | 7         |
| 5.4 Structure of UII Memory Bank (MB 01).....       | 7         |
| 5.4.1 General.....                                  | 7         |
| 5.4.2 Structure of the StoredPC.....                | 7         |
| 5.4.3 Structure of the UII.....                     | 8         |
| <b>6 Backward compatibility.....</b>                | <b>10</b> |
| 6.1 General.....                                    | 10        |
| 6.2 LF transponders (for reference).....            | 11        |
| 6.3 UHF transponders.....                           | 11        |
| <b>Annex A (informative) CRC 8 source code.....</b> | <b>13</b> |
| <b>Bibliography.....</b>                            | <b>14</b> |

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at [www.iso.org/patents](http://www.iso.org/patents). ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 19, *Agricultural electronics*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

This document does not use EPC coding but ISO coding. To define an ISO 18000-63 transponder as assigned for animal identification only, an Application Family Identifier (AFI) shall be implemented according to ISO 15961. The AFI is used in an ISO 18000-63 transponder to select in the bulk reading process only those transponders programmed for the dedicated application.

This document does not specify the characteristics of the transmission protocols between transponder and transceiver. These characteristics are the subject of ISO 18000-63.

Transponders are in conformance with this document provided they meet the requirements given in [Clauses 5](#) and [6](#).

STANDARDSISO.COM : Click to view the full PDF of ISO 6881:2023

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 6881:2023

# Radio-frequency identification of animals — Code structure ultra high frequency transponders

## 1 Scope

This document defines the rules for encoding the animal identification code in a specific memory bank known as MB 01 in the memory of an ISO 18000-63 transponder (UHF RFID technology).

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 11784, *Radio frequency identification of animals — Code structure*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

### 3.1

#### unique item identifier

##### UII

96-bit pattern which defines a unique number that contains the *DSFID* (3.2), the animal identification header, the animal identification code and the 8-bit CRC

Note 1 to entry: If the ISO 18000-63 transponder has more than 96 bits of UII memory, the additional bits are considered UII Trailer bits and shall be set to 0 as default value.

Note 2 to entry: See *DSFID* (3.2), *animal identification header* (3.3), *animal identification code* (3.4), *8-bit CRC* (3.15) and *ISO 18000-63 transponder* (3.30).

### 3.2

#### data storage format identifier

##### DSFID

8-bit number defined by ISO/IEC 15962 that indicates the application and how the data is structured into the UII memory of the ISO 18000-63 transponder, i.e. the access method and data format

Note 1 to entry: See *UII* (3.1) and *ISO 18000-63 transponder* (3.30).

### 3.3

#### animal identification header

16-bit code reserved for future use

Note 1 to entry: The animal identification header shall be set to 0 as default.

### 3.4

#### **animal identification code**

64-bit pattern which unequivocally identifies an animal comprising the country code or manufacturer's code, the national identification code and the control bits

Note 1 to entry: The animal identification code is defined by the ISO 11784.

Note 2 to entry: See *country code* (3.5), *manufacturer's code* (3.6), *national identification code* (3.7) and *control bits* (3.8).

### 3.5

#### **country code**

10-bit pattern to define the country where the transponder was issued or used, according to ISO 3166-1

### 3.6

#### **manufacturer's code**

10-bit pattern identifying the manufacturer of the transponder

Note 1 to entry: The manufacturer's code is used as alternative to the country code, when no competent authority is available to issue the country code authorization.

Note 2 to entry: ISO has appointed the International Committee for Animal Recording (ICAR) as the registration authority (RA) competent to register and manage manufacturer codes used in the radio frequency identification (RFID) of animals in accordance with ISO 11784 and ISO 11785.

### 3.7

#### **national identification code**

38-bit code field with a unique number within a country, where the code structure and sequence is defined by the country in charge

### 3.8

#### **control bits**

16-bit code that contains the animal application bit, the retagging counter, the user information field, the reserved field, the RUDI bit and the data block bit

Note 1 to entry: See *animal application bit* (3.9), *retagging counter* (3.10), *user information field* (3.11), *reserved field* (3.12), *RUDI-bit* (3.13) and *data block bit* (3.14).

### 3.9

#### **animal application bit**

bit which signals whether the transponder is used for animal identification or not

Note 1 to entry: In all animal applications this bit shall be 1.

### 3.10

#### **retagging counter**

three-bit counter for counting the number of retagging

### 3.11

#### **user information field**

five-bit field for additional user information, used only in conjunction with the country code

Note 1 to entry: See *country code* (3.5).

### 3.12

#### **reserved field**

6-bit code reserved for future use

**3.13****RUDI-bit**

bit indicating the existence of data in the User Memory (MB11)

Note 1 to entry: The RUDI-bit shall have the same value of the UMI bit. The RUDI-bit and UMI bit shall be encoded with the value 0 if the User Memory is empty or not available.

Note 2 to entry: See *country code* (3.5) and *UMI* (3.19).

**3.14****data block bit**

bit indicating the existence of data in the additional UII memory

**3.15****8-bit CRC**

8-bit Cyclic Redundancy Check computed over the contents of the UII

Note 1 to entry: The 8-bit CRC protects the information against bit flipping.

**3.16****memory bank****MB**

designated name of a segmented memory structure

Note 1 to entry: For this document, the memory banks are: 00 (Reserved), 01 (UII memory), 10 (TID), and 11 (User memory) using binary notation.

Note 2 to entry: See ISO 18000-63 *transponder* (3.30).

**3.17****storedCRC**

16-bit CRC automatically generated, computed over the contents of the StoredPC and the UII

Note 1 to entry: The storedCRC does not protect against bit flipping (unintentional change of state of a bit stored in memory).

Note 2 to entry: See *StoredPC* (3.18) and *UII* (3.1).

**3.18****storedPC**

protocol-control information stored in the UII Memory Bank (MB 01) that contains the Length Indicator, the UMI, the XI, the Toggle Bit and the AFI

Note 1 to entry: See *StoredPC* (3.18), *UMI* (3.19), *XI* (3.20), *toggle bit* (3.21) and *AFI* (3.22).

**3.19****user memory indicator****UMI**

Boolean flag in the UII Memory Bank (MB 01) indicating whether the User Memory Bank (MB 11) is present and contains data

Note 1 to entry: The UMI bit shall have the same value of the RUDI-bit.

Note 2 to entry: See *RUDI-bit* (3.13).

**3.20****extended protocol control indicator****XI**

bit in the UII Memory Bank (MB 01) indicating whether XPC words are present

### 3.21

#### **toggle bit**

Boolean flag in the UII Memory Bank (MB 01) indicating whether the presence of an Application Family Identifier (AFI)

Note 1 to entry: The Toggle bit shall be encoded with the value 1 to indicate the presence of the AFI.

Note 2 to entry: See *AFI* ([3.22](#)).

### 3.22

#### **application family identifier**

##### **AFI**

code programmed in the UII Memory Bank (MB 01) used to select a class of RFID tags relevant to an application, or aspect of an application, and to ignore further communications with other classes of RFID tags with different identifiers

Note 1 to entry: This document does not use GS1 EPC coding but ISO coding.

Note 2 to entry: Application Family Identifier is defined in ISO/IEC 15961-3.

### 3.23

#### **ISO coding**

application whose usage denotes an acceptance of ISO standards and policies and where in MB01 an Application Family Identifier as defined in ISO/IEC 15961-3 is encoded

### 3.24

#### **kill password**

32-bit password in the Reserved Memory Bank (MB 00) that is presented to the tag in order to complete the mandatory "Kill" command

Note 1 to entry: The "Kill" command is used to permanently silence a tag.

Note 2 to entry: For ISO 6881 transponders, the use of the Kill Command is disabled (see [5.2](#)).

### 3.25

#### **access password**

32-bit password in the Reserved Memory Bank (MB 00) that is presented to the tag in order to perform privileged operations

### 3.26

#### **tag identifier**

##### **TID**

64-bit unique unmodifiable, pre-programmed identification number generated by the IC manufacturer in the TID Memory Bank (MB 10) that guarantees the uniqueness of each device on the market and ensures full traceability

### 3.27

#### **backward compatibility**

compatibility with former generation systems and/or databases

### 3.28

#### **transceiver**

device used to activate and then communicate with a transponder (also called RFID reader)

Note 1 to entry: See *transponder* ([3.29](#)).

### 3.29

#### **transponder**

device which transmits its stored information when activated by a transceiver and may be able to store new information

Note 1 to entry: See *transceiver* ([3.28](#)).

**3.30****ISO 18000-63 transponder**

device in accordance with ISO/IEC 18000-63 which transmits its stored information when activated by a transceiver and may be able to store new information

Note 1 to entry: In this document, the ISO 18000-63 transponder shall have a minimum of 96 bits of UII memory encoding size.

Note 2 to entry: See *transceiver* (3.28).

**4 Symbols (and abbreviated terms)**

|       |                                              |
|-------|----------------------------------------------|
| AFI   | Application Family Identifier                |
| CRC   | Cyclic Redundancy Check                      |
| DSFID | Data Storage Format Identifier               |
| EPC   | Electronic Product Code                      |
| ICAR  | International Committee for Animal Recording |
| IEC   | International Electrotechnical Commission    |
| ISO   | International Standard Organization          |
| LF    | Low Frequency                                |
| LFSR  | Linear Feedback Shift Register               |
| MB    | Memory Bank                                  |
| PC    | Protocol Control                             |
| RA    | Registration Authority                       |
| RFID  | Radio Frequency Identification               |
| RFU   | Reserved for Future Use                      |
| TID   | Tag Identifier                               |
| UHF   | Ultra-High Frequency                         |
| UII   | Unique Item Identifier                       |
| UMI   | User Memory Indicator                        |
| XPC   | Extended protocol control                    |

**5 General requirements****5.1 General**

ISO 18000-63 transponders have what is known as a segmented memory structure, where three or four different Memory Banks are supported and separately addressable. Using binary notation, the memory banks (MBs) are:

— 00 – Reserved memory for passwords.

- 01 – UII memory for the unique item identifier.
- 10 – TID memory for tag identification.
- 11 – User memory for additional user data.

NOTE The Memory Bank 11 is optional and might not be supported in some ISO 18000-63 transponders. The use of Memory Bank 11 to store additional user data shall be indicated by setting the RUDI bit and the UMI bit to 1.

The structure of the memory banks of an ISO 18000-63 transponder is shown in [Figure 1](#).

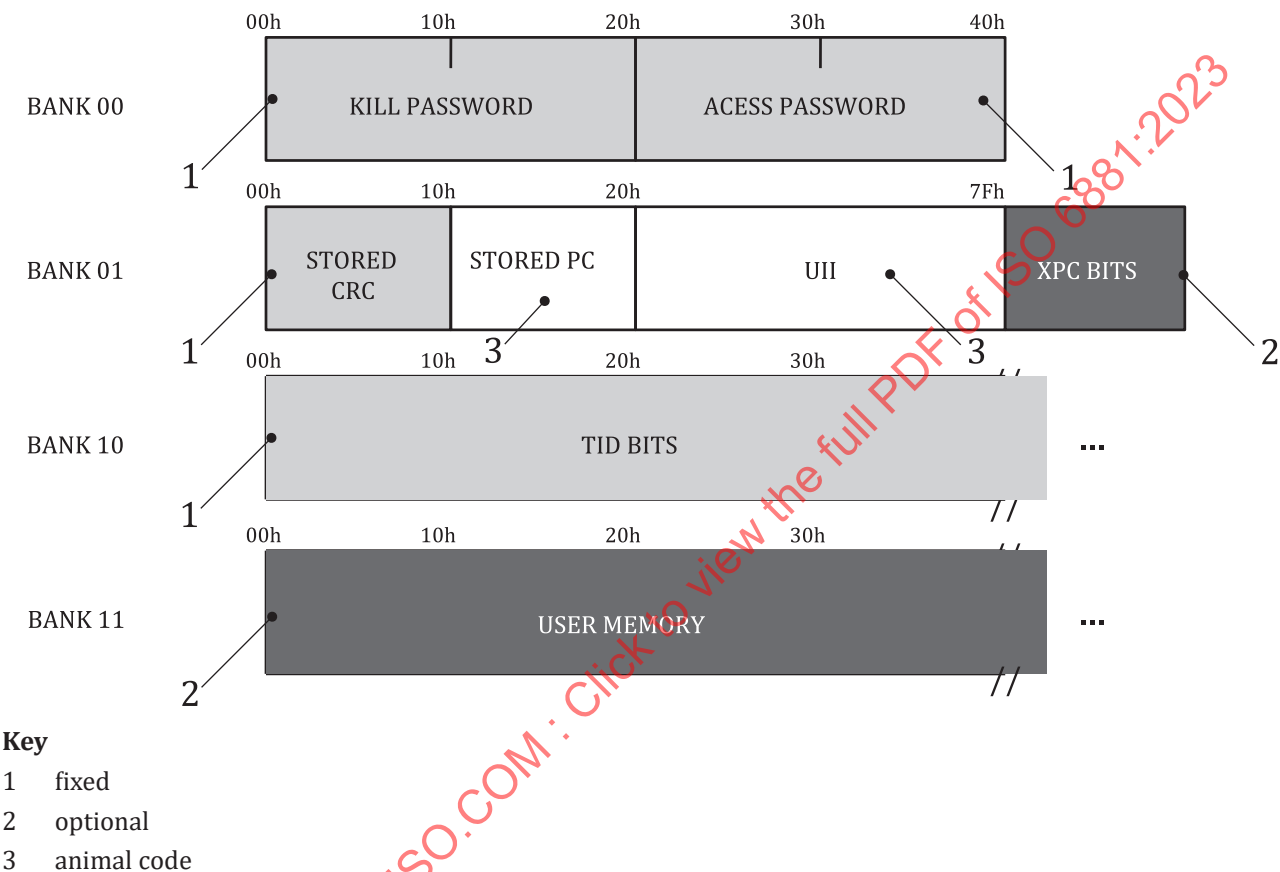


Figure 1 — Memory map of ISO 18000-63 transponder

## 5.2 Structure of Reserved Memory Bank (MB 00)

This Memory Bank is used to store the Kill Password and Access Password.

The Kill Password is a 32-bit password that shall be presented to the tag in order to complete the “Kill” command. The 32-bit Kill Password is stored at locations 00<sub>HEX</sub> to 1F<sub>HEX</sub>. The “Kill” command is used to permanently silence a tag.

The Access Password is a 32-bit password that shall be presented to the tag in order to perform privileged operations. The 32-bit Access Password is encoded at location 20<sub>HEX</sub> to 3F<sub>HEX</sub>.

The default un-programmed value is zero. A tag with a non-zero Access Password requires the interrogator to issue this password before entering the secured state of the tag.

This document does not specify the use of Access password. The Kill Password shall be set to zero and permanently locked to avoid the use of the Kill Command.

### 5.3 Structure of TID Memory Bank (MB 10)

The 64-bit TID shall be programmed and write permalocked at wafer test by the IC manufacturer, before customer delivery. This guarantees the uniqueness of each device on the market.

The 64-bit TID is stored at locations 00<sub>HEX</sub> to 3F<sub>HEX</sub>.

### 5.4 Structure of UII Memory Bank (MB 01)

#### 5.4.1 General

This Memory Bank contains the UII and associated syntax. See [Figure 2](#).

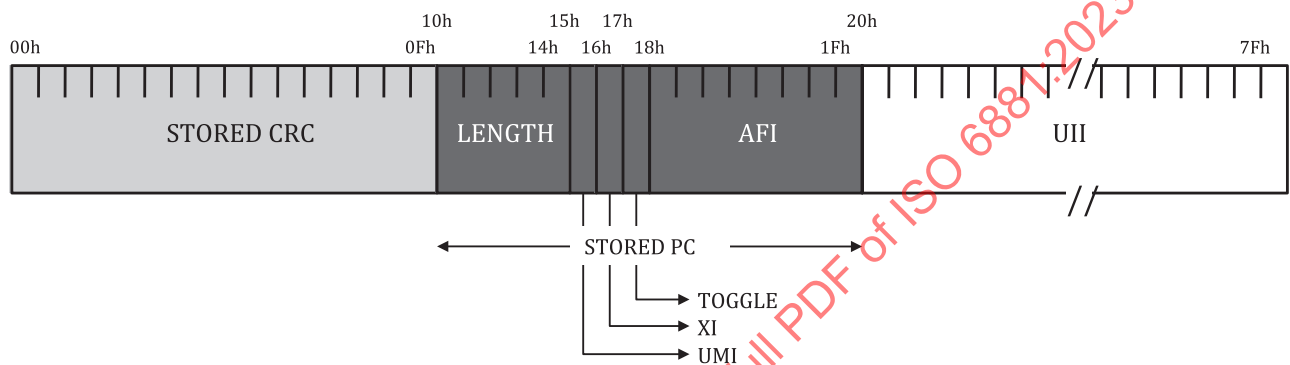


**Figure 2 — MB 01 Memory Map for an ISO 18000-63 transponder for animal identification purpose**

The first word at memory address location 00<sub>HEX</sub> to 0F<sub>HEX</sub> contains a storedCRC-16. This is automatically generated when the tag is processed. The rules and algorithm for that are explained in ISO/IEC 18000-63:2021, Annex F.

The second word contains a StoredPC at memory locations 10<sub>HEX</sub> to 1F<sub>HEX</sub>.

In the sequence of the StoredPC, the MB01 contains the UII at memory locations 20<sub>HEX</sub> to 7F<sub>HEX</sub>.

#### 5.4.2 Structure of the StoredPC

The structure of the StoredPC is significant and relevant to this document as follows:

- A UII Length Indicator encoded in memory locations 10<sub>HEX</sub> to 14<sub>HEX</sub> represents the number of 16-bit words comprising the UII field. The transceiver should read the Length Indicator to check the UII memory size.
- A User Memory Indicator (UMI) is stored in location 15<sub>HEX</sub>. This bit indicates whether the user memory bank (MB 11) is present and contains data. The UMI bit shall have the same value of the RUDI-bit.
- An Extended Protocol Control Indicator (XI) is stored in location 16<sub>HEX</sub>. This bit indicates whether an XPC word is present. The function of this bit is beyond the scope of this document. The XI bit shall be encoded with the value 0 to indicate the absence of XPC words.
- The Toggle Bit is a boolean flag indicating whether the next 8 bits represents reserved memory or an Application Family Identifier (AFI). It is encoded in memory location 17<sub>HEX</sub>. In this document, the Toggle Bit shall be encoded with the value 1 to indicate that the following eight bits are the AFI.
- An AFI Code: 0xAF with the Dataformat Decimal Value of 32 which is defined under the authority of AIM and registered at ISO/IEC 15961 Data Construct Register. This document does not use EPC

coding but ISO coding. The AFI is encoded in memory locations 18<sub>HEX</sub> to 1F<sub>HEX</sub> with the bit values AF<sub>HEX</sub>.

The structure of the StoredPC is shown in [Table 1](#).

**Table 1 — Structure of the StoredPC**

| 5 bits - Length |    |    |    |    | 1 bit - UMI | 1 bit - XI | 1 bit - Toggle bit | 8 bits - AFI |    |    |    |    |    |    |    |
|-----------------|----|----|----|----|-------------|------------|--------------------|--------------|----|----|----|----|----|----|----|
| 10              | 11 | 12 | 13 | 14 | 15          | 16         | 17                 | 18           | 19 | 1A | 1B | 1C | 1D | 1E | 1F |
| 0               | 0  | 1  | 1  | 0  | X           | X          | 1                  | 1            | 0  | 1  | 0  | 1  | 1  | 1  | 1  |

### 5.4.3 Structure of the UII

#### 5.4.3.1 General

In this document focused on animal identification, the Unique Item Identifier (UII) contains the 64-bit Animal Identification Code shall be in accordance with ISO 11784, guaranteeing a unique electronic code structure worldwide and across LF and UHF technologies and providing backward compatibility with data structure on existing national traceability databases. The ISO 18000-63 transponder shall have a minimum of 96 bits of UII memory.

If the ISO 18000-63 transponder has more than 96 bits of UII memory, the additional bits shall be set to zero. In case the additional bits contain data, the Data Block indicator bit shall be set to 1.

The structure of the 96 bits UII is shown in [Table 2](#).

**Table 2 — Structure of the UII**

|         |       | MS byte          |                  |                  |                  |                 |                 |                 |                 | LS byte         |               |               |               |               |               |                 |                  |
|---------|-------|------------------|------------------|------------------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|---------------|---------------|---------------|---------------|---------------|-----------------|------------------|
|         |       | MS bit           |                  |                  |                  |                 |                 |                 | LS bit          | MS bit          |               |               |               |               |               |                 | LS bit           |
| 70h-7Fh | End   | b15<br>User info | b14<br>User info | b13<br>User info | b12<br>User info | b11<br>Retag    | b10<br>Retag    | b9<br>Retag     | b8<br>Animal    | b7<br>CRC       | b6<br>CRC     | b5<br>CRC     | b4<br>CRC     | b3<br>CRC     | b2<br>CRC     | b1<br>CRC       | b0<br>CRC        |
| 60h-6Fh |       | b31<br>CC / MFC  | b30<br>CC / MFC  | b29<br>CC / MFC  | b28<br>CC / MFC  | b27<br>CC / MFC | b26<br>CC / MFC | b25<br>CC / MFC | b24<br>CC / MFC | b23<br>Data blk | b22<br>Rudi   | b21<br>RFU    | b20<br>RFU    | b19<br>RFU    | b18<br>RFU    | b17<br>RFU      | b16<br>User info |
| 50h-5Fh |       | b47<br>ID        | b46<br>ID        | b45<br>ID        | b44<br>ID        | b43<br>ID       | b42<br>ID       | b41<br>ID       | b40<br>ID       | b39<br>ID       | b38<br>ID     | b37<br>ID     | b36<br>ID     | b35<br>ID     | b34<br>ID     | b33<br>CC / MFC | b32<br>CC / MFC  |
| 40h-4Fh |       | b63<br>ID        | b62<br>ID        | b61<br>ID        | b60<br>ID        | b59<br>ID       | b58<br>ID       | b57<br>ID       | b56<br>ID       | b55<br>ID       | b54<br>ID     | b53<br>ID     | b52<br>ID     | b51<br>ID     | b50<br>ID     | b49<br>ID       | b48<br>ID        |
| 30h-3Fh |       | b79<br>Header    | b78<br>Header    | b77<br>Header    | b76<br>Header    | b75<br>Header   | b74<br>Header   | b73<br>Header   | b72<br>Header   | b71<br>ID       | b70<br>ID     | b69<br>ID     | b68<br>ID     | b67<br>ID     | b66<br>ID     | b65<br>ID       | b64<br>ID        |
| 20h-2Fh | Start | b95<br>DSFID     | b94<br>DSFID     | b93<br>DSFID     | b92<br>DSFID     | b91<br>DSFID    | b90<br>DSFID    | b89<br>DSFID    | b88<br>DSFID    | b87<br>Header   | b86<br>Header | b85<br>Header | b84<br>Header | b83<br>Header | b82<br>Header | b81<br>Header   | b80<br>Header    |

The structure of the UII is described as follows:

- A data storage format identifier (DSFID) is encoded in memory locations 20<sub>HEX</sub> to 27<sub>HEX</sub>. The DSFID is 32<sub>HEX</sub>, an 8-bit number defined by ISO/IEC 15962 that indicates how the data is structured into the memory of the ISO 18000-63 transponder, i.e. the access method and data format.

- An Animal Identification Header is encoded in memory locations 28<sub>HEX</sub> to 37<sub>HEX</sub>. The Animal Identification Header is a 16-bit code reserved for future use. RFU values are reserved for future extensibility. Third parties, including but not limited to solution providers and end users, shall not use these RFU values for proprietary purposes.
- An Animal Identification Code is encoded in memory locations 38<sub>HEX</sub> to 77<sub>HEX</sub>. The Animal Identification Code is a 64-bit pattern to identify an animal comprising the Country Code or Manufacturer's Code, the National Identification Code and the Control Bits.
- A 8-Bit CRC is encoded in memory locations 78<sub>HEX</sub> to 7F<sub>HEX</sub>. The CRC-8 computed over the contents of the UII memory, that is, from the location 20<sub>HEX</sub> to 77<sub>HEX</sub> of MB 01.

#### 5.4.3.2 Structure of the Animal Identification Code

The Animal Identification Code is a bit pattern, located in the UII memory, to identify an animal comprising the Country Code or Manufacturer's Code, the National Identification Code and the Control Bits. The structure of the Animal Identification Code is in accordance with ISO 11784, guaranteeing a unique electronic code structure worldwide and across LF and UHF technologies and providing backward compatibility with data structure on existing national traceability databases.

The structure of the Animal Identification Code is shown in Table 3.

**Table 3 — Structure of the Animal Identification Code**

| ISO 11784 DATA STRUCTURE (FROM 38h TO 77h) |    |          |  |  |    |                      |    |           |  |  |    |                  |                |               |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------------------------------|----|----------|--|--|----|----------------------|----|-----------|--|--|----|------------------|----------------|---------------|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 38 BITS NATIONAL IDENTIFICATION CODE       |    |          |  |  |    | 10 BITS COUNTRY CODE |    |           |  |  |    | 1 BIT DATA BLOCK | 1 BIT RUDI BIT | 5 BITS UNUSED |    |    |    |    |    |    |    |    |    |    |    |    |    |
|                                            |    |          |  |  |    |                      |    |           |  |  |    |                  |                |               |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 38                                         | 39 | 3A ...5B |  |  | 5C | 5D                   | 5E | 5F ... 66 |  |  | 67 | 68               | 69             | 6A            | 6B | 6C | 6D | 6E | 6F | 70 | 71 | 72 | 73 | 74 | 75 | 76 | 77 |
| X                                          | X  | ...      |  |  | X  | X                    | X  | ...       |  |  | X  | X                | X              | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  |

The structure of the Animal Identification Code is described below:

- A National Identification Code is encoded in memory locations 38<sub>HEX</sub> to 5D<sub>HEX</sub>. The National Identification Code is a 38-bit code field with a unique number within a country.
- A Country Code or Manufacturer's Code is encoded in memory locations 5E<sub>HEX</sub> to 67<sub>HEX</sub>. The Country Code is a 10-bit pattern to define the country where the transponder was issued, according to ISO 3166-1. The Manufacturer's Code is a 10-bit pattern identifying the manufacturer of the transponder.
- Control Bits are encoded in memory locations 68<sub>HEX</sub> to 77<sub>HEX</sub>. The Control Bits contains the:
  - Data Block indicator bit that indicates the existence of a data block in the UII Trailer;
  - RUDI-bit that indicates the existence of data in the User Memory (MB11). The RUDI-bit bit shall have the same value of the UMI bit;
  - Reserved field that are 5-bit pattern reserved for future use. RFU values are reserved for future extensibility. Third parties, including but not limited to solution providers and end users, shall not use these RFU values for proprietary purposes;
  - User information field. The content of this 5-bit pattern is informative. It is defined by the country, as coded in the country code field;

- Retagging counter that are 3 bits pattern that indicate a retagging with the same identification number. This counter shall be zero for the first assignment of a transponder to an animal;
- Animal application bit indicates whether the transponder is used for animal identification or not. In all animal applications this bit shall be 1.

#### 5.4.3.3 CRC-8

The CRC is implemented as a linear feedback shift register (LFSR). The Shift register computes the LFSR function, the Polynomial register holds the polynomial that defines the LFSR and the Seed register enables initialization of the starting data.

This component requires that the Seed and Polynomial registers are initialized prior to start. Computation of an n-bit LFSR result is specified by a polynomial with  $n + 1$  terms, the last of which is the  $X^0$  term where  $X^0 = 1$ .

The CRC-8 polynomial is  $x^8 + x^2 + x + 1$ . The CRC algorithm assumes the presence of the  $X^0$  term, so that the polynomial for an n-bit result can be expressed by an n bit rather than  $(n + 1)$  bit specification.

To specify the polynomial specification, write an  $(n + 1)$  bit binary number corresponding to the full polynomial, with 1's for each term present.

The CRC-8 polynomial would be  $100000111_{\text{BIN}}$  or  $107_{\text{HEX}}$ . Then, drop the right-most bit (the  $X^0$  term) with the value 1 to obtain the CRC polynomial value.

To implement the CRC example, the Polynomial register is loaded with a value of  $07_{\text{HEX}}$ . A rising edge of the input clock shifts each bit of the input data stream, MSB first, through the Shift register, computing the specified CRC algorithm. Eight clocks are required to compute the CRC for each byte of input data.

CRC-8 is to be applied to the DSFID + Animal Identification Header + Animal Identification Code.

[Annex A](#) provides a reference source code for calculating the CRC-8.

## 6 Backward compatibility

### 6.1 General

The structure of the Animal Identification Code and the meaning of each bit pattern is in accordance with ISO 11784, guaranteeing a unique electronic code structure worldwide and across LF and UHF technologies and providing backward compatibility with data structure on existing national traceability databases. The backward compatibility with the ISO 11784 is shown in [Figure 3](#).

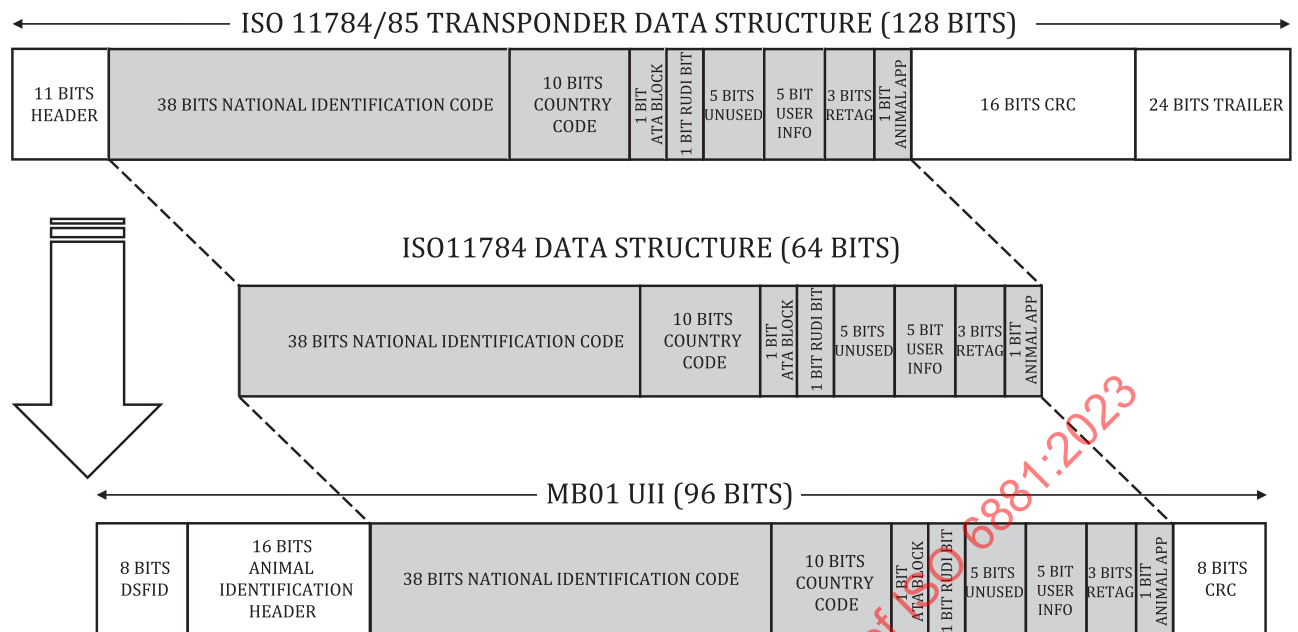


**Figure 3 — Backward compatibility with the ISO 11784 scheme**

## 6.2 LF transponders (for reference)

There are 3 different memory sections in a LF transponder in accordance with ISO 11784, ISO 11785 and ISO 14223:

- Identification Code.
- Trailer.
- Extended memory.

**NOTE** The Extended memory can be equal or larger than 64 bits. The RUDI-bit in the Animal Identification Code indicates the presence of data in this memory. The ISO 14223 series gives guidance for the use of the Extended memory in ISO 11784 transponders.

The 64 bits Animal Identification Code is located at the Identification Code memory in a LF transponder. It is not necessary to have a flag bit to indicate the use of this memory since it is mandatory and always present.

The 24 bits Trailer memory is always present in an LF transponder. The Data Block indicator bit in the Animal Identification Code indicates the presence of data in this memory.

## 6.3 UHF transponders

There are 3 different memory sections to store data in the Memory Banks of an UHF transponder:

- UUI;
- UUI Trailer;
- User memory.

The Animal Identification Code is located at the UUI memory (MB01). The UUI memory shall have at least 96 bits. It is not necessary a flag bit to indicate the use of this memory since it is mandatory and always present.