

INTERNATIONAL STANDARD

IEC
61182-2

First edition
2006-09

Printed board assembly products – Manufacturing description data and transfer methodology –

Part 2: Generic requirements



Reference number
IEC 61182-2:2006(E)

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site** (www.iec.ch)

- **Catalogue of IEC publications**

The on-line catalogue on the IEC web site (www.iec.ch/searchpub) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

- **IEC Just Published**

This summary of recently issued publications (www.iec.ch/online_news/justpub) is also available by email. Please contact the Customer Service Centre (see below) for further information.

- **Customer Service Centre**

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

IEC
61182-2

First edition
2006-09

Printed board assembly products – Manufacturing description data and transfer methodology –

Part 2: Generic requirements

© IEC 2006 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE

XH

For price, see current catalogue

CONTENTS

FOREWORD.....	7
1 Scope and object.....	9
1.1 Focus and intent.....	9
1.2 Notation	9
2 Normative references	10
3 Documentation conventions.....	10
4 Requirements	12
4.1 Rules concerning the use of XML and XML Schema	13
4.2 Data organization and identification rules	14
4.3 Transformation characteristics (Xform)	19
4.4 Substitution groups	21
5 Content	32
5.1 Content: FunctionMode	33
5.2 Function levels	35
5.3 Content: StepListRef	47
5.4 Content: LayerDescRef	47
5.5 Content: BomRef.....	48
5.6 Content: AvlRef	48
5.7 Content: DictionaryStandard.....	49
5.8 Content: DictionaryUser	66
5.9 Content: DictionaryFont.....	74
5.10 Content: DictionaryLineDesc	77
5.11 Content: DictionaryColor	79
5.12 Content: DictionaryFirmware.....	80
6 Logistic header.....	82
6.1 LogisticHeader.....	82
6.2 Role	83
6.3 Enterprise	84
6.4 Person	85
7 History record.....	86
7.1 HistoryRecord	86
7.2 FileRevision	87
7.3 SoftwarePackage	87
7.4 ChangeRec	88
8 BOM (Material List)	89
8.1 BOM Header	90
8.2 BomItem.....	91
9 Electronic computer aided design (ecad)	96
9.1 CadHeader.....	97
9.2 CadData/LayerDesc	100
9.3 CadData/StepList	109
10 Approved vendor list (AVL).....	150
10.1 AvlHeader	151
10.2 AvlItem.....	152
11 Glossary.....	154

Annexe A (informative) IPC-7351 Naming Convention for Land Patterns.....	155
Annexe B Informative references	160
Figure 1 – The IEC 61182-2 children element	13
Figure 2 – Printed board viewing.....	18
Figure 3 – Mirror and rotation diagram	21
Figure 4 – Bounding rectangle to round end character relationships	72
Figure 5 – Text transformation examples	73
Figure 6 – Rotation Angle	73
Figure 7 – Glyph bounding rectangles to Text bounding box relationships.....	77
Table 1– Graphical notation overview	11
Table 2 – Governing template basic types defined by W3C.....	16
Table 3 – Governing template basic types defined by IEC 61182-2-X.....	17
Table 4 – Xform characteristics.....	19
Table 5 – Substitution groups	22
Table 6 – Attribute substitution group.....	23
Table 7 – ColorGroup substitution group.....	25
Table 8 – Feature substitution group	25
Table 9 – Fiducial substitution group.....	26
Table 10 – FirmwareGroup substitution group.....	26
Table 11 – FontDef substitution group	27
Table 12 – LineDescGroup substitution group.....	27
Table 13 – Polystep substitution group	28
Table 14 – Simple substitution group.....	28
Table 15 – Standard primitive substitution group.....	29
Table 16 – StandardShape substitution group.....	31
Table 17 – UserPrimitive substitution group	31
Table 18 – UserShape substitution group.....	32
Table 19 – Content sub-element.....	32
Table 20 – File segmentation and function apportionment.....	34
Table 21 – Content – FunctionMode	36
Table 22 – Content – StepListRef	47
Table 23 – Content – LayerDescRef	48
Table 24 – Content – BomRef.....	48
Table 25 – Content – AvlRef	49
Table 26 – Content –DictionaryStandard.....	49
Table 27 – StandardPrimitive – Butterfly	50
Table 28 – StandardPrimitive – Circle	51
Table 29 – StandardPrimitive – Contour.....	51
Table 30 – StandardPrimitive – Diamond	53
Table 31 – StandardPrimitive – Donut.....	54

Table 32 – StandardPrimitive – Ellipse	55
Table 33 – StandardPrimitive – Hexagon	56
Table 34 – StandardPrimitive – Moire	57
Table 35 – StandardPrimitive – Octagon	58
Table 36 – StandardPrimitive – Oval	58
Table 37 – StandardPrimitive – RectCenter	59
Table 38 – StandardPrimitive – RectCham	60
Table 39 – StandardPrimitive – RectCorner	61
Table 40 – StandardPrimitive – RectRound	62
Table 41 – StandardPrimitive – Thermal	63
Table 42 – StandardPrimitive – Triangle	65
Table 43 – Content – DictionaryUser	66
Table 44 – UserPrimitive – Simple	67
Table 45 – UserPrimitive – Simple: Arc	67
Table 46 – UserPrimitive – Simple: Line	68
Table 47 – UserPrimitive – Simple: Outline	69
Table 48 – UserPrimitive – Simple: PolyLine	70
Table 49 – UserPrimitive – Text	71
Table 50 – UserPrimitive – UserSpecial	74
Table 51 – Content – DictionaryFont	74
Table 52 – FontDetEmbedded element	75
Table 53 – FontDetExternal element	75
Table 54 – FontDet – Glyph	76
Table 55 – Content – DictionaryLineDesc	77
Table 56 – LineDesc element	78
Table 57 – LineDescRef element	79
Table 58 – Content – DictionaryColor	79
Table 59 – Color element	80
Table 60 – ColorRef element	80
Table 61 – Content – DictionaryFirmware	80
Table 62 – CachedFirmware element	81
Table 63 – FirmwareRef element	82
Table 64 – LogisticHeader element	82
Table 65 – Role element	83
Table 66 – Enterprise element	84
Table 67 – Person element	85
Table 68 – HistoryRecord element	86
Table 69 – FileRevision element	87
Table 70 – SoftwarePackage element	87
Table 71 – ChangeRec element	88
Table 72 – Bom element	89
Table 73 – BomHeader element	90
Table 74 – BomItem	91

Table 75 – RefDes element.....	92
Table 76 – Tuning element	93
Table 77 Firmware element.....	93
Table 78 – Characteristics element.....	94
Table 79 Measured element.....	94
Table 80 – Ranged element	95
Table 81 – Enumerated element	96
Table 82 – Textual element.....	96
Table 83 – Ecad.....	96
Table 84 – CadHeader element	97
Table 85 – Spec element	98
Table 86 – SurfaceFinish element.....	99
Table 87 – ChangeRec element.....	100
Table 88 – CadData/LayerDesc elements	101
Table 89 – Layer element	101
Table 90 – Span element	103
Table 91 – DrillTool element	104
Table 92 Stackup element	105
Table 93 – StackupGroup	105
Table 94 – StackupImpedance element.....	107
Table 95 – CadData StepList	109
Table 96 – Step	110
Table 97 – Attribute substitution group.....	111
Table 98 – PadStack element	112
Table 99 – LayHole element	112
Table 100 LayerPad element.....	113
Table 101 – Route element.....	114
Table 102 – Set	115
Table 103 – Datum element	116
Table 104 – Profile element	117
Table 105 – StepRepeat element.....	118
Table 106 – Package element.....	120
Table 107 – Outline element	121
Table 108 – LandPattern element	122
Table 109 – SilkScreen element.....	123
Table 110 – AssemblyDrawing element.....	125
Table 111 – Pin element	127
Table 112 – Component element	128
Table 113 – VplPackage element.....	130
Table 114 – VplComponent element	132
Table 115 – LogicalNet elements	133
Table 116 – PhyNetGroup element	134
Table 117 – PhyNet element.....	134

Table 118 – LayerFeature element.....	136
Table 119 – Attribute element.....	139
Table 120 – Pad element.....	139
Table 121 – Fiducial	140
Table 122 – BadBoardMark element.....	141
Table 123 – GlobalFiducial element.....	142
Table 124 – GoodpanelMark element.....	143
Table 125 – LocalFiducial element.....	145
Table 126 – Hole element.....	146
Table 127 – Slot element.....	147
Table 128 – Features element	147
Table 129 – ColorGroup substitution group.....	148
Table 130 – LineDescGroup substitution group.....	149
Table 131 – DfxMeasurementList element	149
Table 132 – DfxMeasurement element.....	150
Table 133 – Avl element	150
Table 134 – AvlHeader element.....	151
Table 135 AvlItem element	152
Table 136 – AvlVmpn element	152
Table 137 – AvlMpn element.....	153
Table 138 – AvlVendor element.....	154

IECNORM.COM: Click to view the full PDF of IEC 61182-2:2006

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PRINTED BOARD ASSEMBLY PRODUCTS – MANUFACTURING DESCRIPTION DATA AND TRANSFER METHODOLOGY –

Part 2: Generic requirements

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61182-2 has been prepared by IEC technical committee 93: Design automation.

The text of this standard is based on the following documents:

CDV	Report on voting
93/211/CDV	93/231/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this standard may be issued at a later date.

IECNORM.COM: Click to view the full PDF of IEC 61182-2:2006

PRINTED BOARD ASSEMBLY PRODUCTS – MANUFACTURING DESCRIPTION DATA AND TRANSFER METHODOLOGY –

Part 2: Generic requirements

1 Scope and object

This part of IEC 61182 specifies the XML Schema that represents the intelligent data file format used to describe printed board and printed board assembly products with details sufficient for tooling, manufacturing, assembly, and inspection requirements. This format may be used for transmitting information between a printed board designer and a manufacturing or assembly facility. The data is most useful when the manufacturing cycle includes computer-aided processes and numerical control machines.

The data can be defined in either English or International System of Units (SI) units.

1.1 Focus and intent

The generic format requirements are provided in a series of standards focused on printed board manufacturing, assembly, and inspection testing. This standard series consists of a generic standard (IEC 61182-2) that contains all the general requirements. There are four sectional standards that are focused on the XML details necessary to accumulate information in the single file, that addresses the needs of the design, fabrication, assembly and test disciplines producing a particular product.

The sectional standards (IEC 61182-2-1 through IEC 61182-2-4) paraphrase the important requirements and provide suggested usage and examples for the topic covered by the sectional standard.

1.2 Notation

Although the data would be contained in a single file, the file can have different purposes as described in Clause 4. The XML Schema used for this standard follows the notations set forth by the W3C and is as follows:

- element – Element appears exactly one time
- element? – element may appear 0 or 1 times
- element* – element may appear 0 or more times
- element+ – element may appear 1 or more times

Any IEC 61182-2 file is composed of a high level element IEC 61182-2 that contains up to six sub-elements:

- Content – information about the contents of the 258X file
- LogisticHeader – information pertaining to the order and supply data
- HistoryRec – change information of the file
- Bom – Bill of Materials (Material List) information
- Ecad – Computer Aided Design (engineering) information
- Avl – Approved Vendors List information

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60194, *Printed board design, manufacture and assembly – Terms and definitions*

IEC 61188-5-1, *Printed boards and printed board assemblies – Design and use – Part 5-1: Attachment (land/joint) considerations – Generic requirements*

IEC 61188-5-2, *Printed boards and printed board assemblies – Design and use – Part 5-2: Attachment (land/joint) considerations – Discrete components*

IEC 61188-5-3, *Printed boards and printed board assemblies – Part 5-3: Sectional design and use requirements – Attachment (land/joint) considerations – Components with Gull-wing leads on two sides¹*

IEC 61188-5-4, *Printed boards and printed board assemblies – Design and use – Part 5-4: Sectional requirements – Attachment (land/joint) consideration – Components with J leads on two sides²*

IEC 61188-5-5, *Printed boards and printed board assemblies – Design and use – Part 5-5: Sectional requirements – Attachment (land/joint) considerations – Components with Gull-wing leads on four sides²*

IEC 61188-5-6, *Printed boards and printed board assemblies – Design and use – Part 5-6: Attachment (land/joint) considerations – Chip carriers with J-leads on four sides*

IEC 61188-5-8, *Printed boards and printed board assemblies – Design and use – Part 5-8 : Sectional Requirement – Attachment (land/joint) considerations – Area array components (BGA, FBGA, CGA, LGA)²*

3 Documentation conventions





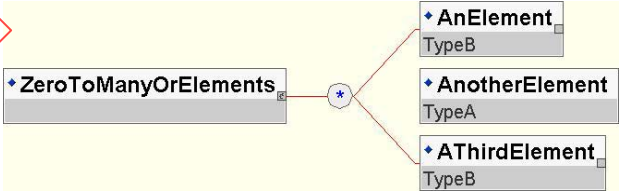

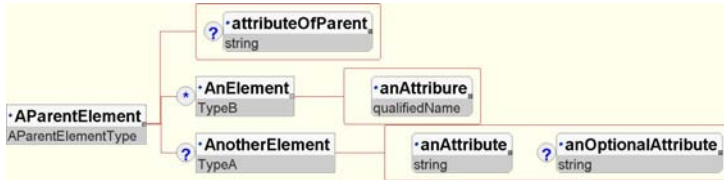
The XML file format standard and the XML Schema definition language standard, as defined by the World Wide Web Consortium (W3C), have been adopted by IEC for use in the IEC 61182 series of standards.

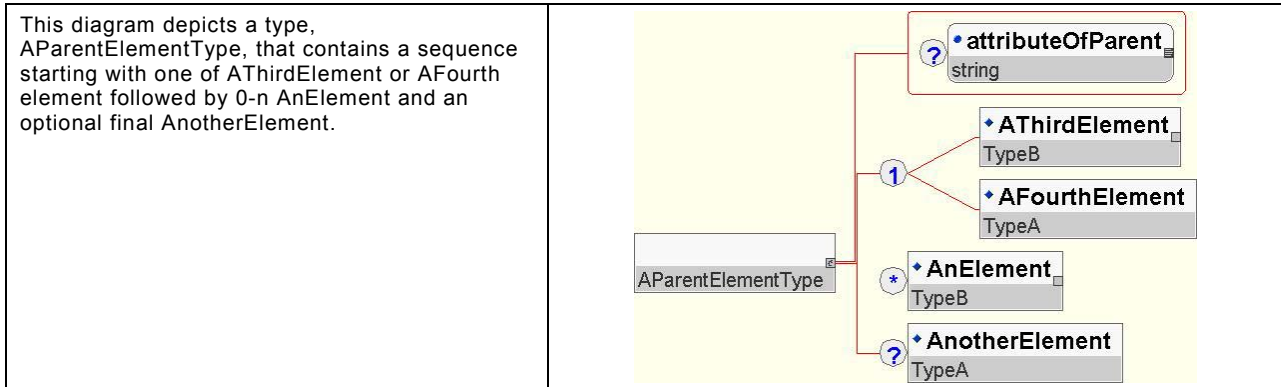
In addition to the text based schema notation, this document provides graphical representation of the structure of the file format. The XML diagrams are designed to effectively illustrate the structure and cardinality of elements and attributes that make up any IEC 61182-2 file. The notation in the graphics does not provide a complete visualization of the schema definition for the file format, but it does provide a good top down overview. Should there be any conflict between the graphical notation and the schema notation, the authoritative definition is the schema notation.

Table 1 provides an overview of the graphical notation used in the document.

¹ To be published.

Table 1– Graphical notation overview

This diagram depicts an element named AnElement that is of type TypeB. There is one attribute, named anAttribute, that is of type double. The attribute is required.	
Example: <code><AnElement anAttribute="14.44e-3"/></code> Note that all attribute values must be enclosed in quotes, regardless of type.	
This diagram depicts an element with two attributes. The attribute anAttribute is required. The "?" in the circle indicates that the second attribute, anOptionalAttribute, is optional. Both attributes are of type string.	
Examples: <code><AnotherElement anAttribute="red" anOptionalAttribute="a string" /></code> <code><AnotherElement anAttribute="blue" /></code>	
The element OneToManyOrElements is the parent of an unordered list of one or more instances of the elements AnElement and AnotherElement. The "+" indicates the occurrence is one to many and the angled lines indicate this is a choice relationship (" ") between the children elements.	
<code>< OneToManyOrParentElement>...</code>	
The absence of an occurrence bubble declares that one and only one occurrence are allowed. The AnOrParentElement can have one of AnElement or AnotherElement as a child element.	
The "*" in the occurrence bubble indicates the choice is from 0 to many.	
This diagram depicts an element, From2to3Elements. The element has no type and no attributes. It can have from 2 to 3 sub-elements of either AnElement or AnotherElement.	
This diagram depicts an element, AParentElement, of type AParentElementType. This element has one attribute, attributeOfParent, which is optional. The lines with square corners indicate that occurrences of AnElement and AnotherElement must appear in the order by the illustration on the right where the top element is addressed first and AnotherElement is addressed secondly.	



4 Requirements

The XML Schema contained in this document describes the structure of a generic computer-aided manufacturing IEC 61182-2 exchange format. The document specifies data elements specifically designed to establish the information exchange related to the data needed by printed board manufacturing, and assembly including inspection of those products.

The XML Schema defines the configuration of mandatory and optional elements, as well as mandatory and optional attributes. The Top Level (TopElement) of the schema contains six major elements. The schema notation specifies that the 6 top-level elements are required to appear in the order shown in Figure 1. The order of appearance in the file is significant. For instance, the appearance of graphics on a layer is dependent on the order of appearance in the file. The order is also important because elements often reference information that is defined elsewhere in the file in order to eliminate redundancy within the file. The file is structured to allow all references to be resolved in one pass.

An implementation of the XML Schema must be able to facilitate the reading and/or writing of all characteristics defined within the requirements stated in the Mode function of this standard. Some tools may have only read capability; some may have only write capability. Some tools may have both read/write capability. All schema defined in the standard as mandatory (1-1, 1-n occurrences) **shall** be executed as appropriate. Tool providers **shall** identify their capability by Mode Level (Full, Design 1, 2 or 3, Fabrication 1, 2, or 3, etc.) plus 2581R (read-only); 2581W (write-only); or 2581RW (read and write).

Each element has a specific function or task. Accordingly, the information interchange for a specific purpose is possible only if that element is populated. The ability to select those characteristics that are appropriate for a given task makes the schema a robust methodology for defining only those areas and characteristics that are necessary to produce a given product. Figure 1 shows the children elements of the Top Element IEC 61182-2.

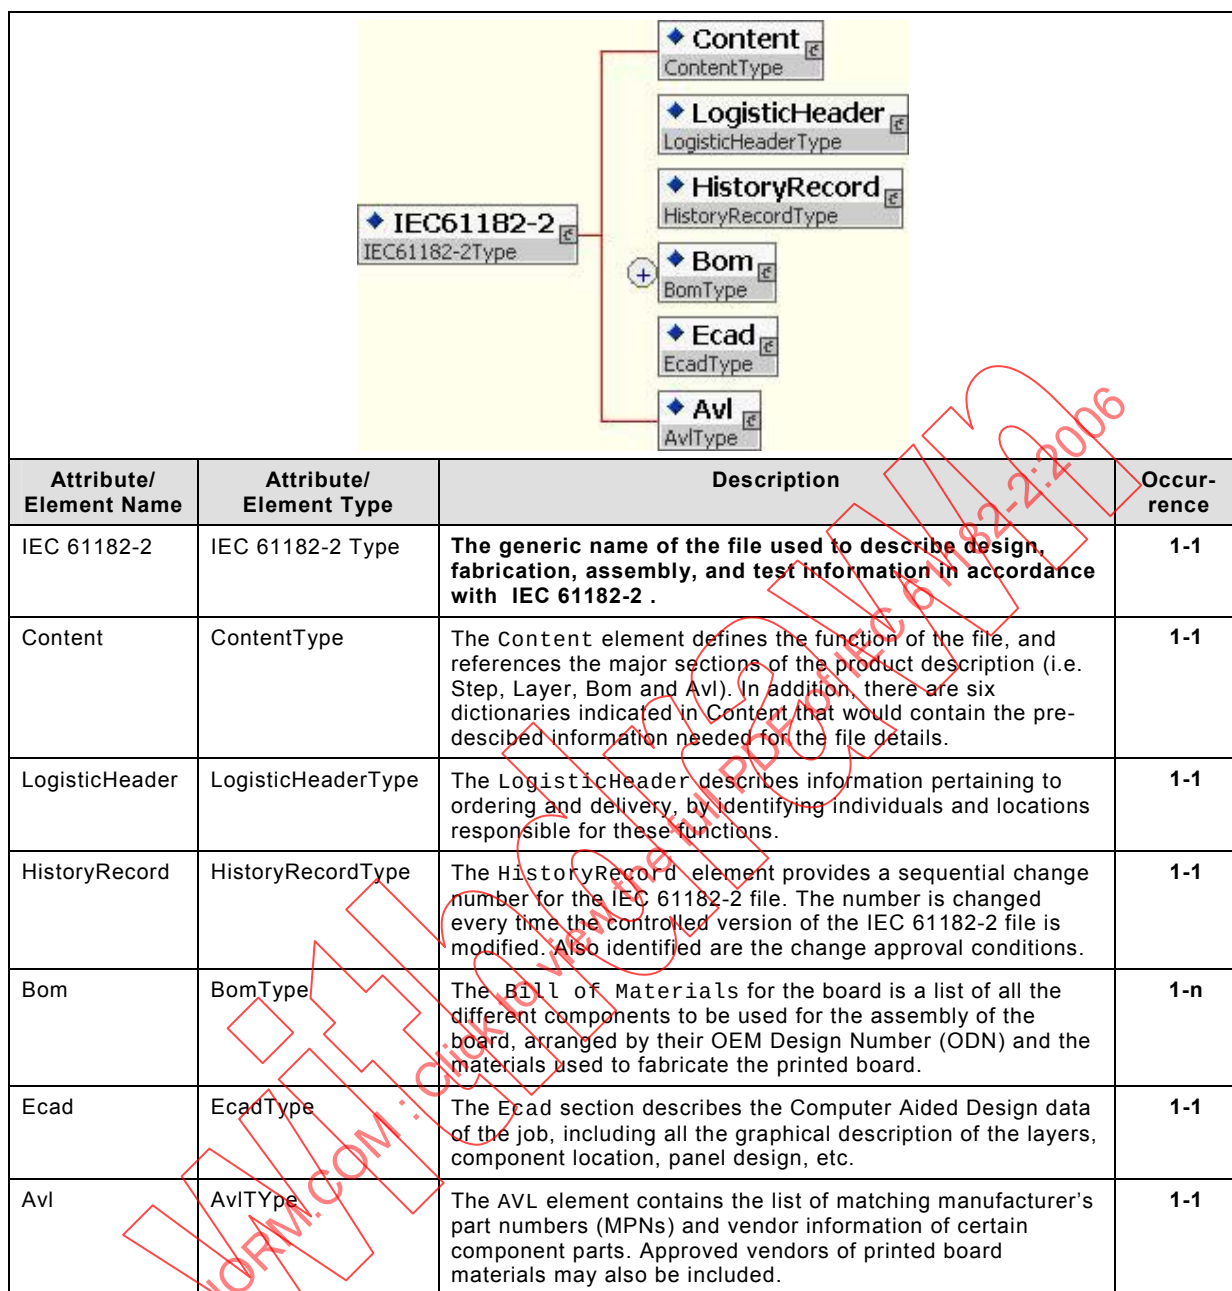


Figure 1 – The IEC 61182-2 children element

IEC 1669/06

4.1 Rules concerning the use of XML and XML Schema

The rules required to define syntax and semantics of the 61182-2-X file format notation have been simplified by the adoption of the W3C standards for XML Schema and XML file formats. These two standards are well-specified by the W3C. The popularity of these standards has lead to the development of many commercial and open source software tools and libraries that conform to the W3C standards.

A IEC 61182-2 file begins with the <61182-2-X revision = "1.0"> tag and end with the </61182-2-X> tag. The content between these tags must match the .xsd definition of the 61182-2-X element as defined by the IEC 61182-2-1 through IEC 61182-2-4 XML Schema.

4.1.1 File readability and uniformity

A valid IEC 61182-2-1 through IEC 61182-2-4 file must conform to the W3C Canonical XML format. The format is defined by the <http://www.w3.org/TR/xml-c14n> specification. Software tools exist that will take malformed XML and automatically generate Canonical XML.

4.1.2 File markers

An optional checksum can be appended following the </61182-2-X > tag. The checksum is an MD5 message digest algorithm (see Internet RFC 1321: <http://www.ietf.org/rfc/rfc1321.txt>) that is base64 encoded. The checksum starts with the "<" character of the <258X> tag and ending with the ">" character of the closing </61182-2-X > tag. The checksum follows immediately after the ">" character of the closing </61182-2-X > tag.

The digest provides a 128-bit checksum of the 61182-2-X file contents. The MD5 signature must be base64 encoded (see IETF RFC 1421 for the base64 algorithm) to convert the MD5 signature to a US-ASCII, base64 string. An end of line character will indicate the end of the base64 encoded MD5 signature.

4.1.3 File extension

The file extension for a 61182-2-X file is .cvg.

4.1.4 File remarks

The 61182-2-X format permits file remarks using the standard XML commenting notation. They are only to be used to support debugging software. A parser may ignore and discard remarks when reading a 61182-2-X file. File remarks are never to be used to represent design or manufacturing information.

4.1.5 Character set definition

The XML standard uses the Unicode character set. This character set covers the characters used in hundreds of written languages. The XML standard allows several of the Unicode encoding formats to be used in an XML file. IEC 61182-2-1 through IEC 61182-2-4 requires the use of the UTF-8 character encoding of the Unicode character set. Although comments and user assigned names may be in any language of choice, all qualified names or enumerated string names **shall** be in English only.

4.2 Data organization and identification rules

The 61182-2-X standards use a namespace mechanism for XML instance files that is similar to the XML namespace mechanism that was created for managing XML meta-data namespaces. The instance file namespace mechanism prevents collisions between the names used by the different products within a single file. This partitioning of namespaces is necessary because any of the 61182-2-X files may contain information describing an arbitrary collection of products. (Boards, assemblies, or panels that are products allowed in an IEC 61182-2-X file.) For example, a file could contain descriptions for building multiple electronic assemblies that are manufactured on separate panels. This mechanism also prepares the way for a distributed database of 61182-2-X design data in which the data can be trusted to be universally unambiguous.

4.2.1 Naming elements within a 61182-2-X file

The capability of Unique namespaces was created to allow a panel to be defined in the single 61182-2-X file that contains multiple unique boards. Since two boards may reuse the same identifier, for example "U1", "R1", it must be possible to separate names in the file into namespaces. The 61182-2-X namespace implementation borrows the notation used by XML namespaces and makes the 61182-2-X standard format consistent with conventional XML usage.

There are two types of names used to name top-level objects (element instances) in a 61182-2-X file. The first type of name is a `qualifiedName` type. This type includes a prefix in the name that corresponds to a namespace within the 61182-2-X file. The prefix and the globally unique identity of the Namespace are declared in the Namespace element. The second type of name is a `shortName` type. This type is required to be unique within the 61182-2-X file. The syntax restrictions on short names and qualified names assure that all names will be unique as top-level names within 61182-2-X file.

4.2.2 The use of XML elements and types

A comprehensive overview of XML Schema can be found in the W3C XML Schema Primer. This section briefly describes the decisions that were made in the development of the 61182-2-X schema. Reviewing the Primer is recommended prior to reading this section.

The XML Schema defines a namespace mechanism that can be used when defining element names. The W3C also provides a set of general purpose element and attribute types, such as `xsd:string`, `xsd:double`, and `xsd:datetime`. The 61182-2-X format uses these standard types, however the documentation of the 61182-2-X standard has been defined without the use of a namespace prefix for element names within a 61182-2-X file.

Each of the schema elements has a prefix, “`xsd:`”, which is associated with the XML Schema namespace through the declaration, `xmlns:xsd= “http://www.w3.org/2000/08/XMLSchema”`, that appears in the schema element. The prefix `xsd:` is used by convention to denote the XML Schema namespace, although any prefix can be used. The same prefix, and hence the same association, also appears on the names of built-in simple types, for example `xsd:string`. The purpose of the association is to identify the elements and simple types as belonging to the vocabulary of the XML Schema language rather than the vocabulary of the schema author.

In XML Schema, there is a basic difference between complex types that allow elements in their content and may carry attributes, and simple types that cannot have element content and cannot carry attributes. There is also a major distinction between definitions that create new types (both simple and complex), and declarations that enable elements and attributes with specific names and types (both simple and complex) to appear in document instances.

New complex types are defined using the `complexType` element and such definitions typically contain a set of element declarations, element references, and attribute declarations. The declarations are not themselves types, but rather an association between a name and constraints that govern the appearance of that name in documents governed by the associated schema. Elements are declared using the “`element`,” and attributes are declared using the “`attribute`.”

4.2.3 Attribute base types (governing templates)

The attribute basic types (SimpleTypes) provided by XML Schema are defined by the W3C. They are easy to distinguish from the 61182-2-X types because the W3C type is always prefixed with “`xsd:`”. The W3C datatypes are defined in <http://www.w3.org/2000/10/XMLSchema> (XML Schema Part 2).

Table 2 defines those W3C basic types that are used to define attributes in the 61182-2-X schema. The `xsd:string` type is constrained to create specific base types for special purpose strings, such as `qualifiedName` and `shortName`. The rules for special number types and the date format are also defined. Table 3 defines those basic types that have been standardized for use within the 61182-2-X format.

Table 2 – Governing template basic types defined by W3C

xsd:string	A W3C standard data type for a Unicode character string. The characters are from the UTF-8 character set as defined in http://www.ietf.org/rfc/rfc2279.txt .
xsd:double	A W3C standard data type for a binary floating-point number. The W3C definition of xsd:double is in http://www.w3.org/TR/xmlschema-2/. The xsd:double is a number where the value can be positive, negative, integer or floating point, with at least 7 digits of precision. Numbers are assumed to be positive but can be explicitly designated as positive by preceding the number with a '+' (ASCII decimal 43) character. Negative numbers must be explicitly designated as negative by a preceding '-' (ASCII decimal 45) character. An internal representation of an IEEE double precision floating-point number is assumed. This range of values for IEEE doubles is defined as $3.4 \times 10^{-38} \leq \text{value} \leq 3.4 \times 10^{38}$. The format for representing a double is the same as the format used in the computer languages C, Perl, Python, or TCL. For example, all the following are legal numbers: 1.005 ; 0.01; .01; -2.334e-33; .224e-2
xsd:nonNegativeInteger	A W3C standard data type for non-negative integer numbers. The W3C definition of xsd:nonNegativeInteger is in http://www.w3.org/TR/xmlschema-2/. The range of values allowed are $0 \leq \text{value} \leq 2147483647$ (the non-negative values that fit in a 32 bit signed integer).
xsd:positiveInteger	A W3C standard data type for positive integer numbers. The W3C definition of xsd:positiveInteger is in http://www.w3.org/TR/xmlschema-2/. The range of values allowed are $1 \leq \text{value} \leq 2147483647$ (the positive values that fit in a 32 bit signed integer).
xsd:dateTime	The W3C standard data type for the current date and time is xsd:dateTime. (See http://www.w3.org/TR/NOTE-datetime-970915.html.) The following formats from the W3C specification are recommended for 61182-2-X files: Complete date plus hours, minutes and seconds: YYYY-MM-DDThh:mm:ssTZD (e.g. 1997-07-16T19:20:30.4536+01:00) Complete date plus hours, minutes, seconds and a decimal fraction of a Second: YYYY-MM-DDThh:mm:ss.sTZD (e.g. 1997-07-16T19:20:30.45+01:00) where: YYYY = four-digit year MM = two-digit month (01=January, etc.) DD = two-digit day of month (01 through 31) Hh = two digits of hour (00 through 23) (am/pm NOT allowed) Mm = two digits of minute (00 through 59) Ss = two digits of second (00 through 59) S = one or more digits representing a decimal fraction of a second TZD = time zone designator (Z or +hh:mm or -hh:mm)
xsd:anyURI	A W3C standard data type for hyperlinks. The W3C definition of xsd:anyURI is in http://www.w3.org/TR/xmlschema-2/ .
xsd:unsignedByte	The W3C standard for an unsigned byte (an unsigned 8 bit integer with a value between 0-255.) The W3C definition of xsd:unsignedByte is in http://www.w3.org/TR/xmlschema-2/ .
xsd:base64Binary	The data is encoded using base64. (see IETF RFC 1421 for the base64 algorithm and http://www.w3.org/TR/xmlschema-2/#base64Binary)

Table 3 – Governing template basic types defined by IEC 61182-2-X

qualifiedName	The qualifiedName data type is a data type defined for the 61182-2-X series. The type is a restricted xsd:string data type where the pattern of the string must match the regular expression "[a-zA-Z][a-zA-Z0-9_]*\.\+". The definition of the qualifiedName data type is: <pre><xsd:simpleType name = "qualifiedName"> <xsd:restriction base = "xsd:string"> <xsd:pattern value = "[a-zA-Z][a-zA-Z0-9_]*\.\+"/> </xsd:restriction> </xsd:simpleType></pre> An example of a string that matches the pattern is: "prefix:name". The "prefix" is a Namespace name. The "name" is the name of an object within the Namespace.
nonNegativeDouble	The nonNegativeDouble data type is defined for the 61182-2-X series. The type restricts an xsd:double to positive numbers, inclusive of 0. The non-negative range of values for IEEE doubles is defined as $0.0 \leq \text{value} \leq 3.4 \times 10^{38}$.
pinName	The pinName data type is a data type defined for the 61182-2-X series. The type is a restricted xsd:string. The definition of the pinName data type is: <pre><xsd:simpleType name = "pinName"> <xsd:restriction base = "xsd:string"/> </xsd:simpleType></pre>
xpath	The xpath data type is a data type defined for the 61182-2-X series. The type is a restricted xsd:string data type where the pattern of the string must be a legal Xpath as defined in W3C http://www.w3.org/TR/xpath.
shortName	The shortName data type is a data type defined for the 61182-2-X series. The type is a restricted xsd:string data type where the pattern of the string must match the regular expression "[a-zA-Z][a-zA-Z0-9_]*". The xsd definition of the shortName data type is: <pre><xsd:simpleType name = "shortName"> <xsd:restriction base = "xsd:string"> <xsd:pattern value = "[a-zA-Z][a-zA-Z0-9_]*"/> </xsd:restriction> </xsd:simpleType></pre> An example of a string that matches the pattern is "bob_24"
contentType	The contentType data type is a restricted xsd:string type that matches IETF MIME type definitions. (e.g. text/html, application/postscript).

The 61182-2-X file supports two types of qualified names. One is a basic qualifiedName; the second is a complete qualifiedName as shown in Table 3.

A basic qualifiedName is composed of at least one letter, followed by any number of letters, numbers, underscores, or hyphens. To form a complete qualifiedName, one can optionally prefix a basic qualifiedName with a colon delimited path, where each step along the path is constructed the same way as the basic qualified name. This permits sorting of sort names into a hierarchy (see Table 3).

Examples of basic qualified names are:

"KarenSingleBoard"
 "MultilayerStrategy"
 "StandardPrimitiveShapes"

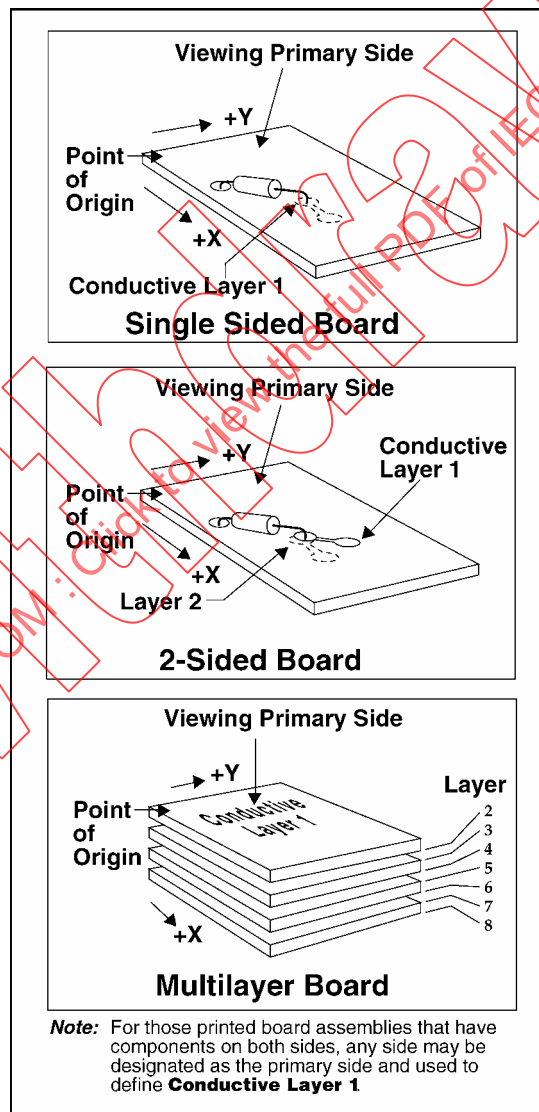
Examples of complete qualified names are:

“Set1:KarenSingleBoard”
 “Set1:MultilayerStrategy”
 “Set1:StandardPrimitiveShapes”

4.2.4 Coordinate system and transformation rules

Any geometry defined in a 61182-2-X file is defined in a Cartesian coordinate system. The x coordinates become more positive going from left to right (west to east). The y coordinates become more positive going from bottom to top (south to north). The primary side (TOP) of the board, coupon, or panel is in the x-y plane of the coordinate system with the primary side facing up.

The illustration in Figure 2 provides a perspective drawing of a board and a coordinate system. Each product in a 61182-2-X file is defined relative to a local coordinate system for the product. The point of origin of the product is located at (0,0) in the local coordinate system.



IEC 1670/06

Figure 2 – Printed board viewing

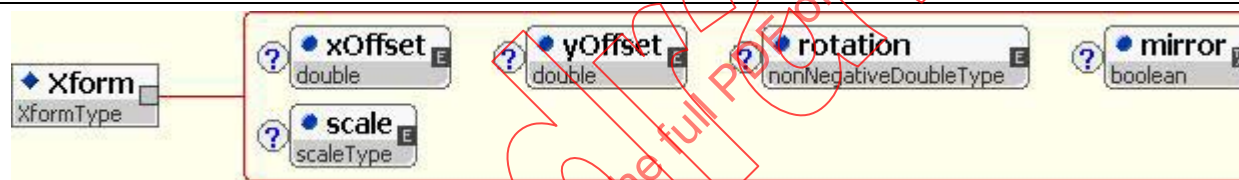
4.3 Transformation characteristics (Xform)

The Xform element defines a transformation that may be used throughout this specification to define a modification of the original stored data in the Dictionaries, the location and orientation of physical features. Features, Shapes, Primitives or other graphics in the file may be manipulated relative to their local Cartesian coordinate system by the values set in the transform. The Xform element can define a modification of the pre-defined feature's point of origin, and then apply rotation, mirroring, scaling and location (x and y) of the image.

The units of measure are defined in the CadHeader as an attribute that describes the details of all the features in the Ecad section. In addition, units of measure are also defined in each of the Dictionaries that contain graphical information. These are DictionaryStandard, DictionaryUser, DictionaryFont, and DictionaryLineDesc. When a pre-defined image from one of the dictionaries is used in the Ecad section, the units of measure must match.

The order of the transformation **shall** always follow the order of the fields in the description. This would be to 1) modify the origin; 2) apply rotation; 3) mirror image; and 4) scale. See Table 4.

Table 4 – Xform characteristics



Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Xform	XformType	An element that provides the ability to reset the point of origin of a predefined target that can be scaled, mirror imaged or rotated.	0-1
xOffset	double	The x offset of a previously defined shape relative to its original point of origin in order to define a new origin used for rotation, mirroring, scaling and location. The CadHeader defines the units of measure.	0-1
yOffset	double	The y offset of a previously defined shape relative to its original point of origin in order to define a new origin used for rotation, mirroring, scaling and location. The CadHeader defines the units of measure.	0-1
rotation	nonNegativeDouble Type	Defines the rotation of a shape about the local origin in degrees. Positive rotation is always counter-clockwise as viewed from the board TOP (primary side). Degree accuracy is expressed as a two place decimal i.e. 45.15; 62.34	0-1
mirror	boolean	An enumerated string as either TRUE or FALSE (part of the 3WC standard). TRUE equals that the image is mirrored; FALSE indicates that it is not.	0-1
scale	scaleType	An attribute that defines a "double" dimension whose minExclusiveValue=0.0 representing the multiplication factor of all x and y dimensions. The scale factor does not apply to angular values.	0-1

4.3.1 The x and y Offset attributes

The xOffset and yOffset attributes are of type xsd:double. They define the x and y offset of a shape relative to the origin of a Cartesian coordinate system. The definition of shapes can be nested and the x and y attributes are always interpreted relative to the local coordinate system of the shape to which the transformation applies. The default value for x and y is 0.0.

4.3.2 The rotation attribute

The rotation attribute is of type `nonNegativeDouble` that defines the rotation of a shape about the local origin. The interpretation of the value is set globally in the file to units of degrees. The `Units` element in the `Ecad` Header element specifies the units of measure. The range of the rotation parameter for `DEGREES` is 0.00 to 360.00 expressed as a `nonNegativeDouble` with an accuracy of a two place decimal. Positive rotation is always counter-clockwise as viewed from the board TOP (primary side), even if the component that is being rotated is on the board BOTTOM (secondary side). Rotation defaults to 0.0, and can be applied to text, or any physical shape.

4.3.3 The mirror attribute

The `mirror` attribute is of data type `boolean`. This type is an enumerated string indicating `TRUE` or `FALSE`. The default value for `MIRROR` is `FALSE`. When `mirror` is set to `TRUE` it indicates that all x dimensions are set to a $-x$ value. The proper interpretation of the `mirror` and `rotate` attributes are shown in Figure 3. The example shows a unique artwork (14-pin DIP device) placed on the top and bottom of a board at 90.00° rotations.

4.3.4 The scale attribute

The `scale` attribute is of data type `scaleType`. The `scale` attribute is a “double” that must have a value greater than zero. All x and y dimensions of a geometry are multiplied by the `scale` attribute. The `scale` factor does not apply to angular values. The default value is 1.0.

4.3.5 The x and y Location attributes

The `xLocation` and `yLocation` attributes are of type `xsd:double`. They define the x and y position where a feature, component, text or other shape is placed. The `xLocation` and `yLocation` coordinate positions a shape by its original origin or its modified origin (x and y Offset) relative to the origin of the image upon which the feature, component etc. is to be located. Mirroring, rotating, and scaling may all apply to the location of the shape as indicated by the `Xform`.

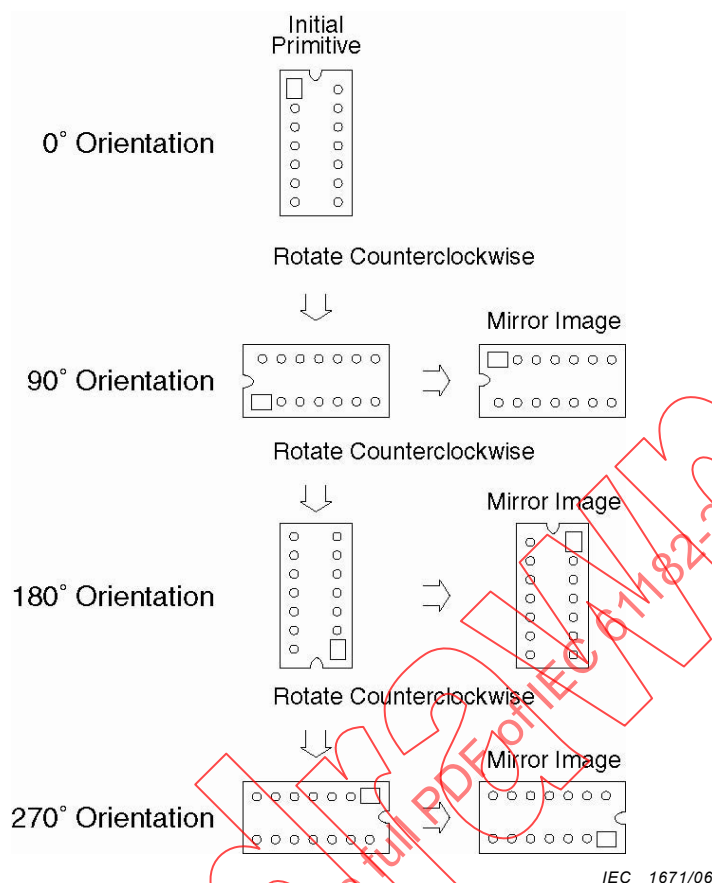


Figure 3 – Mirror and rotation diagram

4.4 Substitution groups

The IEC 61182-2-X uses the concept of substitution within the XML Schema. Various groups of elements have been identified in the body of the standard and have been designated as having a specific focus or purpose. Within the schema, these substitution groups are provided with a name. When a group exists and if they are required according to the instances of the schema, it is mandatory that the substitution name be replaced by one of the acceptable descriptions identified within the group.

Often a schema needs to specify that one of several different XML Elements can be used with equal validity. For example, in every case where a Triangle can be used, it is also permissible to use a Diamond, Hexagon, Octagon, Oval, or one of several others: even though these shapes are quite different, they are equivalent as far as the schema is concerned. IEC 61182-2-X handles this by using “substitution groups.”

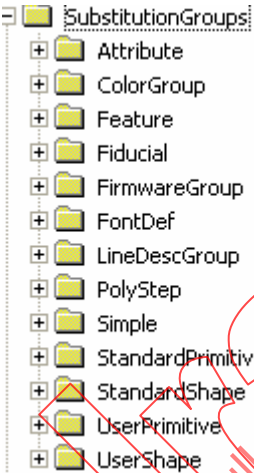
A substitution group consists of two types of elements: a “head”, and elements which may substitute for the head. Furthermore, when the head is denoted as ABSTRACT, the substitution is required, rather than optional. In IEC 61182-2-X, the heads of all substitution groups are ABSTRACT. Thus, it means that a valid instance document is not allowed to contain a StandardPrimitive element, but instead, (where StandardPrimitive is called for in the schema) a Triangle, Diamond, Hexagon, etc. must be used.

It should be noted that the head of one substitution group may be used within a different substitution group. As an example, the StandardPrimitive element is part of the StandardShape substitution group, which in turn is part of the Feature substitution group. This means that a Triangle, Diamond, Hexagon, etc may be used wherever a Feature or StandardShape is called for, as well as wherever a StandardPrimitive is called for.

61182-2-X features several dictionaries that permit specifying some type of information (such as a StandardPrimitive or a LineDesc) one time, and to reuse that definition as often as necessary. Some substitution groups in IEC 61182-2-X are present to enable specifying either a dictionary entry or the same kind of information defined in specific detail within the body of the file. Any predefined image contained in the Dictionaries must have a unique “id”. It is the “id” name that is used to instantiate information from any of the dictionaries.

There are 13 substitution groups within the 61182-2-X schema. These are shown in Table 5.

Table 5 – Substitution groups


			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Attribute	ABSTRACT	A substitution group that permits the substitution of the Attribute element when it is a child of the parent Component, LogicalNet, Set, or Step elements.	4
ColorGroup	ABSTRACT	A substitution group that permits the substitution of the Color element when it is a child of the parent FinishType, Set, or Text Elements.	3
Feature	ABSTRACT	A substitution group that permits the substitution of the Feature element when it is a child of the parent Set element.	1
Fiducial	ABSTRACT	A substitution group that permits the substitution of the Fiducial element when it is a child of the parent Set element.	1
FirmwareGroup	ABSTRACT	A substitution group that permits the substitution of the FirmwareGroup element when it is a child of the parent Firmware element.	1
FontDef	ABSTRACT	A substitution group that permits the substitution of the FontDef element when it is a child of the parent EntryFont element.	1
LineDescGroup	ABSTRACT	A substitution group that permits the substitution of the LineDescGroup element when it is a child of the parent Outline, Polyline, or Set elements.	3
PolyStep	ABSTRACT	A substitution group that permits the substitution of the PolyStep element when it is a child of the parent Polyline or Polygon elements.	2
Simple	ABSTRACT	A substitution group that permits the substitution of the Simple element when it is a child of the parent DfxMeasurement, Glyph, or Slot elements.	3
StandardPrimitive	ABSTRACT	A substitution group that permits the substitution of the StandardPrimitive element when it is a child of the parent EntryStandard element.	1

StandardShape	ABSTRACT	A substitution group that permits the substitution of the StandardShape element when it is a child of the parent LayerPad or Pad elements.	2
UserPrimitive	ABSTRACT	A substitution group that permits the substitution of the UserPrimitive element when it is a child of the parent EntryUser element.	1
UserShape	ABSTRACT	A substitution group that permits the substitution or classification of a higher level substitution group. The UserShape element may be used to further classify Feature. In so doing, UserShape can be substituted by a UserPrimitive or UserPrimitiveRef.	0

4.4.1 Attribute

The Attribute substitution group consists of various attributes that may be used within the body of the 61182-2-X standard. Attributes are optional and are used within the Component, LogicalNet, Set, and Step elements. Attributes contain legacy data that has not yet become a more formal part of 61182-2-X. The long range intention is to deprecate all Attributes and to incorporate their information elsewhere in 61182-2-X files. There are five kinds of standard Attributes that hold different types of data, and a NonstandardAttribute which can contain any type of data. The standard attributes are constrained to have specific names. See Table 6.

Table 6 – Attribute substitution group


			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
BooleanAttribute	ABSTRACT	A substitution for Attribute identified as an enumerated string that may be any of the following: smd gold_plating n_electric nomenclature tear_drop pattern_fill drill_noopt foot_down et_align full_plane out_orig net_point test_point imp_line non_tp patch shave mount_hole tooling_hole is_capped lpol_surf critical_net critical_tp orbotech_plot_stamp skip_indicator out_mirror lpol_done cu_base out_drill_full out_drill_optional out_rout_optional array_with_rotation out_break out_scale break_away center_fiducial comp_ign_spacing no_tp_under no_hole_under no_trace_under no_copper_shape_under no_uncap_via_under no_text_under no_fiducial_check thvpad_required label_clearance guard_comp needs_guarding ind_orient_req is_burried is_shadowed is_wirebonded spo_shape_stretch toep_nochk_o_side no_pop comp_ignore hp3070_test drc_bend_keepout drc_board drc_mech drc_etch_lyrs_all drc_comp_keepin drc_tp_keepin drc_route_keepin drc_comp_keepout drc_tp_keepout drc_trace_keepout drc_pad_keepout drc_plane_keepout drc_via_keepout drc_route_keepout drc_comp_height vcut hatch hatch_border hatch_serrated_border dxf_dimension	0-n

DoubleAttribute	ABSTRACT	A substitution for Attribute identified as an enumerated string that may be any of the following: pitch string_angle spacing_req board_thickness out_x_scale out_y_scale out_comp eda_layers et_adjacency layer_dielectric fill_dx fill_dy image_dx image_dy local_fiducial_dist comp_height comp_htol_plus comp_htol_minus comp_weight spo_shape_rotate spo_move_center spo_w_val spo_w_fact spo_h_val spo_h_fact spo_s_val spo_s_fact spo_p_val spo_p_fact toep_spacing_req hp3070_tol_pos hp3070_tol_neg hp3070_hi_value hp3070_lo_value hp3070_seriesr gencad_device_ptol gencad_device_ntol drc_max_height drc_min_height net_length_min net_length_max dpair_gap eclass_voltage_swing eclass_impedance eclass_rise_time eclass_min_stub_length eclass_max_stub_length min_line_width ar_pad_drill_top_min ar_pad_drill_top_max ar_pad_drill_inner_min ar_pad_drill_inner_max ar_pad_drill_bottom_min ar_pad_drill_bottom_max ar_sm_pad_top_min ar_sm_pad_top_max ar_sm_pad_bottom_min ar_sm_pad_bottom_max ar_sm_drill_top_min ar_sm_drill_top_max ar_sm_drill_bottom_min ar_sm_drill_bottom_max	0-n
IntegerAttribute	ABSTRACT	A substitution for Attribute identified as an enumerated string that may be any of the following: drill_flag rout_chain rout_flag pilot_hole out_flag extended feed speed cut_line aoi_drcu aoi_drbm aoi_cpcu aoi_cpbm aoi_value orig_surf eda_dimension_id output_dcode design_origin_x design_origin_y out_drill_order out_rout_order num_local_fiducials src_orientation rot_correction drc_min_space drc_min_width drc_add_rad eclass_max_via_count testpoint_count	0-n
NonstandardAttribute	ABSTRACT	A substitution for Attribute identified as string data that may be any characteristics that the owner or user of the file deems necessary to help clarify the issues of the Component LogicalNet, Set or Step elements.	0-n
OptionAttribute	ABSTRACT	A substitution for Attribute identified as an enumerated string that may be any of the following: drill via_type comp drill_stage drill_sr_zero pad_usage primary_side out_angle out_polarity layer_hdi_type fs_direction_top fs_direction_bottom smt_direction_top smt_direction_bottom viacap_layer wheel_type comp_type comp_type2 comp_mount_type comp_polarity otherside_keepout spo_w_mode spo_h_mode spo_s_mode spo_p_mode drc_assembly_lyrs sip	0-n
TextAttribute	ABSTRACT	A substitution for Attribute identified as an enumerated string that may be any of the following: bit geometry fiducial_rdlst area_name source_layer fiducial_name string color customer comment technology global_camtek_aoiset drc_route_keepin_lyr drc_comp_keepin_lyr drc_tp_keepin_lyr drc_route_keepout_lyr drc_via_keepout_lyr drc_trace_keepout_lyr drc_plane_keepout_lyr drc_pad_keepout_lyr drc_comp_keepout_lyr drc_comp_height_lyr drc_tp_keepout_lyr inp_file eda_layers out_name assembly_proc_top assembly_proc_bottom all_eda_layers fab_drc hdi_drc hdi_drc spo_shape user_bom_rev machine_pkg hp3070_device hp3070_value hp3070_type hp3070_fail_msg hp3070_common_pin hp3070_contact_pin hp3070_contact_pin hp3070_comment gencad_device_type gencad_device_style gencad_device_value drc_ref_des drc_etch_lyrs drc_etch_lyrs_bit cad_part_override diff_pair net_type electrical_class eclass_individual_parallel_min_jog_list eclass_individual_parallel_max_length_list eclass_individual_parallel_dist_list eclass_accumulative_parallel_max_length_list eclass_accumulative_parallel_dist_list station variant_list comp_variant_list current_variant	0-n

4.4.2 ColorGroup

The ColorGroup substitution group consists of various colors that may be used within the body of the 61182-2-X standard. Color may be predefined and named in the DictionaryColor. Color is used by the FinishType, Set, or Text elements. It is referred to in the body of the file by its “Color ID” or by the three attributes that make up color (red, green, blue). See Table 7.


Table 7 – ColorGroup substitution group

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Color	ColorType	The description of a specific color using the three attributes of red, green, and blue.	0-n
ColorRef	ColorRefType	The id of a previously defined color stored in the DictionaryColor.	0-n

4.4.3 Feature

The Feature substitution consists of two major substitution groups. Where Feature is called for, an instance must substitute a graphic allowed by either the StandardShape or UserShape substitution groups. See Table 8


Table 8 – Feature substitution group

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
StandardShape	ABSTRACT	A substitution group that occurs in the 61182-2-X schema and permits the substitution of the StandardShape element when it is a child of the parent LayerPad or Pad elements.	0-n
UserShape	ABSTRACT	A substitution group that occurs in the 61182-2-X schema and permits the substitution or classification of a higher level substitution group. The UserShape element may be used to further classify Feature. In so doing UserShape can be substituted by a UserPrimitive or UserPrimitiveRef.	0-n

4.4.4 Fiducial

The Fiducial substitution group consists of three elements that may be used to replace the Fiducial element. When the Fiducial element is substituted, it **shall** be by either a BadBoardMark, GlobalFiducial, GoodPanelMark, or LocalFiducial pad type. The Fiducial elements contain an Xform and a substitution capability to a StandardShape. An optional Pin attribute allows reference to a component pin. See Table 9

Table 9 – Fiducial substitution group

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
BadBoardMark	PadType	A set of Standard Shapes used as an aid to the board assembler by defining those boards in a panel that did not pass inspection or electrical test. The fiducial shape is positioned near each board in the assembly panel array and covered over to signify that the board is defective.	0-n
GlobalFiducial	PadType	A set of Standard Shapes used in the description, arrangement or positioning of a group of features on an individual board, assembly, or panel.	0-n
GoodPanelMark	PadType	A single Standard Shape used to define a panel where all boards on the panel are good. The fiducial is positioned once on the panel and enables reduction in inspection time.	0-n
LocalFiducial	PadType	A set of fiducials (usually a pair) used in the description and arrangement of features related to a specific component on a board, assembly, or panel which aide in the location/positioning process.	0-n

4.4.5 FirmwareGroup

The FirmwareGroup substitution group consists of the description element for the firmware that defines the data to be added to a component through the RefDes element of a particular BomItem. The information may be provided as a CachedFirmware element or as a reference to the firmware which has been stored and identified with an “id” in the DictionaryFirmware. See Table 10.


Table 10 – FirmwareGroup substitution group

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
CachedFirmware	CachedFirmwar eType	An element that identifies the firmware needed for a particular component in the Bill of Material. The information is in a hexEncodeBinary format.	0-n
FirmwareRef	FirmwareType	An element that references CachedFirmware stored in the DictionaryFirmware through the callout of the firmware “id”	0-n

4.4.6 FontDef

The FontDef substitution group consists of the description of a font that is different than the standard Helvetica and which is contained in the DictionaryFont. Fonts in the dictionary have an “id” which is called out when a FontRef is instantiated. FontRef is used by the element Text, which is called for in SilkScreen and AssemblyDrawing. Text can also be substituted whenever a UserPrimitive, UserShape or Feature is called for. See Table 11.

Table 11 – FontDef substitution group


			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
FontDefEmbedded	FontDef Embedded Type	A description of a font using individual characters that are defined in accordance with the Glyph element and are contained in the DictionaryFont. Fonts must be predefined and may not be instantiated as part of the data in the file.	0-n
FontDefExternal	FontDef ExternalType	A reference to an external font description through the instantiation of a URN. The font is named and the reference is contained in the DictionaryFont. The appropriate character set is defined by the URN. External Fonts must be predefined and may not be instantiated as part of the data in the file.	0-n

The term "Uniform Resource Name" (URN) refers to the subset of URI that are required to remain globally unique and persistent even when the resource ceases to exist or becomes unavailable. A URI can be further classified as a locator, a name, or both. The term "Uniform Resource Locator" (URL) refers to the subset of URI that identify resources via a representation of their primary access mechanism (e.g. their network "location"), rather than identifying the resource by name or by some other attribute(s) of that resource.

4.4.7 LineDescGroup

The LineDescGroup substitution specifies the LineWidth and LineEnd characteristics of any feature that requires that definition. Line descriptions are a part of the Outline, Polyline and Set element definitions. The substitution is also instantiated by the substitution group Simple which calls for Arc, Line, Outline and Polyline. See Table 12.

Table 12 – LineDescGroup substitution group

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
LineDesc	LineDescType	An element that identifies the LineEnd and LineWidth characteristics	0-n
LineDescRef	LineDescRef Type	A reference to a LineDesc that is contained in the DictionaryLineDesc and identified by its unique "id". The units for the dictionary are defined and must be consistent with the units of the CadHeader when referenced from the Ecad section.	0-n

4.4.8 PolyStep

The Polystep substitution consists of defining either a Line or an Arc as the continuation of a Polyline or Polygon description. The location information is interpreted as being the point to which the curve (Arc), or segment (Line) is drawn. The substitution may take place anywhere within the file where the elements Polyline and Outline occur. This action includes the dictionaries where graphic descriptions are predefined. The Units of measure must be consistent with the Units parameter of the three dictionaries where this substitution can take place; DictionaryStandard, DictionaryUser, and DictionaryFont. See Table 13.

Table 13 – Polystep substitution group

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
PolyStepCurve	PolyStepCurve Type	The continuation of the linear description of a Polyline or Polygon if the next portion to be defined is an arc. The end point of the arc is defined as well as the location of the radius. CounterClockwise is the default direction	0-n
PolyStepSegment	PolyStep SegmentType	The continuation of the linear description of a Polyline or Polygon if the next portion to be defined is a line segment. The end point of the line is defined.	0-n

4.4.9 Simple

The Simple substitution consists of defining an Arc, Line, Outline or Polyline. The Simple substitution is called for in the DfxMeasurement, Glyph, and Slot elements. Simple is also identified as a UserPrimitive, UserShape, or Feature and the four elements may be substituted when called for in conjunction with those descriptions. When predefined in the DictionaryUser, or DictionaryFont the Units must match those of the dictionary. See Table 14.

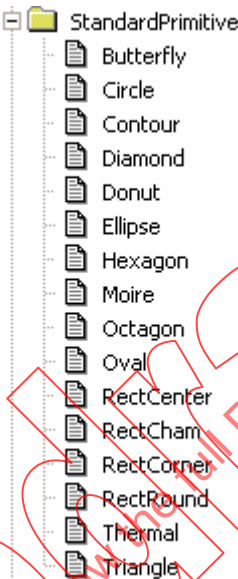
Table 14 – Simple substitution group

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Arc	ArcType	Arc elements are curves (defined by three sets of coordinates: startX, startY, endX, endY and centerX, centerY. The width of the arc is applied when the arc is instantiated or predefined.	0-n
Line	LineType	Line elements are individual line segments. The lineWidth and lineEnd conditions are defined when the line is instantiated or pre-defined. The lineEnd default is ROUND.	0-n
Outline	OutlineType	Outline has Polygon and LineDesc as children elements. The characteristics of the Polygon must be a closed shape. The point of origin of the shape is identified as the 0:0 coordinate. The element includes the start of the polygon definition (PolyBegin) and the appropriate number of PolySteps to complete the closed shape. The lineWidth is defined at a time when the Outline is instantiated or predefined.	0-n
Polyline	PolylineType	The Polyline element consists of a series of lines that define a particular grouping configuration. These line segments do NOT result in a closed shape, however they can be pre-defined and re-used as needed. The lineWidth and lineEnd of the Polyline are defined at the time the Polyline is instantiated or predefined.	0-n

4.4.10 StandardPrimitive

There are sixteen Standard Primitives defined in the 61182-2-X structure. Any of the primitive shapes may be a candidate for substitution when StandardPrimitive is called for in the schema. The names of the various shapes indicate their type; each has its attributes that identify the physical requirements. Any StandardPrimitive may be predefined, provided a unique “id”, and contained in the DictionaryStandard. All StandardPrimitive shapes are developed in accordance with their description requirements in the preferred orientation of this standard. See Table 15.

Table 15 – Standard primitive substitution group

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Butterfly	ButterflyType	A primitive shape (either ROUND or SQUARE) that has two quadrants of the Cartesian coordinate system removed (0° to 90° and 180° to 270°).	0-n
Circle	CircleType	A primitive shape that defines a round object where the circular shape consists of a diameter.	0-n
Contour	ContourType	A closed primitive shape that has as its children a polygon and optional cutout(s) The sequence of connected edges that form the polygon may be straight or circular.	0-n
Diamond	DiamondType	A primitive shape with four equal sides that are extended from its horizontal center to its vertical center. The lines converge into a point both horizontally and vertically. The overall description of the shape is controlled by the width (distance between vertical point) and the height (distance between horizontal point).	0-n
Donut	DonutType	A round, square, hexagon, or octagon shaped primitive consisting of an outer diamer and inner diameter that define physical characteristics of the donut.	0-n
Ellipse	EllipseType	An elliptical primitive shape that follows the standard ellipse characteristics and is defined by a width and height dimension, establishing the overall limits of the feature.	0-n
Hexagon	HexagonType	A six-sided primitive shape with all sides being equal in length and with all angles between adjacent sides being equal. The orientation of the Hexagon is with one of its points facing North. Only the dimension across the points is required.	0-n

Moire	MoireType	A series of circles, each consisting of a smaller diameter than the previous. The details of the Moire is defined by the number of rings, their center line spacing, and the ring width. The pattern may also contain a crosshair representing its point of origin. Restrictions apply so that ringWidth is smaller than ringGap.	0-n
Octagon	OctagonType	An eight-sided primitive shape with all sides being equal in length and with all angles between adjacent sides being equal. The orientation of the Octagon is with one of its points facing north. Only the dimension across the points is required.	0-n
Oval	OvalType	A rectangular primitive shape with a complete radius (180° arc) at each end. The limits of the feature are controlled by the length and width of the oval across the outer extremities.	0-n
RectCenter	RectCenterType	The characteristics of a rectangle defined by a width and height dimension consistent with a horizontal position on the Cartesian coordinate system. The center point is the point of origin and is used to locate the RectCenter. A "square" is a RectCenter with the width and height equal.	0-n
RectCham	RectChamType	A rectangle with one or more corners chamfered. The user has the option to define any of the corners as containing the chamfer as well as the chamfered dimensions. All chamfers (or opportunities for chamfers) must be identical in size.	0-n
RectCorner	RectCornerType	A constraining rectangular area (bounding box) that describes a rectangle consistent with a horizontal position on the Cartesian coordinate system. The point of origin is the lower left corner. A Square positioned by its corners is a RectCorner that is defined by having the X and Y offset be equal.	0-n
RectRound	RectRoundType	A rectangle with one or more corners rounded. The user has the option to define any of the corners as containing the radius as well as the radiused dimensions. All corners (or opportunities for corners) must be identical in size.	0-n
Thermal	ThermalType	A primitive shape consisting either of ROUND, SQUARE, HEXAGON, or OCTAGON configuration that historically defines the removal of material from a plane or conductive fill area in accordance to the shape attribute description.	0-n
Triangle	TriangleType	A primitive isosceles triangular shape that has two equal sides and a base. The feature is defined by a base and height dimension.	0-n

4.4.11 StandardShape

The StandardShape substitution group permits the substitution of any of the Standard Primitive shapes in accordance with their individual descriptions. A predefined StandardPrimitive may also be instantiated by its unique "id" when the feature is contained in the DictionaryStandard. When a reference is made to the dictionary predefined primitive, the Units must match. See Table 16.


Table 16 – StandardShape substitution group

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Standard Primitive	ABSTRACT	A substitution group that permits the substitution of the StandardPrimitive element with any of the sixteen standard primitive types.	0-n
StandardPrimitive Ref	StandardPrimitive RefType	A reference to a predefined StandardPrimitive, contained in the DictionaryPrimitive. The reference is by its unique "id". The units of the referenced predefined primitive and the Ecad section where it is to be instantiated must match.	0-n

4.4.12 UserPrimitive

The UserPrimitive substitution group consists of any simple graphic feature (Arc, Line, Outline or Polyline), as well as text or UserSpecial shapes. The UserSpecial element is a collection of Features (which are any of the permitted graphics used in the 61182-2-X file). UserSpecial permits the definition of logos, special targets, drawing formats or other graphics needed by a particular design. UserPrimitives can be predefined, assigned a unique "id" and contained in the DictionaryUser. The DictionaryUser defines the Units used to describe the graphic shapes. See Table 17.


Table 17 – UserPrimitive substitution group

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Simple	ABSTRACT	A substitution consists of defining an Arc, Line, Outline or Polyline. The Simple substitution is called for in the schema in DfxMeasurement, Glyph, and Slot elements and may be defined in any other graphics.	0-n
Text	TextType	The text element defines text strings, fonts, and the bounding box containing the text. Also included are Xform to position, mirror or rotate the text.	0-n
UserSpecial	UserSpecial Type	The UserSpecial element has all the capabilities allowed by the standard. The characteristic uses the substitution group "Feature" and may develop any combination of graphical shapes.	0-n

4.4.13 UserShape

The UserShape substitution group permits the substitution of any of the UserPrimitive shapes in accordance with their individual descriptions. A predefined UserPrimitive may also be instantiated by its unique "id" when the feature is contained in the DictionaryUser. When a reference is made to the dictionary predefined primitive, the Units must match. See Table 18.

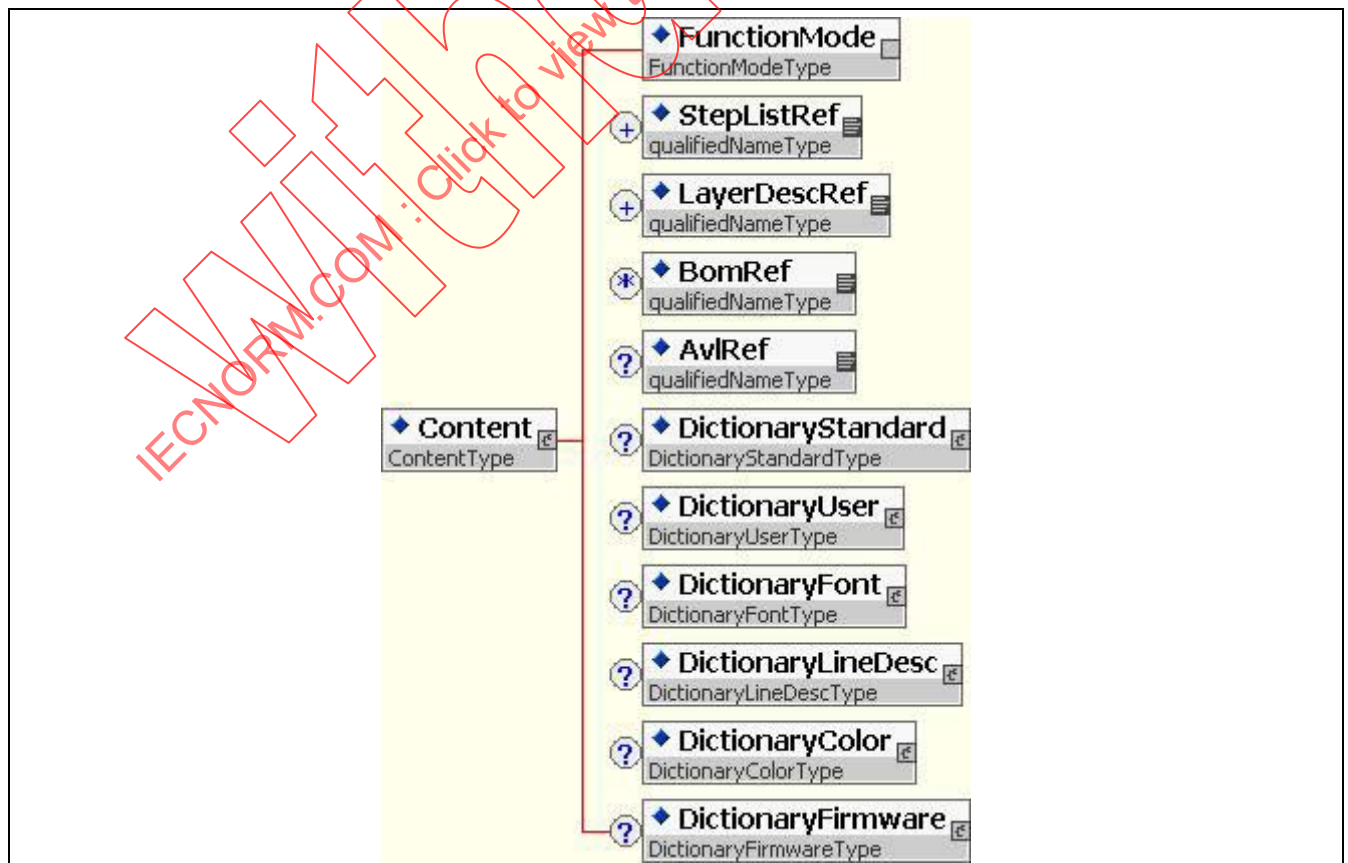
Table 18 – UserShape substitution group

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
UserPrimitive	ABSTRACT	A substitution group that occurs in the 61182-2-X schema and permits the substitution of the UserPrimitive element with any of the user primitive description or types.	0-n
UserPrimitiveRef	UserPrimitive RefType	A reference to a predefined UserPrimitive, contained in the DictionaryUser. The reference is by its unique "id". The units of the referenced predefined primitive and the Ecad section where it is to be instantiated must match.	0-n

5 Content

The Content sub-element provides the information about the contents of the IEC 61182-2-X file. See Table 19. The Content schema identifies the depth and breadth of information in the file. The Content sub-elements include references to the FunctionMode, StepsListRef, LayersDescRef, BomRef, and AvlRef included in the file, plus six Dictionaries: DictionaryStandard, DictionaryUser, DictionaryFont, DictionaryLineDesc, DictionaryColor, and DictionaryFirmware.

Table 19 – Content sub-element



Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Content	ContentType	The Content element defines the function of the file, and references the major sections of the product description (i.e. Step, Layer, Bom and Avl). In addition, there are six dictionaries indicated in Content that would contain the pre-described information needed for the file details.	1-1
FunctionMode	FunctionModeType	The function that the file is intended to perform between trading partners.	1-1
StepListRef	qualifiedNameType	A reference to all the StepLists that are included in the 61182-2-X file.	1-n
LayerDescRef	qualifiedNameType	A reference to all the LayerLists that are included in the IPC-61182-2-X file.	1-n
BomRef	qualifiedNameType	A reference to all the BomData included in the file. There may be several Bom elements.	0-n
AvlRef	qualifiedNameType	A reference to the Avl portion of the file. This file contains the approved vendor list for all items contained in the BomData.	0-1
DictionaryStandard	DictionaryStandardType	An element that contains substitution group information using predefined descriptions of standard primitives identified by the 61182-2-X standard and described by the user for reuse in the file.	0-1
DictionaryUser	DictionaryUserType	An element that contains substitution group information using predefined descriptions of user primitives identified by the 61182-2-X standard and described by the user for reuse in the file.	0-1
DictionaryFont	DictionaryFontType	An element that contains substitution group information regarding font descriptions as predefined Glyphs or references to external URN's for character sets that differ from the Helvetica standard.	0-1
DictionaryLineDesc	DictionaryLineDescType	An element that contains substitution group information using line description criteria, predefined by the user for reuse in the file.	0-1
DictionaryColor	DictionaryColorType	An element that contains substitution group information using color description criteria, predefined by the user for reuse in the file.	0-1
DictionaryFirmware	DictionaryFirmwareType	An element that contains substitution group information using firmware description criteria, predefined by the user for reuse in the file.	0-1

5.1 Content: FunctionMode

The FunctionMode element defines the global mode of the file (see Table 20). There are five valid values for the mode attribute. These are:

FULL – everything in the IEC 61182-2 standard job is included

DESIGN (IEC 61182-2-1) – file carries mostly Design start or complete description

FABRICATION (IEC 61182-2-2) – file carries mostly Fabrication information

ASSEMBLY (IEC 61182-2-3) – file carries mostly Assembly information

TEST (IEC 61182-2-4) – file carries mostly testing information for bare board or assembly

Table 20 – File segmentation and function apportionment

Name	Full	Design			Fabrication			Assembly			Test		
		1	2	3	1	2	3	1	2	3	1	2	3
Hierarchical layer/stack instance files	Y	N	Y	N	N	N	N	N	N	N	N	N	N
Hierarchical conductor routing files	Y	N	Y	N	N	N	N	N	N	N	N	N	N
BOM (Components and Materials)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y
AVL (Components and Materials)	Y	N	Y	Y	N	Y	Y	Y	Y	Y	N	N	Y
Component Packages	Y	Y	Y	Y	N	N	Y	Y	Y	Y	N	Y	Y
Land Patterns	Y	N	Y	Y	N	N	Y	N	Y	Y	N	Y	Y
Device Descriptions	Y	Y	Y	Y	N	N	N	N	N	Y	N	N	Y
Component Descriptions	Y	Y	Y	Y	N	N	N	Y	Y	Y	N	Y	Y
Soldermask; Solder Paste Legend Layers	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Drilling and Routing Layers	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Documentation Layers	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Net List	Y	Y	Y	Y	N	Y	Y	N	Y	Y	Y	N	Y
Outer Copper Layers	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Inner Layers	Y	N	N	Y	Y	Y	Y	N	Y	Y	N	N	Y
Miscellaneous Image Layers	Y	N	Y	Y	N	Y	Y	N	Y	Y	N	Y	Y
DFX Analysis	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y

Each FunctionMode has a specific purpose defined for the industry. The FunctionMode element has three attributes. The first is mode, which can be the enumerated strings of DESIGN, FABRICATION, ASSEMBLY, TEST and FULL. In many instances, the testing function is already included in fabrication and assembly modes consisting of bare board testing for fabrication, and in-circuit testing for assembly. Nevertheless, there are times when companies wish to outsource the testing activity. Therefore it is important to identify the various testing modes.

In order to define additional granularity, FunctionMode has a second attribute, level, that defines the data complexity needed for each of the mode condition. The attribute level is a positive integer however only the numbers 1, 2 or 3 are presently allowed since each mode has only three levels. When identifying FULL as the mode, the level should be set at 1. The levels encompass their own file details in order to identify that they are associated with an individual mode. Thus, the required file content for level 1 of the DESIGN mode is not the same as a level 1 for the ASSEMBLY mode.

The FunctionMode element has a third attribute. The attribute is comment which, as string data, permits the users of the 61182-2-X file to enhance the FunctionMode descriptions with additional information. See Table 21.

5.1.1 FULL mode

The FULL mode identifier incorporates a total of fifteen functions. Each function is represented and available in the file. The order of the details in the file is not significant as several elements may be used to address any given function. Hierarchical padstack and route information reflects original design intent that may be altered in the representation of the flattened fabrication data. For FABRICATION and ASSEMBLY, flattened data **shall** be used.

5.1.2 DESIGN mode

The DESIGN mode consists of three levels of complexity. Each level performs a different function consisting of an original design starting from scratch to completed design that had already been converted to manufacturing data, or a completed design that is still in the CAD format structure.

5.1.3 FABRICATION mode

The FABRICATION mode consists of three levels of complexity. Each level describes information in a layered format, from very simplistic data to that where the customer has dictated very specific materials and material stack-up structures.

5.1.4 ASSEMBLY mode

The ASSEMBLY mode consists of three levels of complexity. Each level describes a concept of more complete information. The simplest level is mainly bill of material data as well as external copper layers. In its most complete form, the assembly information describes the component approved vendor listing for aliases and substitution in sufficient detail to ensure proper assembly.

5.1.5 TEST mode

The Test mode consists of three levels of complexity. Each level describes a specific function for testing information that must be contained within a file. In its simplest mode, the data describes information to allow bare board testing. In its most complex mode, there is information on in-circuit test, impedance control, and dielectric withstanding voltage conditions.

5.2 Function levels

The IEC 61182-2 is limited to be organized as one of thirteen function levels. The level attribute, when associated with the mode attribute, defines the complexity and detail of the file content.

The level attribute consists of a positive integer and identifies complexity with respect to the characteristics for mode-DESIGN, mode-FABRICATION, mode-ASSEMBLY, and mode-TEXT. A mode-FULL consists of all the elements for an 61182-2 file and has only one (1) level value. For all other modes, the level attribute relates to the type of mode and is apportioned as one of three levels.

Table 21 – Content – FunctionMode

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
FunctionMode	FunctionMode Type	The function that the file is intended to perform between trading partners.	1-1
mode	modeType	Defines type of mode that the file is intended to serve.	1-1
level	positiveInteger	A numerical value of 1, 2, or 3 used to define the complexity of the mode.	1-1
comment	string	Any appropriate comment to help clarify the intended use of the file.	0-1

5.2.1 FULL Mode Level 1

The FULL mode level 1 requirements are shown as follows. The characteristics represent the most complete state possible.

Layer Stack: Instances of multilayer structure at a single point site defining the characteristics that exist at a particular point including land description or reference, non-pad description or reference, thermal connections or reference, and holes (through-hole, buried, blind, and microvias). LayerStacks are for reference to the construction of the original design.

Conductor Route: Original CAD data files describing conductive patterns and features used to interconnect electronic components in accordance with the original schematic capture file and component library descriptions.

Bom: Bill of Material information that describes, in sufficient detail, the component descriptions of the printed board, as well as the materials used for board fabrication, assembly, and test.

Avl: An approved vendor list for each item as defined by the OEM and modified accordingly by the board fabricator and the board assembler to reflect the materials and components used in the final electronic assembly.

Component Packages: Physical outlines of mechanical dimensions for electronic and mechanical components, their pins, (lands), and their relation to their logical net description.

Land Patterns: Combinations of lands used on outer layers that are grouped into a pattern so that they coincide with the mounting pins (IO's) of electronic or electromechanical components. The information is through a reference to the individual land for each pin of a device. Land patterns are for reference only to provide a grouping of lands related to a particular component.

Device Descriptions: Device characterization including the electronic or electromechanical part number, as well as its value, tolerance, and pin ID consisting of a name and function.

Component Descriptions: Consists of the components and their instances on the electronic assembly, including a reference to a specific land pattern, a component package style, and a device if the component is electronic.

Masking Layer: Images for soldermask on external layers of a printed circuit board (top and bottom) as well as legend marking to be incorporated on top of soldermask material.

Drilling Routing: Information on hole forming, either through mechanical drilling, laser ablation, or chemical mechanism and the relationship of the conductor routing layer.

Documentation Layers: Information on the details for finishes, tolerances, and other details necessary to complete the full disclosure of the printed board structure and/or assembly.

Net List: A list of physical nets that includes the physical net points, the location, side, as well as additional information required for bare board electrical testing.

Outer Conductive: External copper geometries and features used for electronic probing or component attachment. They may be defined as positive or negative.

Inner Layers: Image description for innerlayers of multilayered PCB's where the description indicates the conductive pattern as well as plated-through holes contained within a layerset. These characteristics are also used to describe embedded passive layers.

Image Layers: Miscellaneous image layers that may be extracted from the originating CAD system that provide supplementary details for either printed circuit board fabrication or printed circuit board assembly processes and testing.

Analysis: Any of the CAD data can have Design for Manufacturing (DFM) processes run against it. The results of these are referenced in the Analysis element.

5.2.2 Design Levels

The Design Level requirements have a variety of element combinations. Each combination is identified by its mode and level in combination. There are three Design Level descriptions starting with Design Level 1, Design Level 2 and Design Level 3. The following subclauses show the content of each of the three design levels. It should be noted that when the elements that represent the design mode are available in any of the fabrication or assembly file structures, the information should be treated as original input and reference and can be used for analysis and checking, however ASSEMBLY and FABRICATION elements take precedence.

5.2.2.1 Design Level 1

This level represents the original OEM design as was used to lay out a PCB from the design schematic, layout design rules, and component information. The characteristics represent designing from scratch, taking OEM input and developing the board. Design Level 1 requirements are shown as follows:

Bom: Bill of Material information that describes, in sufficient detail, the component descriptions of the printed board, as well as the materials used for board fabrication, assembly, and test.

Component Packages: Physical outlines of mechanical dimensions for electronic and mechanical components and their relation to their logical net description.

Device Descriptions: Device characterization including the electronic or electromechanical part number, as well as its value, tolerance, and pin ID consisting of a name and function.

Component Descriptions: Consists of the components and their instances on the electronic assembly, including a reference to a specific land pattern, a component package style, and a device if the component is electronic.

Documentation Layers: Information on the details for finishes, tolerances, and other details necessary to complete the full disclosure of the printed board structure and/or assembly.

Net List: A list of logical nets that includes the physical net points of the components, the location, side, as well as additional information required for bare board electrical testing.

Analysis: Any of the CAD data can have Design for Manufacturing processes run against it. The results of these are referenced in the Analysis element.

5.2.2.2 Design Level 2

This level provides information that is used to modify an existing design using the original CAD data information since the changes impact the electrical characteristics that should be maintained. The characteristics represent modifying a design where the Fabrication and Assembly file has been archived by the OEM. Design Level 2 requirements are shown as follows:

Layer Stack: Instances of multilayer structure at a single point site, defining the characteristics that exist at a particular point including land description or reference, non-pad description or reference, thermal connections or reference, and holes (through-hole, buried, blind, and microvias). LayerStacks are for reference to the construction of the original design.

Conductor Route: Original CAD data files describing conductive patterns and features used to interconnect electronic components in accordance with the original schematic capture file and component library descriptions.

Bom: Bill of Material information that describes, in sufficient detail, the component descriptions of the printed board, as well as the materials used for board fabrication, assembly, and test.

Avl: An approved vendor list for each item as defined by the OEM and modified accordingly by the board fabricator and the board assembler to reflect the materials and components used in the final electronic assembly.

Component Packages: Physical outlines of mechanical dimensions for electronic and mechanical components, their pins, (lands), and their relation to their logical net description.

Land Patterns: Combinations of lands used on outer layers that are grouped into a pattern so that they coincide with the mounting pins (IO's) of electronic or electromechanical components. The information is through a reference to the individual land for each pin of a device. Land patterns are for reference only to provide a grouping of lands related to a particular component.

Device Descriptions: Device characterization including the electronic or electromechanical part number, as well as its value, tolerance, and pin ID consisting of a name and function.

Component Descriptions: Consists of the components and their instances on the electronic assembly, including a reference to a specific land pattern, a component package style, and a device if the component is electronic.

Documentation Layers: Information on the details for finishes, tolerances, and other details necessary to complete the full disclosure of the printed board structure and/or assembly.

Net List: A list of physical nets that includes the physical net points, the location, side, as well as additional information required for bare board electrical testing.

Image Layers: Miscellaneous image layers that may be extracted from the originating CAD system that provide supplementary details for either printed circuit board fabrication or printed circuit board assembly processes and testing.

Analysis: Any of the CAD data can have Design for Manufacturing processes run against it. The results of these are referenced in the Analysis element.

5.2.2.3 Design Level 3

This information is used to modify an existing or archived design where the original hierarchical information was not maintained or may not be compatible with the design system. The characteristics represent modifying a design using the original CAD data information since the changes impact the electrical characteristics that should be maintained. Design Level 3 requirements are shown as follows:

Bom: Bill of Material information that describes, in sufficient detail, the component descriptions of the printed board, as well as the materials used for board fabrication, assembly, and test.

Avl: An approved vendor list for each item as defined by the OEM and modified accordingly by the board fabricator and the board assembler to reflect the materials and components used in the final electronic assembly.

Component Packages: Physical outlines of mechanical dimensions for electronic and mechanical components, their pins, (lands), and their relation to their logical net description.

Land Patterns: Combinations of lands used on outer layers that are grouped into a pattern so that they coincide with the mounting pins (IO's) of electronic or electromechanical components. The information is through a reference to the individual land for each pin of a device. Land patterns are for reference only to provide a grouping of lands related to a particular component.

Device Descriptions: Device characterization including the electronic or electromechanical part number, as well as its value, tolerance, and pin ID consisting of a name and function.

Component Descriptions: Consists of the components and their instances on the electronic assembly, including a reference to a specific land pattern, a component package style, and a device if the component is electronic.

Masking Layer: Images for soldermask on external layers of a printed circuit board (top and bottom) as well as legend marking to be incorporated on top of soldermask material.

Drilling Routing: Information on hole forming, either through mechanical drilling, laser ablation, or chemical mechanism and the relationship of the conductor routing layer.

Documentation Layers: Information on the details for finishes, tolerances, and other details necessary to complete the full disclosure of the printed board structure and/or assembly.

Net List: A list of physical nets that includes the physical net points, the location, side, as well as additional information required for bare board electrical testing.

Outer Conductive: External copper geometries and features used for electronic probing or component attachment. They may be defined as positive or negative.

Inner Layers: Image description for innerlayers of multilayered PCB's where the description indicates the conductive pattern as well as plated-through holes contained within a layerset. These characteristics are also used to describe embedded passive layers.

Image Layers: Miscellaneous image layers that may be extracted from the originating CAD system that provide supplementary details for either printed circuit board fabrication or printed circuit board assembly processes and testing.

Analysis: Any of the CAD data can have Design for Manufacturing processes run against it. The results of these are referenced in the Analysis element.

5.2.3 Fabrication Levels

The Fabrication Level requirements have a variety of element combinations. Each combination is identified by its mode and level in combination. There are three Fabrication Level descriptions starting with Fabrication Level 1, Fabrication Level 2 and Fabrication Level 3. The following sections show the content of each of the three fabrication levels.

5.2.3.1 Fabrication Level 1

This information represents single, double-sided, or multilayer PCB graphical data. There is no electrical connectivity or performance data included. This level replaces PCB fabrication Gerber data. This level presents the fabrication print notes and material construction information in a machine-readable ASCII file format. The level is for build to documentation instructions. Electrical testing is derived from the conductive images. The characteristics represent single or double sided boards, built to documentation. Fabrication Level 1 requirements are shown as follows:

Bom: Bill of Material information that describes, in sufficient detail, the component descriptions of the printed board, as well as the materials used for board fabrication, assembly, and test.

Masking Layer: Images for soldermask on external layers of a printed circuit board (top and bottom) as well as legend marking to be incorporated on top of soldermask material.

Drilling Routing: Information on hole forming, either through mechanical drilling, laser ablation, or chemical mechanism and the relationship of the conductor routing layer.

Documentation Layers: Information on the details for finishes, tolerances, and other details necessary to complete the full disclosure of the printed board structure and/or assembly.

Outer Conductive: External copper geometries and features used for electronic probing or component attachment. They may be defined as positive or negative.

Inner Layers: Image description for innerlayers of multilayered PCB's where the description indicates the conductive pattern as well as plated-through holes contained within a layerset. These characteristics are also used to describe embedded passive layers.

Analysis: Any of the CAD data can have Design for Manufacturing processes run against it. The results of these are referenced in the Analysis element.

5.2.3.2 Fabrication Level 2

This information represents single, double-sided, or multilayer PCB's where electrical connectivity or performance data is included. This replaces the PCB Gerber and IEC 61182-7. This level presents the fabrication print notes and material construction information in a machine-readable ASCII file format. The boards defined may include buried and blind vias with electrical opens and shorts testing and complete stack up definition. Fabrication Level 2 requirements are shown as follows:

Bom: Bill of Material information that describes, in sufficient detail, the component descriptions of the printed board, as well as the materials used for board fabrication, assembly, and test.

Avl: An approved vendor list for each item as defined by the OEM and modified accordingly by the board fabricator and the board assembler to reflect the materials and components used in the final electronic assembly.

Masking Layer: Images for soldermask on external layers of a printed circuit board (top and bottom) as well as legend marking to be incorporated on top of soldermask material.

Drilling Routing: Information on hole forming, either through mechanical drilling, laser ablation, or chemical mechanism and the relationship of the conductor routing layer.

Documentation Layers: Information on the details for finishes, tolerances, and other details necessary to complete the full disclosure of the printed board structure and/or assembly.

Net List: A list of physical nets that includes the physical net points, the location, side, as well as additional information required for bare board electrical testing.

Outer Conductive: External copper geometries and features used for electronic probing or component attachment. They may be defined as positive or negative.

Inner Layers: Image description for innerlayers of multilayered PCB's where the description indicates the conductive pattern as well as plated-through holes contained within a layerset. These characteristics are also used to describe embedded passive layers.

Image Layers: Miscellaneous image layers that may be extracted from the originating CAD system that provide supplementary details for either printed circuit board fabrication or printed circuit board assembly processes and testing.

Analysis: Any of the CAD data can have Design for Manufacturing processes run against it. The results of these are referenced in the Analysis element.

5.2.3.3 Fabrication Level 3

This information represents single, double-sided, or multilayer PCB's where electrical connectivity, performance data, and embedded passive information is included. This file level replaces the existing PCB fabrication Gerber and IEC 61182-7 data. This level presents the fabrication print notes and material construction information in a machine-readable ASCII file format. These descriptions represent complex printed boards intended to perform a circuit function. Also included is a complete description of core, prepreg and sometimes reinforcement. Fabrication Level 3 requirements are shown as follows:

Bom: Bill of Material information that describes, in sufficient detail, the component descriptions of the printed board, as well as the materials used for board fabrication, assembly, and test.

Avl: An approved vendor list for each item as defined by the OEM and modified accordingly by the board fabricator and the board assembler to reflect the materials and components used in the final electronic assembly.

Component Packages: Physical outlines of mechanical dimensions for electronic and mechanical components and their relation to their logical net description.

Land Patterns: Combinations of lands used on outer layers that are grouped into a pattern so that they coincide with the mounting pins (IO's) of electronic or electromechanical components. The information is through a reference to the individual land for each pin of a device. Land patterns are for reference only to provide a grouping of lands related to a particular component.

Masking Layer: Images for soldermask on external layers of a printed circuit board (top and bottom) as well as legend marking to be incorporated on top of soldermask material.

Drilling Routing: Information on hole forming, either through mechanical drilling, laser ablation, or chemical mechanism and the relationship of the conductor routing layer.

Documentation Layers: Information on the details for finishes, tolerances, and other details necessary to complete the full disclosure of the printed board structure and/or assembly.

Net List: A list of physical nets that includes the physical net points, the location, side, as well as additional information required for bare board electrical testing.

Outer Conductive: External copper geometries and features used for electronic probing or component attachment. They may be defined as positive or negative.

Inner Layers: Image description for innerlayers of multilayered PCB's where the description indicates the conductive pattern as well as plated-through holes contained within a layerset. These characteristics are also used to describe embedded passive (resistive or capacitive) material layers.

Image Layers: Miscellaneous image layers that may be extracted from the originating CAD system that provide supplementary details for either printed circuit board fabrication or printed circuit board assembly processes and testing.

Analysis: Any of the CAD data can have Design for Manufacturing processes run against it. The results of these are referenced in the Analysis element.

5.2.4 Assembly Levels

The Assembly Level requirements have a variety of element combinations. Each combination is identified by its mode and level in combination. There are three Assembly Level descriptions starting with Assembly Level 1, Assembly Level 2 and Assembly Level 3. The following sections show the content of each of the three assembly levels.

5.2.4.1 Assembly Level 1

This information represents pure assembly. There is no Design for Manufacturing (DFM) analysis of the bare board only assembly functions. Parts are provided on a consignment basis, however an Approved Vendor List (AVL) is still required that includes the part number of parts in the consignment. There is no analysis of the data to improve the design. There are no added value services. The requirements are to build to print. Assembly Level 1 requirements are shown as follows:

Bom: Bill of Material information that describes, in sufficient detail, the component descriptions of the printed board, assembly, and test information.

Avl: An approved vendor list for each item as defined by the OEM and modified accordingly by the board fabricator and the board assembler to reflect the materials and components used in the final electronic assembly.

Component Packages: Physical outlines of mechanical dimensions for electronic and mechanical components, their pins, (lands), and their relation to their logical net description.

Component Descriptions: Consists of the components and their instances on the electronic assembly, including a reference to a component package style, and a Bom item.

Masking Layer: Images for soldermask on external layers of a printed circuit board (top and bottom) as well as legend marking to be incorporated on top of soldermask material.

Drilling Routing: Information on hole forming, either through mechanical drilling, laser ablation, or chemical mechanism and the relationship of the conductor routing layer.

Documentation Layers: Information on the details for finishes, tolerances, and other details necessary to complete the full disclosure of the printed board structure and/or assembly.

Outer Conductive: External copper geometries and features used for electronic probing or component attachment. They may be defined as positive or negative.

Analysis: Any of the CAD data can have Design for Manufacturing processes run against it. The results of these are referenced in the Analysis element.

5.2.4.2 Assembly Level 2

The information provided represents assemblies that are to be built to print. Parts are procured by Electronic Manufacturing Services (EMS) companies. There is limited DFM analysis, Automated Optical Inspection (AOI), and Flying probe testing. Assembly Level 2 requirements are shown as follows:

Bom: Bill of Material information that describes, in sufficient detail, the component descriptions of the printed board, as well as the materials used for board fabrication, assembly, and test.

Avl: An approved vendor list for each item as defined by the OEM and modified accordingly by the board fabricator and the board assembler to reflect the materials and components used in the final electronic assembly.

Component Packages: Physical outlines of mechanical dimensions for electronic and mechanical components, their pins, (lands), and their relation to their logical net description.

Land Patterns: Combinations of lands used on outer layers that are grouped into a pattern so that they coincide with the mounting pins (IO's) of electronic or electromechanical components. The information is through a reference to the individual land for each pin of a device. Land patterns are for reference only to provide a grouping of lands related to a particular component.

Component Descriptions: Consists of the components and their instances on the electronic assembly, including a reference to a component package style, and a Bom item.

Masking Layer: Images for soldermask on external layers of a printed circuit board (top and bottom) as well as legend marking to be incorporated on top of soldermask material.

Drilling Routing: Information on hole forming, either through mechanical drilling, laser ablation, or chemical mechanism and the relationship of the conductor routing layer.

Documentation Layers: Information on the details for finishes, tolerances, and other details necessary to complete the full disclosure of the printed board structure and/or assembly.

Net List: A list of physical nets that includes the physical net points, the location, side, as well as additional information required for bare board electrical testing.

Outer Conductive: External copper geometries and features used for electronic probing or component attachment. They may be defined as positive or negative.

Inner Layers: Image description for innerlayers of multilayered PCB's where the description indicates the conductive pattern as well as plated-through holes contained within a layerset. These characteristics are also used to describe embedded passive layers.

Image Layers: Miscellaneous image layers that may be extracted from the originating CAD system that provide supplementary details for either printed circuit board fabrication or printed circuit board assembly processes and testing.

Analysis: Any of the CAD data can have Design for Manufacturing processes run against it. The results of these are referenced in the Analysis element.

5.2.4.3 Assembly Level 3

This level of information represents a full service assembly process. This includes full Design for Excellence (DFX) and customer feed back. Procurement of parts is required as well as an analysis of component substitution. Customer contact provides design improvement recommendations. Full testing, including in-circuit, automatic optical inspection (AOI), Automatic X-ray Inspection (AXI), functional testing and some stress or burn-in testing is a part of this level. DFA can include assignment of parts to specific machines. Assembly Level 3 requirements are shown as follows.

Bom: Bill of Material information that describes, in sufficient detail, the component descriptions of the printed board, as well as the materials used for board fabrication, assembly, and test.

Avl: An approved vendor list for each item as defined by the OEM and modified accordingly by the board fabricator and the board assembler to reflect the materials and components used in the final electronic assembly.

Component Packages: Physical outlines of mechanical dimensions for electronic and mechanical components, their pins, (lands), and their relation to their logical net description.

Land Patterns: Combinations of lands used on outer layers that are grouped into a pattern so that they coincide with the mounting pins (IO's) of electronic or electromechanical components. The information is through a reference to the individual land for each pin of a device. Land patterns are for reference only to provide a grouping of lands related to a particular component.

Device Descriptions: Device characterization including the electronic or electromechanical part number, as well as its value, tolerance, and pin ID consisting of a name and function.

Component Descriptions: Consists of the components and their instances on the electronic assembly, including a reference to a component package style, and a Bom item.

Masking Layer: Images for soldermask on external layers of a printed circuit board (top and bottom) as well as legend marking to be incorporated on top of soldermask material.

Drilling Routing: Information on hole forming, either through mechanical drilling, laser ablation, or chemical mechanism and the relationship of the conductor routing layer.

Documentation Layers: Information on the details for finishes, tolerances, and other details necessary to complete the full disclosure of the printed board structure and/or assembly.

Net List: A list of physical nets that includes the physical net points, the location, side, as well as additional information required for bare board electrical testing.

Outer Conductive: External copper geometries and features used for electronic probing or component attachment. They may be defined as positive or negative.

Inner Layers: Image description for innerlayers of multilayered PCB's where the description indicates the conductive pattern as well as plated-through holes contained within a layerset. These characteristics are also used to describe embedded passive layers.

Image Layers: Miscellaneous image layers that may be extracted from the originating CAD system that provide supplementary details for either printed circuit board fabrication or printed circuit board assembly processes and testing.

Analysis: Any of the CAD data can have Design for Manufacturing processes run against it. The results of these are referenced in the Analysis element.

5.2.5 Test Levels

The Test Level requirements have a variety of element combinations. Each combination is identified by its mode and level in combination. There are three Test Level descriptions starting with Test Level 1, Test Level 2 and Test Level 3. The following sections show the content of each of the three test levels.

5.2.5.1 Test Level 1

This information provides testing of the bare board only. It includes opens and shorts, impedance control and dielectric withstanding voltage testing. Test Level 1 requirements are shown as follows:

Masking Layer: Images for soldermask on external layers of a printed circuit board (top and bottom) as well as legend marking to be incorporated on top of soldermask material.

Drilling Routing: Information on hole forming, either through mechanical drilling, laser ablation, or chemical mechanism and the relationship of the conductor routing layer.

Documentation Layers: Information on the details for finishes, tolerances, and other details necessary to complete the full disclosure of the printed board structure and/or assembly.

Net List: A list of physical nets that includes the physical net points, the location, side, as well as additional information required for bare board electrical testing.

Outer Conductive: External copper geometries and features used for electronic probing or component attachment. They may be defined as positive or negative.

Analysis: Any of the CAD data can have Design for Manufacturing processes run against it. The results of these are referenced in the Analysis element.

5.2.5.2 Test Level 2

The information provided includes capability for inspection, manual or using automated equipment such as AOI and AXI. It does not include electrical testing. Test Level 2 requirements are shown as follows:

Bom: Bill of Material information that describes, in sufficient detail, the component descriptions of the printed board, as well as the materials used for board fabrication, assembly, and test.

Component Packages: Physical outlines of mechanical dimensions for electronic and mechanical components, their pins, (lands), and their relation to their logical net description.

Land Patterns: Combinations of lands used on outer layers that are grouped into a pattern so that they coincide with the mounting pins (IO's) of electronic or electromechanical components. The information is through a reference to the individual land for each pin of a device. Land patterns are for reference only to provide a grouping of lands related to a particular component.

Component Descriptions: Consists of the components and their instances on the electronic assembly, including a reference to a component package style, and a Bom item.

Masking Layer: Images for soldermask on external layers of a printed circuit board (top and bottom) as well as legend marking to be incorporated on top of soldermask material.

Drilling Routing: Information on hole forming, either through mechanical drilling, laser ablation, or chemical mechanism and the relationship of the conductor routing layer.

Documentation Layers: Information on the details for finishes, tolerances, and other details necessary to complete the full disclosure of the printed board structure and/or assembly.

Outer Conductive: External copper geometries and features used for electronic probing or component attachment. They may be defined as positive or negative.

Image Layers: Miscellaneous image layers that may be extracted from the originating CAD system that provide supplementary details for either printed circuit board fabrication or printed circuit board assembly processes and testing.

Analysis: Any of the CAD data can have Design for Manufacturing processes run against it. The results of these are referenced in the Analysis element.

5.2.5.3 Test Level 3

The information available is for full electrical testing. It includes in-circuit as well as functional testing requirements and boundary scan (self test) analysis. Test Level 3 requirements are shown as follows:

Bom: Bill of Material information that describes, in sufficient detail, the component descriptions of the printed board, as well as the materials used for board fabrication, assembly, and test.

Avl: An approved vendor list for each item as defined by the OEM and modified accordingly by the board fabricator and the board assembler to reflect the materials and components used in the final electronic assembly.

Component Packages: Physical outlines of mechanical dimensions for electronic and mechanical components, their pins, (lands), and their relation to their logical net description.

Land Patterns: Combinations of lands used on outer layers that are grouped into a pattern so that they coincide with the mounting pins (IO's) of electronic or electromechanical components. The information is through a reference to the individual land for each pin of a device. Land patterns are for reference only to provide a grouping of lands related to a particular component.

Device Descriptions: Device characterization including the electronic or electromechanical part number, as well as its value, tolerance, and pin ID consisting of a name and function.

Component Descriptions: Consists of the components and their instances on the electronic assembly, including a reference to a component package style, and a Bom item.

Masking Layer: Images for soldermask on external layers of a printed circuit board (top and bottom) as well as legend marking to be incorporated on top of soldermask material.

Drilling Routing: Information on hole forming, either through mechanical drilling, laser ablation, or chemical mechanism and the relationship of the conductor routing layer.

Documentation Layers: Information on the details for finishes, tolerances, and other details necessary to complete the full disclosure of the printed board structure and/or assembly.

Net List: A list of physical nets that includes the physical net points, the location, side, as well as additional information required for bare board electrical testing.

Outer Conductive: External copper geometries and features used for electronic probing or component attachment. They may be defined as positive or negative.

Inner Layers: Image description for innerlayers of multilayered PCB's where the description indicates the conductive pattern as well as plated-through holes contained within a layerset. These characteristics are also used to describe embedded passive layers.

Image Layers: Miscellaneous image layers that may be extracted from the originating CAD system that provide supplementary details for either printed circuit board fabrication or printed circuit board assembly processes and testing.

Analysis: Any of the CAD data can have Design for Manufacturing processes run against it. The results of these are referenced in the Analysis element.

5.3 Content: StepListRef

StepListRef references the names of Steps used in the description of the Printed Circuit Assembly (PCA) itself. In manufacturing, this basic Step is often step and repeated (nested) inside a larger step (called array, or sub-panel). This array step can be further nested into another step (called a production panel). The Ecad element always contains at least one Step, but may contain several, some basic ones and others nesting previous steps.

The StepsListRef element, as it appears in the Contents schema, references the job StepList names and thus the Steps that are included in the 61182-2 file. All the graphical data of a 61182-2 job are located inside Steps that can be nested inside each other (PCB/Sub Panel/Panel, etc.). Steps are referenced in the Content schema (StepsListRef) as a qualifiedName that relates to the details in the Ecad schema.

Table 22 – Content – StepListRef

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
StepListRef	qualifiedName Type	A list of the names of the existing steps contained within the file. This feature is a method of checking completeness in file transfer.	1-1

5.4 Content: LayerDescRef

Layers, as the name implies, are sheets of two-dimensional data that, when laid on top of each other, create the Printed Circuit Assembly (unpopulated PCB and components). The Layer element appears in the 61182-2 file as a sub-element of the LayerDesc element.

The LayerDescRef element, as it appears in the Contents schema, references a job's LayerDesc names included in the 61182-2 file. See Table 23

Table 23 – Content – LayerDescRef

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
LayerDescRef	qualifiedName Type	A list of the names of the existing layer descriptions contained within the file. This feature is a method of checking completeness in file transfer.	1-1

5.5 Content: BomRef

The BOM section describes the Bill of Materials for the board. A bill of materials is a list of all the different components, materials, mechanical parts, or programmable software used in the electronic product. Components are arranged by the OEMDesignNumber or an alternate; materials for board fabrication or component attachment are arranged by their appropriate identifier. Each part number has a list of attributes and is accompanied by a list of the various specific uses or locations on the electronic product, each with its unique name.

Each BomRef element, as it appears in the Contents schema, references one of the potentially many Bom categories and the number of items included in each category in the 61182-2 file. See Table 24.

Table 24 – Content – BomRef

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
BomRef	qualifiedNameTy pe	A list of BOM items that are arranged by the category description contained as an attribute of each BomItem, i.e., ELECTRICAL PROGRAMMABLE MECHANICAL MATERIAL. This feature identifies the specific number of BomItems as well as the category to which they pertain, and is a method of checking completeness in file transfer.	0-n

5.6 Content: AvlRef

The Avl section describes the Approved Vendor Lists for the materials used to fabricate the board and the assembly. The BOM (bill of material) lists include all the different components to be used on the board, arranged by their appropriate part number, and material used to fabricate the board arranged by the part number of the material. There are also BOMs for the material used that are consumed by the fabrication and assembly processes. Each BOM has a corresponding list of approved vendors if the customer wishes to restrict the components and materials used for the electronic assembly to a specific supplier(s). There **shall** be only one Avl section in a 61182-2 file. It **shall** provide the names of each of the approved suppliers and **shall** correlate them with the BOM that contains the material/component descriptions.

The Avl is used by the customer, the fabricator and the assembler to coordinate the relationship with the bills of materials described in the 61182-2 file. See Table 25.

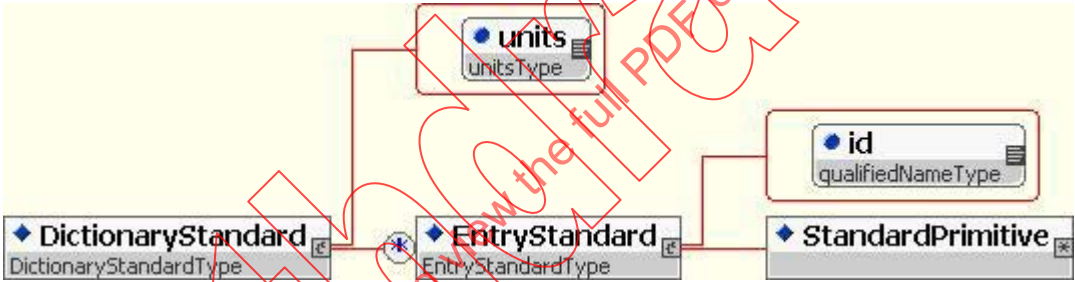
Table 25 – Content – AvlRef

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- ence
AvlRef	qualifiedName Type	A reference to the single Approved Vendor List for all the suppliers identified and the total number in the 61182-2 file. This feature is a method of checking completeness in file transfer.	0-1

5.7 Content: DictionaryStandard

The DictionaryStandard is intended to provide lookup information on predefined Standard Primitives. The DictionaryStandard is maintained as part of a substitution group schema. The intent is to have graphic descriptions available that are identified by their characteristics and a specific name (id). They may be reused throughout the file as appropriate. The name (id) of a StandardPrimitive must be unique within the DictionaryStandard. See Table 26.

Table 26 – Content –DictionaryStandard

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- ence
DictionaryStandard	Dictionary StandardType	An element that contains substitution group information using predefined descriptions of standard primitives identified by the 61182-2 standard and described by the user for reuse in the file.	0-1
units	unitsType	An enumerated string that may be one of the following: MILLIMETER MICRON INCH.	1-1
EntryStandard	EntryStandard Type	An element that establishes the individual characteristic associated with a StandardPrimitive substitution shape that has been identified by the user of the 61182-2 file.	0-n
Id	qualifiedName Type	The unique qualified name description assigned as an id for any StandardPrimitive for XML Schema substitution.	1-1
StandardPrimitive	ABSTRACT	Any standard primitive that is part of the substitution group that permits the substitution of the StandardShape element.	1-n

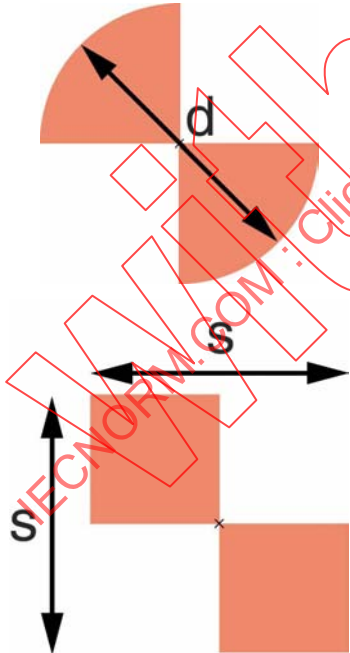
The organization of the DictionaryStandard is accomplished in accordance with the substitution group description criteria. The StandardPrimitive description may be any of sixteen standard shapes according to the specific characteristics identified in the following paragraphs. The StandardPrimitiveRef function is used in the body of the 61182-2 file when a specific StandardPrimitive has been predefined, assigned a name, and the unique “id” is referenced in the file. This feature permits the use of either a predefined StandardPrimitive, or defining the details of a StandardPrimitive within the file. The description in the file must contain all the features of a particular primitive shape under the rules of the particular shape definition.

5.7.1 StandardPrimitive: Butterfly

A Butterfly is a StandardPrimitive shape that may have the external periphery either round or square with two quadrants of the Cartesian coordinate system removed (0 to 90° and 180 to 270°). The round shape is defined by its diameter; the square shape is defined by an equal side dimension. The Butterfly is positioned by its point of origin, which is at the center of the Butterfly. See Table 27.

Table 27 – StandardPrimitive – Butterfly

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Butterfly	ButterflyType	A primitive shape (either ROUND or SQUARE) that has two quadrants of the Cartesian coordinate system removed (0 to 90° and 180 to 270°).	1-1
shape	butterflyShapeType	The inner and outer shapes are one of ROUND or SQUARE: ROUND: The inner and outer shapes are like circleDef. SQUARE: The inner and outer shapes are like RectCenterDef with height and width of each shape being equal.	1-1
diameter	nonNegative DoubleType	The diameter applies to the circular butterfly and is the outer boundary of the butterfly.	0-1
side	nonNegative DoubleType	The width along the x-axis and the height along the y-axis of a square.	0-1



```

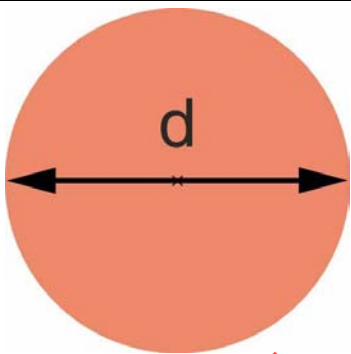
<DictionaryStandard units = "MILLIMETER">
  </EntryStandard>
  <EntryStandard id = "Butterfly1">
    <Butterfly shape = "ROUND" diameter = "3.2"/>
  </EntryStandard>
  <EntryStandard id = "Butterfly2">
    <Butterfly shape = "SQUARE" side = "1.8"/>
  </EntryStandard>
</DictionaryStandard>

```

5.7.2 StandardPrimitive: Circle

A Circle is a StandardPrimitive shape that defines a circle by the diameter of the circle. The point of origin is the center of a circle. See Table 28

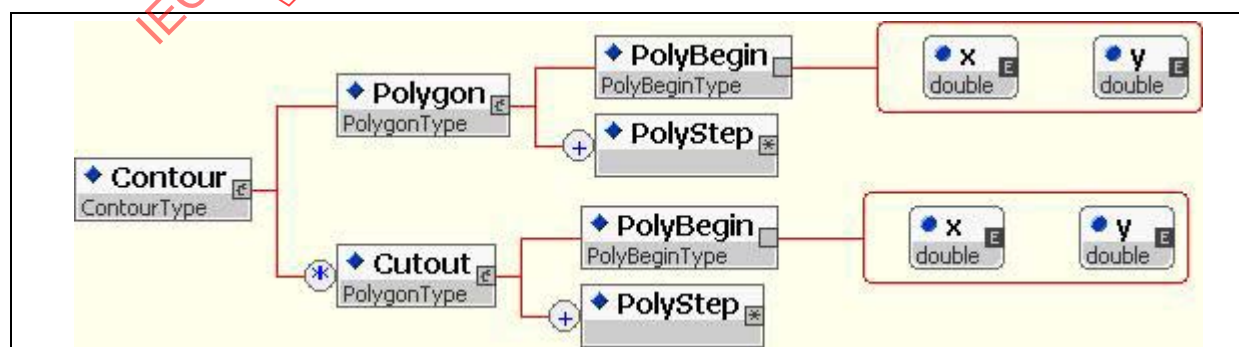
Table 28 – StandardPrimitive – Circle

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Circle	CircleType	An embedded element that defines a circular shape consisting of a diameter.	0-n
diameter	nonNegative DoubleType	The diameter of the circle.	0-n
		<pre> <DictionaryStandard units = "MILLIMETER"> </EntryStandard> <EntryStandard id = "Circle1"> <Circle diameter = "3.6"/> </EntryStandard> <EntryStandard id = "Circle2"> <Circle diameter = "4.0"/> </EntryStandard> </DictionaryStandard> </pre>	

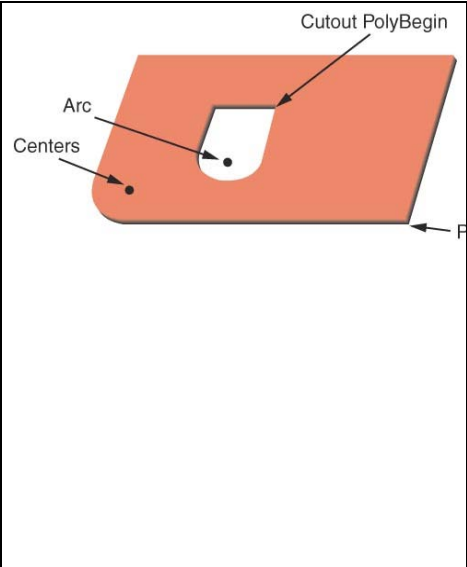
5.7.3 StandardPrimitive: Contour

The Contour element is a StandardPrimitive shape that defines a sequence of connected edges that form a polygon. An edge can be straight or circular. The polygon is a closed shape whose edges do not cross. This same characteristic is also true for cutout, which represents the absence of material inside the polygon shape. The coordinates of the polygon, cutout, and subsequent cutouts are defined relative to the local coordinate system of the original polygon. The point of origin may be a centroid of the polygon or one of the corners that sets the 0/0 coordinate. This is the point used to place the polygon or to rotate the image. The cutout uses the same coordinates. See Table 29.

Table 29 – StandardPrimitive – Contour



Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Contour	ContourType	A sequence of connected edges that form a polygon. An edge can be straight or circular.	1-1
Polygon	PolygonType	A closed shape whose edges do not cross, the coordinates of which are defined relative to the local coordinate system of the polygon.	1-1
PolyBegin	PolyBeginType	The PolyBegin element defines the starting point of the polygon.	1-1
x	double	The X starting point of the first polygon edge.	1-1
y	double	The Y starting point of the first polygon edge.	1-1
PolyStep	ABSTRACT	The PolyStep element is a substitution group that defines a circular (PolyStepCurve) or straight line (PolyStepSegment) continuation of the polygon. The polystep direction may be clockwise or counterclockwise which must be consistent when any Arc description is used as one of the PolyStep elements. Straight or curved line segments must not cross. The final X and final Y coordinate must match those of the PolyBegin element to signify that the shape is closed.	1-n
Cutout	CutoutType	A polygon closed shape whose edges do not cross, which adopts the coordinates of the original polygon, however represents the absence of material within the original polygon shape.	0-n
PolyBegin	PolyBeginType	The PolyBegin element defines the starting point of the polygon.	1-1
x	double	The X starting point of the first polygon edge.	1-1
y	double	The Y starting point of the first polygon edge.	1-1
PolyStep	ABSTRACT	The PolyStep element is a substitution group that defines a circular (PolyStepCurve) or straight line (PolyStepSegment) continuation of the polygon. The polystep direction may be clockwise or counterclockwise which must be consistent when any Arc description is used as one of the PolyStep elements. Straight or curved line segments must not cross. The final X and final Y coordinate must match those of the PolyBegin element to signify that the shape is closed.	1-n
 PolyBegin		<pre> <DictionaryStandard units = "MILLIMETER"> </EntryStandard> <EntryStandard id = "Contour1"> <Contour> <Polygon> <PolyBegin x = "0.00" y = "0.00"/> <PolyStepSegment x = "0.00" y = "7.00"/> <PolyStepSegment x = "-8.00" y = "7.00"/> <PolyStepCurve x = "-15.00" y = "0.00" centerX = "-8.00" centerY = "0.00"/> <PolyStepSegment x = "0.00" y = "0.00"/> </Polygon> </Contour> </EntryStandard> </DictionaryStandard> </pre>	

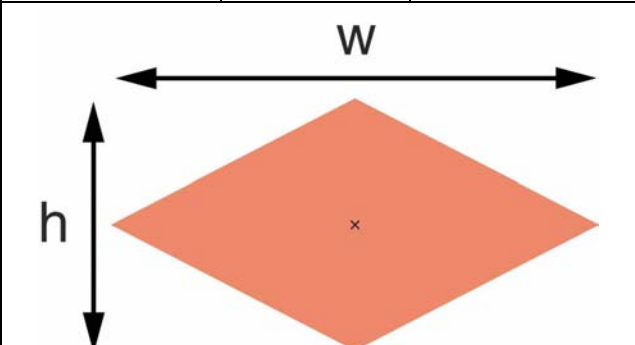
	<pre> <EntryStandard id = "Contour2"> <Contour> <Polygon> <PolyBegin x = "0.00" y = "0.00"/> <PolyStepSegment x = "-14.00" y = "0.00"/> <PolyStepCurve x = "-3.00" y = "3.00" centerX = "-14.00" centerY = "3.00" clockwise = "TRUE"/> <PolyStepSegment x = "-17.00" y = "7.00"/> <PolyStepSegment x = "0.00" y = "7.00"/> <PolyStepSegment x = "0.00" y = "0.00"/> </Polygon> <Cutout> <PolyBegin x = "-10.00" y = "5.00"/> <PolyStepSegment x = "-13.00" y = "5.00"/> <PolyStepSegment x = "-13.00" y = "3.00"/> <PolyStepCurve x = "-10.00" y = "3.00" centerX = "-11.50" centerY = "3.00"/> <PolyStepSegment x = "-10.00" y = "5.00"/> </Cutout> </Contour> </EntryStandard> </pre>
---	---

5.7.4 StandardPrimitive: Diamond

A Diamond is a 4-sided StandardPrimitive shape. The lengths of the sides of a diamond are always equal. A height and a width dimension specify the diamond. The first line defining the outline of the diamond is drawn between the point that is $\frac{1}{2}$ the height dimension along the positive y-axis and the point that is $\frac{1}{2}$ the width dimension along the x-axis. The same process is used to draw the other three lines of the diamond in each of the remaining quadrants. The Diamond is positioned with one of its corners facing the North direction. See Table 30.

Table 30 – StandardPrimitive – Diamond

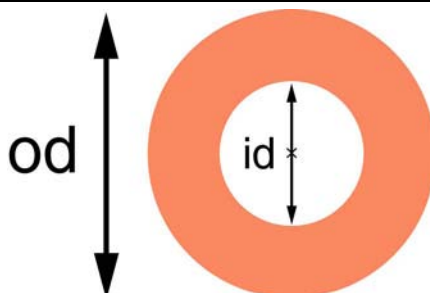
Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
Diamond	DiamondType	A primitive shape with four equal sides that are extended from its horizontal center to its vertical center. The lines converge into a point both horizontally and vertically. The overall description of the shape is controlled by the width (distance between vertical point) and the height (distance between horizontal point).	1-1
width	nonNegative DoubleType	The length of the diamond along, and centered on, the x-axis.	1-1
height	nonNegative DoubleType	The length of the diamond along, and centered on, the y-axis.	1-1

	<pre> <EntryStandard id = "Diamond1"> <Diamond width = "10.40" height = "6.20"/> </EntryStandard> <EntryStandard id = "Diamond2"> <Diamond width = "6.00" height = "8.60"/> </EntryStandard> </pre>
---	---

5.7.5 StandardPrimitive: Donut

A Donut is a StandardPrimitive shape composed of two concentric identical shapes. The shapes are the same but of different sizes with the outer diameter (OD) being larger than the inner diameter (ID). The shapes must be identical and may be square, round, hexagonal, or octagonal. The center of a Donut is also the point of origin of the primitive. The hexagonal and octagonal shapes are defined with a point of the shape facing the North direction. See Table 31.

Table 31 – StandardPrimitive – Donut

Donut DonutType shape donutShapeType outerDiameter nonNegativeDoubleType innerDiameter nonNegativeDoubleType			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur-rence
Donut	DonutType	A round, square, hexagon, or octagon shape consisting of an outer diamter and inner diameter that define physical characteristics of the donut.	1-1
shape	donutShape Type	The inner and outer shapes are one of ROUND, SQUARE , HEXAGON or OCTAGON: ROUND – The inner and outer shapes are like a circle. SQUARE – The inner and outer shapes are like a RectCenter with height and width of each shape being equal. HEXAGON – The inner and outer shapes are like a Hexagon. OCTAGON – The inner and outer shapes are like an Octagon.	1-1
outerDiameter	nonNegative DoubleType	The outer boundary of the filled region. The meaning based on donutShape: ROUND – The diameter of the circle is the outer boundary of the donut. The center of the circle is at the origin of the donut. SQUARE – The width along the x-axis and the height along the y-axis of a square at the inner boundary of the donut. The center of the square is at the origin. HEXAGON – The point-to-point measurement on the x-axis of the hexagon that forms the outer boundary of the donut. OCTAGON – The point-to-point measurement on the x-axis of the octagon that forms the outer boundary of the donut.	1-1
innerDiameter	nonNegative DoubleType	The inner boundary of the filled region. The meaning based on donutShape : ROUND – The diameter of the circle is the inner boundary of the donut. The center of the circle is at the origin of the donut. SQUARE – The width along the x-axis and height along the y-axis of a square at the inner boundary of the donut. The center of the square is at the origin. HEXAGON – The point-to-point measurement on the x-axis of the hexagon that forms the inner boundary of the donut. OCTAGON – the point-to-point measurement on the x-axis of the octagon that forms the inner boundary of the donut.	1-1
		<pre> <EntryStandard id = "Donut1"> <Donut shape = "ROUND" outerDiameter = "6.8" innerDiameter = "4.8"/> </EntryStandard> <EntryStandard id = "Donut2"> <Donut shape = "ROUND" outerDiameter = "8.6" innerDiameter = "7.4"/> </EntryStandard> </pre>	

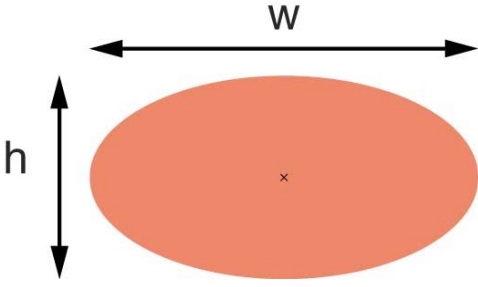
	<pre> <EntryStandard id = "Donut3"> <Donut shape = "SQUARE" outerDiameter = "6.8" innerDiameter = "5.0"/> </EntryStandard> <EntryStandard id = "Donut4"> <Donut shape = "SQUARE" outerDiameter = "8.20" innerDiameter = "6.20"/> </EntryStandard> </pre>
	<pre> <EntryStandard id = "Donut5"> <Donut shape = "HEXAGON" outerDiameter = "12.40" innerDiameter = "10.20"/> </EntryStandard> <EntryStandard id = "Donut6"> <Donut shape = "HEXAGON" outerDiameter = "10.00" innerDiameter = "8.00"/> </EntryStandard> </pre>
	<pre> <EntryStandard id = "Donut7"> <Donut shape = "OCTAGON" outerDiameter = "11.60" innerDiameter = "10.00"/> </EntryStandard> <EntryStandard id = "Donut8"> <Donut shape = "OCTAGON" outerDiameter = "12.00" innerDiameter = "10.00"/> </EntryStandard> </pre>

5.7.6 StandardPrimitive: Ellipse

The Ellipse is a StandardPrimitive shape that is an ellipse with the standard ellipse characteristics. The shape is defined by the width and height dimension. The Ellipse is positioned with its point of origin at the center of the width and height dimensions. See Table 32.

Table 32 – StandardPrimitive – Ellipse

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Ellipse	EllipseType	An elliptical shape that follows the standard ellipse characteristics and is defined by a width and height dimension, establishing the overall limits of the feature.	1-1
width	nonNegative DoubleType	The height of the ellipse on the y-axis.	1-1
height	nonNegative DoubleType	The width of the ellipse on the x-axis.	1-1

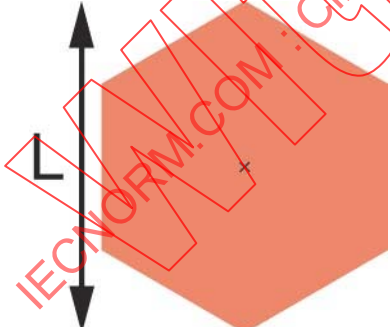
	<pre> <EntryStandard id = "Ellipse1"> <Ellipse width = "12.60" height = "6.20"/> </EntryStandard> <EntryStandard id = "Ellipse2"> <Ellipse width = "6.20" height = "12.60"/> </EntryStandard> <EntryStandard id = "Ellipse3"> <Ellipse width = "14.80" height = "4.20"/> </EntryStandard> <EntryStandard id = "Ellipse4"> <Ellipse width = "10.60" height = "14.20"/> </EntryStandard> </pre>
---	---

5.7.7 StandardPrimitive: Hexagon

A Hexagon is a six-sided StandardPrimitive shape with each of the sides being equal in length and with all angles between adjacent sides also being equal. The orientation of the hexagon is in accordance with one of its points facing the North direction. Only one dimension is required and that is the length across the points. Rotation is accomplished using Xform at the time the hexagon is instantiated. See Table 33.

Table 33 – StandardPrimitive – Hexagon

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Hexagon	HexagonType	A six-sided primitive shape with all sides being equal and which is defined by the length (L) across the points. The position of the octagon is in accordance with one of the points facing North.	0-1
length	nonNegative DoubleType	The length (L) between any two opposing corner points of the hexagon.	1-1

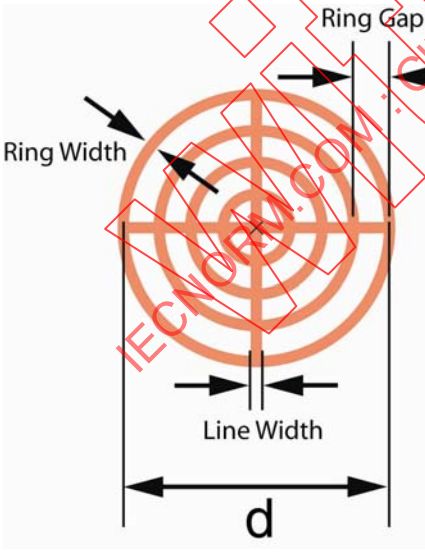
	<pre> <EntryStandard id = "Hexagon1"> <Hexagon length = "12.8"/> </EntryStandard> <EntryStandard id = "Hexagon2"> <Hexagon length = "11.8"/> </EntryStandard> <EntryStandard id = "Hexagon3"> <Hexagon length = "10.8"/> </EntryStandard> <EntryStandard id = "hexagon4"> <Hexagon length = "9.8"/> </EntryStandard> </pre>
---	---

5.7.8 StandardPrimitive: Moire

The Moire is a primitive shape that consists of a series of circles each with a smaller diameter. The Moire is used as an assist in image registration. The Moire may be only circles or may also contain a crosshair line to assist in human acknowledgement of moiré alignment. The shape is defined by the number of rings, their center line spacing and the ring line width. The line spacing must be larger than the line width. The crosshair lines can also be described. The Moire pattern is positioned using its point of origin which is the center of the ring pattern. See Table 34.

Table 34 – StandardPrimitive – Moire

Attribute/ Element Name	Attribute/ Element Type	Description	Occur-rence
Moire	MoireType	A series of circles, each consisting of a smaller diameter the shape of which is defined by the number of rings, their center line spacing, and the ring width. The pattern may also contain a crosshair representing its point of origin.	1-1
diameter	nonNegative DoubleType	The diameter of the center of the outermost circle.	1-1
ringWidth	nonNegative DoubleType	The width of the line used for each circle.	1-1
ringGap	nonNegative DoubleType	The gap between circle lines as defined by the dimension between the centerlines of each circle location. The gap between centerlines must be larger than the ringWidth so that there is a clearance between individual rings.	1-1
ringNumber	nonNegative Integer	The number of rings.	1-1
lineWidth	nonNegative DoubleType	The line width used to develop a crosshair across the moiré. The default is 0.	0-1
lineLength	nonNegative DoubleType	The length of the line for both the horizontal and vertical cross-hair.	0-1
lineAngle	angleType	The angle at which the crosshair may be rotated. Rotation is always counter-clockwise. The default is 0° and can be oriented up to 90°.	0-1



```

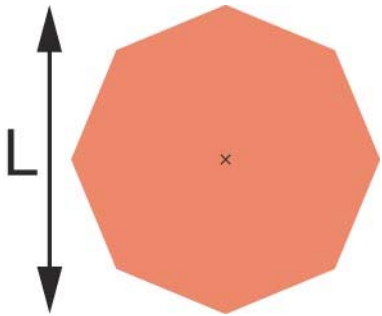
<EntryStandard id = "Moire1">
  <Moire diameter = "8.4" ringWidth = "0.3" ringGap = "0.6" ringNumber = "5"
    lineWidth = "0.3" lineLength = "8.2" lineAngle = "0"/>
</EntryStandard>
<EntryStandard id = "Moire2">
  <Moire diameter = "6.0" ringWidth = "0.2" ringGap = "0.4" ringNumber = "4"
    lineWidth = "0.2" lineLength = "5.8" lineAngle = "45"/>
</EntryStandard>

```

5.7.9 StandardPrimitive: Octagon

An Octagon is an eight-sided StandardPrimitive shape with each of the sides being equal in length and with all angles between adjacent sides also being equal. The orientation of the Octagon is in accordance with one of its points facing the North direction. Only one dimension is required and that is the length across the points. Rotation is accomplished using Xform at the time the Octagon is instantiated. See Table 35


Table 35 – StandardPrimitive – Octagon

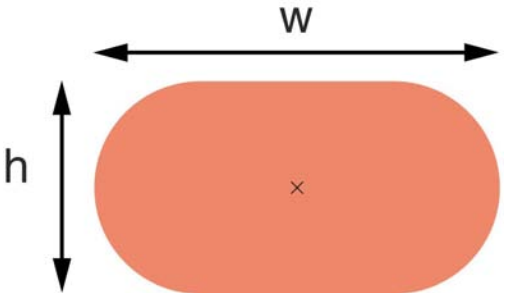
 			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Octagon	OctagonType	An eight-sided primitive shape with all sides being equal and which is defined by the length (L) across the points. The position of the octagon is in accordance with one of its points facing north.	0-1
length	nonNegative DoubleType	The length (L) between any two opposing corner points of the octagon.	0-1
		<pre> <EntryStandard id = "Octagon1"> <Octagon length = "12.8"/> </EntryStandard> <EntryStandard id = "Octagon2"> <Octagon length = "11.8"/> </EntryStandard> <EntryStandard id = "Octagon3"> <Octagon length = "10.8"/> </EntryStandard> <EntryStandard id = "Octagon4"> <Octagon length = "9.8"/> </EntryStandard> </pre>	

5.7.10 StandardPrimitive: Oval

An Oval is a StandardPrimitive shape that defines a rectangle with a complete radius (180° arc) at each end. The base rectangle is defined by a width attribute and a height attribute with the center of the rectangle being centered on both the height and width dimensions. The center of the Oval rectangle is the point of origin of the shape. The rectangle is defined with edges parallel to the x-axis and y-axis relative to the local coordinate system. Rotation is about the point of origin. The Oval is defined with the radius located along the y-axis sides. The radius on the ends of the oval shaped rectangle is always equal to ½ the height. See Table 36

Table 36 – StandardPrimitive – Oval

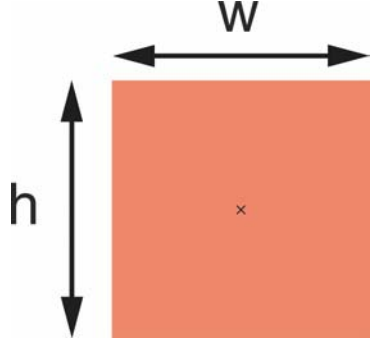
  			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Oval	OvalType	A rectangle defined by a width and height attribute with the center of the rectangle being centered on both the height and width dimensions.	1-1
width	nonNegative DoubleType	The length of the rectangle about the x-axis.	1-1
height	nonNegative DoubleType	The length of the rectangle about the y-axis. It is an error to define a height greater than the width.	1-1

	<pre> <EntryStandard id = "Oval1"> <Oval width = "10.6" height = "6.4"/> </EntryStandard> <EntryStandard id = "Oval2"> <Oval width = "8.4" height = "8.4"/> </EntryStandard> <EntryStandard id = "Oval3"> <Oval width = "16.4" height = "5.6"/> </EntryStandard> <EntryStandard id = "Oval4"> <Oval width = "14.8" height = "6.8"/> </EntryStandard> </pre>
---	---

5.7.11 StandardPrimitive: RectCenter

A RectCenter is a primitive shape that defines a rectangle by a width attribute and a height attribute with the center of the rectangle being centered on both the height and width dimensions. The center of the RectCenter rectangle is the point of origin of the shape. The rectangle is defined with edges parallel to the x-axis and y-axis relative to the local coordinate system. Rotation is about the point of origin. The RectCenter is also used to represent a square shape. The characteristics of the square would be to have the width and height equal. See Table 37.

Table 37 – StandardPrimitive – RectCenter

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
RectCenter	RectCenter Type	The characteristics of a rectangle defined by a width and height dimension consistent with a horizontal position on the Cartesian coordinate system	1-1
width	nonNegative DoubleType	The length of the rectangle about the x-axis.	1-1
height	nonNegative DoubleType	The length of the rectangle about the y-axis.	1-1
	<pre> <EntryStandard id = "RectangleC1"> <RectCenter width = "16.8" height = "6.4"/> </EntryStandard> <EntryStandard id = "RectangleC2"> <RectCenter width = "6.4" height = "12.8"/> </EntryStandard> <EntryStandard id = "RectangleC3"> <RectCenter width = "10.4" height = "6.4"/> </EntryStandard> </pre>		
	<pre> <EntryStandard id = "RectangleSquare1"> <RectCenter width = "8.4" height = "8.4"/> </EntryStandard> <EntryStandard id = "RectangleSquare2"> <RectCenter width = "10.0" height = "10.0"/> </EntryStandard> <EntryStandard id = "RectangleSquare3"> <RectCenter width = "4.8" height = "4.8"/> </EntryStandard> </pre>		

5.7.12 StandardPrimitive: RectCham

A RectCham is a StandardPrimitive shape that defines a rectangle with chamfered corners. The base rectangle is defined by a width attribute and a height attribute with the center of the rectangle being centered on both the height and width dimensions. The center of the RectCham rectangle is the point of origin of the shape. The rectangle is defined with edges parallel to the x-axis and y-axis relative to the local coordinate system. Rotation is about the point of origin. The RectCham is also used to represent a square shape with chamfered corners. The characteristics of the square would be to have the width and height equal. See Table 38.

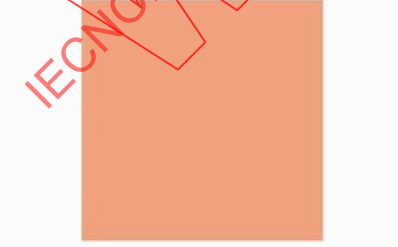
Table 38 – StandardPrimitive –RectCham

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
RectCham	RectChamType	A rectangle with one or more corners chamfered. The user has the option to define any of the corners as containing the chamfer as well as the chamfered dimensions. All chamfers (or opportunities for chamfers) must be identical in size.	1-1
width	nonNegative DoubleType	The length of the rectangle about the x-axis.	1-1
height	nonNegative DoubleType	The length of the rectangle about the y-axis.	1-1
chamfer	nonNegative DoubleType	The length measured from each corner that defines 4 points along the width and 4 points along the height. The corners are clipped between the points at each corner. The resulting chamfers are always cut at 45° relative to the local coordinate system. It is an error to define the value of chamfer to be greater than ½ the height or ½ the width.	1-1
upperRight	boolean	The upper right corner (1).	0-1
upperLeft	boolean	The upper left corner (2).	0-1
lowerLeft	boolean	The lower left corner (3).	0-1
lowerRight	boolean	The lower right corner (4).	0-1
		<pre> <EntryStandard id = "ChamferedRect1"> <RectCham width = "12.6" height = "8.4" chamfer = "2.0" upperLeft = "TRUE" lowerRight = "TRUE"/> </EntryStandard> <EntryStandard id = "ChamferedRect2"> <RectCham width = "10.6" height = "6.2" chamfer = "2.0" upperRight = "TRUE" upperLeft = "TRUE" lowerLeft = "TRUE" lowerRight = "TRUE"/> </EntryStandard> </pre>	
		<pre> <EntryStandard id = "ChamferedSquare1"> <RectCham width = "8.4" height = "8.4" chamfer = "2.0" upperRight = "TRUE" lowerLeft = "TRUE"/> </EntryStandard> <EntryStandard id = "ChamferedSquare2"> <RectCham width = "6.6" height = "6.6" chamfer = "1.8" upperRight = "TRUE" upperLeft = "TRUE" lowerLeft = "TRUE" lowerRight = "TRUE"/> </EntryStandard> </pre>	

5.7.13 StandardPrimitive: RectCorner

A RectCorner is a StandardPrimitive shape that defines a rectangle. The element describes the lower left and upper right corners of the rectangle. The point of origin of a RectCorner rectangle is (0, 0). This can be coincident with attribute lowerLeftX and lowerLeftY, the lower left corner of the rectangle, but there is no requirement for that location to be at (0, 0). The rectangle is defined with edges parallel to the x-axis and y-axis relative to the local coordinate system. Rotation is about the point of origin, not about the lower left or upper right corners. See Table 39.

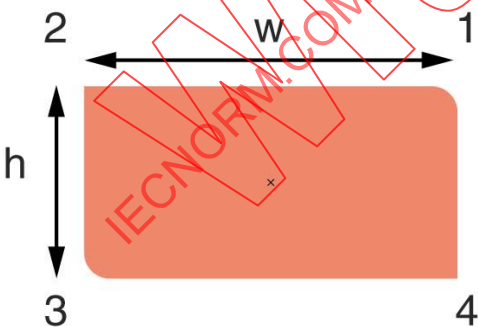
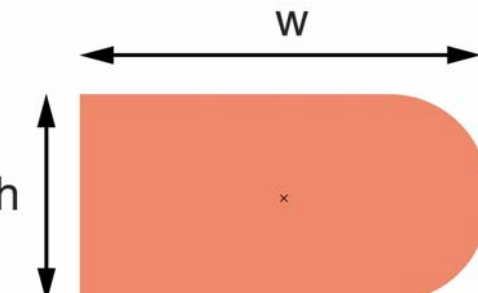
Table 39 – StandardPrimitive – RectCorner

RectCorner RectCornerType lowerLeftX double lowerLeftY double upperRightX double upperRightY double			
Attribute/ Element Name	Attribute / Element Type	Description	Occur- rence
RectCorner	RectCornerType	A constraining rectangular area (bounding box) that describes a rectangle consistent with a horizontal position on the Cartesian coordinate system.	1-1
lowerLeftX	double	The lower left hand x dimension of the rectangular area encompassing the text.	1-1
lowerLeftY	double	The lower left hand y dimension of the rectangular area encompassing the text.	1-1
upperRightX	double	The upper right hand x dimension of the the rectangular area encompassing the text.	1-1
upperRightY	double	The upper right hand y dimension of the rectangular area encompassing the text.	1-1
		<pre> <EntryStandard id = "CorneredRectangle1"> <RectCorner lowerLeftX = "0.0" lowerLeftY = "0.0" upperRightX = "12.6" upperRightY = "6.8"/> </EntryStandard> <EntryStandard id = "CorneredRectangle2"> <RectCorner lowerLeftX = "-6.4" lowerLeftY = "-3.2" upperRightX = "6.4" upperRightY = "3.2"/> </EntryStandard> </pre>	
		<pre> <EntryStandard id = "CorneredSquare1"> <RectCorner lowerLeftX = "0.0" lowerLeftY = "0.0" upperRightX = "8.4" upperRightY = "8.4"/> </EntryStandard> <EntryStandard id = "CorneredSquare2"> <RectCorner lowerLeftX = "-4.6" lowerLeftY = "-4.6" upperRightX = "4.6" upperRightY = "4.6"/> </EntryStandard> </pre>	

5.7.14 StandardPrimitive: RectRound

A RectRound is a StandardPrimitive shape that defines a rectangle with radius corners. The base rectangle is defined by a width attribute and a height attribute with the center of the rectangle being centered on both the height and width dimensions. The center of the RectRound rectangle is the point of origin of the shape. The rectangle is defined with edges parallel to the x-axis and y-axis relative to the local coordinate system. Rotation is about the point of origin. The RectRound is also used to represent a square shape with rounded corners. The characteristics of the square would be to have the width and height equal. See Table 40.

Table 40 – StandardPrimitive – RectRound

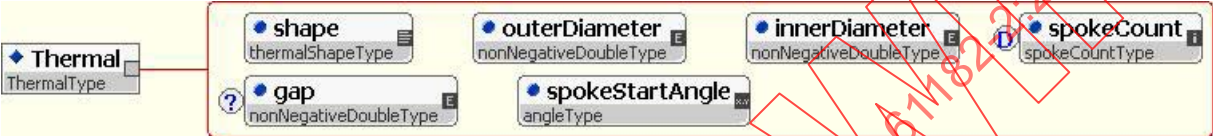
RectRound RectRoundType width nonNegativeDoubleType height nonNegativeDoubleType radius nonNegativeDoubleType upperRight boolean upperLeft boolean lowerLeft boolean lowerRight boolean			
Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
RectRound	RectRoundType	A rectangle with one or more corners rounded. The user has the option to define any of the corners as containing the radius as well as the radiused dimensions. All corners (or opportunities for corners) must be identical in size.	1-1
width	nonNegativeDoubleType	The length of the rectangle about the x-axis.	1-1
height	nonNegativeDoubleType	The length of the rectangle about the y-axis.	1-1
radius	nonNegativeDoubleType	The radius to be trimmed from the four corners of the rectangle. It is an error to define a radius that is greater than $\frac{1}{2}$ the height value or $\frac{1}{2}$ the width value.	1-1
upperRight	boolean	The upper right corner (1).	0-1
upperLeft	boolean	The upper left corner (2).	0-1
lowerLeft	boolean	The lower left corner (3).	0-1
lowerRight	boolean	The lower right corner (4).	0-1
		<pre> <EntryStandard id = "RoundedDshape1"> <RectRound width = "10.2" height = "6.4" radius = "3.2" upperRight = "TRUE" lowerRight = "TRUE"/> </EntryStandard> </pre>	
		<pre> <EntryStandard id = "RoundedDshape2"> <RectRound width = "4.8" height = "4.8" radius = "2.4" upperRight = "TRUE" lowerRight = "TRUE"/> </EntryStandard> </pre>	

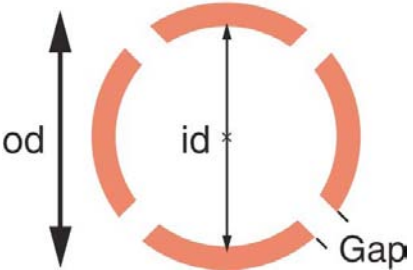
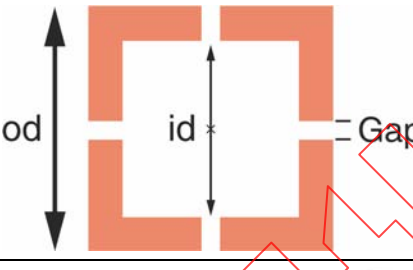
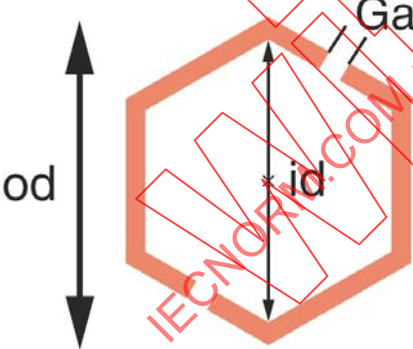
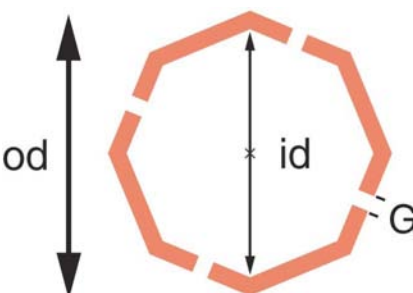
5.7.15 StandardPrimitive: Thermal

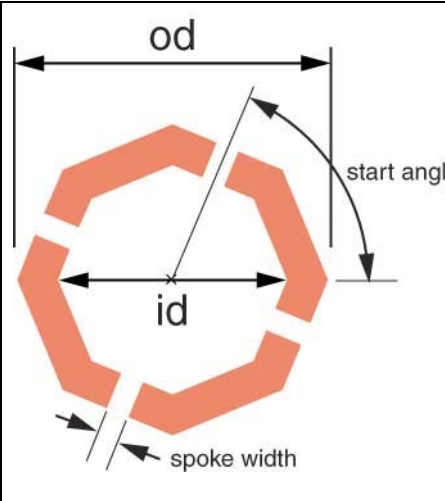
A Thermal is a StandardPrimitive shape that historically was used to remove material from a plane, conductive filled area or around a plated through hole. The Thermal shapes include square, round, hexagonal, or octagonal, and have varying numbers of spokes. The center of a thermal is the point of origin of the primitive.

A spokeless thermal can be used for non-functional lands on an innerlayer plane, where the land is not connected to the plane. IEC 61182-2 defines these using the Thermal element with a spoke count of zero. These are similar to a Donut except that they remove material. Many thermal primitive configurations can be generated using different spoke numbers and end types. See Table 41.

Table 41 – StandardPrimitive –Thermal

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur-rence
Thermal	ThermalType	A primitive shape consisting either of ROUND, SQUARE, HEXAGON, or OCTAGON configuration that defines the removal of material from a plane or conductive fill area in accordance to the shape attribute description.	1-1
shape	thermalShape Type	The shape of the thermal. One of ROUND SQUARE OCTAGON. ROUND: The inner and outer shapes are like Circle. SQUARE: The inner and outer shapes are like RectCenter with height and width of each shape being equal. HEXAGON: The inner and outer shapes are like Hexagon. OCTAGON: The inner and outer shapes are like Octagon.	1-1
outerDiameter	nonNegative DoubleType	The outer boundary of the filled region. The meaning based on the shape attribute: ROUND: The diameter of the circle is the outer boundary of the thermal. The center of the circle is at the origin of the thermal. SQUARE: The width along the x-axis and the height along the y-axis of a square at the inner boundary of the thermal. The center of the square is at the origin. HEXAGON: The point-to-point measurement (L) on the x-axis of the hexagon that forms the outer boundary of the thermal. OCTAGON: The point-to-point (L) measurement on the x-axis of the octagon that forms the outer boundary of the thermal.	1-1
innerDiameter	nonNegative DoubleType	The inner boundary of the filled region. The meaning based on the shape attribute: ROUND: The diameter of the circle is the inner boundary of the thermal. The center of the circle is at the origin of the thermal. SQUARE: The width along the x-axis and the height along the y-axis of a square at the inner boundary of the thermal. The center of the square is at the origin. HEXAGON: The point-to-point measurement on the x-axis of the hexagon that forms the inner boundary of the thermal. OCTAGON: The point-to-point measurement on the x-axis of the octagon that forms the inner boundary of the thermal.	1-1

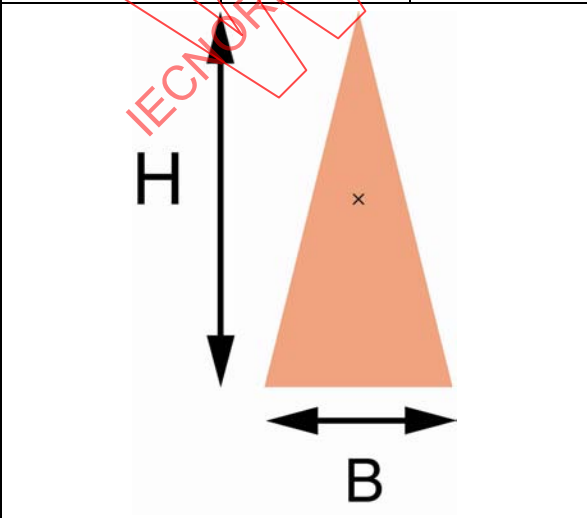
spokeCount	spokeCount Type	The number of cutouts allowed in the inner and outer shapes. ROUND: must be 0, 2, 3, or 4 (the default is 4) SQUARE: must be 0, 2, or 4 (the default is 4) HEXAGON: must be 0, 2, or 3 (the default is 3) OCTAGON: must be 0, 2, or 4 (the default is 4) If the spokeCount is defined as 0 (zero), the other three optional parameters do not apply. The spokeless thermal has a shape like a donut shape.	0-1
gap	nonNegative DoubleType	The minimum distance between the sides of a spoke cut. The default value is the innerDiameter subtracted from the outerDiameter.	0-1
spokeStartAngle	angleType	The angle in counterclockwise direction from the x-axis at which the first spoke is cut. The default angle is 45° counterclockwise from the x-axis.	1-1
		<pre> <EntryStandard id = "ThermalRound1"> <Thermal shape = "ROUND" outerDiameter = "10.6" innerDiameter = "6.0" spokeCount = "4" gap = "2.0" spokeStartAngle = "45.00"/> </EntryStandard> <EntryStandard id = "ThermalRound2"> <Thermal shape = "ROUND" outerDiameter = "12.0" innerDiameter = "8.0" spokeCount = "4" gap = "2.0" spokeStartAngle = "0.00"/> </EntryStandard> </pre>	
		<pre> <EntryStandard id = "ThermalSquare1"> <Thermal shape = "SQUARE" outerDiameter = "10.8" innerDiameter = "6.0" spokeCount = "4" gap = "2.4" spokeStartAngle = "0.00"/> </EntryStandard> <EntryStandard id = "ThermalSquare2"> <Thermal shape = "SQUARE" outerDiameter = "12.8" innerDiameter = "8.0" spokeCount = "4" gap = "2.4" spokeStartAngle = "0.00"/> </EntryStandard> </pre>	
		<pre> <EntryStandard id = "ThermalHex1"> <Thermal shape = "HEXAGON" outerDiameter = "10.8" innerDiameter = "6.4" spokeCount = "4" gap = "2.0" spokeStartAngle = "45.00"/> </EntryStandard> <EntryStandard id = "ThermalHex2"> <Thermal shape = "HEXAGON" outerDiameter = "12.0" innerDiameter = "8.0" spokeCount = "4" gap = "2.0" spokeStartAngle = "45.00"/> </EntryStandard> </pre>	
		<pre> <EntryStandard id = "ThermalOct1"> <Thermal shape = "OCTAGON" outerDiameter = "10.6" innerDiameter = "6.6" spokeCount = "4" gap = "2.0" spokeStartAngle = "60.00"/> </EntryStandard> <EntryStandard id = "ThermalOct2"> <Thermal shape = "OCTAGON" outerDiameter = "12.0" innerDiameter = "8.0" spokeCount = "4" gap = "2.0" spokeStartAngle = "60.00"/> </EntryStandard> </pre>	

	<pre> <EntryStandard id = "ThermalOct3"> <Thermal shape = "OCTAGON" outerDiameter = "10.6" innerDiameter = "6.0" spokeCount = "4" gap = "2.0" spokeStartAngle = "60.00"/> </EntryStandard> <EntryStandard id = "ThermalOct4"> <Thermal shape = "OCTAGON" outerDiameter = "12.0" innerDiameter = "7.6" spokeCount = "2" gap = "2.2" spokeStartAngle = "60.00"/> </EntryStandard> </pre>
---	--

5.7.16 StandardPrimitive: Triangle

The Triangle is a StandardPrimitive shape that is an isosceles triangle that has two equal sides and a base. The shape is defined by the base and height dimension. The triangle is positioned with its point of origin which is at the center of the base and height dimensions. See Table 42.

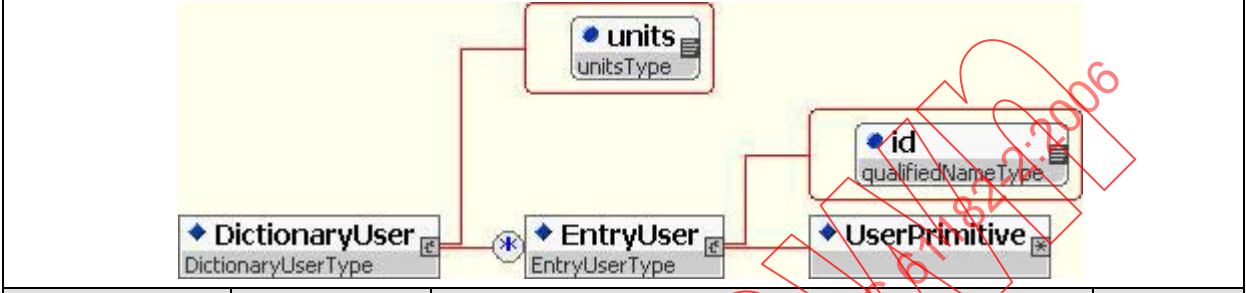
Table 42 – StandardPrimitive – Triangle

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- ence
Triangle	TriangleType	A primitive shape defined by a base and height dimension.	1-1
base	nonNegative DoubleType	The distance between the two corner points of the base of the triangle with the point of origin at the center of the base and height dimensions.	1-1
height	nonNegative DoubleType	The triangle height.	1-1
		<pre> <EntryStandard id = "Triangle1"> <Triangle base = "4.0" height = "8.0"/> </EntryStandard> <EntryStandard id = "Triangle2"> <Triangle base = "4.0" height = "6.0"/> </EntryStandard> <EntryStandard id = "Triangle3"> <Triangle base = "4.0" height = "12.0"/> </EntryStandard> <EntryStandard id = "Triangle4"> <Triangle base = "8.0" height = "4.0"/> </EntryStandard> </pre>	

5.8 Content: DictionaryUser

The DictionaryUser is intended to provide lookup information on predefined UserPrimitives. The DictionaryUser is maintained as part of a substitution group schema. The intent is to have graphic descriptions available that are identified by their characteristics and a specific name (id). They may be reused throughout the file as appropriate. The name (id) of a UserPrimitive must be unique within the DictionaryUser. See Table 43.

Table 43 – Content – DictionaryUser



Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
DictionaryUser	DictionaryUser Type	An element that contains substitution group information using predefined descriptions of user primitives identified by the 61182-2 standard and described by the user for reuse in the file.	0-1
units	unitsType	An enumerated string that may be one of the following: MILLIMETER MICRON INCH.	1-1
EntryUser	EntryUserType	An element that establishes the individual characteristic associated with a UserPrimitive substitution shape that has been identified by the user of the 61182-2 file.	0-n
id	qualifiedName Type	The unique qualified name description assigned as an id for any StandardPrimitive for XML Schema substitution.	1-1
UserPrimitive	ABSTRACT	Any user primitive that is part of the substitution group that permits the substitution of the user primitives (arc, line, Out line, Polygon), a text string, or UserSpecial shape.	1-n

The organization of the DictionaryUser is accomplished in accordance with the substitution group description criteria. The UserPrimitive description may be any of four simple shapes according to the specific characteristics identified in the following paragraphs plus text strings or user combinations of primitives to develop UserSpecial graphics for such items as logos, targets, drawing formats, etc. The UserPrimitiveRef function is used in the body of the 61182-2 file when a specific UserPrimitive has been predefined, assigned a name, and this unique “id” is referenced in the file. This feature permits the use of either a predefined UserPrimitive or defining the details of a UserPrimitive within the file. The description in the file must contain all the features of a particular primitive shape under the rules of the particular shape definition.

5.8.1 UserPrimitive, Simple

An abstract type identifying a substitution set of pre-defined simple primitive shapes that may be any one of four geometries. Each of the simple primitives must have a unique name within the DictionaryUser section. See Table 44.

Table 44 – UserPrimitive – Simple

Simple Arc Line Outline Polyline			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Arc	ArcType	The Arc element represents an arc. Arcs are curves (defined by three sets of coordinates: startX, startY, endX, endY, and centerX, centerY. The width of the arc is defined as a substitution group for LineDesc or applied when the Arc is instantiated.	0-n
Line	LineType	The Line element is used to describe an individual line segment. The lineWidth and lineEnd conditions are defined as a substitution group for LineDesc or applied when the line segment is instantiated. The lineEnd default is ROUND.	0-n
Outline	OutlineType	The Outline element is that of a Polygon and represents a closed shape. The point of origin of the shape is identified as the 0:0 coordinate. The element includes the start of the polygon definition (PolyBegin) and the appropriate number of PolySteps to complete the closed shape. The lineWidth is defined as a substitution group for LineDesc or applied when the Outline is instantiated.	0-n
Polyline	PolylineType	The Polyline element consists of a series of lines that define a particular grouping configuration. These line segments do not result in a closed shape, however they can be predefined and reused as needed. The lineWidth and lineEnd of the Polyline are defined as a substitution group for LineDesc or applied at the time the Polyline is instantiated.	0-n

5.8.1.1 UserPrimitive, Simple: Arc

Each Arc entry (EntryUser) in the DictionaryPrim **shall** have a unique id and consist of the characteristics shown in Table 45.

Table 45 – UserPrimitive – Simple: Arc

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Arc	ArcType	The Arc element represents an arc. Arcs are curves (defined by three sets of coordinates: startX, startY, endX, endY and centerX, centerY. The width of the arc is set by the LineDesc substitution group or applied when the Arc is instantiated.	0-n
startX	double	Beginning x-coordinate of the Arc.	1-1
startY	double	Beginning y-coordinate of the Arc.	1-1

endX	double	Ending x-coordinate of the Arc.	1-1
endY	double	Ending y-coordinate of the Arc.	1-1
centerX	double	The X location for the origin of the radius of the circular Arc.	1-1
centerY	double	The Y location for the origin of the radius of the circular Arc.	1-1
clockwise	boolean	An enumerated string as either TRUE or FALSE (part of the 3WC standard). TRUE equals that the Arc is in a clockwise direction; FALSE is the default indicating a counterclockwise direction.	0-1
LineDescGroup	ABSTRACT	A substitution group that specifies the LineWidth and LineEnd characteristics of the Arc by reference to a predefined LineDesc or specified when the Arc is instantiated.	1-1

```

<EntryUser id = "Arc1">
  <Arc startX = "8.0" startY = "0.0" endX = "-8.0" endY = "0.0" centerX = "0.0" centerY = "0.0" clockwise = "FALSE">
    <LineDescRef id = "MediumLine"/>
  </Arc>
</EntryUser>
<EntryUser id = "Arc2">
  <Arc startX = "0.0" startY = "0.0" endX = "12.0" endY = "0.0" centerX = "6.0" centerY = "0.0" clockwise = "TRUE">
    <LineDescRef id = "HeavyLine"/>
  </Arc>
</EntryUser>
<EntryUser id = "Arc3">
  <Arc startX = "-8.0" startY = "0.0" endX = "0.0" endY = "8.0" centerX = "0.0" centerY = "0.0" clockwise = "TRUE">
    <LineDesc lineEnd = "ROUND" lineWidth = "1.0"/>
  </Arc>
</EntryUser>

```

5.8.1.2 UserPrimitive, Simple: Line

Each Line entry (EntryUser) in the DictionaryUser shall have a unique id and consist of the characteristics shown in Table 46.

Table 46 – UserPrimitive – Simple: Line

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Line	LineType	The Line element is used to describe an individual line segment. The lineWidth and lineEnd conditions are defined by the LineDescGroup or when the line is instantiated. The lineEnd default is ROUND.	0-n
startX	double	Beginning x-coordinate of the Line.	1-1
startY	double	Beginning y-coordinate of the Line.	1-1
endX	double	Ending x-coordinate of the Line.	1-1
endY	double	Ending y-coordinate of the Line.	1-1
LineDescGroup	ABSTRACT	A substitution group that specifies the LineWidth and LineEnd characteristics of the Line by reference to a predefined LineDesc or specified when the Line is instantiated.	1-1

```

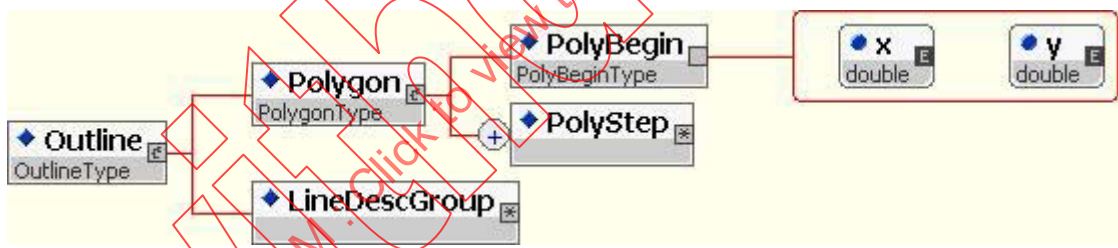
<EntryUser id = "Line1">
  <Line startX = "0.0" startY = "0.0" endX = "12.6" endY = "9.4">
    <LineDesc lineEnd = "ROUND" lineWidth = "1.0"/>
  </Line>
</EntryUser>
<EntryUser id = "Line2">
  <Line startX = "3.6" startY = "4.8" endX = "-4.8" endY = "-3.6">
    <LineDescRef id = "MediumLine"/>
  </Line>
</EntryUser>
<EntryUser id = "Line3">
  <Line startX = "0.0" startY = "0.0" endX = "12.8" endY = "0.0">
    <LineDescRef id = "HeavyLine"/>
  </Line>
</EntryUser>
<EntryUser id = "Line4">
  <Line startX = "12.8" startY = "2.4" endX = "-10.2" endY = "1.2">
    <LineDesc lineEnd = "SQUARE" lineWidth = "0.8"/>
  </Line>
</EntryUser>

```

5.8.1.3 UserPrimitive, Simple: Outline

Each Outline entry (EntryUser) in the DictionaryUser **shall** have a unique id and consist of the following characteristics. The Outline element consists of the characteristics shown in Table 47 using a Polygon shape to represent a closed shaped group of lines.

Table 47 UserPrimitive – Simple: Outline



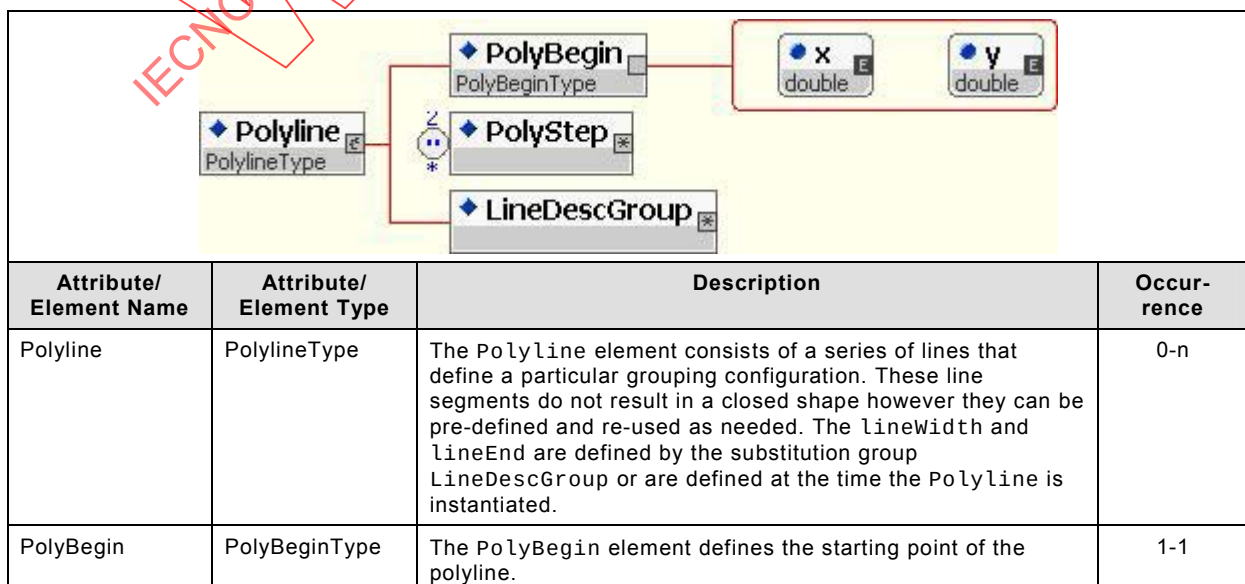
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Outline	OutlineType	An element that has as its sub-elements the Polygon and LineDesc elements in order to define a closed shape that has a line width.	0-n
Polygon	PolygonType	The standard description for the Polygon characteristic must be a closed shape. The point of origin of the shape is identified as the 0:0 coordinate. The element includes the start of the polygon definition (PolyBegin) and the appropriate number of PolySteps to complete the closed shape. The lineWidth is through the LineDesc substitution group or defined at a time when the Polygon is instantiated.	0-n
PolyBegin	PolyBeginType	The PolyBegin element defines the starting point of the polygon.	1-1
x	double	The X starting point of the first polygon line.	1-1
y	double	The Y starting point of the first polygon line.	1-1

```
<EntryUser id = "Outline1">
  <Outline>
    <Polygon>
      <PolyBegin x = "0.0" y = "6.4"/>
      <PolyStepSegment x = "12.6" y = "6.4"/>
      <PolyStepCurve x = "14.8" y = "4.2" centerX = "12.6" centerY = "4.2" clockwise = "TRUE"/>
      <PolyStepSegment x = "14.8" y = "0.0"/>
      <PolyStepSegment x = "0.0" y = "0.0"/>
      <PolyStepSegment x = "0.0" y = "6.4"/>
    </Polygon>
    <LineDescRef id = "FineLine"/>
  </Outline>
</EntryUser>
<EntryUser id = "Outline2">
  <Outline>
    <Polygon>
      <PolyBegin x = "-10.4" y = "-2.0"/>
      <PolyStepSegment x = "-10.4" y = "0.0"/>
      <PolyStepCurve x = "10.4" y = "0.0" centerX = "0.0" centerY = "0.0" clockwise = "TRUE"/>
      <PolyStepSegment x = "10.4" y = "-2.0"/>
      <PolyStepSegment x = "0.0" y = "-6.0"/>
      <PolyStepSegment x = "-10.4" y = "-2.0"/>
    </Polygon>
    <LineDesc lineEnd = "ROUND" lineWidth = "0.2"/>
  </Outline>
</EntryUser>
```

5.8.1.4 UserPrimitive, Simple: PolyLine

Each PolyLine entry (Entryuser) in the DictionaryUser **shall** have a unique id and consist of the characteristics shown in Table 48. The PolyLine characteristics represent an open shaped group of lines.

~~Table 48~~ UserPrimitive – Simple: PolyLine



x	double	The X starting point of the first polyline line segment.	1-1
y	double	The Y starting point of the first polyline line segment.	1-1
PolyStep	ABSTRACT	The PolyStep element is a substitution group that defines a circular (PolyStepCurve) or straight line (PolyStepSegment) continuation of the polyline. The polystep direction may be clockwise or counterclockwise which must be consistent when any Arc description is used as one of the PolyStep elements. Straight or curved line segments must not cross.	2-n
LineDescGroup	ABSTRACT	A substitution group that specifies the LineWidth and LineEnd characteristics of the Line by reference to a predefined LineDesc or specified when the polyline is instantiated.	1-1

```

<EntryUser id = "Polyline1">
  <Polyline>
    <PolyBegin x = "0.0" y = "0.0"/>
    <PolyStepSegment x = "4.0" y = "0.0"/>
    <PolyStepCurve x = "4.0" y = "6.0" centerX = "4.0" centerY = "3.0" clockwise = "FALSE"/>
    <PolyStepCurve x = "4.0" y = "12.0" centerX = "4.0" centerY = "9.0" clockwise = "TRUE"/>
    <LineDescRef id = "HeavyLine"/>
  </Polyline>
</EntryUser>
<EntryUser id = "Polyline2">
  <Polyline>
    <PolyBegin x = "3.2" y = "2.2"/>
    <PolyStepSegment x = "8.8" y = "10.4"/>
    <PolyStepCurve x = "8.8" y = "16.4" centerX = "8.8" centerY = "13.4" clockwise = "TRUE"/>
    <PolyStepSegment x = "6.0" y = "16.4"/>
    <PolyStepSegment x = "6.0" y = "10.0"/>
    <LineDesc lineEnd = "ROUND" lineWidth = "0.5"/>
  </Polyline>
</EntryUser>

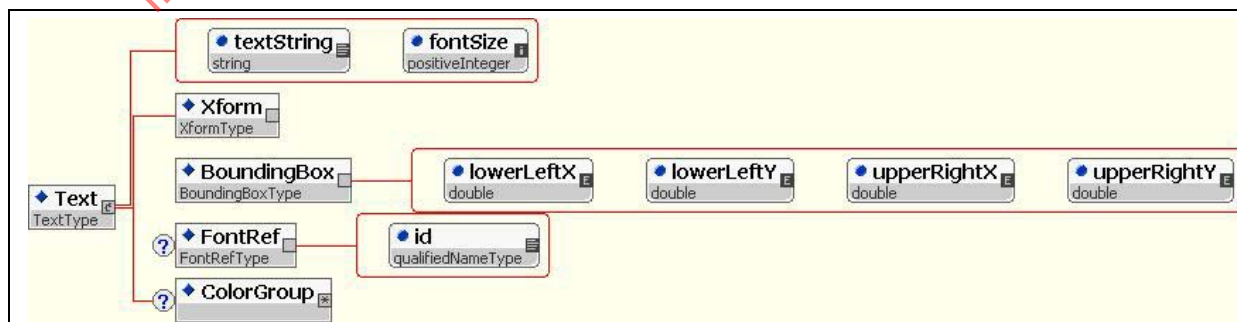
```

5.8.2 UserPrimitive: Text

When text is to be drawn on a product or a drawing the definition includes a bounding rectangle for the text. The lowerLeftX and lowerLeftY coordinate and the upperRightX and upperRightY coordinate define the BoundingBox rectangle. All portions of the text, including the line width of the strokes of the text, must fit within the BoundingBox rectangle. Any portion of a character exceeding the perimeter of the BoundingBox rectangle will be clipped at the boundaries of the BoundingBox rectangle.

Each Text entry (EntryUser) in the DictionaryUser **shall** have a unique id and consist of the characteristics shown in Table 49.

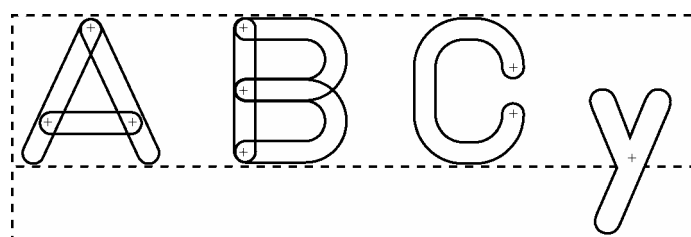
Table 49 – UserPrimitive –Text



Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Text	TextType	A pre-defined string of text that may be referenced and instantiated within the 61182-2 file, including specific transformation.	0-n
textString	string	The text phrase (case-sensitive) in accordance with the language element of the Header element.	1-1
fontSize	positive Integer	A dimensional characteristic in terms of an integer that defines the font size	1-1
Xform	XformType	An element that provides the ability to reset the point of origin of the text box, then scale, mirror image or rotate the text box after the text box origin has been placed at an X and Y location. See 3.3	1-1
Boundingbox	BoundingBox Type	A constraining rectangular area (bounding box) that encompasses the entire text string including upper and lower case characters.	1-1
lowerLeftX	double	The lower left hand x dimension of the rectangular area encompassing the text.	1-1
lowerLeftY	double	The lower left hand y dimension of the rectangular area encompassing the text.	1-1
UpperRightX	double	The upper right hand x dimension of the the rectangular area encompassing the text.	1-1
UpperRightY	double	The upper right hand y dimension of the rectangular area encompassing the text.	1-1
FontRef	FontRefType	An element that is optional to reference a predefined font by its id, if the standard Helvetica font is not being instantiated.	0-1
id	qualifiedName Type	The identification of the FontDef stored in the DictionaryFont.	1-1
ColorGroup	ABSTRACT	An optional substitution group that permits assigning a particular color through instantiating the three basic colors or by providing a reference to a predefined Color in DictionaryColor.	0-1

The following diagram and the requirements describe the general case for how text is to be drawn. There are two variations on the use of text. This makes Text an element that is incorporated as a layer feature or in a Package description. When used in this manner, all the characteristics of Xform and the BoundingBox apply. The other form of text is as a simple string attribute. This is where the word text is used to add extra information to a particular element and therefore does not require the special features for location, font, and Xform.

When text is used as an element, the attribute textString should be defined to be enclosed in the textbox as illustrated in Figure 4. This includes upper and lower case letters, as well as all line widths, line descriptions, and line ends. Anything outside the clipping box will be clipped. The clipping boundary is necessary because fonts vary between computer systems and application implementations.

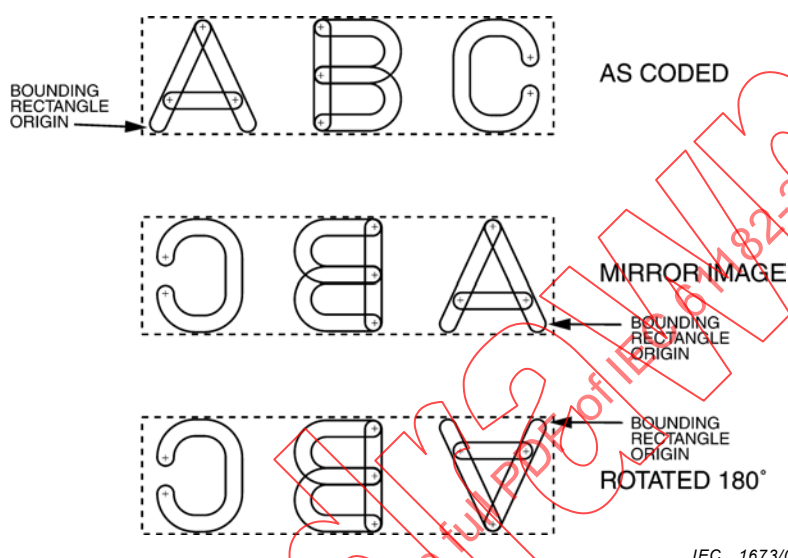


IEC 1672/06

Figure 4 – Bounding rectangle to round end character relationships

5.8.2.1 Text restrictions

Text character dimensions are constrained by the bounding rectangle as illustrated in Figure 5. Character height is expressed by the `fontSize` attribute. Incremental units of the `BoundingBox` follow the `Units` element used by the file; this sets the limits (left and right xy coordinates) of the bounding rectangle. Both upper and lower case letters must be inside the `BoundingBox` rectangle. Included in this requirement are the extensions of such descending letters as lower case “g,” “q,” “y,” “j,” and “p.”



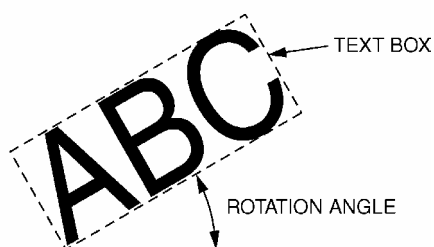
IEC 1673/06

Figure 5 – Text transformation examples

5.8.2.2 Text rotation

The bounding rectangle of Text is defined relative to the local coordinate system. The `xLocation` and `yLocation` of `Xform` is applied to the bounding rectangle and the text contained within the rectangle to locate the Text. The bounding rectangle must be mirrored if required before it is rotated. The text is drawn relative to the bounding rectangle.

The example shown in Figure 6 indicates a `BoundingBox` rectangle that has been rotated 30° about the lower left xy coordinate.




IEC 1674/06

Figure 6 – Rotation Angle

5.8.3 UserPrimitive: UserSpecial

Each `UserSpecial` entry (`EntryUser`) in the `DictionaryUser` **shall** have a unique id and consist of the characteristics shown in Table 50. The `UserSpecial` may be any combination of `StandardShapes` or `UserShapes`, and is used to develop logos, targets, drawing formats or other combination of shapes.

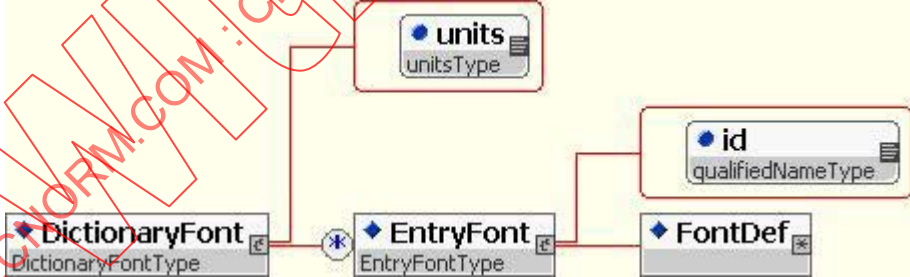
Table 50 – UserPrimitive – UserSpecial

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
UserSpecial	UserSpecialType	A combination of primitive shapes that may be organized in any orientation needed to represent the users needs for defining a special graphic shape.	0-n
Feature	ABSTRACT	A substitution group consisting of any graphic allowed by either the StandardShape or UserShape substitution groups.	0-n
StandardShape	ABSTRACT	A substitution group that permits the substitution of the StandardShape element. The StandardShape element may be used to further classify Feature. In so doing, StandardShape can be substituted by a StandardPrimitive or StandardPrimitiveRef.	0-n
UserShape	ABSTRACT	A substitution group that permits the substitution or classification of a higher level substitution group. The UserShape element may be used to further classify Feature. In so doing, UserShape can be substituted by a UserPrimitive or UserPrimitiveRef.	0-n

5.9 Content: DictionaryFont

The DictionaryFont is intended to provide lookup information on predefined font descriptions when the standard Helvetica font is not used. The DictionaryFont is maintained as part of a substitution group schema. The intent is to have font descriptions available that are identified by their characteristics and a specific name (id). The reference is to individual Glyph characters or to a known font through reference to a URN. Font descriptions may be reused throughout the file as appropriate. The name (id) of a FontDef must be unique within the DictionaryFont. See Table 51

Table 51 – Content – DictionaryFont

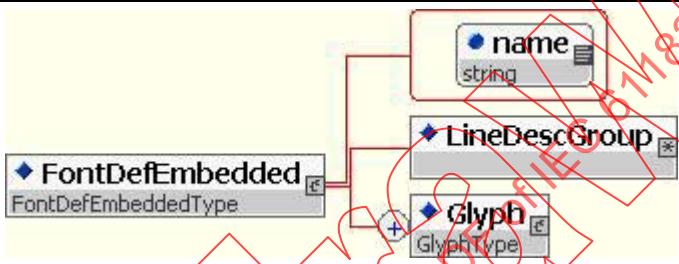
			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
DictionaryFont	dictionaryFont Type	An element that consists of all the named font descriptions within the 61182-2 file.	0-n
units	unitsType	An enumerated string that may be one of the following: MILLIMETER MICRON INCH.	1-1
EntryFont	EntryFontType	An element that establishes the individual characteristic associated with a font substitution character or characters that have been identified by the user in the 61182-2 file.	0-n
id	qualifiedName Type	The unique qualified name description assigned as an id for any EntryFont for XML Schema substitution.	1-1
FontDef	ABSTRACT	A part of the substitution group that permits the substitution of individual Glyphs (EmbeddedFontDef) or known font types through reference of a URN (ExternalFontDef).	1-n

The organization of the DictionaryFont is accomplished in accordance with the substitution group description criteria. The FontDef description may be any character represented as a Glyph according to the specific characteristics identified in the following paragraphs. FontDef may also be a known font through reference of a URN. The FontRef function is used in the body of the 61182-2 file when a specific font has been predefined, assigned a name, and the unique "id" is referenced in the file. This feature permits the substitution of the standard Helvetica font; Font descriptions are only contained in the DictionaryFont and are not instantiated in the body of the 61182-2 file.

5.9.1 FontDefEmbedded

The FontDefEmbedded element is used to capture individual characters and store them in the DictionaryFont. See Table 52.

Table 52 – FontDefEmbedded element




The diagram shows the 'FontDefEmbedded' element (FontDefEmbeddedType) connected to three sub-elements: 'name' (string), 'LineDescGroup' (ABSTRACT), and 'Glyph' (GlyphType). The 'Glyph' element has a '+' sign next to it, indicating it can occur multiple times.

Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
FontDefEmbedded	FontDefEmbeddedType	A substitution for FontDef that identifies an individual Glyph character by a specific name and the Glyph characteristics.	0-n
name	string	A unique name related to the charCode of the Glyph character.	0-n
LineDescGroup	ABSTRACT	A substitution group that specifies the LineWidth and LineEnd characteristics of the Font by reference to a predefined LineDesc or specified when the font is instantiated.	1-1
Glyph	GlyphType	The element that contains the description of all the character definitions defined in the user developed font.	1-n

5.9.2 FontDefExternal

The FontDefExternal element is used to capture known font characters and store the reference in the DictionaryFont. See Table 53.

Table 53 FontDefExternal element



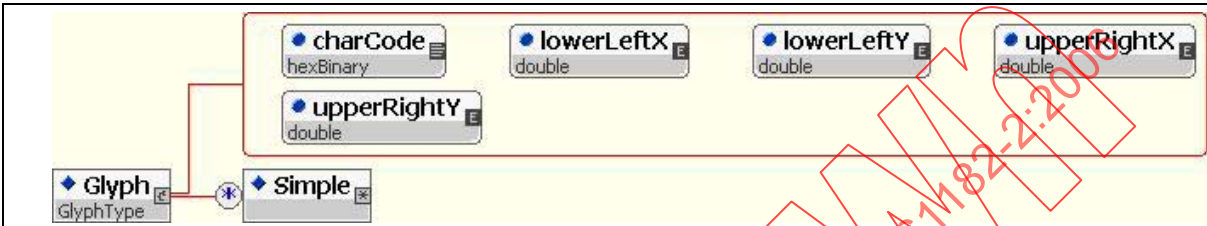
The diagram shows the 'FontDefExternal' element (FontDefExternalType) connected to two sub-elements: 'name' (string) and 'urn' (urn).

Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
FontDefExternal	FontDefExternalType	A substitution for FontDef that identifies a known group of characters through their font style.	0-n
name	string	A unique name related to the character set of a known font.	0-n
urn	urn	A specific urn that makes reference to a known font that has the appropriate permission to use the font substitution in a 61182-2 file.	1-1

5.9.3 FontDef: Glyph

The Glyph character set is a group of user defined characters that will be reference by the text command in the file. Glyph permits the user to define a special set of characters that need description as a part of the 61182-2 file. Each character is in a BoundingBox that contains all the line strokes needed to completely define each character in the set. The point of origin is the lower left hand corner of the BoundingBox. The lowerLeftX and lowerLeftY point of origin will be used to position, rotate or mirror image all Glyph characters. See Table 54.

Table 54 – FontDet – Glyph



Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
Glyph	GlyphType	The element that contains the description of all the character definitions defined in the user developed font.	0-n
charCode	hexBinary	A code used by the user to identify a special character.	0-1
lowerLeftX	double	The lower left hand x dimension of the rectangular area encompassing the character.	1-1
lowerLeftY	double	The lower left hand y dimension of the rectangular area encompassing the character.	1-1
upperRightX	double	The upper right hand x dimension of the the rectangular area encompassing the character.	1-1
upperRightY	double	The upper right hand y dimension of the rectangular area encompassing the text character.	1-1
Simple	ABSTRACT	A substitution set of simple primitive shapes that may be any one of four geometries: Arc, Line, Outline, or PolyLine. The LineWidth and LineEnd characteristics are established by the Simple substitution	0-n

5.9.4 FontDef: Glyph combination

The developers of individual Glyph characters are encouraged to consider the manner in which the characters will be used. Since the BoundingBox surrounding the character must entirely encompass the Glyph, it is important to leave room in the BoundingBox so that the spacing between characters is consistent with the character style.

Using individual Glyph characters does not present a problem, however Glyph combinations should match the style of Glyph chosen by the user. Since it is mostly the Text element that instantiates fonts, the Glyph BoundingBox must fit into the Text BoundingBox. This is a simple strategy when all the Glyph characters are of a similar height. In this instance the “Y” dimensional differences between Glyph characters bounding boxes and Text bounding boxes should be identical in order to keep the Glyph characters within the Text box. Under those circumstances, only the spacing between characters needs to be considered.

As an example consider the word simple instantiated in capital letters or lower case. When instantiating a Text string, the Glyph for “SIMPLE” would only require equal bounding boxes in the character height even though the character “l” would have a smaller character width than the character “M”. A different strategy for Glyph development must be used if the Text string were to call for “Simple”. Since character height is different, it is recommended that the

Glyph BoundingBox consider its location position in a Text BoundingBox according to the rule that all characters must be inside the Text box.

Figure 7 shows an example of Glyph bounding boxes related to the Text BoundingBox. The characters line up even though they are positioned on the lower y-coordinate. They were designed along a construction line to have this condition occur.

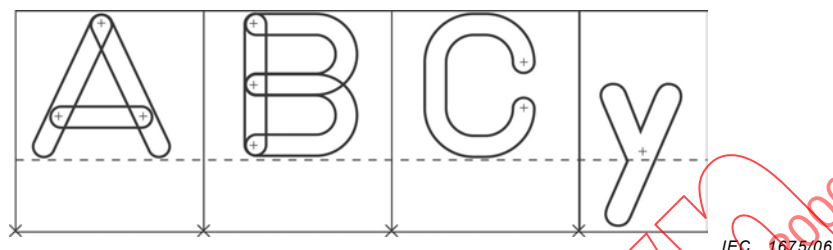


Figure 7 – Glyph bounding rectangles to Text bounding box relationships

5.10 Content: DictionaryLineDesc

The DictionarylineDesc is intended to provide lookup information on predefined line descriptions. The DictionarylineDesc is maintained as part of a substitution group schema. The intent is to have line descriptions available that are identified by their characteristics and a specific name (id). They may be reused throughout the file as appropriate. The name (id) of a LineDesc must be unique within the DictionaryLineDesc. See Table 55.

Table 55 – Content – DictionaryLineDesc

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
DictionaryLineDesc	DictionaryLineDescType	An element that contains substitution group information using line description criteria, predefined by the user for reuse in the file.	0-1
units	unitsType	An enumerated string that may be one of the following: MILLIMETER MICRON INCH.	1-1
EntryLineDesc	EntryLineDescType	An element that establishes the individual characteristic associated with a line description substitution group that has been identified by the user of the 61182-2 file.	0-n
id	qualifiedNameType	The unique qualified name description assigned as an id for any LineDesc for XML Schema substitution.	1-1
LineDesc	LineDescType	An element that defines the LineEnd and Linewidth characteristics to become part of the substitution group for defining line descriptions.	1-n


```
<DictionaryLineDesc units = "MILLIMETER">
  <EntryLineDesc id = "FineLine">
    <LineDesc lineEnd = "ROUND" lineWidth = "0.05"/>
  </EntryLineDesc>
  <EntryLineDesc id = "MediumLine">
    <LineDesc lineEnd = "NONE" lineWidth = "0.15"/>
  </EntryLineDesc>
  <EntryLineDesc id = "HeavyLine">
    <LineDesc lineEnd = "SQUARE" lineWidth = "0.30"/>
  </EntryLineDesc>
</DictionaryLineDesc>
```

The organization of the DictionaryLineDesc is accomplished in accordance with the substitution group description criteria. The LineDesc description defines the LineEnd and LineWidth according to the specific characteristics identified in the following paragraphs. The LineDescRef function is used in the body of the 61182-2 file when a specific LineDesc has been predefined, assigned a name, and the unique "id" is referenced in the file. This feature permits the use of either a predefined LineDesc, or defining the details of a LineDesc within the file. The description in the file must contain all the features of a line description under the rules of the LineDesc definition.

5.10.1 LineDesc

The LineDesc element is used throughout the 61182-2 file to establish the characteristics of lineEnd and lineWidth descriptions. The LineDesc definition is according to the following characteristics. See Table 56.


Table 56 – LineDesc element

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
LineDesc	LineDesc	An element that defines the characteristics of a line. The Units are defined when the LineDesc is instantiated; Units is a part of the characteristics when LineDesc is contained in the DictionaryLineDesc.	1-n
lineEnd	lineEndType	A description of the line ends used in any graphic description. The lineEnd description is an enumerated string that may be ROUND SQUARE NONE.	1-1
lineWidth	nonNegativeDoubleType	A dimensional characteristic that defines the nominal lineWidth of a Line, Polyline, or Arc element. The dimensions are in the same category as all dimensions contained in the 61182-2 file.	1-1

5.10.2 LineDescRef

The LineDescRef element is used throughout the 61182-2 file to establish the relationship to a previously defined LineDesc. The Units of the predefined LineDesc must match the Units of the Ecad section in which it is instantiated. The LineDescRef definition is according to the following characteristics. See Table 57

Table 57 – LineDescRef element

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
LineDescRef	LineDescRef Type	An element used to reference a previously defined LineDesc, contained in the DictionaryLineDesc.	1-n
id	qualifiedName Type	The identification of the LineDesc being referenced from the DictionaryLineDesc.	1-1

5.11 Content: DictionaryColor

The DictionaryColor is intended to provide lookup information on predefined Color descriptions. The DictionaryColor is maintained as part of a substitution group schema. The intent is to have color descriptions available that are identified by their three color hues and intensity characteristics and a specific name (id). They may be reused throughout the file as appropriate. The name (id) of a color must be unique within the DictionaryColor. See Table 58.

Table 58 – Content – DictionaryColor


			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
DictionaryColor	DictionaryColorType	An element that contains substitution group information using color description criteria, predefined by the user for reuse in the file.	0-1
EntryColor	EntryColorType	An element that establishes the individual characteristic associated with a color substitution that has been identified by the user in the 61182-2 file.	0-n
id	qualifiedNameType	The qualified description name assigned as an id standard for XML Schema color substitution.	1-1
Color	ColorType	A specific color identified through the instantiation of the three color spectrum as a part of the schema within the 61182-2 file.	1-n

The organization of the DictionaryColor is accomplished in accordance with the substitution group description criteria. The Color description may be any combination of the three color hues (red, green and blue) at the appropriate intensity according to the specific characteristics identified in the following paragraphs. The colorRef function is used in the body of the 61182-2 file when a specific Color has been predefined, assigned a name, and the unique “id” is referenced in the file. This feature permits the use of either a predefined Color, or defining the details of a Color within the file. The description in the file must contain all the features of a particular Color under the rules of the particular color definition.

5.11.1 Color

Color is defined by three values that represent the red, green and blue components of the composite color. If r, g, and b are all set to 0, the color is black. If all values are 255 then the color is white. The attributes of a Color element are defined in Table 59.

Table 59 – Color element




Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Color	ColorType	The specific description of the color represented by the three attributes.	1-1
r	unsignedByte	Defines the red color intensity as a value between 0 and 255.	1-1
g	unsignedByte	Defines the green color intensity as a value between 0 and 255.	1-1
b	unsignedByte	Defines the blue color intensity as a value between 0 and 255.	1-1

5.11.2 ColorRef

The ColorRef element is used throughout the 61182-2 file to establish the relationship to a previously defined Color. The ColorRef definition is according to the characteristics shown in Table 60.

Table 60 – ColorRef element



Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
ColorRef	ColorRefType	The specific reference to a predefined color represented by the three attributes and contained in the DictionaryColor.	1-1
id	qualifiedNameType	The qualified description name assigned as an id standard for XML Schema color substitution.	1-1

5.12 Content: DictionaryFirmware

The DictionaryFirmware is intended to provide lookup information on predefined CachedFirmware. The DictionaryFirmware is maintained as part of a substitution group schema. The intent is to have firmware descriptions available that are identified by their characteristics and a specific name (id). They may be reused throughout the file as appropriate. The name (id) of a CachedFirmware must be unique within the DictionaryFirmware. See Table 61.

Table 61 – Content – DictionaryFirmware



Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
DictionaryFirmware	DictionaryFirm wareType	An element that consists of all the named CachedFirmware within the 61182-2 file.	0-n
EntryFirmware	EntryFirmware Type	An element that establishes the individual characteristic associated with a Firmware entry substitution that has been identified by the user in the 61182-2 file.	0-n
id	qualifiedName Type	The qualified description name assigned as an id for XML Schema substitution of firmware.	1-1
CachedFirmware	CachedFirm wareType	Any CachedFirmware identified and contained in the DictionaryFirmware as a part of the schema within the 61182-2 file.	1-n

The organization of the DictionaryFirmware is accomplished in accordance with the substitution group description criteria. The CachedFirmware description may be any hexEncodedBinary string according to the specific characteristics identified in the following paragraphs. The FirmwareRef function is used in the body of the 61182-2 file when a specific CachedFirmware has been predefined, assigned a name, and the unique "id" is referenced in the file. This feature permits the use of either a predefined CachedFirmware, or defining the details of the Firmware associated with a particular Component identified by reference designator in the Step section within the file. The description in the file must contain all the features of a particular Firmware under the rules of the particular encoded definition.

5.12.1 CachedFirmware

The CachedFirmware element is used to describe firmware that will be contained in the DictionaryFirmware. The details are in accordance to the characteristics in Table 62.


Table 62 – CachedFirmware element

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
CachedFirmware	CachedFirmware Type	The firmware description needed by a particular component that becomes part of the predefined firmware in the DictionaryFirmware.	1-1
hexEncodedBinary	string	An attribute defining the binary code that shall be added to a particular component and which is contained in the DictionaryFirmware.	1-1

5.12.2 FirmwareRef

The FirmwareRef element is used throughout the 61182-2 file to establish the relationship to a previously defined CachedFirmware. The FirmwareRef definition is according to the characteristics in Table 63.

Table 63 – FirmwareRef element

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur-rence
FirmwareRef	FirmwareRefType	The specific reference to firmware previously defined and contained in the DictionaryFirmware.	1-1
id	qualifiedNameType	The qualified name of CachedFirmware contained in the DictionaryFirmware.	1-1

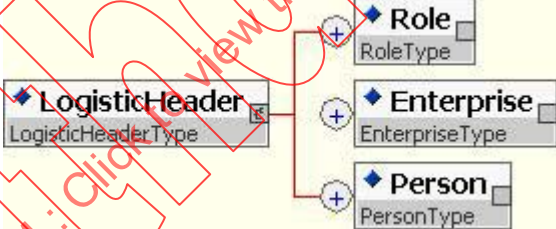
6 Logistic header

The LogisticHeader element consists of information about the owner of the 61182-2 file. It can be used for configuration management or contact information. The enterprise is also linked to the Bill of Material and the Approved Vendor List.

6.1 LogisticHeader

The LogisticHeader describes information pertaining to ordering and delivery. This includes the role played by the individual providing ordering and delivery information, the title of the person responsible and the address and particulars of the enterprise. See Table 64.

Table 64 LogisticHeader element

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
LogisticHeader	LogisticHeaderType	The LogisticHeader describes information pertaining to ordering and delivery.	1-1
Role	RoleType	Defines the type of activity within the enterprise.	1-n
Enterprise	EnterpriseType	Provides information about the company identified in the BOM or Avl schema.	1-n
Person	PersonType	Identifies the person involved in sending receiving or having anything to do in the trading partner relationship.	1-n


```

<LogisticHeader>
  <Role name = "OWNER" description = "IPC Staff" publicKey = "x6d8f7xd90mJHR13" authority = "25XX standard development"/>
  <Enterprise id = "IPC" name = "IPC Incorporated – Association Connecting Electronincs Industries" code = "57834" codeType = "CAGE"
    address1 = "2215 Sanders Road" city = "Northbrook" stateProvince = "Illinois" country = "US" postalCode = "60062" phone =
      "+1-847-790-5339" fax = "+1-847-509-9798" email = "Dieterbergman@ipc.org" url = "www.ipc.org"/>
  <Person name = "Dieter W. Bergman" enterpriseRef = "IPC" title = "Director Technology Transfer" email = "Bergdi@ipc.org" phone =
    "847-790-5339" fax = "847-509-9798" mailstop = "2nd Floor " roleRef = "Owner"/>
</LogisticHeader>

```

6.2 Role

A **Role** element declares a type of activity within an **Enterprise**. The attribute values of the **Role** based on the requirements of the activities performed by the role. See Table 65.

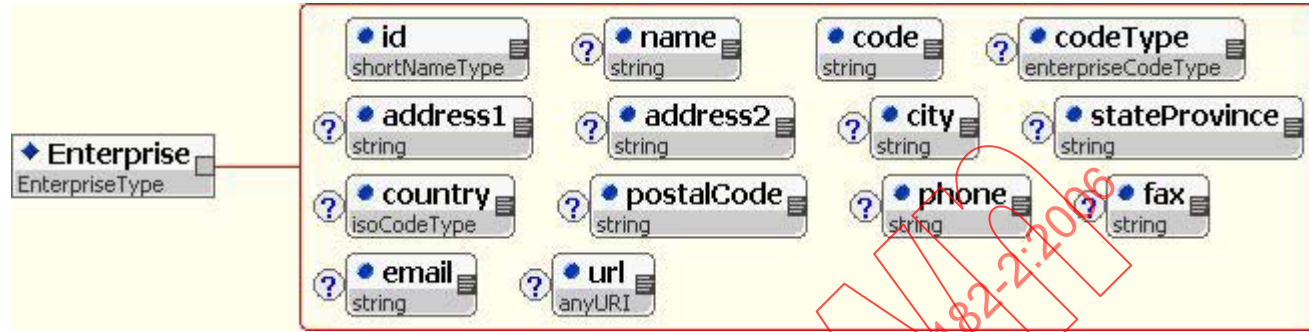
Table 65 – Role element

Attribute/ Element Name	Attribute/ Element Type	Description	Occur-rence
Role	RoleType	Defines the type of activity within the enterprise.	1-n
Name	shortNameType	The name uniquely identifies a role type used by the enterprise. The name is a <code>shortName</code> data type (a restricted <code>xsd:string</code>) that must be unique within the global (top level) namespace of the 61182-2 file. The standard IPC role types are defined as follows: SENDER: Identifies the person sending out the 61182-2 file. OWNER: Identifies the person who maintains the configuration management of the 61182-2 file and has the right to increment the file history number of the 61182-2 file. RECEIVER: Identifies the person receiving the 61182-2 file. DESIGNER: Identifies the designer of the product described in the 61182-2 file. ENGINEER: Identifies the engineer who is responsible for the product described in the 61182-2 file. BUYER: Identifies the person who is responsible for payment. CUSTOMERSERVICE: Identifies the customer service representative who is responsible for the account. DELIVERTO: Identifies the person in the receiving department who takes possession of the shipment in the name of the enterprise. BILLTO: Identifies the person in the billing or purchasing department to whom the billing should be addressed.	1-1
description	string	The <code>description</code> attribute defines a role within an enterprise. (The <code>description</code> is optional if the IPC definition is to be used.)	0-1
publicKey	base64Binary	The <code>publicKey</code> attribute of a role holds the public encryption key if one exists for the role. The key is base64 encoded. (See IETF <i>RFC 1421</i> for the base64 algorithm) If a role <code>publicKey</code> is present it can be used instead of a <code>Person/publicKey</code> to encrypt data. The role's <code>publicKey</code> is used to encrypt data so only that someone with access to the role's private key can access the data.	0-1
authority	string	The access level associated with this role as defined by the system referenced by <code>externalConfigurationControlEntryPoint</code>	0-1
<pre> <LogisticHeader> <Role name = "ENGINEER" description = "responsible for data in file"/> <Role name = "BUYER" description = "responsible for ordering data"/> <Role name = "DESIGNER" description = "responsible for design description in file"/> </LogisticHeader> </pre>			

6.3 Enterprise

The `Enterprise` element provides information about an enterprise that will be referenced within the 61182-2 file. The attributes of the `Enterprise` element are defined in Table 66.

Table 66 – Enterprise element



Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
Enterprise	EnterpriseType	Provides information about the company identified in the Bom or Avl schema.	1-n
id	shortNameType	The id uniquely identifies an enterprise throughout the 61182-2 file. The id is a <code>shortName</code> data type (a restricted <code>xsd:string</code>) that must be unique within the global (top-level) namespace of the 61182-2 file. (Suggest "XYZ", "ACME"...).	1-1
name	string	The full name of the enterprise.	0-1
code	string	Value of a CAGE or DUNS code. If no CAGE or DUNS code is available use "NONE" as the value of the code attribute.	1-1
codeType	enterpriseCodeType	One of DUNS or CAGE. The default is DUNS. If the DUNS codeType is selected, then the <code>code</code> attribute of <code>Enterprise</code> is the D-U-N-S Number of the enterprise. (see the reference to D&B D-U-N-S Number at http://www.dnb.com/) If the CAGE codeType is used then the CAGE code of the <code>Enterprise</code> is in the code attribute of <code>Enterprise</code> . (see http://www.dscc.dla.mil/offices/sourcedev/cage.html).	0-1
address1	string	The street address of the <code>Enterprise</code> .	0-1
address2	string	Additional address information for the <code>Enterprise</code> .	0-1
city	string	The city.	0-1
stateProvince	string	The state or province.	0-1
country	isoCodeType	The two-letter ISO country code from the ISO 3166 standard. (see ftp://info.ripe.net/iso3166-countrycodes). The default country is "US."	0-1
postalCode	string	The postal code.	0-1
phone	string	The general phone number for the <code>Enterprise</code> .	0-1
fax	string	The phone number of the <code>Enterprise</code> fax machine.	0-1
email	string	The email address for the <code>Enterprise</code> .	0-1
url	anyURI	The Internet HTTP Web address of the <code>Enterprise</code> .	0-1

```

<LogisticHeader>
  <Role name = "ENGINEER" description = "responsible for data in file"/>
  <Enterprise id = "Acme" name = "Acme Tool and Die Company Inc." code = "1433" codeType = "DUNNS" address1 = "7347
Concorde Ave." address2 = "suite 42" city = "Camden" stateProvince = "NJ" country = "US" postalCode = "08780" phone = "609-458-
5943" fax = "609-458-5900" email = "AcmeCorp@mindspring.com" url = "www.Acmeproducts.com"/>
  <Enterprise id = "Masters" name = "Master Spring Manufacturer" code = "NONE" address1 = "3793 Varembe Ave." address2 =
"Room 412" city = "Geneva" stateProvince = "Switzerland" country = "CH" phone = "+ 49-22-47 64 84" email =
"masters@swisscom.ch"/>
</LogisticHeader>

```

6.4 Person

The Person element provides information about a person who will be referenced within the 61182-2 file. The attributes of a Person element are defined in Table 67.

Table 67 – Person element

Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
Person	PersonType	Identifies the person involved in sending receiving or having anything to do in the trading partner relationship.	1-n
name	string	A string that uniquely identifies the person throughout the 61182-2 file. The Name must be unique within the global (top-level) namespace of the 61182-2 file. It may be the full legal name or a known abbreviation.	1-1
enterpriseRef	shortNameType	The shortName of the person's company or enterprise. If no enterprise exists, the term "SELF" should be used.	1-1
title	string	The job title of the person.	0-1
email	string	The email address of the person.	0-1
phone	string	The phone number of the person.	0-1
fax	string	The fax machine phone number of the person.	0-1
mailstop	string	The mail stop within the Enterprise, however this may be an alternate address from the Enterprise should the mail be directed somewhere else. In that event, the Enterprise shall be named, but contain no address or contact information.	0-1
publicKey	base64Binary	The publicKey attribute of a person holds the public encryption key if one exists for the person. The key is base64 encoded. (see IETF RFC 1421 for the base64 algorithm) The person's publicKey is used to encrypt data so only that person can access the data.	0-1
roleRef	qualifiedNameType	A reference to the role and identified responsibility of the person.	0-1

```

<LogisticHeader>
  <Person name = "Dilbert" enterpriseRef = "Acme" email = jdilbert@acme.com phone = "(301) 555-1212"/>
  <Person name = "John Jones" enterpriseRef = "Philco Corp" title = "Consultant" email = jones@aol.com
phone = "(301) 555-1212" mailstop = "37 Stringer Rd., Overland, OH, 56432" roleRef = JJ Engineer" />
</LogisticHeader>

```

7 History record

The History Record element consists of changes performed on the file throughout its history. Several attributes are defined as part of the History as well as two elements. These are file revision and change records elements.

7.1 HistoryRecord

The HistoryRecord element provides a sequential change number for the 61182-2 file. The number is changed every time the controlled version of the 61182-2 file is modified. Only the file owner is allowed to change the value of HistoryRecord/number. The attributes of a HistoryRecord element are defined in Table 68.

Table 68 HistoryRecord element

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- ence
HistoryRecord	HistoryRecordType	The HistoryRecord element provides a sequential change number for the 61182-2 file. The number is changed every time the controlled version of the 61182-2 file is modified. Also identified are the change approval conditions.	1-1
number	historyNumberType	The revision number of the 61182-2 file. The content of this number is defined and controlled by the file owner.	1-1
origination	dateTime	The timestamp recorded when the 61182-2 file was first created.	1-1
toolRef	string	A reference to the tool used to create the original file.	1-1
lastChange	dateTime	The timestamp recorded when the History number was last incremented.	1-1
externalConfiguration EntryPoint	anyURI	A URI referencing a configuration control system that "owns" the 61182-2 file contents.	0-1
FileRevision	FileRevisionType	An element that tracks the changes that have been made to an 61182-2 file. The revision identifier does not necessarily track the revision of the product but does establish the sequence and software tools used to make the changes.	1-1
ChangeRec	ChangeRecType	An element that is required to manage the configuration of the changes made to the product during its development phases and its final configuration in the field.	0-n

```

<HistoryRecord number = "Example1" origination = "2004-02-11T12:53" toolRef = "Dieter Laptop Dell Latitude" lastChange =
  "2004-02-13T13:24:00">
  <FileRevision fileRevisionId = "Example1" comment = "Primitive layout positioning">
    <SoftwarePackage name = "Manual Interpretation" vendor = "IPC" revision = "none">
      <Certification certificationStatus = "ALPHA" certificationCategory = "DETAILED DRAWING"/>
    </SoftwarePackage>
  </FileRevision>
</HistoryRecord>

```

7.2 FileRevision

The FileRevision element tracks changes to the 61182-2 file. The revision identifier does not necessarily track the revision of the product. The purpose of the FileRevision is to track which software tools were used to make changes to the file and the sequence in which the changes were made. See Table 69.

Table 69 FileRevision element



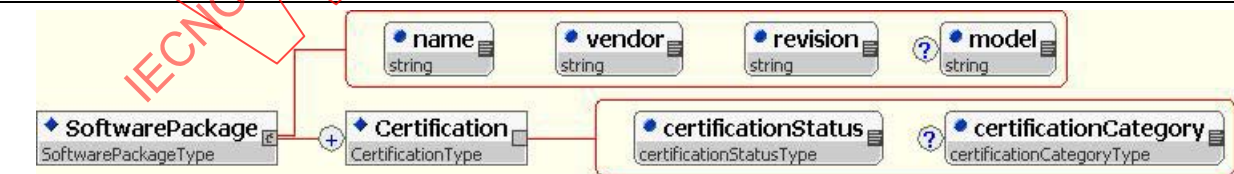
The diagram shows the FileRevision element (FileRevisionType) containing a nested SoftwarePackage element (SoftwarePackageType). FileRevision also contains three attributes: fileRevisionId (string), comment (string), and label (string, optional). The label attribute is marked with a question mark icon.

Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
FileRevision	FileRevision Type	An element that tracks the changes that have been made to an 61182-2 file. The revision identifier does not necessarily track the revision of the product but does establish the sequence and software tools used to make the changes.	1-1
fileRevisionID	string	An identifier for the revision. This value may be supplied by a revision control system such as RCS, CVS, or SCCS.	1-1
comment	string	A short description of the revision, such as a changes statement entered by RCS or SCCS.	1-1
label	string	A label that can be applied to a branch head. The label can be used to associate a file revision of special significance.	0-1
SoftwarePackage	Software PackageType	A nested element, the software package that wrote this revision of the file.	1-1

7.3 SoftwarePackage

The SoftwarePackage element is the description of the software package that was used to create the revision to the file. This includes the revision of the software that wrote the file as well as the vendor name and platform model. Also added to the SoftwarePackage schema is any certification that has occurred of the software's ability to meet the requirements of the 61182-2 standard. See Table 70.

Table 70 SoftwarePackage element



The diagram shows the SoftwarePackage element (SoftwarePackageType) containing a nested Certification element (CertificationType). SoftwarePackage also contains four attributes: name (string), vendor (string), revision (string), and model (string, optional). The model attribute is marked with a question mark icon. The Certification element contains two attributes: certificationStatus (certificationStatusType) and certificationCategory (certificationCategoryType, optional). The certificationCategory attribute is marked with a question mark icon.

Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
SoftwarePackage	SoftwarePackage Type	A nested element, the software package that wrote this revision of the file.	1-1
name	string	The name of the software package that wrote the revision to the file.	1-1
vendor	string	The tool providers name both system and software package.	1-1
revision	string	The revision of the software that wrote the file.	1-1
model	string	The model of the software or release number.	0-1
Certification	CertificationType	The different certifications that the tool or software package has acquired.	1-n

certificationStatus	certification StatusType	An enumerated string that defines the status as one of four types. ALPHA BETA CERTIFIED SELFTEST.	1-1
certificationCategory	certification CategoryType	The various categories that exist for certification of the type of activities related to building electronic assemblies. An enumerated string consisting of: ASSEMBLYDRAWING ASSEMBLYFIXTUREGENERATION ASSEMBLYPANEL ASSEMBLYPREPTOOLS ASSEMBLYTESTFIXTUREGENERATION ASSEMBLYTESTGENERATION BOARDFABRICATION BOARDFIXTUREGENERATION BOARDPANEL BOARDTESTGENERATION COMPONENTPLACEMENT DETAILEDDRAWING FABRICATIONDRAWING GENERALASSEMBLY GLUEDOT MECHANICALHARDWARE MULTIBOARDPARTLIST PHOTOTOOLS SCHEMATICDRAWINGS SINGLEBOARDPARTLIST SOLDERSTENCILPASTE SPECSOURCECONTROLDRAWING.	0-1

7.4 ChangeRec

The ChangeRec element is the information needed for configuration management of the changes made to the product that the data file represents. The characteristics are stored by the datecode that the change record was executed. The information can also be used to obtain approval of a suggested change. See Table 71.

Table 71 – ChangeRec element

Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
ChangeRec	ChangeRecType	An element that is required to manage the configuration of the changes made to the product during its development phases and its final configuration in the field.	0-n
datetime	dateTime	The timestamp recorded when the change was made to the file.	0-n
personRef	qualifiedNameType	The pointer to the person listed in the LogisticHeader.	1-1
application	string	The effectivity of the change indicating when it becomes active, such as after so many completed units.	1-1
change	string	A short description of the change.	1-1
Approval	approvalType	The approval of a suggested change by the fabricator or assembler	0-n
datetime	dateTime	The timestamp recorded when the change was made to the file.	0-n
personRef	qualifiedNameType	The pointer to the person listed in the LogisticHeader.	1-1

8 BOM (Material List)

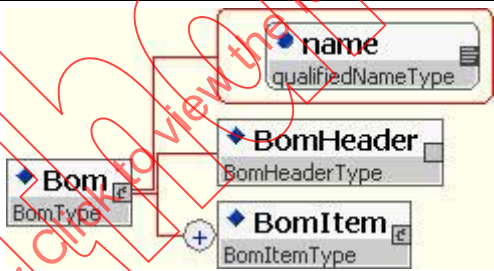
This clause describes the Bill of Materials for the printed board and printed board assembly. A bill of materials is a list of all the different materials and components to be used in the manufacture of the electronic assembly. The information is arranged by a specific category of material or components and then by the OEM Design Number (ODN). This is the number assigned by the owner of the file. Each ODN has a list of attributes and is accompanied by a list of the various specific uses of the materials or components on the electronic assembly, each with its private name or reference designator.

The BOM dataset represents the list of materials or components found on a particular board, keyed by the OEM Design Number (ODN). The original BOM is delivered by the owner of the file (OEM, EMS, etc.) in the early stages of the design. The Bom element is composed of the BomHeader and the BomData

For example, ODN **348324-001** can be of package **pqfp100**, has an Internal Part Number (IPN) **30020A** and may have four occurrences on the board, labelled **U14**, **U15**, **U75**, **U76**. Each occurrence is called a Reference Designator (RefDes for short).

The 61182-2 file can contain several BOM elements. Each one has a BomHeader sub-element with board and date/time information. The main data resides in the sub-element BomData. See Table 72.

Table 72 – Bom element



Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
Bom	BomType	The Bom element describes the Bill of Materials for the printed board and printed board assembly. A bill of materials is a list of all the different materials and components to be used in the manufacture of the electronic assembly.	1-1
name	qualifiedNameType	The name string that identifies the specific Bom section. This name is referenced in the AvlDataHeader element.	1-1
BomHeader	BomHeaderType	A nested element containing identification and logistical information about the Bom.	1-1
BomItem	BomItemType	The individual elements that define the details of each of the items in the Bom.	1-n

```
<Bom name = "TestBoard1">
<BomHeader assembly = "Karens Design" revision = "Prototype" stepListRef = "KarensBoard"/>
  <BomItem OEMDesignNumberRef = "Fabricated" quantity = "1" numberIO = "4" category = "ELECTRICAL" description = "Card
    Edge Connector">
    <RefDes name = "J1" populate = "FALSE"/>
    <Characteristics category = "ELECTRICAL"/>
  </BomItem>
  <BomItem OEMDesignNumberRef = "Sample1234" quantity = "1" numberIO = "8" category = "ELECTRICAL" internalPartNumber =
    "Molex 354892" description = "Biforcated Thru-hole connector" packageRef = "Connector1">
    <RefDes name = "J2" populate = "TRUE"/>
    <Characteristics category = "ELECTRICAL"/>
  </BomItem>
  <BomItem OEMDesignNumberRef = "SOIC129867" quantity = "1" numberIO = "8" category = "ELECTRICAL" internalPartNumber =
    "Phillips IC2436" description = "SOIC 1.27 pitch" packageRef = "SOIC12">
    <RefDes name = "U1" populate = "TRUE"/>
    <Characteristics category = "ELECTRICAL">
      <Textual definitionSource = "Pretested Logic" textualCharacteristicName = "Per Supplier Data Sheet"/>
    </Characteristics>
  </BomItem>
  <BomItem OEMDesignNumberRef = "CAP 24A1846" quantity = "1" numberIO = "2" category = "ELECTRICAL" internalPartNumber =
    "Phillips Cap1235" description = "3225 Surface Mount Capacitor" packageRef = "Capacitor1">
    <RefDes name = "C1" populate = "TRUE"/>
    <Characteristics category = "ELECTRICAL">
      <Measured measuredCharacteristicName = "Capacitance" measuredCharacteristicValue = "20 Microfarads"
        engineeringUnitOfMeasure = "Microfarads" engineeringNegativeTolerance = "3 microfarads" engineering
        PositiveTolerance = "3 microfarads"/>
    </Characteristics>
  </BomItem>
</Bom>
```

8.1 BOM Header

Each Bom in the 61182-2 file has a BomHeader element. This is a mandatory requirement as a part of the Bom element. Table 73 provides the characteristics that are necessary to properly describe a Bom.

Table 73 – BomHeader element

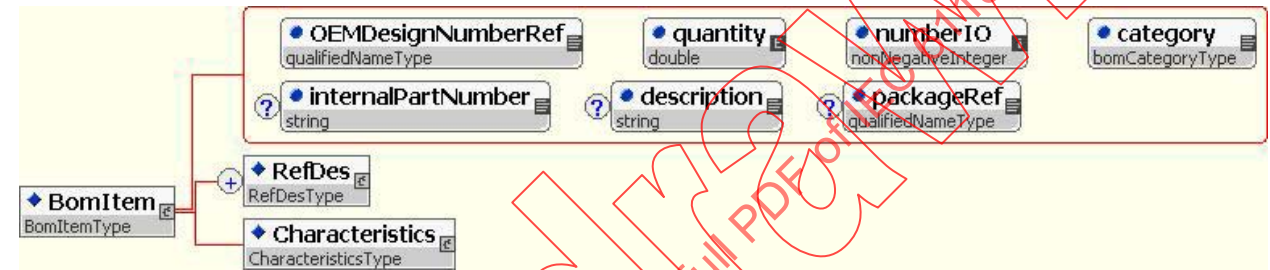
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
BomHeader	BomHeaderType	A nested element containing identification and logistical information about the Bom.	1-1
assembly	qualifiedNameType	Electronic assembly name as parsed from the Bom file.	1-1
revision	string	Revision as parsed from the Bom file.	1-1
affecting	boolean	An enumerated string as either TRUE or FALSE (part of the 3WC standard). True equals that the current BOM was used in the assembly merge process in the job and therefore was the affecting one. This is due to the fact that there can be multiple BOMs in a job, but only one has been used to affect the current top and bottom component placements sections.	0-1
stepListRef	qualifiedNameType	Identification of specific steps used to help describe the BomItem within the category of materials	1-1

8.2 BomItem

Each BomItem is a part of the BomItem list. A BomItem consists of a variety of attributes. BomItem contains the reference to the OEM Design Number (ODN), the line item of the ODN, a quantity of parts required, and optional internalPartNumber (IPN), description of the bomItem and a reference to the package type (packageRef). The BomItem also contains three additional elements that include the list of reference designators (RefDes) associated with the BomItem, a list of detail descriptions related to the BomItem (DescList), and FirmWare (Firmware) associated with programming a part that needs those characteristics. Multiple RefDes lists may be maintained since there may be several reference designator file locations.

The attributes are shown in theTable 74 and are a mandatory part of the BOM section of the 61182-2 file.

Table 74 – BomItem



The UML class diagram illustrates the structure of the BomItem. The BomItem class (BomItemType) is the central entity. It has several attributes: OEMDesignNumberRef (qualifiedNameType), quantity (double), numberIO (nonNegativeInteger), category (bomCategoryType), internalPartNumber (string), description (string), and packageRef (qualifiedNameType). Additionally, it has two nested elements: RefDes (RefDesType) and Characteristics (CharacteristicsType). The diagram uses standard UML notation, with a box for the class, a circle for the attribute, and a rectangle for the nested element. A red watermark 'IECNOVA.COM' is visible across the diagram.

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
BomItem	BomItemType	The individual elements that define the details of each of the items in the Bom.	1-n
OEMDesignNumberRef	qualifiedNameType	A qualified name referencing the OEM part number data.	1-1
quantity	double	The count of the instances of this item in the assembly.	1-1
numberIO	nonNegativeInteger	The number of input/output determinations on the lineItem.	0-n
category	bomCategoryType	The category of the bomItem as an enumerated string being either ELECTRICAL PROGRAMMABLE MECHANICAL MATERIAL	1-1
internalPartNumber	string	Internal or warehouse stock part identifier.	1-1
description	string	The description of the BomItem.	0-1
packageRef	qualifiedNameType	The name assigned to the package describing the physical outlines, documentation, and land patterns features related to package pin assignment.	0-1
RefDes	RefDesType	A nested element containing the reference designator strings for the individual parts identified in the file for a one to one relationship with the quantity listed for the BomItem.	1-n
Characteristics	CharacteristicsType	A nested element containing descriptive strings that can be linked together and also a reference to a describing line in an external file.	1-1

```

<Bom name = "TestBoard1">
  <BomHeader assembly = "Karens Design" revision = "Prototype" stepListRef = "KarensBoard"/>
  <BomItem OEMDesignNumberRef = "Fabricated" quantity = "1" numberIO = "4" category = "ELECTRICAL" description = "Card Edge
    Connector">
    <RefDes name = "J1" populate = "FALSE"/>
    <Characteristics category = "ELECTRICAL"/>
  </BomItem>
  <BomItem OEMDesignNumberRef = "Sample1234" quantity = "1" numberIO = "8" category = "ELECTRICAL" internalPartNumber =
    "Molex 354892" description = "Biforcated Thru-hole connector" packageRef = "Connector1">
    <RefDes name = "J2" populate = "TRUE"/>
    <Characteristics category = "ELECTRICAL"/>
  </BomItem>
  <BomItem OEMDesignNumberRef = "SOIC129867" quantity = "1" numberIO = "8" category = "ELECTRICAL" internalPartNumber =
    "Phillips IC2436" description = "SOIC 1.27 pitch" packageRef = "SOIC12">
    <RefDes name = "U1" populate = "TRUE"/>
    <Characteristics category = "ELECTRICAL">
      <Textual definitionSource = "Pretested Logic" textualCharacteristicName = "Per Supplier Data Sheet"/>
    </Characteristics>
  </BomItem>
  <BomItem OEMDesignNumberRef = "CAP 24A1846" quantity = "1" numberIO = "2" category = "ELECTRICAL" internalPartNumber =
    "Phillips Cap1235" description = "3225 Surface Mount Capacitor" packageRef = "Capacitor1">
    <RefDes name = "C1" populate = "TRUE"/>
    <Characteristics category = "ELECTRICAL">
      <Measured measuredCharacteristicName = "Capacitance" measuredCharacteristicValue = "20" Microfarads"
        engineeringUnitOfMeasure = "Microfarads" engineeringNegativeTolerance = "3 microfarads"
        engineeringPositiveTolerance = "3 microfarads"/>
    </Characteristics>
  </BomItem>
</Bom>

```

8.2.1 RefDes

The RefDes is an element that represents the specific reference designator associated with a component that becomes a part of the electronic assembly. This is a mandatory requirement for all BomItems that have a reference designator associated with their ELECTRICAL descriptions. In this instance, the standard set of reference designator letters **shall** be used. i.e. R = Resistor, C = Capacitor, CR = Diode etc. The prefix letter M **shall** be used for all MECHANICAL parts, P **shall** be used for all Process MATERIAL bomItems, and S for all Software PROGRAMMABLE bomItems. See Table 75.

Table 75 – RefDes element

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- ence
RefDes	RefDesType	A nested element containing the reference designator strings for the individual parts identified in the file for a one to one relationship with the quantity listed for the BomItem.	0-1
name	qualifiedNameType	The name of the reference designator used.	1-n
populate	boolean	An enumerated string as either TRUE or FALSE (part of the 3WC standard). True equals that the RefDes was populated; False indicates that it was not. TRUE is the default.	0-1
Tuning	TuningType	A number of conditions that determine any adjustment that is needed for a particular BomItem.	0-n
Firmware	FirmwareType	A nested element containing descriptive strings that can be linked together to describe the software implementation for an individual BomItem.	0-n

8.2.1.1 Tuning

The Tuning element represents conditions that determine any adjustment that is needed for a particular BomItem. See Table 76.

Table 76 – Tuning element

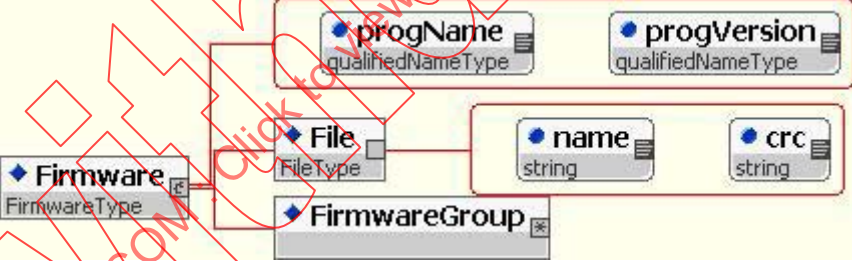


Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Tuning	TuningType	A number of conditions that determine any adjustment that is needed for a particular BomItem.	0-n
value	qualifiedNameType	The value of the tuning characteristics and its relationship to the other prescribed values.	1-1
comments	string	Any instructions or comments needed to prescribe the proper tuning.	0-n

8.2.1.2 Firmware

A nested element containing descriptive strings that can be linked together to describe the software implementation for an individual BomItem and associates the characteristics of the specific reference designators to which the programmable information is to be included. See Table 77.

Table 77 Firmware element



Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Firmware	FirmwareType	A nested element containing descriptive strings that can be linked together to describe the software implementation for an individual BomItem.	0-n
progName	qualifiedNameType	Name of the program to be embedded in the BomItem.	0-1
progVersion	qualifiedNameType	Version of program or revision status.	0-1
File	FileType	Computer file containing the program code to be inserted.	1-1
name	string	Name of the file.	1-1
crc	string	Certification status to verify correct program elements.	1-1
FirmwareGroup	ABSTRACT	A substitution group that specifies the CachedFirmware which has been stored by the user in the DictionaryFirmware.	0-1

8.2.2 Characteristics

A group of specific characteristics applicable to a particular BomItem; they all relate to one of the categories to which the BomItem belongs. Each characteristic has its own level of requirements and are defined under the major element Characteristics. See Table 78.

Table 78 – Characteristics element

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Characteristics	CharacteristicsType	A nested element containing descriptive strings that can be linked together and also a reference to a describing line in an external file.	1-1
category	bomCategoryType	Defines the type of material or component category to which the BomItem belongs.	1-1
Measured	MeasuredType	A nested element containing descriptive strings that can be linked together to describe the measurable characteristics for an individual BomItem.	0-n
Ranged	RangedType	A nested element containing descriptive strings that can be linked together to describe the tolerances or ranges of variation that can be applied to the characteristics for an individual BomItem.	0-n
Enumerated	EnumeratedType	A nested element containing descriptive strings that can be linked together to describe those values that define the numerical characteristics and the source for that information for an individual BomItem.	0-n
Textual	TextualType	A nested element containing descriptive strings that can be linked together to describe any textual characteristics and their source for an individual BomItem.	0-n

8.2.2.1 Measured

The Measured elements are those properties that when linked together describe the measurable characteristics for an individual BomItem. These characteristics provide the nominal value and also include the tolerances on the measurement. See Table 79

Table 79 Measured element

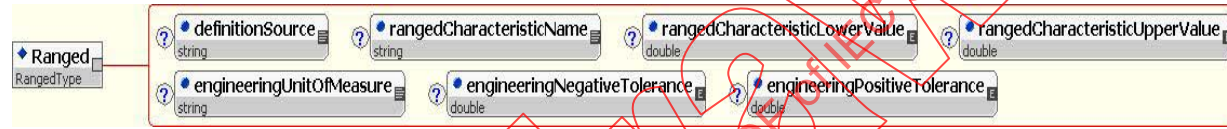
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Measured	MeasuredType	A nested element containing descriptive strings that can be linked together to describe the measurable characteristics for an individual BomItem.	0-n
definitionSource	string	The source of the information about the measurements.	0-1
measured CharacteristicName	string	A unique name applied to the characteristic (e.g. capacitance)	0-1

measuredCharacteristicValue	double	The value of the measured property at its nominal or target value.	0-1
engineeringUnitOfMeasure	string	The engineering unit of measure.	0-1
engineeringNegativeTolerance	double	The negative tolerance on the value identified.	0-1
engineeringPositiveTolerance	double	The positive tolerance on the value identified.	0-1

8.2.2.2 Ranged

The Ranged elements are those properties that when linked together describe the ranges that a BomItem must meet. These range characteristics include the upper and lower limit of the range as well as the tolerances on the measurement. These values are compared against those that have been measured to ascertain that the BomItem is within specifications. See Table 80.

Table 80 – Ranged element

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- ence
Ranged	RangedType	A nested element containing descriptive strings that can be linked together to describe the tolerances or ranges of variation that can be applied to the characteristics for an individual BomItem.	0-n
definitionSource	string	The source of the information about the measurement ranges.	0-1
rangedCharacteristicName	string	A unique name applied to the characteristic.	0-1
rangedCharacteristicLowerValue	double	The lower value of a ranged characteristic.	0-1
rangedCharacteristicUpperValue	double	The upper value of a ranged characteristic.	0-1
engineeringUnitOfMeasure	string	The engineering unit of measure.	0-1
engineeringNegativeTolerance	double	Any negative tolerance that can may be applied to the range in order to affix the target value of the BomItem.	0-1
engineeringPositiveTolerance	double	Any positive tolerance that can may be applied to the range in order to affix the target value of the BomItem.	0-1

8.2.2.3 Enumerated

The Enumerated elements are those properties that, when linked together, describe the enumerated value of a BomItem as well as the source of that information. See Table 81.

Table 81 – Enumerated element




The diagram shows a hierarchy where 'Enumerated' (EnumeratedType) is the parent element, and it contains three child elements: 'definitionSource' (string), 'enumeratedCharacteristicName' (string), and 'enumeratedCharacteristicValue' (string). Each child element has a question mark icon next to it.

Attribute/ Element Name	Attribute / Element Type	Description	Occur- rence
Enumerated	EnumeratedType	A nested element containing descriptive strings that can be linked together to describe those values that define the numerical characteristics and the source for that information for an individual BomItem.	0-n
definitionSource	string	The source of the information about the enumerated value.	0-1
enumeratedCharacter- isticName	string	A unique name applied to the characteristic.	0-1
enumeratedCharacter- isticValue	string	The enumerated value identified for the BomItem.	0-1

8.2.2.4 Textual

The Textual elements are those properties that when linked together describe the textual value of a BomItem as well as the source of that information. See Table 82.

Table 82 – Textual element



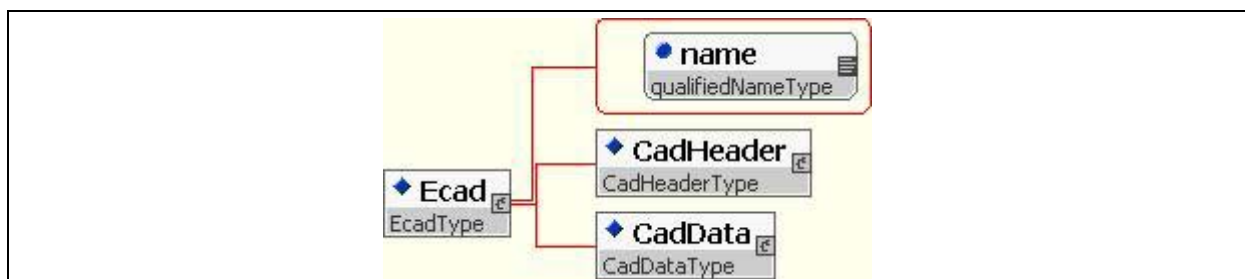
The diagram shows a hierarchy where 'Textual' (TextualType) is the parent element, and it contains three child elements: 'definitionSource' (string), 'textualCharacteristicName' (string), and 'textualCharacteristicValue' (string). Each child element has a question mark icon next to it.

Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
Textual	TextualType	A nested element containing descriptive strings that can be linked together to describe any textual characteristics and their source for an individual BomItem.	0-n
definitionSource	string	The source of the information about the textual value.	0-1
textualCharacteristicName	string	A unique name applied to the characteristic.	0-1
textualCharacteristicValue	string	The textual value identified for the BomItem.	0-1

9 Electronic computer aided design (ecad)

The Ecad section describes the Computer Aided Design data of the job, including all the graphical description of the layers, component location, panel design, etc. In most cases, the Ecad section is by far the largest body of data inside the 61182-2 file. To understand how the Ecad section is organized, it is important to be familiar with the Layers and Step elements. See Table 83.

Table 83 – Ecad

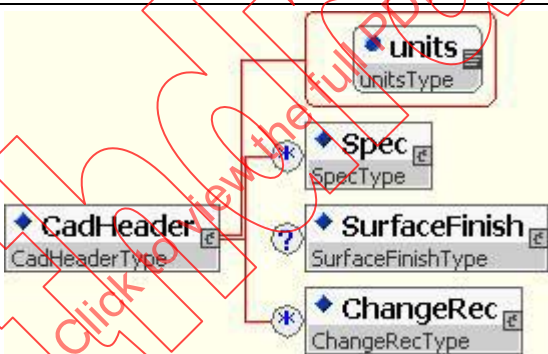


Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Ecad	EcadType	The Ecad section describes the Computer Aided Design data of the job, including all the graphical description of the layers, component location, panel design, etc.	1-1
name	qualifiedNameType	The qualified name related to identify the specific Ecad information based on the electronic assembly(s) in the 61182-2 file.	1-1
CadHeader	CadHeaderType	A nested element containing identification and information about the description of the data in the file.	1-1
CadData	CadDataType	A nested element containing the actual Cad data describing the printed board and printed board assembly characteristics.	1-1

9.1 CadHeader

The CadHeader element is mandatory. Inside the CadHeader there are general attributes that describe the board and its format. Thickness should be in inches (imperial) or mm (metric) depending on units. The thickness attribute is the overall thickness of the board used to mount the components, including all plating and over-plating. See Table 84.

Table 84 – CadHeader element

			
Attribute/ Element Name	Attribute / Element Type	Description	Occur- rence
CadHeader	CadHeaderType	A nested element containing identification and information about the description of the data in the file.	1-1
units	unitsType	An enumerated string that may be one of the following: MILLIMETER MICRON INCH.	1-1
Spec	SpecType	Contains the values for conductor width and spacing in addition to other attributes.	0-n
SurfaceFinish	SurfaceFinishType	The list of potential surface finishes for the printed board.	0-1
ChangeRec	ChangeRecType	A nested element containing identification and information about the description of the data in the Ecad section of the file.	0-n

9.1.1 Spec

The Spec element contains various values for

- width, spacing, component spacing, component to edge, etc.;
- impedance, capacitance and resistance values;
- dimensions between edge/feature/hole to edge/feature/hole.

An optional comment can point to a Spec and version. An optional instruction can explain the measurement method, net and pin names or the type of elements between which the measurement has to be taken.

Up to two sub-elements describe the Location of the Spec measurement. See Table 85.

Table 85 – Spec element

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Spec	SpecType	Contains the values for conductor width and spacing in addition to other attributes.	0-n
name	qualifiedNameType	The qualified name of the specification and indicating to which product in the file the specification pertains.	1-1
value	string	The value to be assigned to the property of the product being assessed	1-1
instruction	string	Any special instructions needed to apply the specification characteristics to the product	0-1
tolPlus	nonNegativeDoubleType	The positive tolerance to determine the upper specification limit.	1-1
tolMinus	nonNegativeDoubleType	The negative tolerance to determine the lower specification limit.	1-1
global	boolean	An enumerated string as either TRUE or FALSE (part of the 3WC standard). TRUE equals that conditions apply to the entire Ecad data as global characteristics; False indicates that they do not.	1-1
comment	string	Any comment needed to help clarify the issues pertaining to the specification limits.	0-1
Xform	XformType	An element that provides the ability to reset the point of origin of a predefined area that can be scaled, mirror imaged or rotated. See 3.3	0-1
Location	LocationType	The image defined by Outline or a pre-defined image is located to identify where the specification applies. The image may have been reorientated by the Xform.	1-1
x	double	The x coordinate of the location to which the specification applies	1-1
y	double	The y coordinate of the location to which the specification applies	1-1
Outline	OutlineType	A nested element containing a specific area(s) to which the specification(s). The Outline is a closed polygon configuration	0-1

Polygon	PolygonType	The standard description for the Polygon characteristic must be a closed shape. The point of origin of the shape is identified as the 0:0 coordinate. The element includes the start of the polygon definition (PolyBegin) and the appropriate number of PolyStep's to complete the closed shape. The lineWidth is through the LineDesc substitution group or defined at a time when the Polygon is instantiated.	0-n
PolyBegin	PolyBeginType	The PolyBegin element defines the starting point of the polygon.	1-1
x	double	The X starting point of the first polygon line.	1-1
y	double	The Y starting point of the first polygon line.	1-1
PolyStep	ABSTRACT	The PolyStep element is a substitution group that defines a circular (PolyStepCurve) or straight line (PolyStepSegment) continuation of the polygon. The polystep direction may be clockwise or counterclockwise which must be consistent when any Arc description is used as one of the PolyStep elements. Straight or curved line segments must not cross. The final X and final Y coordinate must match those of the PolyBegin element to signify that the shape is closed.	1-n
LineDescGroup	ABSTRACT	A substitution group that specifies the LineWidth and LineEnd characteristics of the Line by reference to a predefined LineDesc or specified when the Outline is instantiated.	1-1
Modification	ModificationType	An element that defines the acceptable modifications that may be accomplished to the final physical product.	
repairInfo	string	Information on the type of repairs permitted to the printed board.	0-1
weldsPermitted	boolean	An enumerated string that defines whether welds are permitted and may be one of the following YES, NO; or UNKNOWN.	0-1

9.1.2 SurfaceFinish

The SurfaceFinish element contains a list of potential surface finish choices and a name of a layer to which the finishes pertains. Location attributes can also be referenced by the name of the attribute to where the finish needs to be applied. These are usually in the form of polygons, each having an attribute that points to the right finish type by its id. See Table 86.

Table 86 – SurfaceFinish element

Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
SurfaceFinish	SurfaceFinishType	The list of potential surface finishes for the printed board.	0-1
layerRef	string	Description of the layer to which the surface finish applies.	1-1
FinishType	FinishType	A nested element that describes the surface finish type.	0-n
name	string	The name of the surface finish.	1-1
material	string	The material designation or reference to a specification.	1-1
thickness	nonNegativeDoubleType	The maximum thickness that the surface finish needs to be after final application.	1-1
id	string	A special "id" given to the surface finish to allow it to be selectively applied to a location on a specific layer.	0-1
ColorGroup	ABSTRACT	An element that is a substitution group which can be used to define a particular Color for the surface finish, either in the body of the file or by reference to a predefined Color contained in DictionaryColor.	0-1

9.1.3 ChangeRec

The ChangeRec element contains the ChangeRec elements specifying deviations requested by the manufacturer and approved by the customer (OEM, EMS, other). See Table 87.

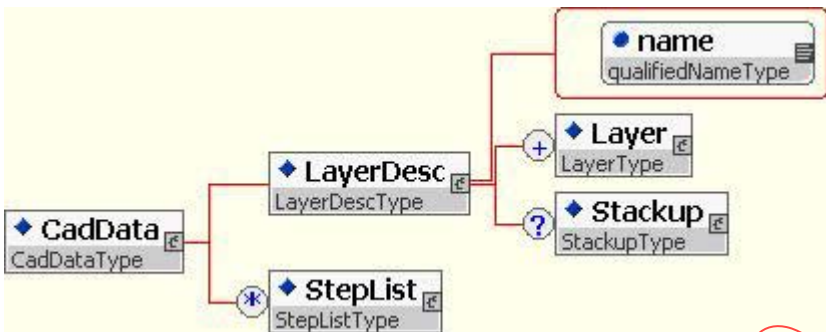
Table 87 – ChangeRec element

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
ChangeRec	ChangeRecType	A nested element containing identification and information about the description of the data in the Ecad section of the file.	0-n
datetime	dateTime	The standard date and time indication of the change request.	1-1
personRef	qualifiedNameType	The name of the person to whom the request was made.	1-1
application	string	The effectivity of the change and exactly where the change was to be made.	1-1
change	string	A detailed description of the change, including a reference to a URL if graphic descriptions are involved.	1-1
Approval	ApprovalType	A nested element that signifies who approved the change requested by the manufacturer.	0-n
datetime	dateTime	The standard date and time indication of the change approval.	1-1
personRef	qualifiedNameType	The name of the person who approved the change request.	1-1

9.2 CadData/LayerDesc

The CadData element is the three-dimensional structure of the design that is retrieved from the Cad system as a group of layers. The information is contained in the LayerDesc element. The layers are listed in the correct order inside LayerDesc. This includes name, context, type, side, polarity, span, and DrillToolList that define each layer. CAD data layers are required in 61182-2 to successfully hold ECAD layout information. These layers are not necessarily physical layers, but the myriad of layers that can be represented in the Ecad data but not actually fabricated into the bare board. See Table 88.

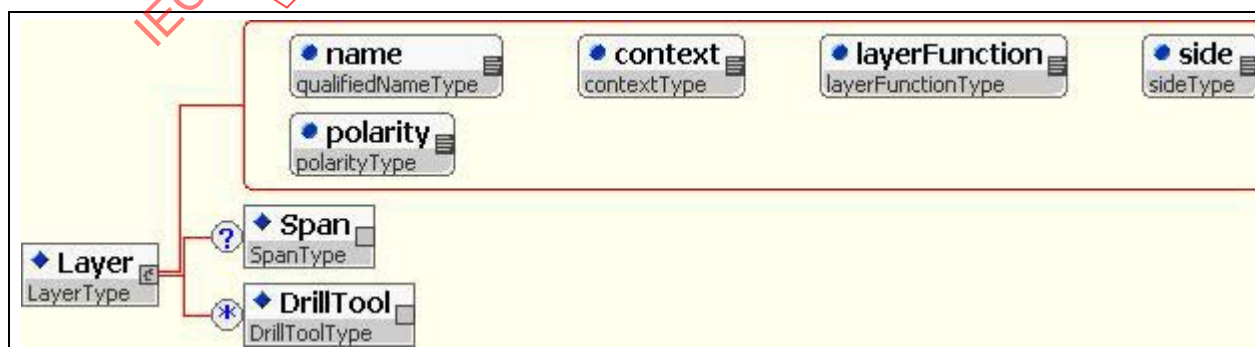
Layers, as the name implies, are sheets of two-dimensional data which, when laid on top of each other, create the Printed Circuit Assembly (unpopulated PCB and components). Some layers are physical layers that are laminated together to form the board. Other layers represent masks, films or phototools used to expose the board in a process that applies materials selectively on the outer layers of the boards. Some layers contain only drawings and annotations, which are not put physically on the board but can be used to further define it. These layers are organized in the 61182-2 file by their specific type.

Table 88 – CadData/LayerDesc elements


Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
CadData	CadDataType	A nested element containing the actual Cad data describing the printed board and printed board assembly characteristics.	1-1
LayerDesc	LayerDescType	Defines the type of layers contained in the list. This may be any one of the following enumerated strings: BOARD BOARDPANEL ASSEMBLY ASSEMBLYARRAY COUPON DOCUMENTATION TOOLING MISCELLANEOUS.	1-1
name	qualifiedNameType	The unique identification of the Layer grouping and how it applies to the total structure.	1-1
Layer	LayerType	A nested element containing the different layer information represented in the CAD data base which describes the electronic assembly to be manufactured.	1-n
Stackup	StackupType	A nested element containing the construction information for the printed board.	0-1
StepList	StepListType	The element that signifies the collection of layers, each with their own profile as is used to describe the printed circuit board assembly sub-panel or other conditions in the file.	0-n

9.2.1 Layer

The Layer element describes the characteristics of specific layers. The layers may be for the board or the assembly and may be individual characterization or those of the board fabrication panel and the assembly array of boards in the assembly panel. There are also documentation, tooling and miscellaneous layers. See Table 89.

Table 89 – Layer element

Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
Layer	LayerType	A nested element containing the different layer information represented in the CAD data base which describes the electronic assembly to be manufactured.	1-n
name	qualifiedNameType	The identification of the Cad data element identifying a particular layer.	1-1
context	contextType	The main use of the layer is an enumerated string and may be noted as BOARD BOARDPANEL ASSEMBLY ASSEMBLYARRAY COUPON DOCUMENTATION TOOLING MISCELLANEOUS. This type element matches the layerListCategory element. However mixing of types within a category is permitted in order to help identify the layer characteristics.	1-1
layerFunction	layerFunctionType	The type of layer and its main use as established by the following: The function of the layer. One of: LEGEND GLUE SOLDERMASK BOARDOUTLINE COATINGCOND COATINGNONCOND CONDUCTOR COURTYARD DIEBASE DIECORE DIEPREG DIEADHV SOLDERBUMP PASTEMASK HOLEFILL PIN COMPONENT RESISTIVE CAPACITIVE PROBE REWORK FIXTURE GRAPHIC DRILL_ROUTE LANDPATTERN OTHER.	1-1
side	sideType	A fixed field parameter that defines the side of the layer. The fixed attribute is one of the following TOP BOTTOM BOTH INTERNAL ALL NOTAPPLICABLE.	1-1
polarity	polarityType	Applies for layers of type signal, power_ground or mixed. In such layers, positive means that the layer features represent copper. NEGATIVE means that the layer features represent laminate. For example, on a negative power_ground layer, features represent clearances. All other layers should be defined as positive. POSITIVE is the default.	1-1
Span	SpanType	A nested element where the field may be added to layers of type drill and route that are either buried or blind. In such a case, it represents the start and end board layers between which drilling/routing is done. If the drill layer is going through the board, it is required not to include a span subsection.	0-1
DrillTool	DrillToolType	A nested element containing drill tool and tolerance data.	0-n

There are eight context values for layers:

- BOARD** for all the 'important' layers representing the graphics of the board itself.
- BOARDPANEL** for all the 'important' layers representing the graphics of the board panel itself.
- ASSEMBLY** for all the 'important' layers representing the graphics of the assembly itself.
- ASSEMBLYARRAY** for all the 'important' layers representing the graphics of the assembly array panel itself.
- DOCUMENTATION** for all the 'important' layers representing the documentation of the board or the assembly.
- TOOLING** for all the 'important' layers representing the tooling used on the board or the assembly.
- COUPON** for test coupons that are embedded in the design of the board or assembly.
- MISCELLANEOUS**, for all the remaining layers that do not have a home in any of the other context identification.

A layer type can take one of 26 discrete values, as specified in the XML Schema, each representing a different usage for the layer. Some systems may use color coding to distinguish layers by type (Green for solder mask, white for silk screen, etc.).

The side of the layer can take one of 6 discrete values, as specified in the XML Schema. This attribute can be stored in the layer but no special action is required by the viewer, as the order of the layers always defines the side.

The polarity of the layer is mostly relevant for copper layers (signal, power and ground, mixed). Polarity defines whether the graphical features on the layer define copper (positive) or laminate (negative). In most cases, signal layers are positive and power and ground layers are negative, although there can be exceptions. It is used when determining the image conductivity.

When combining layers such as BOARD and COUPONS layers on the same PANEL the layer construction must be identical between those elements being instantiated on the same panel.

The viewer should always display the graphical features but store the layer polarity as an attribute.

9.2.1.1 Span

The Span element is relevant only for layers of type drill (holes drilled in the board) and rout (final cut around the outline of the board). The span defines the layers through which the drill/rout is done. Span **shall not** be used for holes that are drilled through the entire board; The Span element is used to define drilling for board construction subsets, or sequential lamination processes. See Table 90.

Table 90 – Span element

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Span	SpanType	A nested element where the field may be added to layers of type drill and route that are either buried or blind. In such a case, it represents the start and end board layers between which drilling/routing is done. If the drill layer is going through the board, it is required not to include a span subsection.	0-1
fromLayer	qualifiedNameType	The identification of the starting layer where the drilling or routing information applies.	0-1
toLayer	qualifiedNameType	The identification of the ending layer where the drilling or routing information applies.	0-1

9.2.1.2 DrillTool

The DrillTool is the list of elements and their tolerances used in the drill and rout layers of the final printed board or printed board panel See Table 91.

Table 91 – DrillTool element

Attribute / Element Name	Attribute/ Element Type	Description	Occurrence
DrillTool	DrillToolType	A nested element containing drill tool and tolerance data.	0-n
number	double	A unique number assigned by the user to the drill or router bit.	1-1
name	qualifiedNameType	A unique name assigned by the user to identify the type of hole as to whether it is plated, or non-plated or whether the routing path is completed or only partial.	1-1
type	drillType	An enumerated string that defines the type of drill. The applicable names are: CARBIDE ROUTER LASER FLATNOSE EXTENSION.	1-1
tolPlus	nonNegativeDouble Type	The permitted variation on the positive side of the nominal drill size.	1-1
tolMinus	nonNegativeDouble Type	The permitted variation on the negative side of the nominal drill size.	1-1
bitUnit	bitUnitType	The type of identification given to the drill or router bit as to its diameter and is an enumerated string. The applicable names are: FRACTION WIREGAUGE LETTER METRIC.	0-1
finishSize	nonNegativeDouble Type	A numerical range description of the finished hole or routing slot size.	1-1
drillSize	string	The size of the drill or router bit used to produce the holes or routing path. The information may be a drill number, or fraction depending on the size standardization of the fabricator.	1-1

Typically, a hole is drilled through the whole board, thus no span is defined. However, in more complex designs, a subset of the layers is drilled separately, and then laminated with the rest of the layers. The drills are then called blind or buried vias. Separate layers will contain the holes of these kinds and the span for these layers is set accordingly.

9.2.2 Stackup

The Stackup element represents the construction for the printed board. The Stackup element consists of several sub-elements that help to define various sections of the construction permitting the description of core material or prepreg definition. These are accomplished in the StackupGroup element. See Table 92.

Table 92 Stackup element

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- ence
Stackup	StackupType	A nested element containing the construction information for the printed board.	0-1
overallThickness	nonNegativeDoubleType	Describes the overall nominal thickness of the finished printed board including all plating and coatings.	1-1
tolPlus	nonNegativeDoubleType	The plus tolerance that may be applied to the nominal thickness to set the printed board upper control limit.	1-1
tolMinus	nonNegativeDoubleType	The minus tolerance that may be applied to the nominal thickness to set the printed board lower control limit.	1-1
whereMeasured	whereMeasuredType	An enumerated string that may be one of the following: LAMINATE METAL MASK OTHER that defines the location on the printed board, panel, or assembly where the overall thickness is to be measured.	1-1
StackupGroup	StackupGroupType	A nested element containing information of the printed board construction.	0-n
StackupImpedance	StackupImpedanceType	A nested element containing information on those areas that are sensitive to impedance matching and must therefore be controlled to achieve the desired results.	0-n

9.2.2.1 StackupGroup

The StackupGroup represents all the layers of the printed board and defines the order of their occurrence in the board construction. Individual layers may be identified as layer pairs. In this manner, the user has the ability to define the characterization of the multilayer construction as well as preparing layer prelamination sequences. The order, however, must be in accordance with the description of the final board. See Table 93.

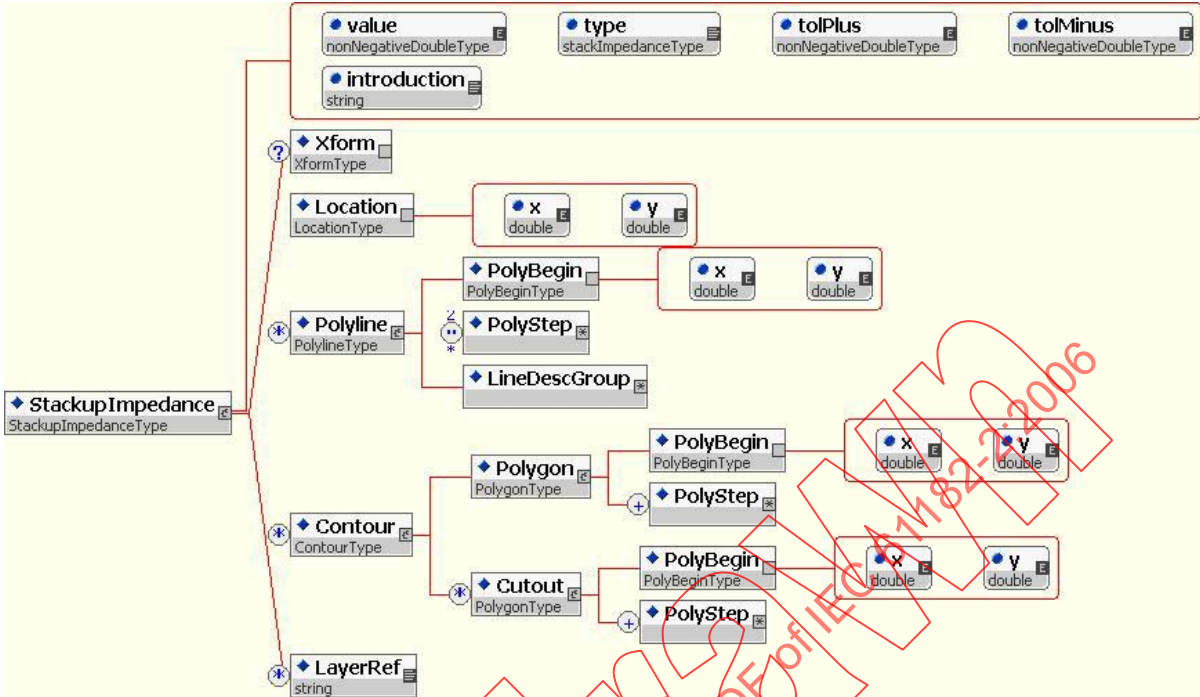
Table 93 – StackupGroup

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- ence
StackupGroup	StackupGroupType	A nested element containing information of the printed board construction.	0-n
StackupGroupName	string	A unique name assigned to an individual or group of layers that make up the printed board. The name must be unique so that when a group becomes nested in the over all board it is referenced in the proper order of occurrence in the stackup.	1-1
thickness	nonNegativeDoubleType	The nominal thickness of the stackup group. If the stackup group represents the total board rather than a subset, the thickness must match the information provided in the stackup element attributes.	1-1

tolPlus	nonNegativeDouble Type	The plus tolerance that may be applied to the nominal thickness to set the stackupGroup upper control limit.	1-1
tolMinus	nonNegativeDouble Type	The minus tolerance that may be applied to the nominal thickness to set the stackupGroup lower control limit.	1-1
StackupLayer	StackupLayerType	A nested element containing in all the layer formation as to how the printed board is constructed. If layer pairs are produced separately possibly containing buried vias they are defined as a separate group and then positioned in the appropriate order of their occurrence in the stackup.	0-n
LayerOrGroupRef	qualifiedNameType	A reference to an individual layer or a group that has been previously identified. A single sheet of copper foil may be a named layer and would thus apply to the group, as would a layer pair of copper clad laminate purchased from a laminator.	1-1
materialType	string	Identification of the material in the stackup. The material may be conductive or nonconductive, film, adhesive, prepreg, copper foil or metal core.	1-1
thickness	nonNegativeDouble Type	The thickness of the particular material being defined. The thickness matches nominal thickness of a predefined StackupGroup.	1-1
weight	nonNegativeDouble Type	An optional attribute mostly used to define starting copper foil or metal cores which are measured in ounces.	0-1
coating	string	An optional attribute used to define special coating used in the stackup, such as adhesives, solder mask or selective conformal coating.	0-1
comment	string	An optional attribute used to provide any special instructions about the layering or stackup of a multilayer, single-sided, or double-sided printed board.	0-1

9.2.2.2 StackupImpedance

The StackupImpedance element defines the circuits that have impedance control requirements. See Table 94.

Table 94 – StackupImpedance element


The diagram illustrates the structure of the **StackupImpedance** element. It is a nested element containing the following attributes and elements:

- Attributes:**
 - value** (nonNegativeDoubleType): The numeric value in Z ohms.
 - type** (stackImpedanceType): The enumerated string defining the type (e.g., MICROSTRIP, DIFFERENTIAL_PAIR, EMBEDDED_MICROSTRIP, etc.).
 - tolPlus** (nonNegativeDoubleType): The plus tolerance on the nominal number.
 - tolMinus** (nonNegativeDoubleType): The minus tolerance on the nominal number.
 - introduction** (string): Details required to identify the source and receptor of the signals.
- Elements:**
 - Xform** (XformType): An element providing the ability to reset the point of origin of a predefined area.
 - Location** (LocationType): An element defining the image to which the impedance applies, containing **x** and **y** coordinates.
 - Polyline** (PolylineType): An element defining a polygon, containing **PolyBegin** and **PolyStep** elements.
 - Polygon** (PolygonType): An element defining a polygon, containing **PolyBegin** and **PolyStep** elements.
 - Contour** (ContourType): An element defining a contour, containing **PolyBegin** and **PolyStep** elements.
 - Cutout** (PolygonType): An element defining a cutout, containing **PolyBegin** and **PolyStep** elements.
 - LayerRef** (string): A reference to the layer.

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- ence
StackupImpedance	StackupImpedance Type	A nested element containing information on those areas that are sensitive to impedance matching and must therefore be controlled to achieve the desired results.	0-n
value	nonNegativeDouble Type	The numeric value in Z ohms trying to be achieved for the circuit that is defined in the StackupImpedance element.	1-1
type	StackImpedance Type	The enumerated string that defines the type as being either MICROSTRIP DIFFERENTIAL_PAIR EMBEDDED_MICROSTRIP EDGE_COUPLED_STRIPLINE DECOUPLED_EMBEDDED_MICROSTRIP RAMBUS COPLANAR_WAVEGUIDE_MICROSTRIP COPLANAR_WAVEGUIDE_STRIPLINE EDGE_COUPLED_COPLANAR_WAVEGUIDE_STRIPLINE EDGE_COUPLED_COPLANAR_WAVEGUIDE_MICROSTRIP that requires the impedance control.	1-1
tolPlus	nonNegativeDouble Type	The plus tolerance on the nominal number established as the value for the impedance circuitry.	1-1
tolMinus	nonNegativeDouble Type	The minus tolerance on the nominal number established as the value for the impedance circuitry.	1-1
introduction	string	The details required to identify the source and receptor of the signals that need the control and whether the construction is a Stripline, Embedded Stripline, microstrip, dual microstrip or some other configuration.	1-1
Xform	XformType	An element that provides the ability to reset the point of origin of a predefined area that can be scaled, mirror imaged or rotated. See 3.3. The details provide where the impedance is critical	0-1
Location	LocationType	The image defined by Polyline or Contour or a pre-defined image is located to identify where the impedance applies. The image may have been reorientated by the Xform.	1-1
x	double	The x coordinate of the location to which the impedance applies	1-1
y	double	The y coordinate of the location to which the impedance applies	1-1

Polyline	PolylineType	A particular conductor that can be defined as a continuous circuit on a particular layer of reference where the conductor width or dielectric separation are part of the impedance calculations. The polyBegin and polyStep attributes are provided.	0-n
PolyBegin	PolyBeginType	The PolyBegin element defines the starting point of the polyline.	1-1
x	double	The X starting point of the first polyline line segment.	1-1
y	double	The Y starting point of the first polyline line segment.	1-1
PolyStep	ABSTRACT	The PolyStep element is a substitution group that defines a circular (PolyStepCurve) or straight line (PolyStepSegment) continuation of the polygon. The polystep direction may be clockwise or counterclockwise which must be consistent when any Arc description is used as one of the PolyStep elements. Straight or curved line segments must not cross.	2-n
LineDescGroup	ABSTRACT	A substitution group that specifies the Linewidth and LineEnd characteristics of the Line by reference to a predefined LineDesc or specified when the PolyLine is instantiated.	1-1
Contour	ContourType	A sequence of connected edges that form a polygon. An edge can be straight or circular.	0-n
Polygon	PolygonType	A closed shape whose edges do not cross, the coordinates of which are defined relative to the local coordinate system of the polygon.	1-1
PolyBegin	PolyBeginType	The PolyBegin element defines the starting point of the polygon.	1-1
x	double	The X starting point of the first polygon edge.	1-1
y	double	The Y starting point of the first polygon edge.	1-1
PolyStep	ABSTRACT	The PolyStep element is a substitution group that defines a circular (PolyStepCurve) or straight line (PolyStepSegment) continuation of the polygon. The polystep direction may be clockwise or counterclockwise which must be consistent when any Arc description is used as one of the PolyStep elements. Straight or curved line segments must not cross. The final X and final Y coordinate must match those of the PolyBegin element to signify that the shape is closed.	1-n
Cutout	CutoutType	A polygon closed shape whose edges do not cross, which adopts the coordinates of the original polygon, however represents the absence of material within the original polygon shape.	0-n
PolyBegin	PolyBeginType	The PolyBegin element defines the starting point of the polygon.	1-1
x	double	The X starting point of the first polygon edge.	1-1
y	double	The Y starting point of the first polygon edge.	1-1
PolyStep	ABSTRACT	The PolyStep element is a substitution group that defines a circular (PolyStepCurve) or straight line (PolyStepSegment) continuation of the polygon. The polystep direction may be clockwise or counterclockwise which must be consistent when any Arc description is used as one of the PolyStep elements. Straight or curved line segments must not cross. The final X and final Y coordinate must match those of the PolyBegin element to signify that the shape is closed.	1-n
LayerRef	string	A reference to the layer being described in the elements.	0-n

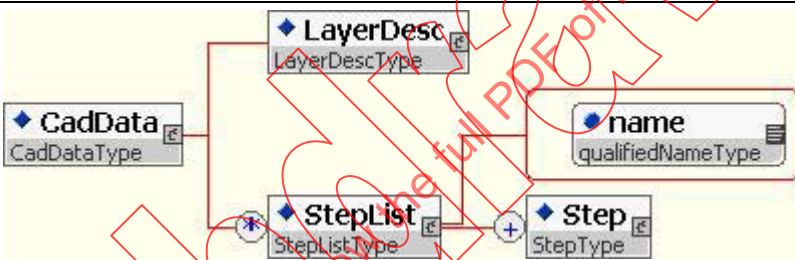
9.3 CadData/StepList

The CadData StepList represent a collection of layers, each with a profile that defines its outer shape. The basic step is the Printed Circuit Assembly (PCA) itself. In manufacturing, this basic step is often step and repeated (nested) inside a larger step (called array, or sub-panel). This array step can be further nested into another step; called a production panel. The Ecad element always contains at least one Step, but may contain several, some basic ones and others nesting previous steps.

The CAD Step tag can be repeated multiple times inside a job to represent several job Steps and their optional panelization. Each Step contains all the relevant information including Datum, Profile, StepRepeatList, LayerAttributeList, PackageList, ComponentList, VplComponentList, LogicalNetList and LayerFeatureList. See Table 96.

All steps inside an Ecad element share the exact same layer structure, since they are 'cut' from the same basic panel. Each layer, in the list of layers, exists in every step, although in each step it may contain different graphical information or be empty.

Table 95 – CadData StepList



Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
CadData	CadDataType	A nested element containing the actual Cad data describing the printed board and printed board assembly characteristics.	1-1
LayerDesc	LayerDescType	Defines the type of layers contained in the list. This may be any one of the following enumerated strings: BOARD BOARDPANEL ASSEMBLY ASSEMBLYARRAY COUPON DOCUMENTATION TOOLING MISCELLANEOUS.	1-1
StepList	StepListType	The element that signifies the collection of layers, each with their own profile as is used to describe the printed circuit board assembly sub-panel or other conditions in the file.	0-n
name	qualifiedNameType	The name assigned by the user for the collection of layers identified in the StepList.	1-1
Step	StepType	The Step element consists of multiple sub-elements each intended to help describe the different steps needed in the board fabrication, or assembling the electronic product.	1-n

Table 96 – Step

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Step	StepType	The Step element consists of multiple sub-elements each intended to help describe the different steps needed in the board fabrication, or assembling the electronic product.	1-n
name	qualifiedName Type	The name assigned by the user for the individual Steps used to make up the layers identified in a particular StepList.	1-1
Attribute	ABSTRACT	A substitution group that consists of various attributes that may be used within the body of the 61182-2 standard. Attributes are optional and are used within the Component, LogicalNet, Set, and Step elements. Attributes contain legacy data that has not yet become a more formal part of 61182-2 : the long range intention is to deprecate all Attributes and to incorporate their information elsewhere in 61182-2 files. There are five kinds of standard Attribute that hold different types of data, and a NonstandardAttribute which can contain any type of data. The standard attributes are constrained to have specific names.	0-n

PadStack	PadStackType	A nested element containing a list of all the PadStack configurations taken from the CAD file as a description of the original design of the board or panel and their application to the electronic product. The data is redundant when layered fabrication is defined in the file, and serves the purpose of archiving CAD data used for reference.	0-n
Route	RouteType	The individual route segment list captured from the CAD system. The data is redundant when layered fabrication is defined in the file, and serves the purpose of archiving CAD data used for reference.	0-n
Datum	LocationType	The Datum element defines the location of the point of origin for the individual Step file. The name of the StepList helps to associate the datum between boards and panels or arrays.	1-1
Profile	ContourType	The profile of all the elements in the Step established as a Contour.	1-1
StepRepeat	StepRepeat Type	A nested element list containing the Step and Repeat functions that impact the information of the electronic product.	0-n
Package	PackageType	Generic component package descriptions for use by the Step file schemas.	0-n
Component	Component Type	A nested element list of component descriptions and their application to the electronic product. Each component references a package style from the Package section.	0-n
VplPackage	VplPackage Type	A nested element list of package types and CAD library descriptions and their application to the electronic product.	0-n
VplComponent	VplComponent Type	A nested element list of component descriptions combined with any External Vendor Parts Library (EVPL) Database. Each component references a package style from the VplPackage section.	0-n
LogicalNet	LogicalNetType	A nested element list of logical net descriptions and their application to the electronic product.	0-n
PhyNetGroup	PhyNetGroup Type	A nested element list of physical net descriptions and their application to the electronic product.	0-n
LayerFeature	LayerFeature Type	A nested element list of all the features associated with a specific layer and their application to the electronic product.	0-n
DfxMeasurementList	DfxMeasurementList Type	A nested element list of the recommended modifications of the design features, indicating the measurements made of the physical conditions that might be considered as manufacturing improvements.	0-n

9.3.1 Attribute

The Attribute substitution group consists of various attributes that may be used in association with the Step. There are five kinds of standard Attribute that hold different types of data, and a NonstandardAttribute which can contain any type of data. The standard attributes are constrained to have specific names. There may be from one to many occurrences each with a unique name within the Step named identified file. See Table 97.

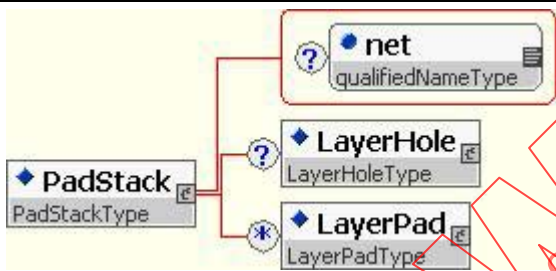
Table 97 – Attribute substitution group

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Attribute	ABSTRACT	A substitution group that may be any of a group of enumerated string description or a unique string for a condition not addressed by the standard attributes.	0-n

9.3.2 PadStack

The PadStack element consists of multiple padstacks taken from the CAD system and is intended to preserve the data from the layout system. The information noted pertains to the CadProperty of which the padstack is a part. The relationship is identified by the CadProperty unique name and is the original design file from the CAD system. The data becomes redundant when the individual layered features are defined and is then for reference only. See Table 98.

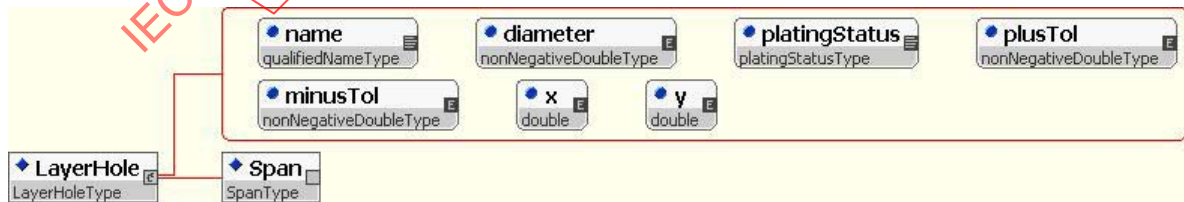
Table 98 – PadStack element

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
PadStack	PadStackType	A nested element containing a list of all the PadStack configurations taken from the CAD file as a description of the original design of the board or panel and its application to the electronic product. The data is redundant when layered fabrication is defined in the file, and therefore is for reference only.	0-n
net	qualifiedNameType	The name attached to the electrical description of the conductive hole pattern.	0-1
LayerHole	layerHoleType	The hole description of the padstack including all of its attributes.	0-1
LayerPad	layerPadType	A nested element defining the pad(s) that the hole traverses indicating location and layer reference for different pad sizes.	0-n

9.3.2.1 LayerHole

The LayerHole element associated with a padstack identifies the distance through which the hole transcends as a span between individual layers. See Table 99.

Table 99 – LayHole element

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
LayerHole	LayerHoleType	The hole description of the padstack including all its attributes.	0-1
name	qualifiedNameType	A unique identification of a particular hole.	1-1
diameter	nonNegativeDoubleType	The nominal diameter of the hole in the as-finished state.	1-1
platingStatus	platingStatusType	The type of hole defined as an enumerated string indicating PLATED NONPLATED VIA.	1-1

plusTol	nonNegativeDouble Type	The plus tolerance that defines the variation permitted from the nominal hole-diameter.	1-1
minusTol	nonNegativeDouble Type	The minus tolerance that defines the variation permitted from the nominal hole-diameter.	1-1
x	double	The x-location of the hole.	1-1
y	double	The y-location of the hole.	1-1
Span	SpanType	A nested element where the field may be added to layers of type drill and route that are either buried or blind. In such a case, it represents the start and end board layers between which drilling/routing is done. If the drill layer is going through the board, it is required not to be included in a span subsection.	1-1

9.3.2.2 LayerPad

The LayerPad element is a group of specific graphic features that become part of the padstack with a description of the pin to which the padstack applies and the layer on which the individual pad is located. See Table 100.

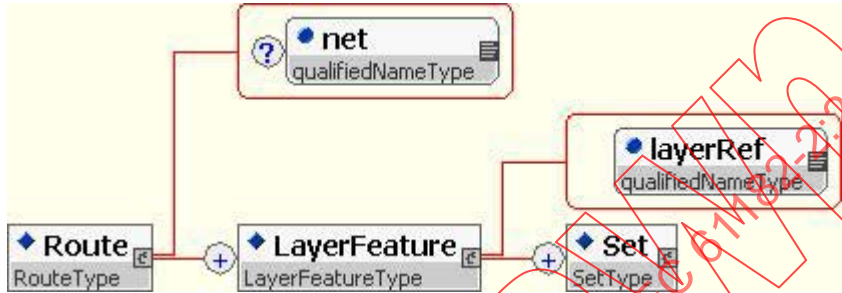
Table 100 LayerPad element

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
LayerPad	LayerPadType	A nested element defining the pad(s) that the hole traverses indicating location and layer reference for different pad sizes	0-n
pin	string	Identification of the electrical connection to specific pins of electronic components.	0-1
layerRef	qualifiedNameType	A reference to the appropriate layer to which the attribute applies.	1-1
Xform	XformType	An element that provides the ability to reset the point of origin of a predefined pad that can be scaled, mirror imaged or rotated. See 3.3	0-1
Location	LocationType	The location of the image defined by the StandardShape or a pre-defined StandardShape of the pad. The image may have been reorientated by the Xform.	1-1
x	double	The x coordinate of the location of the pad.	1-1
y	double	The y coordinate of the location of the pad.	1-1
StandardShape	ABSTRACT	A substitution group that may call for any StandardPrimitive, instantiated by describing their unique features or by referencing a predefined primitive contained in the DictionaryStandard.	1-1

9.3.3 Route

The Route element consists of multiple routes taken from the CAD system and is intended to preserve the data from the layout system. Each Route is referenced to a particular Net and a layer on which the route or net occurs as taken from the CAD system. The data becomes redundant when the individual layered features are defined and is then for reference only. The Route element uses the same characteristics of the Step description as defined in the LayerFeature schema (see 8.3.13). See Table 101.

Table 101 – Route element



The diagram illustrates the structure of the Route element. It shows a central 'Route' element (RouteType) which is connected to a 'net' element (qualifiedNameType) and a 'LayerFeature' element (LayerFeatureType). The 'LayerFeature' element is further connected to a 'Set' element (SetType), which is in turn connected to a 'layerRef' element (qualifiedNameType). The 'net' element is also connected to the 'layerRef' element. The 'Route' element is marked with a blue diamond and a plus sign, indicating it is a mandatory element. The 'net' element is marked with a blue circle and a question mark, indicating it is an optional element. The 'LayerFeature' element is marked with a blue diamond and a plus sign, indicating it is a mandatory element. The 'Set' element is marked with a blue diamond and a plus sign, indicating it is a mandatory element. The 'layerRef' element is marked with a blue circle and a question mark, indicating it is an optional element.

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Route	RouteType	The individual route segment list captured from the CAD system. The data is redundant when layered fabrication is defined in the file, and therefore is for reference only.	0-n
net	qualifiedNameType	Each route is linked to a particular net which is defined in the Cad system and matches the padstacks that are associated with the net.	0-1
LayerFeature	LayerFeatureType	The standard 61182-2 Step characteristics for layer features related to the route taken from the Cad system.	1-n
layerRef	qualifiedNameType	A reference to a specific conductive layer where the route exists.	1-1
Set	SetType	The multiple Set elements and attributes defined in 8.3.13 LayerFeature used to define specific features associated with a conductive layer.	1-n

A specific set of graphical descriptions for a particular set of graphical shapes. These shapes are applied defining the conductive pattern of the printed board. See Table 102.

Table 102 – Set

Attribute / Element Name	Attribute/ Element Type	Description	Occurrence
Set	SetType	The multiple Set elements and attributes defined in 8.3.1 used to define specific features associated with a conductive layer.	1-n
net	qualifiedNameType	The electrical relationship of any feature that has conductivity checked in the PhyNetPoint descriptions. This attribute is left blank if the Set descriptions are for other than printed board fabrication or assembly conductivity.	0-1
polarity	polarityType	Polarity indicates whether the information described in the Set is POSITIVE NEGATIVE. A NEGATIVE connotation can be used to describe the removal of a dark field to the specific dimensions described for another attribute. Thus, a surface that contains islands may have the islands described in a negative format.	0-1
padUsage	padUsageType	An indication as to the usage of any pad that becomes a part of the LayerFeature Set. The descriptions are enumerated strings and must be one of the following: TOE VIA GLOBAL_FIDUCIAL LOCAL_FIDUCIAL TOOLING_HOLE NONE.	0-1
testPoint	boolean	An enumerated string as either TRUE or FALSE (part of the 3WC standard). TRUE indicates that the feature is a candidate for a test point used for either in-circuit or functional testing. FALSE indicates that it is not.	0-1
geometry	string	An identification to describe the overall geometry of the features contained in the Set and their particular application to the electronic product.	0-1
plate	boolean	An enumerated string as either TRUE or FALSE (part of the 3WC standard). TRUE indicates that the feature is plated in a secondary operation . FALSE indicates that it is not.	0-1
toolNumberRef	string	A reference to the tool number defined in the DrillTool instance of the Layer section. This feature is used to associate the tool with features that are part of the Set.	0-1

Attribute	ABSTRACT	A substitution group that may be any of a group of enumerated string descriptions or a unique string for a condition not addressed by the standard attributes. The Attribute is associated with the LayerFeature Set.	0-n
Pad	PadType	A series of pads that are associated with the LayerFeature Set.	0-n
Fiducial	ABSTRACT	A substitution that consists of four elements that may be used to replace the fiducial element. When the Fiducial element is substituted it shall be by a Global, Local, BadBoardMark, or GoodPanelMark.	0-n
Hole	HoleType	A series of holes associated with the LayerFeature Set.	0-n
Slot	SlotType	A series of slots associated with the LayerFeature Set.	0-n
Features	FeaturesType	An embedded element that defines a substitution group of any predefined StandardShape or UserShape that may be instantiated as a part of the LayerFeature Set.	0-n
ColorGroup	ABSTRACT	A substitution group that permits assigning a particular color through instantiating the three basic colors or by providing a reference to a predefined Color in DictionaryColor.	0-n
LineDescGroup	ABSTRACT	A substitution group that specifies the Linewidth and LineEnd characteristics of a Feature that requires that description. If a predefined feature is instantiated the presents of a LineDescGroup will override the previously defined LineDesc.	0-n

9.3.4 Datum

The Datum element of the Step schema (StepType/Datum) defines the location of the point of origin for the individual Step file. The name of the StepList helps to associate the datum between boards and panels or arrays. See Table 103.

Table 103 – Datum element

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Datum	LocationType	A nested element containing the datum origin for the overall Step.	1-1
x	double	The X location of the datum.	1-1
y	double	The Y location of the datum.	1-1

9.3.5 Profile

The Profile element of the Step schema (StepTypeProfile) defines the exact periphery of the board or assembly and therefore all the characteristics of the Step element. See Table 104.

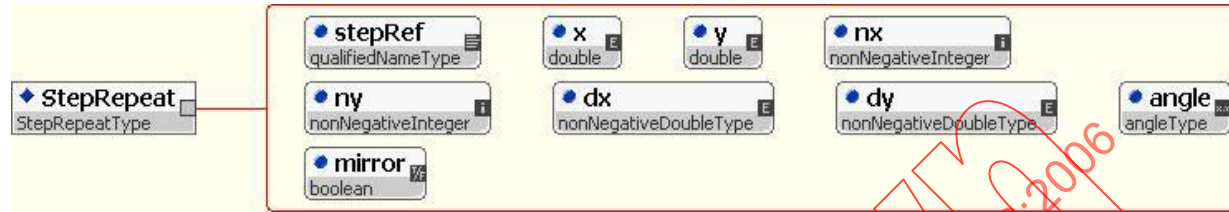
Table 104 – Profile element

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Profile	ContourType	The profile is a contourType and thus describes the periphery that encompasses all the elements in the Step.	1-1
PolyBegin	PolyBeginType	The PolyBegin element defines the starting point of the polygon.	1-1
x	double	The X starting point of the first polygon edge.	1-1
y	double	The Y starting point of the first polygon edge.	1-1
PolyStep	ABSTRACT	The PolyStep element is a substitution group that defines a circular (PolyStepCurve) or straight line (PolyStepSegment) continuation of the polygon. The polystep direction may be clockwise or counterclockwise which must be consistent when any Arc description is used as one of the PolyStep elements. Straight or curved line segments must not cross. The final X and final Y coordinate must match those of the PolyBegin element to signify that the shape is closed.	1.n
Cutout	CutoutType	A polygon closed shape whose edges do not cross, which adopts the coordinates of the original polygon, however represents the absence of material within the original polygon shape.	0-n
PolyBegin	PolyBeginType	The PolyBegin element defines the starting point of the polygon.	1-1
x	double	The X starting point of the first polygon edge.	1-1
y	double	The Y starting point of the first polygon edge.	1-1
PolyStep	ABSTRACT	The PolyStep element is a substitution group that defines a circular (PolyStepCurve) or straight line (PolyStepSegment) continuation of the polygon. The polystep direction may be clockwise or counterclockwise which must be consistent when any Arc description is used as one of the PolyStep elements. Straight or curved line segments must not cross. The final X and final Y coordinate must match those of the PolyBegin element to signify that the shape is closed.	1-n
<pre> <Step name = "KarensSingleBoard"> <Datum x = "10.00" y = "10.00"/> <Profile> <Polygon> <PolyBegin x = "0.00" y = "10.00"/> <PolyStepSegment x = "0.00" y = "90.00"/> <PolyStepCurve x = "10.00" y = "100.00" centerX = "10.00" centerY = "90.00" clockwise = "TRUE"/> <PolyStepSegment x = "200.00" y = "100.00"/> <PolyStepSegment x = "200.00" y = "50.00"/> <PolyStepSegment x = "150.00" y = "50.00"/> <PolyStepSegment x = "150.00" y = "0.00"/> <PolyStepSegment x = "10.00" y = "0.00"/> <PolyStepCurve x = "0.00" y = "10.00" centerX = "10.00" centerY = "10.00" clockwise = "TRUE"/> </Polygon> </Profile> </Step> </pre>			

9.3.6 StepRepeat

The StepRepeat elements provides information for steps representing panels or assembly arrays. Coupons may also use this feature to step the coupon description on the borders of the panel. The layer descriptions of any Board and Coupon combined in a Panel description must be of the same construction. See Table 105.

Table 105 – StepRepeat element

			
Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
StepRepeat	StepRepeatType	A nested element list containing the Step and Repeat functions that impact the information of the electronic product.	0-n
stepRef	qualifiedNameType	A reference to the step that should be replicated on the panel.	1-1
x	double	The X point of origin where the first step should be placed in relationship to the datum. This may be coincident or may be offset from the datum of the particular step.	1-1
y	double	The Y point of origin where the first step should be placed in relationship to the datum. This may be coincident or may be offset from the datum of the particular step.	1-1
nx	nonNegativeInteger	The number of times that the referenced step should be repeated in the X direction.	1-1
ny	nonNegativeInteger	The number of times that the referenced step should be repeated in the Y direction.	1-1
dx	nonNegativeDouble Type	The dimensional distance in the positive X direction as a step from the first position point of origin (not necessarily from the datum).	1-1
dy	nonNegativeDouble Type	The dimensional distance in the positive Y direction as a step from the first position point of origin (not necessarily from the datum).	1-1
angle	angleType	A unique angle to allow rotation of the StepRepeat image description where "0°" is as defined with the angle descriptions being counterclockwise (i.e. 45° 90°) from the horizontal zero angle.	1-1
mirror	boolean	An enumerated string as either TRUE or FALSE (part of the 3WC standard). TRUE equals that the image is mirrored; FALSE indicates that it is not.	1-1

```

<Step name = "KarensAssemblyPanel">
  <Datum x = "0.00" y = "0.00"/>
  <Profile>
    <Polygon>
      <PolyBegin x = "0.00" y = "0.00"/>
      <PolyStepSegment x = "0.00" y = "427.00"/>
      <PolyStepSegment x = "260.00" y = "427.00"/>
      <PolyStepSegment x = "260.00" y = "0.00"/>
      <PolyStepSegment x = "0.00" y = "0.00"/>
    </Polygon>
  </Profile>
  <StepRepeat stepRef = "KarensSingleBoard" x = "110.00" y = "20.00" nx = "1" ny = "1" dx = "120.00" dy = "207.00" angle =
    "90.00" mirror = "FALSE"/>
  <LayerFeature layerRef = "1-Top Signal">
    <Set polarity = "POSITIVE">
      <GlobalFiducial>
        <Location x = "250.00" y = "10.00"/>
        <Circle diameter = "1.00"/>
      </GlobalFiducial>
      <GlobalFiducial>
        <Location x = "250.00" y = "417.00"/>
        <Circle diameter = "1.00"/>
      </GlobalFiducial>
      <GlobalFiducial>
        <Location x = "10.00" y = "10.00"/>
        <Circle diameter = "1.00"/>
      </GlobalFiducial>
      <BadBoardMark>
        <Location x = "190.00" y = "5.00"/>
        <Circle diameter = "1.50"/>
      </BadBoardMark>
      <BadBoardMark>
        <Location x = "70.00" y = "5.00"/>
        <Circle diameter = "1.00"/>
      </BadBoardMark>
      <BadBoardMark>
        <Location x = "190.00" y = "213.00"/>
        <Circle diameter = "1.00"/>
      </BadBoardMark>
      <BadBoardMark>
        <Location x = "70.00" y = "213.00"/>
        <Circle diameter = "1.00"/>
      </BadBoardMark>
      <GoodPanelMark>
        <Location x = "250.00" y = "213.00"/>
        <Donut shape = "ROUND" outerDiameter = "1.50" innerDiameter = "0.80"/>
      </GoodPanelMark>
    </Set>
  </LayerFeature>
</Step>

```

9.3.7 Package

The Package element descriptions define the package shape (Outline), library descriptions including land patterns, silk screen information, assembly drawing details, and pin identification. The Package element defines all the physical description of all the packages used by the Component element inside the Step. See Table 106. The names assigned to the package should be consistent with the naming convention established in IPC-7350 series of parts and land pattern descriptions. (See Annex A)

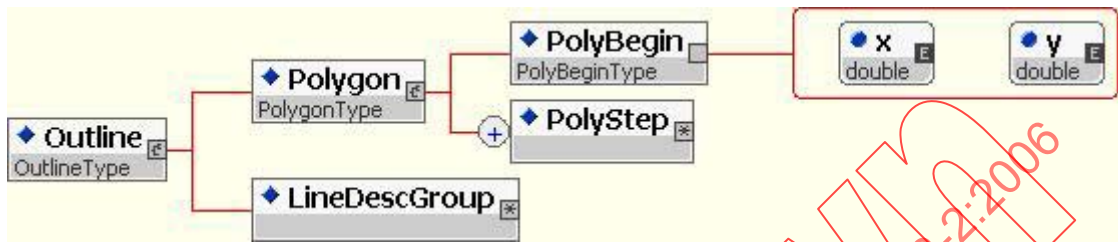
Table 106 – Package element

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Package	PackageType	Generic component package descriptions for use by the Step file schemas.	0-n
name	qualifiedName Type	A unique name assigned to the physical and graphical description of a part in accordance with the IPC-7351 Naming Convention for Packages and Land Patterns.	1-1
type	PackageType Type	A specific body construction indicated as an enumerated string using one of the following naming conventions: AXIAL_LEADED BARE_DIE CERAMIC_BGA CERAMIC_DIP CERAMIC_FLATPACK CERAMIC_QUAD_FLATPACK CERAMIC_SIP CHIP CHIP_SCALE CHOKE_SWITCH_SM COIL CONNECTOR_SM CONNECTOR_TH EMBEDDED FLIPCHIP HERMETIC_HYBRED LEADLESS_CERAMIC_CHIP_CARRIER MCM MELF FINEPITCH_BGA MOLDED NETWORK PGA PLASTIC_BGA PLASTIC_CHIP_CARRIER PLASTIC_DIP PLASTIC_SIP POWER_TRANSISTOR RADIAL_LEADED RECTANGULAR_QUAD_FLATPACK RELAY_SM RELAY_TH SOD123 SOIC SOJ SOPIC SOT143 SOT23 SOT52 SOT89 SQUARE_QUAD_FLATPACK SSOIC SWITCH_TH TANTALUM TO_TYPE TRANSFORMER TRIMPOT_SM TRIMPOT_TH OTHER	1-1
pinOne	string	A description of Pin one of the part in accordance with its relationship to the original orientation as stored. Pin one moves with the change in orientation.	0-1
height	double	A description of the component height in terms of the mounting surface to the highest protrusion of the Package. The units are in the Units set by the Cadheader.	0-1
Outline	OutlineType	A nested element that defines the physical outline of the part as seen from the top, related to the graphical image that appears on the assembly. Includes body and pin profiles if applicable. The outline is an enclosed polygon type.	1-1
LandPattern	LandPattern Type	A nested element that defines the surface land pattern consisting of Lands in a particular pattern that matches the footprint of the component outline. The point of origin of the LandPattern and Outline are identical.	0-1
SilkScreen	SilkScreen Type	A nested element that defines the symbolization and legend required to be placed on the board for the particular package. Includes location of the reference designator or other Text. The point of origin of the image is the same as the origin of the LandPattern and Outline.	0-1
AssemblyDrawing	Assembly DrawingType	A nested element that defines the graphics required for the assembly drawing. The images relate to the component body outline and any text needed. The point of origin for the assembly drawing is the same as the images of the Outline, LandPattern, and SilkScreen schema.	0-1
Pin	PinType	A nested element that defines the pin relationship of all the pins that are a part of the package style related to the land pattern description.	0-n

9.3.7.1 Outline

A nested element that defines the physical outlines of the part related to the graphical image that appears on the assembly. The Outline includes the body of the part, the Pin element and the Pin element includes the Pin profiles. These are combined to describe the component. See Table 107.

Table 107 – Outline element



Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Outline	OutlineType	A nested element that defines the physical outlines of the part viewed from the top, related to the graphical image that appears on the assembly. Includes the body only. Pin profiles are defined by the Pin element. The Outline is an enclosed polygon type.	1-1
Polygon	PolygonType	A closed shape whose edges do not cross, the coordinates of which are defined relative to the local coordinate system of the polygon.	1-1
PolyBegin	PolyBeginType	The PolyBegin element defines the starting point of the polygon.	1-1
x	double	The X starting point of the first polygon edge.	1-1
y	double	The Y starting point of the first polygon edge.	1-1
PolyStep	ABSTRACT	The PolyStep element is a substitution group that defines a circular (PolyStepCurve) or straight line (PolyStepSegment) continuation of the polygon. The polystep direction may be clockwise or counterclockwise which must be consistent when any Arc description is used as one of the PolyStep elements. Straight or curved line segments must not cross. The final X and final Y coordinate must match those of the PolyBegin element to signify that the shape is closed.	1-n
LineDescGroup	ABSTRACT	A substitution group that specifies the LineWidth and LineEnd characteristics of the Outline. The LineDesc may also have been predefined in the DictionaryLineDesc and instantiated from the dictionary.	1-1

9.3.7.2 LandPattern

The LandPattern element consists of those characteristics that define the pattern to which surface mount components are attached. The embedded elements include both the Pad description and the potential for providing a target, usually indicating pinOne. Land pattern descriptions should be used wherever a relationship to component pins needs to be established. This information is redundant when layers for component attachment are defined. See Table 108

Table 108 – LandPattern element

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
LandPattern	LandPatternType	A nested element that defines the surface land pattern consisting of Pads in a particular pattern that matches the footprint of the component.	0-1
Pad	PadType	A nested element defining the pad to be located as part of the land pattern.	1-n
pin	string	A description relating the Pad to a specific pin of the component being mounted on the particular land pattern.	0-1
Xform	XformType	An element that provides the ability to reset the point of origin of a predefined pad that can be scaled, mirror imaged or rotated. See 3.3	0-1
Location	LocationType	The location of the image defined by the standard shape or a pre-defined standard shape of the pad. The image may have been reorientated by the Xform.	1-1
x	double	The x coordinate of the location of the pad.	1-1
y	double	The y coordinate of the location of the pad.	1-1
StandardShape	ABSTRACT	A substitution group that permits the substitution of any of the StandardPrimitive shapes in accordance with their individual descriptions. A predefined StandardPrimitive may also be instantiated by its unique "id" when the feature is contained in the DictionaryStandard. When a reference is made to the dictionary predefined primitive the Units must match.	1-1
Target	TargetType	A nested element defining the target to be located as part of the land pattern.	0-n
Xform	XformType	An element that provides the ability to reset the point of origin of a predefined target that can be scaled, mirror imaged or rotated. See 3.3	0-1
Location	LocationType	The location of the image defined by the standard shape or a pre-defined standard shape of the target. The image may have been reorientated by the Xform.	1-1
x	double	The x coordinate of the location of the target.	1-1
y	double	The y coordinate of the location of the target.	1-1
StandardShape	ABSTRACT	A substitution group that permits the substitution of any of the StandardPrimitive shapes in accordance with their individual descriptions. A predefined StandardPrimitive may also be instantiated by its unique "id" when the feature is contained in the DictionaryStandard. When a reference is made to the dictionary predefined primitive the Units must match.	1-1

9.3.7.3 SilkScreen

The SilkScreen element defines the symbolization and legend required to be placed on the board for the particular package. The SilkScreen descriptions include location of the reference designator or other Text. The point of origin of the image is the same as the origin of the LandPattern and Outline. See Table 109.

Table 109 – SilkScreen element

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- ence
SilkScreen	SilkScreenType	A nested element that defines the symbolization and legend required to be placed on the board for the particular package. Includes location of the reference designator or other Text. The point of origin of the image is the same as the origin of the LandPattern and Outline.	0-1
Outline	OutlineType	A nested element that defines the outlines of the part related to the graphical image that appears on the board. The outline is an enclosed polygon type.	0-n
Polygon	PolygonType	A closed shape whose edges do not cross, the coordinates of which are defined relative to the local coordinate system of the polygon.	1-1
PolyBegin	PolyBeginType	The PolyBegin element defines the starting point of the polygon.	1-1
x	double	The X starting point of the first polygon edge.	1-1
y	double	The Y starting point of the first polygon edge.	1-1
PolyStep	ABSTRACT	The PolyStep element is a substitution group that defines a circular (PolyStepCurve) or straight line (PolyStepSegment) continuation of the polygon. The polystep direction may be clockwise or counterclockwise which must be consistent when any Arc description is used as one of the PolyStep elements. Straight or curved line segments must not cross. The final X and final Y coordinate must match those of the PolyBegin element to signify that the shape is closed.	1-n
LineDescGroup	ABSTRACT	A substitution group that specifies the Linewidth and LineEnd characteristics of the Outline. The LineDesc may also have been predefined in the DictionaryLineDesc and instantiated from the dictionary.	1-1

Text	TextType	A nested element that defines the text to be silkscreened onto the surface of the printed board.	0-n
textString	string	The text phrase (case-sensitive) in accordance with the language element of the Header element representing the specific characters to be silkscreened onto the board surface.	1-1
fontSize	positiveInteger	A dimensional characteristic in terms of an integer that defines the font size	1-1
Xform	XformType	An element that provides the ability to reset the point of origin of the text box, then scale, mirror image or rotate the text box after the text box origin has been placed at an X and Y location. See 3.3	0-1
Location	LocationType	The location of the point of origin of the BoundingBox used to contain the text or a predefined text contained in the DictionaryUser. The textbox may have been reorientated by the Xform.	1-1
x	double	The x coordinate of the location of the point of origin (lowerLeftX) of the BoundingBox.	1-1
y	double	The y coordinate of the location of the point of origin (lowerLeftY) of the BoundingBox.	1-1
Boundingbox	BoundingBoxType	A constraining rectangular area (bounding box) that encompasses the entire text string including upper and lower case characters.	1-1
lowerLeftX	double	The lower left hand x dimension of the rectangular area encompassing the text.	1-1
lowerLeftY	double	The lower left hand y dimension of the rectangular area encompassing the text.	1-1
upperRightX	double	The upper right hand x dimension of the the rectangular area encompassing the text.	1-1
upperRightY	double	The upper right hand y dimension of the rectangular area encompassing the text.	1-1
FontRef	FontRefType	An element that is optional to reference a predefined font by its id, if the standard Helvetica font is not being instantiated.	0-1
id	qualifiedNameType	The identification of the FontDef stored in the DictionaryFont.	1-1
ColorGroup	ABSTRACT	An optional substitution group that permits assigning a particular color through instantiating the three basic colors or by providing a reference to a predefined Color in DictionaryColor.	0-1
Target	TargetType	A nested element defining the target to be located as part of the land pattern.	0-n
Xform	XformType	A nested element describing the location and mirroring, rotation or scaling of the StandardShape used to define the Target in order to have it be consistent within the silk screen image description.	0-1
Location	LocationType	The location of the image defined by the standard shape or a pre-defined standard shape of the target. The image may have been reorientated by the Xform.	1-1
x	double	The x coordinate of the location of the target.	1-1
y	double	The y coordinate of the location of the target.	1-1
StandardShape	ABSTRACT	A substitution group that permits the substitution of any of the StandardPrimitive shapes in accordance with their individual descriptions. A predefined StandardPrimitive may also be instantiated by its unique "id" when the feature is contained in the DictionaryStandard. When a reference is made to the dictionary predefined primitive the Units must match.	1-1

9.3.7.4 AssemblyDrawing

The AssemblyDrawing element reuses the same embedded elements and attributes as defined for the Silkscreen characteristics. The construction schemas are repeated to aid the reader in interpretation of the library structure. See Table 110.

Table 110 – AssemblyDrawing element

Attribute/ Element Name	Attribute/ Element Type	Description	Occurrence
AssemblyDrawing	Assembly DrawingType	A nested element that defines the graphics required for the assembly drawing. The images relate to the component body outline and any text needed. The point of origin for the assembly drawing is the same as the images of the outline, land pattern, and silk screen schema.	0-1
Outline	OutlineType	A nested element that defines the the outlines of the part related to the graphical image that appears on the board. The outline is an enclosed polygon type.	0-1
Polygon	PolygonType	A closed shape whose edges do not cross, the coordinates of which are defined relative to the local coordinate system of the polygon	1-1
PolyBegin	PolyBeginType	The PolyBegin element defines the starting point of the polygon.	1-1
x	double	The X starting point of the first polygon edge.	1-1
y	double	The Y starting point of the first polygon edge	1-1
PolyStep	ABSTRACT	The PolyStep element is a substitution group that defines a circular (PolyStepCurve) or straight line (PolyStepSegment) continuation of the polygon. The polystep direction may be clockwise or counterclockwise which must be consistent when any Arc description is used as one of the PolyStep elements. Straight or curved line segments must not cross. The final X and final Y coordinate must match those of the PolyBegin element to signify that the shape is closed.	1-n
LineDescGroup	ABSTRACT	A substitution group that specifies the LineWidth and LineEnd characteristics of the Outline. The LineDesc may also have been predefined in the DictionaryLineDesc and instantiated from the dictionary.	1-1
Text	TextType	A nested element that defines the text to be silkscreened onto the surface of the printed board.	0-n

textString	string	The text phrase (case-sensitive) in accordance with the language element of the Header element representing the specific characters to be silkscreened onto the board surface.	1-1
fontSize	positiveInteger	A dimensional characteristic in terms of an integer that defines the font size	1-1
Xform	XformType	An element that provides the ability to reset the point of origin of the text box, then scale, mirror image or rotate the text box after the text box origin has been placed at an X and Y location. See 3.3	0-1
Location	LocationType	The location of the point of origin of the BoundingBox used to contain the text or a predefined text contained in the DictionaryUser. The textbox may have been reorientated by the Xform.	1-1
x	double	The x coordinate of the location of the point of origin (lowerLeftX) of the BoundingBox.	1-1
y	double	The y coordinate of the location of the point of origin (lowerLeftY) of the BoundingBox.	1-1
Boundingbox	BoundingBox Type	A constraining rectangular area (bounding box) that encompasses the entire text string including upper and lower case characters.	1-1
lowerLeftX	double	The lower left hand x dimension of the rectangular area encompassing the text.	1-1
lowerLeftY	double	The lower left hand y dimension of the rectangular area encompassing the text.	1-1
UpperRightX	double	The upper right hand x dimension of the the rectangular area encompassing the text.	1-1
UpperRightY	double	The upper right hand y dimension of the rectangular area encompassing the text.	1-1
FontRef	FontRefType	An element that is optional to reference a predefined font by its id, if the standard Helvetica font is not being instantiated.	0-1
id	qualifiedName Type	The identification of the FontDef stored in the DictionaryFont.	1-1
ColorGroup	ABSTRACT	An optional substitution group that permits assigning a particular color through instantiating the three basic colors or by providing a reference to a predefined Color in DictionaryColor.	0-1
Target	TargetType	A nested element defining the target to be located as part of the land pattern.	0-n
Xform	Xform Type	A nested element describing the location and mirroring, rotation or scaling of the StandardShape used to define the Target in order to have it be consistent within the AssemblyDrawing description.	0-1
Location	LocationType	The location of the image defined by the standard shape or a pre-defined standard shape of the pad. The image may have been reorientated by the Xform.	1-1
x	double	The x coordinate of the location of the target.	1-1
y	double	The y coordinate of the location of the target.	1-1
StandardShape	ABSTRACT	A substitution group that permits the substitution of any of the StandardPrimitive shapes in accordance with their individual descriptions. A predefined StandardPrimitive may also be instantiated by its unique "id" when the feature is contained in the DictionaryStandard. When a reference is made to the dictionary predefined primitive the Units must match.	1-1

9.3.7.5 Pin

The Pin element represents a set of Pin characteristics that are attached to each component package. Each Pin has a number, name, type, electricalType and mountType. Each Pin also contains its relative location and outline. See Table 111.

Table 111 – Pin element

Attribute/ Element Name	Attribute/ Element Type	Description	Occur- rence
Pin	PinType	A nested element that defines the pin relationship of all the pins that are a part of the package style related to the land pattern description.	0-n
number	nonNegativeDoubleType	A specific number for the Pin being described. The number is usually an integer, however may require more granularity thus the type is identified as a nonNegativeDouble.	1-1
name	qualifiedNameType	A unique name assigned by the user to describe the Pin at a particular location.	1-1
type	cadPinType	An enumerated string that defines the type of Pin as being one of the following: THRU BLIND SURFACE.	1-1
electricalType	pinElectricalType	The electrical type enumerated string that defines the Pin as one of three possible conditions. These are: ELECTRICAL MECHANICAL UNDEFINED.	0-1
mountType	pinMountType	An enumerated string that defines the mounting characteristics of the Pins and may be any one of the following: SURFACE_MOUNT_PIN SURFACE_MOUNT_PAD THROUGH_HOLE_PIN THROUGH_HOLE_HOLE PRESSFIT NONBOARD HOLE UNDEFINED	0-1
Xform	XformType	An element that provides the ability to reset the point of origin of the graphic outline pin shape, then scale, mirror image or rotate the shape it has been placed at an X and Y location. See 3.3	0-1
Location	LocationType	The location of the image defined by the pin shape or a pre-defined standard shape of the Pin. The image may have been reorientated by the Xform.	1-1
x	double	The X location of the Pin defined by its centroid.	1-1
y	double	The Y location of the Pin defined by its centroid.	1-1
Outline	OutlineType	A nested element that defines the the outlines of the part related to the graphical image that appears on the board. The Outline is an enclosed polygon type.	1-1

Polygon	PolygonType	A closed shape whose edges do not cross, the coordinates of which are defined relative to the local coordinate system of the polygon	1-1
PolyBegin	PolyBeginType	The PolyBegin element defines the starting point of the polygon.	1-1
x	double	The X starting point of the first polygon edge.	1-1
y	double	The Y starting point of the first polygon edge	1-1
PolyStep	ABSTRACT	The PolyStep element is a substitution group that defines a circular (PolyStepCurve) or straight line (PolyStepSegment) continuation of the polygon. The Polystep direction may be clockwise or counterclockwise which must be consistent when any Arc description is used as one of the PolyStep elements. Straight or curved line segments must not cross. The final X and final Y coordinate must match those of the PolyBegin element to signify that the shape is closed.	1-n
LineDescGroup	ABSTRACT	A substitution group that specifies the Linewidth and LineEnd characteristics of the Outline. The LineDesc may also have been predefined in the DictionaryLineDesc and instantiated from the dictionary.	1-1

9.3.8 Component

The Component section contains all the Component elements that were read from the originating CAD system and were captured in the Component element descriptions. See Table 112.

Table 112 – Component element

Attribute / Element Name	Attribute / Element Type	Description	Occurrence
Component	ComponentType	A nested element list of component descriptions and their application to the electronic product.	0-n
refDes	qualifiedNameType	A unique name assigned to the particular component.	1-1
packageRef	string	A reference to the package style used to house the component.	1-1
part	string	A part description of the part or its electrical/mechanical characteristics.	1-1
layerRef	qualifiedNameType	The reference to the layer to which the component should be attached as identified by the layer name including defining a reference to an internal layer for embedded component attachment.	1-1
mountType	mountType	The mount type as defined by an enumerated string which may be one of the following: SMT THMT OTHER. This attribute can be used to modify the Package description i.e. a through-hole mount modified to be surface mounted.	1-1

weight	nonNegativeDouble Type	The weight of the particular component in grams.	0-1
height	nonNegativeDouble Type	The height that the top protrusion of the component body is above the surface of the printed board in units assigned in the CadHeader.	0-1
standoff	nonNegativeDouble Type	The standoff clearance between the body and the printed board in units assigned in the CadHeader.	0-1
Attribute	ABSTRACT	A substitution group that may be any of a group of enumerated string descriptions or a unique string for a condition not addressed by the standard attributes. The Attribute is associated with the Component description.	0-n
Xform	XformType	An element that provides the ability to reset the point of origin of a predefined area that can be scaled, mirror imaged or rotated. The image may also be located by the Xform. See 3.3.	1-1
xOffset	double	The x offset of a previously defined shape relative to its original point of origin in order to define a new origin used for rotation, mirroring, scaling and location. The CadHeader defines the units of measure.	0-1
yOffset	double	The y offset of a previously defined shape relative to its original point of origin in order to define a new origin used for rotation, mirroring, scaling and location. The CadHeader defines the units of measure.	0-1
rotation	nonNegativeDouble Type	Defines the rotation of a shape about the local origin in degrees. Positive rotation is always counter-clockwise as viewed from the board TOP (primary side). Degree accuracy is expressed as a two place decimal i.e. 45,15; 62,34	0-1
mirror	boolean	An enumerated string as either TRUE or FALSE (part of the 3WC standard). TRUE equals that the image is mirrored; FALSE indicates that it is not.	0-1
scale	scaleType	An attribute that defines a "double" dimension whose minExclusiveValue=0,0 representing the multiplication factor of all x and y dimensions. The scale factor does not apply to angular values.	0-1
Location	LocationType	The location of the component defined by the packageRef or a pre-defined standard shape of the Package. The image may have been reorientated by the Xform.	1-1
x	double	The x coordinate upon which a features' point-of-origin is located, relative to the point of origin of the product on which a component is positioned in accordance with the Cartesian coordinate system. The CadHeader defines the units of measure.	1-1
y	double	The y coordinate upon which a features' point-of-origin is located, relative to the point of origin of the product on which a component is positioned in accordance with the Cartesian coordinate system. The CadHeader defines the units of measure.	1-1

9.3.9 VplPackage

The VplPackage element represents information for each component as a new package description that may differ from the original EDA package, thus affecting the shape or the location of the components on the electronic assembly. The details of the VplPackage descriptions contain data regarding other possible matching packages for each component. It should be noted that only one package could be set as chosen for a particular component. See Table 113.