

INTERNATIONAL STANDARD



**Coaxial communication cables –
Part 1-126: Electrical test methods – Corona extinction voltage**

IECNORM.COM : Click to view the full PDF of IEC 61196-1-126:2022



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2022 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IECNORM.COM : Click to view the full PDF of IEC 61960-1-26:2022

INTERNATIONAL STANDARD



**Coaxial communication cables –
Part 1-126: Electrical test methods – Corona extinction voltage**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.120.10

ISBN 978-2-8322-5619-0

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	3
1 Scope	5
2 Normative references	5
3 Terms and definitions	5
4 Preparation of test sample	6
4.1 Flexible cable	6
4.2 Semi-flexible cable	7
4.3 Semi-rigid cable and unjacketed semi-flexible cable	7
5 Test principle	8
6 Test equipment	9
7 Calibration of measuring system	9
8 Test procedure	9
9 Failure criterion	10
10 Information to be given in the relevant detail (product) specification	10
11 Test report	10
Figure 1 – Preparation of flexible cable sample	6
Figure 2 – Preparation of semi-flexible cable sample	7
Figure 3 – Preparation of semi-rigid cable and unjacketed semi-flexible cable sample	8
Figure 4 – Test principle diagram	8
Figure 5 – Layout of test equipment	9

IECNORM.COM : Click to view the full PDF of IEC 61196-1-126:2022

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COAXIAL COMMUNICATION CABLES –

Part 1-126: Electrical test methods – Corona extinction voltage

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61196-1-126 has been prepared by subcommittee 46A: Coaxial cables, of IEC technical committee 46: Cables, wires, waveguides, R.F. connectors, R.F. and microwave passive components and accessories. It is an International Standard.

The text of this International Standard is based on the following documents:

Draft	Report on voting
46A/1582/FDIS	46A/1597/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

A list of all parts in the IEC 61196 series, published under the general title *Coaxial communication cables*, can be found on the IEC website. This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC

Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

IECNORM.COM : Click to view the full PDF of IEC 61196-1-126:2022

COAXIAL COMMUNICATION CABLES –

Part 1-126: Electrical test methods – Corona extinction voltage

1 Scope

This part of IEC 61196 provides the test method for the corona (partial discharge) extinction voltage of coaxial communication cables under specified environmental conditions.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60270, *High-voltage test techniques – Partial discharge measurements*

IEC 61196-1, *Coaxial communication cable – Part 1: Generic specification – General, definitions and requirements*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61196-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1

partial discharge inception voltage **PDIV**

lowest voltage (in V RMS) at which a partial discharge (at least 5 pC and above) is detected when the test voltage is slowly increased between the inner and outer conductors of the cable

3.2

partial discharge extinction voltage **PDEV**


highest voltage (in V RMS) at which partial discharge no longer occurs as the applied voltage between the inner and outer conductors of the cable is decreased from the inception voltage (3.1)

4 Preparation of test sample


4.1 Flexible cable

Test samples are prepared as follows:


- Take a sample of 0,6 m to 1,5 m (1 m is recommended) in length and strip 75 mm of jacket material from each end, as shown in Figure 1a).
- Roll back the shield over the jacket and trim as shown in Figure 1b). Avoid breaking any strands. Trim the shield edges to nearly 25 mm lengths.
- Trim the insulation of one end of the sample to the dimensions shown in Figure 1c) and wrap the shield edge and jacket with a plastic tube or adhesive tape or heat-shrink sleeve, and wrap a grounding copper wire 0,8 mm in diameter tightly around the other end of the shielding layer, or use an equivalent grounding method.

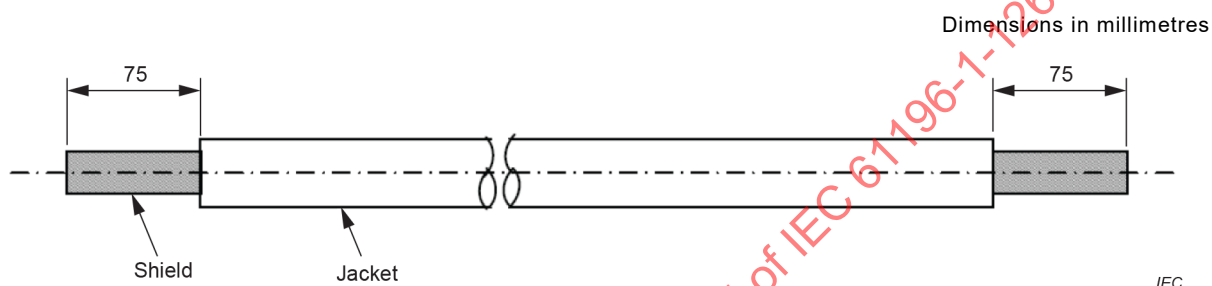

a) Striped jacket

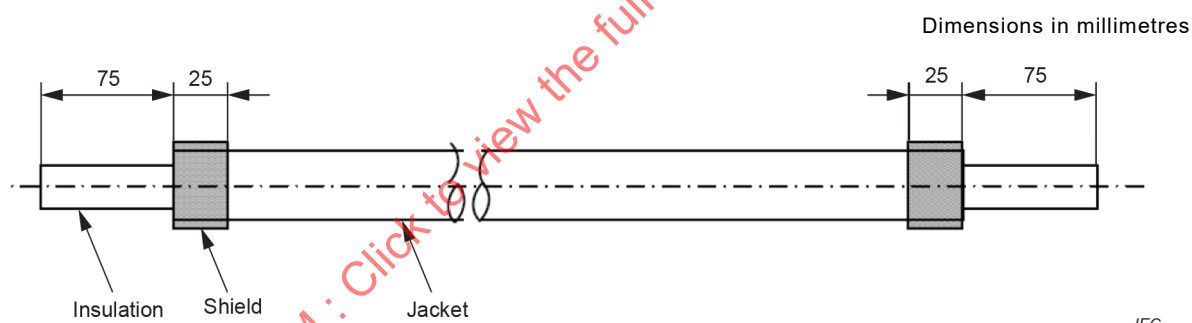

b) Rolled back the shield over the jacket

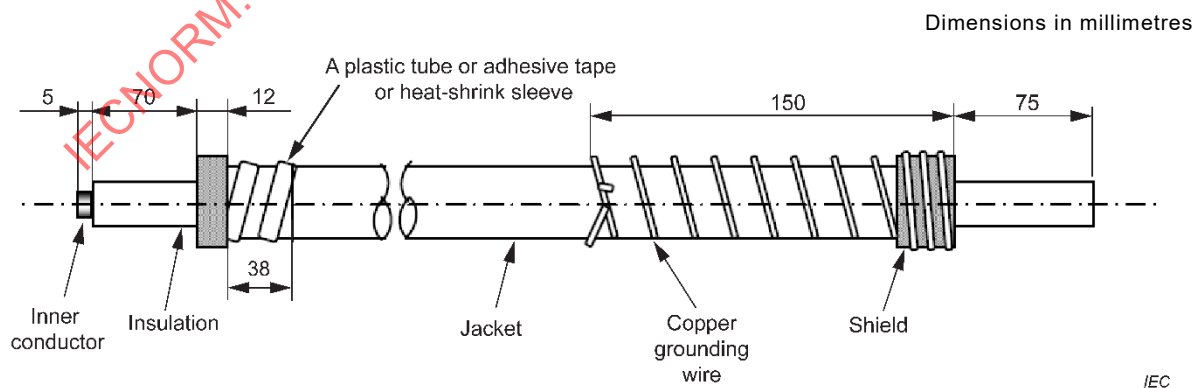

c) Trim one end of the sample and wrap the shield and jacket

Figure 1 – Preparation of flexible cable sample

4.2 Semi-flexible cable

Test samples are prepared as follows:

- Take a sample of 0,6 m to 1,5 m (1 m is recommended) in length and strip jacket and outer conductor material from each end and trim the sample to the dimensions shown in Figure 2a).
- Trim the end where only the insulation is exposed to the dimensions shown in Figure 2b) and tightly wind a grounding copper wire 0,8 mm in diameter around the other end of the outer conductor, or use an equivalent grounding method, then cover both ends of the outer conductor tightly with heat-shrinkable sleeves.

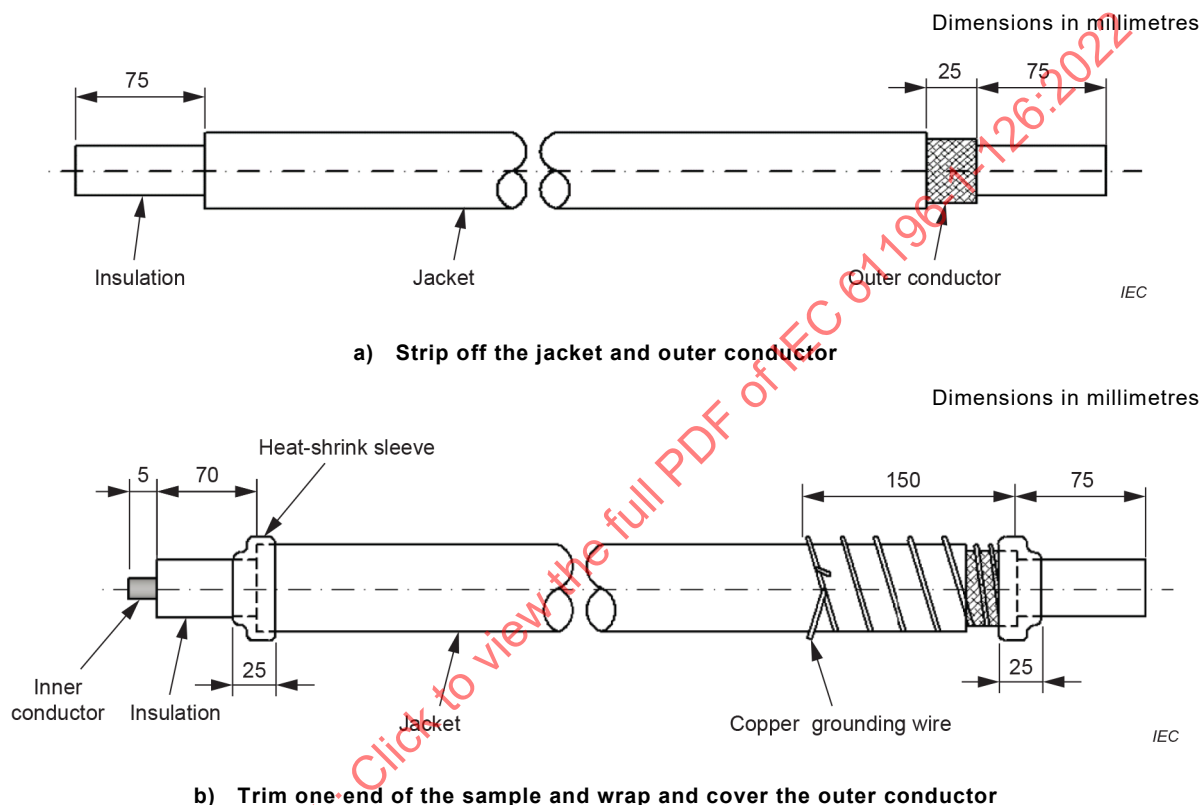


Figure 2 – Preparation of semi-flexible cable sample

4.3 Semi-rigid cable and unjacketed semi-flexible cable

Test samples are prepared as follows:

- Take a sample of 0,6 m to 1,5 m (1 m is recommended) in length and strip 75 mm of outer conductor material from each end, as shown in Figure 3a).
- Trim one end of the sample to the dimensions shown in Figure 3b) and tightly wind a grounding copper wire 0,8 mm in diameter around the other end of the outer conductor, or use an equivalent grounding method, and then both ends of the outer conductor are tightly covered with heat-shrinkable sleeves.


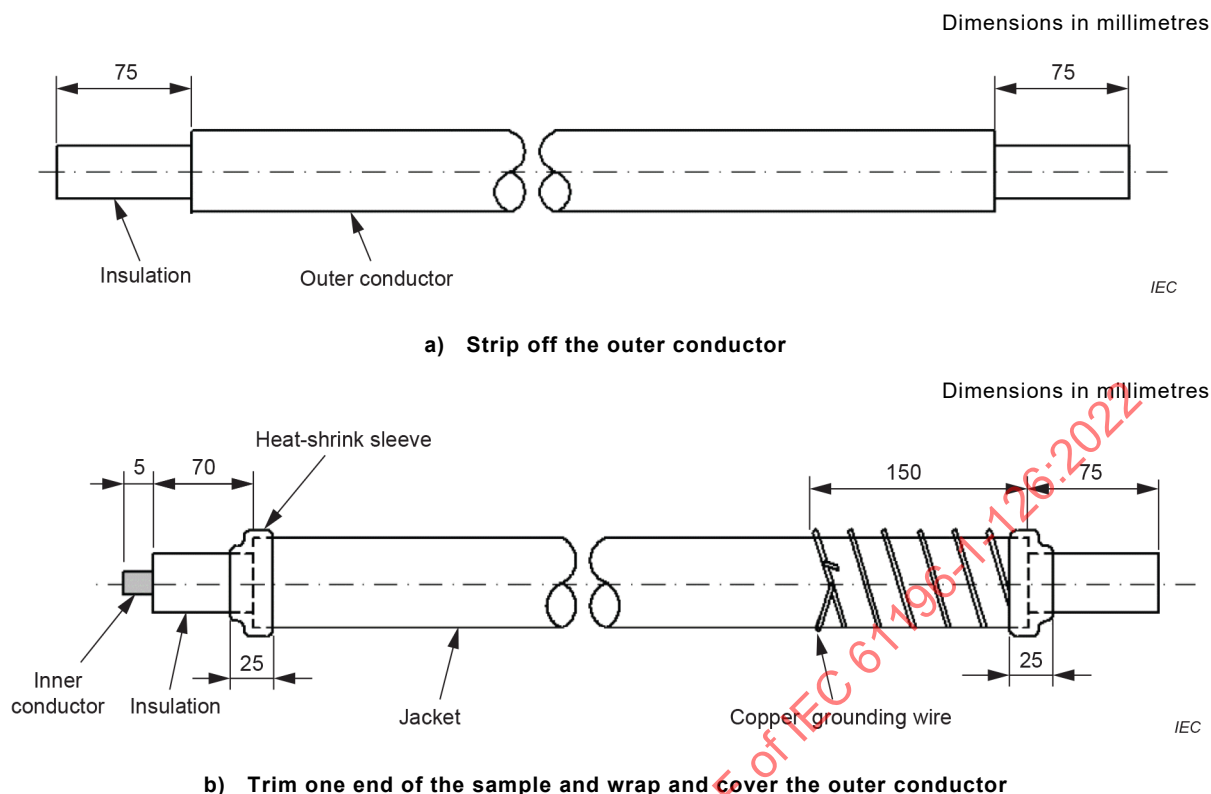


Figure 3 – Preparation of semi-rigid cable and unjacketed semi-flexible cable sample

5 Test principle

The test principle is shown in Figure 4. The test voltage is slowly increased between the inner and outer conductors of the cable, and as the voltage increases to a certain critical value, the detector will detect the partial discharge phenomenon of 5 pC and above. When the test voltage is slowly reduced, the discharge phenomenon will disappear.

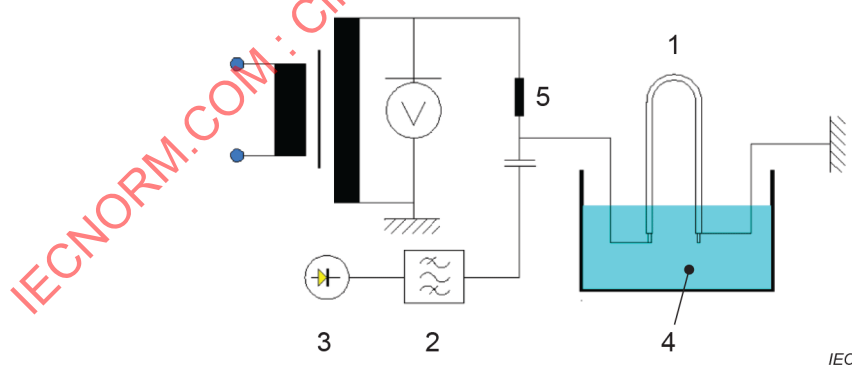

NOTE

- 1 cable under test
- 2 band pass filter (10 kHz to 50 kHz)
- 3 detector
- 4 oil
- 5 choke


Figure 4 – Test principle diagram

6 Test equipment

The test equipment includes: a high voltage source, a fault indicator, an oscilloscope, a partial discharge free-adaptor, an altitude test chamber (when applicable), and associated instrumentation.

The equipment shall be capable of detecting a partial discharge of 5 pC or less. The frequency of the test voltage shall be 40 Hz to 60 Hz.

The test equipment should be assembled in accordance with Figure 5.

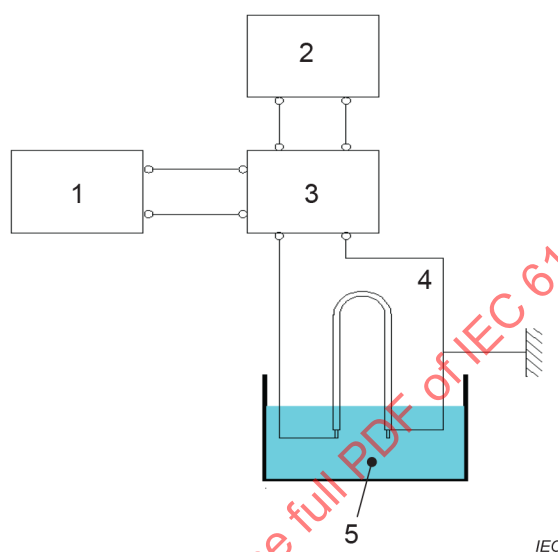

NOTE

- 1 high-voltage source
- 2 oscilloscope
- 3 fault indicator
- 4 cable under test
- 5 oil

Figure 5 – Layout of test equipment

7 Calibration of measuring system

The object of calibration is to verify that the measuring system is able to measure the specified PD magnitude correctly.

The calibration shall be done in accordance with the procedure described in IEC 60270.

8 Test procedure

Test procedure is as follows:

- a) The test setup shall be energized without the test sample to ensure that it is partial discharge-free at a minimum of 1 000 V above the required test voltage (as specified in the relevant detail specification or product specification) and does not breakdown.
- b) The cable sample shall be inserted in the test setup. If necessary, to prevent partial discharge at the cable ends, the cable ends may be immersed in insulating oil. Other preventive measures may be used.