

INTERNATIONAL STANDARD



Liquid crystal display devices –
Part 20-3: Visual inspection – Active matrix colour liquid crystal display modules

IECNORM.COM : Click to view the full PDF of IEC 61747-20-3:2016



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2016 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IECNORM.COM : Click to view the full text of IEC 817-203:2016

INTERNATIONAL STANDARD



**Liquid crystal display devices –
Part 20-3: Visual inspection – Active matrix colour liquid crystal display modules**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 31.120

ISBN 978-2-8322-3210-1

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references.....	6
3 Terms, definitions and abbreviations	6
3.1 General.....	6
3.3 Abbreviations	11
4 Visual inspection method and criteria	11
4.1 Standard inspection conditions	11
4.1.1 Ambient conditions.....	11
4.1.2 Visual inspection conditions	12
4.1.3 Electrical driving conditions	12
4.2 Standard inspection method	12
4.2.1 Setup of inspection equipment and liquid crystal display modules	12
4.2.2 Inspector and limit sample for visual inspection	12
4.2.3 Inspection and record of result	12
4.3 Criteria	12
4.3.1 Bright subpixel defects	12
4.3.2 Dark subpixel defects.....	12
4.3.3 Intermediate subpixel defects	13
4.3.4 Cluster subpixel defects	13
4.3.5 Bright line defects	13
4.3.6 Dark line defects	13
4.3.7 Scratch and dent defects.....	13
4.3.8 Foreign material and bubble defects	13
4.3.9 Light leakage defects	14
Bibliography	15
Figure 1 – Classification of defects by visual inspection.....	7
Figure 2 – Examples of bright subpixel and adjacent subpixel defects in case of an RGB primary colour display.....	8
Figure 3 – Examples of dark subpixel and adjacent subpixel defects in case of RGB primary colour display	9
Figure 4 – Examples of minimum distance between subpixel defects	10
Figure 5 – Example of light leakage between the top case and outer black matrix	11
Figure 6 – Shape of scratch and dent defects	13
Figure 7 – Shape of foreign material and bubble defects.....	14
Table 1 – Criteria for scratch and dent defects.....	13
Table 2 – Criteria for foreign material and bubble defects	14

INTERNATIONAL ELECTROTECHNICAL COMMISSION

LIQUID CRYSTAL DISPLAY DEVICES –

**Part 20-3: Visual inspection – Active matrix colour
liquid crystal display modules**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61747-20-3 has been prepared by IEC technical committee 110: Electronic display devices.

This first edition cancels and replaces the first edition of IEC 61747-5-2 published in 2011. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) document numbering was changed to align with the new numbering of IEC 61747.

The text of this standard is based on the following documents:

FDIS	Report on voting
110/725/FDIS	110/740/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61747 series, under the general title *Liquid crystal display devices*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This part of IEC 61747 facilitates the visual inspection of the image defect of LCD modules by human eyes subjectively. Visual inspection is performed at specified conditions and criteria. The objective measurement method of visual image defects with an instrument will be studied and standardized.

IECNORM.COM : Click to view the full PDF of IEC 61747-20-3:2016

LIQUID CRYSTAL DISPLAY DEVICES –

Part 20-3: Visual inspection – Active matrix colour liquid crystal display modules

1 Scope

This part of IEC 61747 gives the details of the quality assessment procedures and provides general rules for visual inspection of the active area of transmissive type active matrix colour liquid crystal display modules by the human eye. Furthermore, this standard includes defect definitions and the method for visual defect inspection.

NOTE 1 Mura is excluded from this standard because it was not clearly specified at the time this standard was developed.

NOTE 2 Restrictions on defect types, number, and sizes are specified in the quality contract (customer acceptance specification and incoming inspection specification).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61747-10-2:2014, *Liquid crystal display devices – Part 10-2: Environmental, endurance and mechanical test methods – Environmental and endurance*

3 Terms, definitions and abbreviations

For the purposes of this document, the following terms, definitions and abbreviations apply.

3.1 General

3.1.1

visual inspection

method of checking display defects with the human eye

Note 1 to entry: The limitation on display defects depends on supplier and customer. Therefore a limit sample, with well-defined observation and operational conditions, can be used as a reference for the defect level.

3.2

defect

any observable abnormal phenomenon appearing in the active display area

EXAMPLE Figure 1 shows a classification of defects into two categories. The first category is classified as defects with a clear boundary, and the second category is classified as defects with an unclear boundary. The latter category is not yet well defined, and hence difficult to evaluate. For this reason, defects in the second category are excluded from this standard.

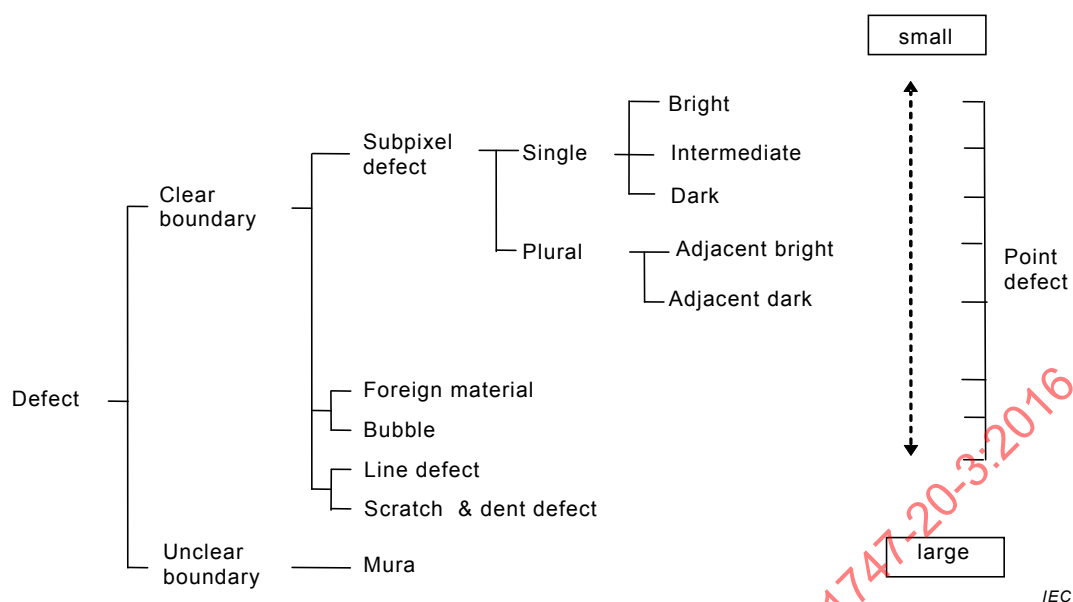


Figure 1 – Classification of defects by visual inspection

3.2.1

subpixel defect

defect in the smallest pixel element when it appears in a state different from the intended one


EXAMPLE Bright subpixels appear on a dark pattern, and dark subpixels appear on a bright pattern.

3.2.2

bright subpixel defect


defect which appears bright on the screen when a dark pattern is displayed

EXAMPLE Figure 2 a) shows a single subpixel bright defect of red, green, and blue respectively. Figure 2 b) shows two adjacent bright subpixel defects connected or disconnected in a horizontal and/or vertical one-pixel area. Figure 2 c) shows three adjacent bright subpixel defects connected in three horizontal and/or vertical subpixel areas.

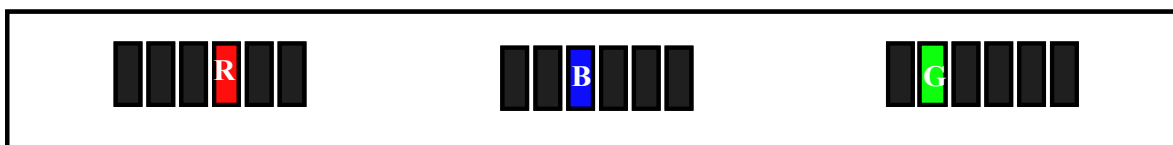


IEC

Figure 2 a) – Examples of one bright subpixel defect

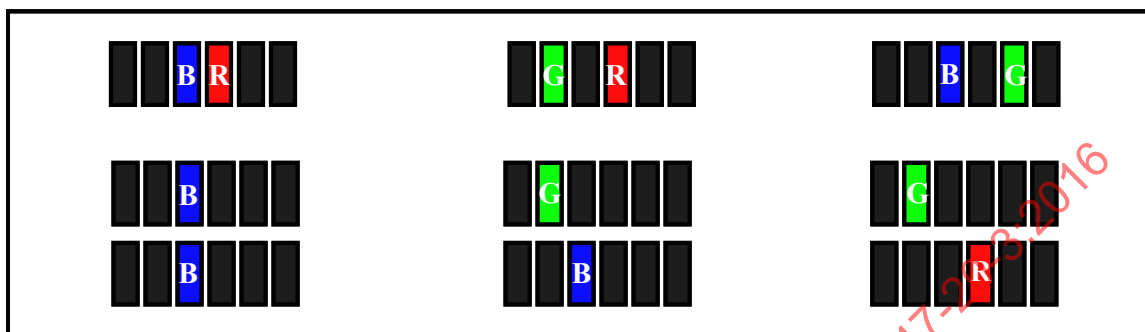

IEC

Figure 2 b) – Examples of two adjacent bright subpixel defects

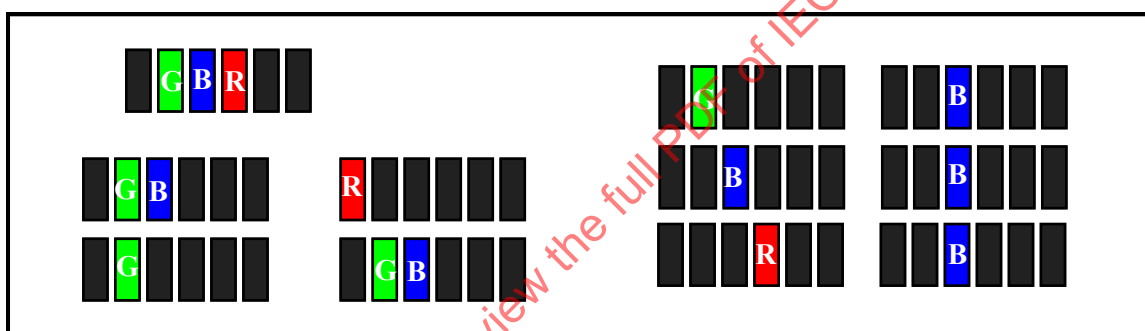

IEC

Figure 2 c) – Examples of three adjacent bright subpixel defects

Figure 2 – Examples of bright subpixel and adjacent subpixel defects in case of an RGB primary colour display

3.2.3

dark subpixel defect


defect which appears dark on the screen when a bright pattern is displayed

EXAMPLE Figure 3 a) shows a single subpixel defect of the dark-type of red, green, blue, respectively. Figure 3 b) shows two adjacent dark subpixel defects connected or disconnected in a horizontal and/or vertical one-pixel area. Figure 3 c) shows three adjacent dark subpixel defects connected in three horizontal and/or vertical subpixel areas.




IEC

Figure 3 a) – One dark subpixel defect

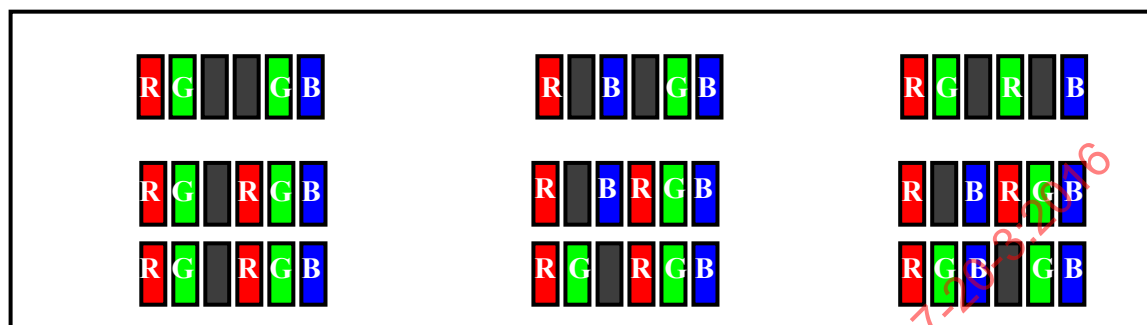

IEC

Figure 3 b) – Two adjacent dark subpixel defects

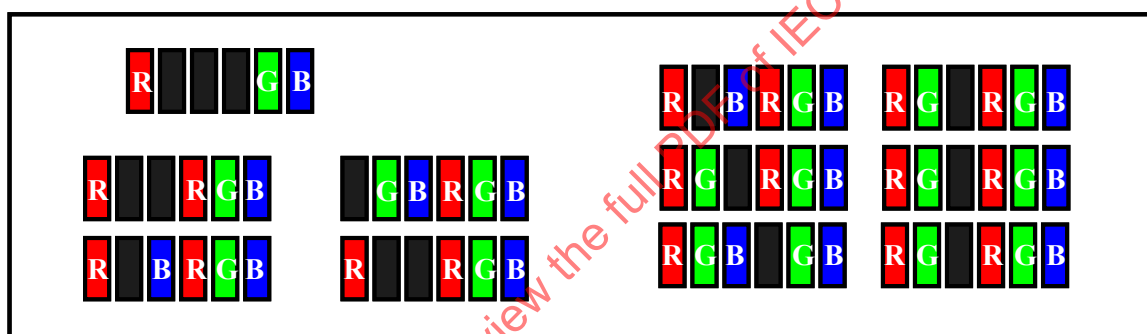

IEC

Figure 3 c) – Three adjacent dark subpixel defects

**Figure 3 – Examples of dark subpixel and adjacent subpixel defects
in case of RGB primary colour display**

3.2.4

intermediate subpixel defect

defect which appears with an intermediate luminance level on the screen when a bright or dark pattern is displayed

3.2.5

cluster subpixel defect

at least two subpixel defects in a specified area or within a specified distance with many subpixel defects

EXAMPLE Figure 4 a) and Figure 4 b) show an example of bright and dark cluster subpixel defects in which the minimum distance between the defects is specified. " d_h " and " d_v " stand for horizontal and vertical minimum distance.

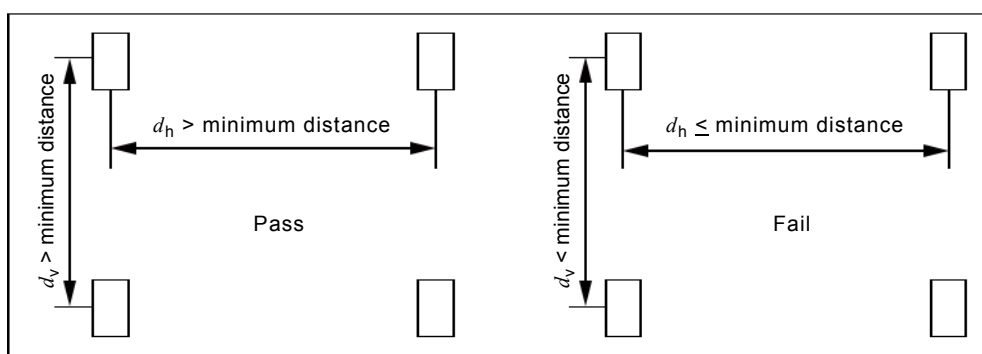


Figure 4 a) – Bright subpixel defect to bright subpixel defect

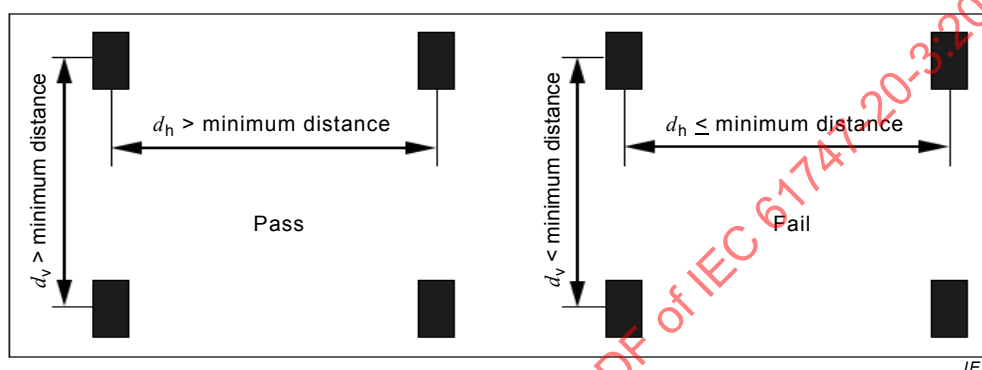


Figure 4 b) – Dark subpixel defect to dark subpixel defect

Figure 4 – Examples of minimum distance between subpixel defects

3.2.6

line defect

vertical or horizontal line which appears in the bright or dark state when a dark or bright pattern is displayed

3.2.7

bright line defect

line that appears bright on the screen when a dark pattern is displayed

3.2.8

dark line defect

line that appears dark on the screen when a bright pattern is displayed

3.2.9

scratch and dent defect

defect on top of or underneath the polarizer or other optical components in the active display area

3.2.10

scratch defect

light (white) line that can be seen over a darker background and does not vary in size

3.2.11

dent defect

light (white) spot that can be seen over a darker background and does not vary in size

3.2.12

foreign material defect

defect that is located between the panel and backlight unit

3.2.13**bubble defect**

defect that is caused by a cavity or gas in the liquid crystal material in the paste of the polarizer/reflector

3.2.14**light leakage defect**

light that is visible between the top case (chassis) and outer black matrix in a bezel open area

EXAMPLE Figure 5 shows an example of a light leakage defect.

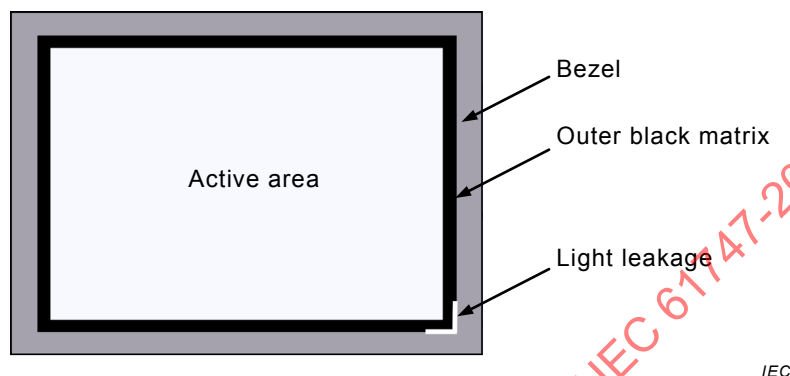


Figure 5 – Example of light leakage between the top case and outer black matrix

3.2.15**mura****non-uniformity**

visual imperfection in luminance or chromaticity

[SOURCE: IEC 61747-1-2:2014, 3.3.20]

3.3 Abbreviations

DUT device under test

4 Visual inspection method and criteria**4.1 Standard inspection conditions****4.1.1 Ambient conditions****4.1.1.1 Temperature and humidity**

All visual inspection shall be carried out at the temperature specified in IEC 61747-10-2:2014, Clause 4.

All visual inspection shall be carried out at the humidity specified in IEC 61747-10-2:2014, Clause 4.

4.1.1.2 Illuminance

All visual inspection shall be carried out at the illumination levels as specified in the detail specification. The illumination level shall be adjusted in such a way that it allows for an accurate visual inspection.

4.1.2 Visual inspection conditions

4.1.2.1 Viewing angle range

The inspection shall be conducted within the specified viewing angle range of the liquid crystal display modules.

4.1.2.2 Viewing distance

The distance between the DUT and the inspector's eyes should be set at optimum distance. The optimum distance depends on pixel size, display size, application type, and defect size.

4.1.3 Electrical driving conditions

4.1.3.1 Driving supply voltage or current of DUT

The specified voltage and/or current shall be supplied to the DUT.

4.1.3.2 Test pattern

Test patterns shall be specified in the detail specification. For example, the test patterns for visual inspection are the full raster of white, black, grey and all primary colour patterns under the specified luminance range.

4.2 Standard inspection method

4.2.1 Setup of inspection equipment and liquid crystal display modules

The DUT will be installed on a rotatable fixture to enable changes in the horizontal and vertical viewing direction range. Alternatively, the inspector moves around and the DUT is fixed.

Turn on the direct current power supply and pattern generator and warm up for stabilization. Supply the driving voltage and pattern to the DUT. The warm-up time of the DUT shall be sufficiently long to obtain a stable signal, necessary for the visual inspection.

4.2.2 Inspector and limit sample for visual inspection

The inspector shall have (corrected-to) normal vision, normal colour vision and shall be periodically trained with specified limit samples in order to accurately carry out the visual examination.

4.2.3 Inspection and record of result

The inspector shall carry out the visual inspection based on the specified procedure and record the result on recording sheets with the specified inspection conditions.

4.3 Criteria

4.3.1 Bright subpixel defects

The maximum number of bright defects shall be specified in the specification.

- One subpixel: To be specified in the detail specification.
- Adjacent subpixels: To be specified in the detail specification.
- Total amount of bright subpixels: To be specified in the detail specification.

4.3.2 Dark subpixel defects

The maximum number of dark defects shall be specified in the specification.

- One subpixel: To be specified in the detail specification.
- Adjacent subpixels: To be specified in the detail specification.
- Total amount of dark subpixels: To be specified in the detail specification.

4.3.3 Intermediate subpixel defects

The maximum number of intermediate defects shall be specified in the specification.

- One subpixel: To be specified in the detail specification.
- Adjacent subpixels: To be specified in the detail specification.
- Total amount of subpixels: To be specified in the detail specification.

4.3.4 Cluster subpixel defects

The maximum number of cluster defects shall be specified in specification.

The minimum distance between subpixel defects (d_v and d_h , see Figure 4) shall also be specified.

- Cluster subpixels: To be specified in the detail specification.

4.3.5 Bright line defects

All types of bright line defects such as vertical, horizontal or cross are not allowed.

4.3.6 Dark line defects

All types of dark line defects such as vertical, horizontal or cross are not allowed.

4.3.7 Scratch and dent defects

The criteria for scratch and dent defects are provided in Table 1 and Figure 6. The symbol of “ a ” and “ b ” indicates the major axis and minor axis of the polarizer defect. Extraneous substances which can be wiped out, such as fingerprints or particles, are not considered a defect. Scratches and dents located on the black matrix (outside of the active area) are not considered defects.

Table 1 – Criteria for scratch and dent defects

Item		Criteria
Scratches	Linear ($a > 2b$)	Minimum $\leq$ width [mm] $\leq$ maximum, minimum $\leq$ length [mm] $\leq$ maximum, N (number of defects) $\leq$ maximum
Dents	Circular ($a \leq 2b$)	Minimum $\leq$ average diameter, $(a + b)/2$ [mm] $\leq$ maximum, N (number of defects) $\leq$ maximum

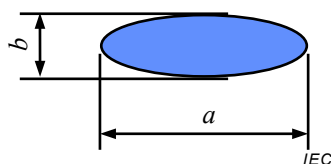


Figure 6 – Shape of scratch and dent defects

4.3.8 Foreign material and bubble defects

The criteria for foreign material such as dust, thread, etc, located inside the DUT, and bubbles such as air, gas, etc., are provided in Table 2 and Figure 7.

Table 2 – Criteria for foreign material and bubble defects

Item	Criteria
Foreign material	N (number of defects): maximum size of defects $< \max [a, b]$
Bubbles	N (number of defects): maximum size of defects $< \max [a, b]$




Figure 7 – Shape of foreign material and bubble defects

4.3.9 Light leakage defects

There shall be no visible light from the backlight unit around the edges of the screen.

IECNORM.COM : Click to view the full PDF of IEC 61747-20-3:2016