

# CONSOLIDATED VERSION



Photovoltaic inverters – Data sheet and name plate

IECNORM.COM : Click to view the full PDF of IEC 62894:2014+AMD1:2016 CSV



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2016 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
Fax: +41 22 919 03 00  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

#### IEC Catalogue - [webstore.iec.ch/catalogue](http://webstore.iec.ch/catalogue)

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

#### IEC publications search - [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

#### IEC Glossary - [std.iec.ch/glossary](http://std.iec.ch/glossary)

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

#### IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [csc@iec.ch](mailto:csc@iec.ch).

IECNORM.COM : Click to view the full PDF of IEC 62347-1:2016 CSV

# CONSOLIDATED VERSION



---

**Photovoltaic inverters – Data sheet and name plate**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

ICS 27.160

ISBN 978-2-8322-3642-0

**Warning! Make sure that you obtained this publication from an authorized distributor.**

IECNORM.COM : Click to view the full PDF of IEC 62894:2014+AMD1:2016 CSV

# REDLINE VERSION



Photovoltaic inverters – Data sheet and name plate

IECNORM.COM : Click to view the full PDF of IEC 62894:2014+AMD1:2016 CSV

## CONTENTS

|                                                                      |    |
|----------------------------------------------------------------------|----|
| FOREWORD .....                                                       | 3  |
| 1 Scope .....                                                        | 5  |
| 2 Normative references .....                                         | 5  |
| 3 Terms and definitions .....                                        | 5  |
| 3.1 Input side (PV generator) .....                                  | 5  |
| 3.2 Output side (grid connection) .....                              | 6  |
| 4 Data sheet information .....                                       | 8  |
| 4.1 General .....                                                    | 8  |
| 4.2 Short description .....                                          | 8  |
| 4.3 Conformity .....                                                 | 8  |
| 4.4 Electrical parameters .....                                      | 9  |
| 4.4.1 General .....                                                  | 9  |
| 4.5 Characterisation of the operating performance .....              | 9  |
| 4.6 Safety .....                                                     | 11 |
| 4.7 Operating conditions .....                                       | 11 |
| 4.8 Fitting and construction .....                                   | 11 |
| 4.8.1 Physical characteristics .....                                 | 11 |
| 4.8.2 Other characteristics .....                                    | 12 |
| 5 Details on the name plate .....                                    | 12 |
| Bibliography .....                                                   | 14 |
| Figure 1 – Representation of the inverter efficiency .....           | 10 |
| Figure 2 – Power reduction with increased ambient temperatures ..... | 11 |
| Figure 3 – Example of a name plate .....                             | 13 |

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

### PHOTOVOLTAIC INVERTERS – DATA SHEET AND NAME PLATE

#### FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

#### DISCLAIMER

**This Consolidated version is not an official IEC Standard and has been prepared for user convenience. Only the current versions of the standard and its amendment(s) are to be considered the official documents.**

**This Consolidated version of IEC 62894 bears the edition number 1.1. It consists of the first edition (2014-12) [documents 82/887/FDIS and 82/917/RVD] and its amendment 1 (2016-11) [documents 82/1175/FDIS and 82/1205/RVD]. The technical content is identical to the base edition and its amendment.**

**In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions are in green text, deletions are in strikethrough red text. A separate Final version with all changes accepted is available in this publication.**

International Standard IEC 62894 has been prepared by IEC technical committee 82: Solar photovoltaic energy systems.

This standard has been derived from EN 50524.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

**IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

## PHOTOVOLTAIC INVERTERS – DATA SHEET AND NAME PLATE

### 1 Scope

This International Standard describes data sheet and name plate information for photovoltaic inverters in grid parallel operation.

The object of this standard is to provide minimum information required to configure a safe and optimal system with photovoltaic inverters.

In this context, data sheet information is a technical description separate from the photovoltaic inverter. The name plate is a sign of durable construction on or in the photovoltaic inverter. The name plate may be inside the photovoltaic inverter only if the name plate is visible once a door is opened in normal use.

### 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60529, *Degrees of protection provided by enclosures (IP Code)*

IEC 60664-1, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

IEC 60721-2-1, *Classification of environmental conditions – Part 2-1: Environmental conditions appearing in nature – Temperature and humidity*

IEC 61683, *Photovoltaic systems – Power conditioners – Procedure for measuring efficiency*

IEC 62109-1, *Safety of power converters for use in photovoltaic power systems – Part 1: General requirements*

ISO 216, *Writing paper and certain classes of printed matter – Trimmed sizes – A and B series, and indication of machine direction*

### 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

#### 3.1 Input side (PV generator)

##### 3.1.1

##### maximum input voltage

$V_{dcmax}$

allowed maximum voltage at the inverter input

### 3.1.2

#### minimum input voltage

$V_{dcmin}$

minimum input voltage for the inverter to energize the utility grid, independent of mode of operation

### 3.1.3

#### start-up input voltage

$V_{dcstart}$

input voltage at which the inverter starts energizing the utility grid

### 3.1.4

#### rated input voltage

$V_{dc,r}$

input voltage specified by the manufacturer, to which other data sheet information refers

### 3.1.5

#### maximum MPP voltage

$V_{mppmax}$

maximum voltage at which the inverter can deliver its rated power

### 3.1.6

#### minimum MPP voltage

$V_{mppmin}$

minimum voltage at which the inverter can deliver its rated power

### 3.1.7

#### maximum input current

$I_{dcmax}$

maximum current at which the inverter can operate. If the inverter has multiple MPP inputs,  $I_{dcmax}$  is related to each single input

### 3.1.8

#### maximum short-circuit DC input current

$I_{scmax}$

absolute maximum total PV array short circuit current (DC) that the inverter is rated to have connected to its input terminals, under worst-case conditions of ambient temperature, irradiance, etc.

Note 1 to entry: This term is based on the term  $I_{sc, PV}$  in IEC 62109-1. It refers to the absolute maximum current the DC input to the inverter is designed for under conditions of expected use. This differs from the simple sum of the marked  $I_{sc}$  ratings of the connected PV modules, since those markings are based on short-circuit conditions under standard test conditions, and may be exceeded in temperatures or irradiance levels different from the standard levels.

### 3.1.9

#### rated input power

$P_{dc,r}$

input power (DC) at rated input voltage and rated power (AC)

## 3.2 Output side (grid connection)

### 3.2.1

#### maximum grid voltage

$V_{acmax}$

maximum voltage at which the inverter can energize the grid

### 3.2.2

#### minimum grid voltage

$V_{acmin}$

minimum voltage at which the inverter can energize the grid

### 3.2.3

#### rated grid voltage

$V_{ac,r}$

utility grid voltage to which other data sheet information refers

### 3.2.4

#### maximum output current

$I_{acmax}$

maximum output current that the inverter can deliver

### 3.2.5

#### rated power

$P_{ac,r}$

active power the inverter can deliver in continuous operation

### 3.2.6

#### rated frequency

$f_r$

utility grid frequency at which the inverter performs as specified

### 3.2.7

#### maximum frequency

$f_{max}$

maximum frequency at which the inverter can energize the grid

### 3.2.8

#### minimum frequency

$f_{min}$

minimum frequency at which the inverter can energize the grid

### 3.2.9

#### night-time power loss

power loss of the inverter, which is supplied from the public grid, when no solar generator power is present

### 3.2.10

#### $\cos\phi_{ac,r}$

minimum power factor for which the inverter can output the rated active power

### 3.2.11

#### nominal operation power factor

power factor operating at nominal power

### 3.2.12

#### power factor of operation range

range of power factor for the range operation of the inverter

## 3.3 Other optional parameters

### 3.3.1

#### time to start-up

$t_{start}$

default start-up delay time of the inverter under normal conditions

### 3.3.2 rated AC current

$I_{ac,r}$   
rated AC current at rated power ( $P_{ac,r}$ ), and rated grid voltage ( $V_{ac,r}$ )

### 3.3.3 maximum AC output power

$P_{acmax}$   
maximum continuous active power the inverter can deliver under specified voltage or temperature conditions within the inverter's rated range of operation

Note 1 to entry: The maximum AC output power ( $P_{acmax}$ ) may differ from rated power ( $P_{ac,r}$ ) if the inverter is capable of delivering additional power under specific conditions, for example at temperatures below the inverter's maximum ambient temperature rating, or within specified DC voltage ranges.

### 3.3.4 total harmonic distortion

$THD$   
<current> total harmonic distortion measured in the output current at rated power ( $P_{ac,r}$ ), divided by the full rated fundamental current

Note 1 to entry: This definition of "total harmonic distortion" applies to this document only.

### 3.3.5 maximum efficiency

$\eta_{max}$   
maximum measured DC to AC efficiency recorded, tested in accordance with IEC 61683

## 4 Data sheet information

### 4.1 General

Technical products are usually brought into the market with a documentation providing information to the user regarding the operating conditions and its intended purpose. A data sheet specifies a product to the extent that the contained data could be consulted for planning or dimensioning. The size and organization of the data sheet are left to the manufacturer. It is however recommendable to be limited to a double-side printed on A4 sheet, according to ISO 216, whereby a topic-specific separation is favourable.

The following subclauses define the minimum required information, which should be included on the datasheet for a photovoltaic inverter. Additional information can however be supplied by the manufacturer.

### 4.2 Short description

In short the characteristics of the inverter are to be described. Special characteristics of the inverters can be mentioned. For better identification of the equipment, its photo or its true design drawing should be included on the data sheet. The internal design of the inverter should be represented in a clear way (e.g. by means of a block diagram). ~~The topology type should be indicated too.~~

### 4.3 Conformity

The conformity to relevant norms and standards shall be shown in the data sheet.

## 4.4 Electrical parameters

### 4.4.1 General

The electrical parameters from 4.4.2 to 4.4.3 are to be regarded as minimum requirement for a professional system integration of an inverter.

**4.4.2** The following parameters of the input side shall be indicated:

$V_{dcmax}$ ,  $V_{dcmin}$ ,  $V_{dcstart}$ <sup>1)</sup>,  $V_{dc,r}$ ,  $V_{mppmax}$ ,  $V_{mppmin}$ ,  $I_{dcmax}$ , number of independent MPP inputs (if applicable),  $I_{scmax}$ ,  $P_{dc,r}$ ,  $P_{dcmax}$ ,  $t_{start}$

The maximum voltage of the connected solar generator should be determined in individual cases from the planner. The maximum input voltage of the inverter should not be exceeded at any time.

The specification of maximum and minimum MPP voltage may also be indicated as ranges.

The list of parameters does not include a maximum DC power rating and it is recommended that such a term not be included in product data sheets. This is due to significant inconsistencies in how the term is used, defined, and interpreted. The maximum array size that can be connected to an inverter should be determined by the maximum short-circuit DC input current rating and the maximum input voltage rating.

**4.4.3** The following parameters of the output side shall be indicated:

$V_{acmax}$ ,  $V_{acmin}$ ,  $V_{ac,r}$ ,  $I_{acmax}$ ,  $P_{ac,r}$ ,  $f_r$ ,  $f_{min}$ ,  $f_{max}$ ,  $\cos\phi_{ac,r}$ ,  $I_{ac,r}$ ,  $P_{acmax}$ ,  $THD$ ,  $\eta_{max}$

The power factor should be displayed over the range of power and not only at rated power. Additionally the number of phases to be connected at the output and the number of phases fed in have to be noted.

The specification of the maximum and minimum output voltages and frequencies may be specified in each case as ranges. If only one value is given, the default status at delivery should be used.

**4.4.4** The following parameters are not required on the product data sheet, but may be included if considered useful:

$t_{start}$ ,  $I_{ac,r}$ ,  $P_{acmax}$ ,  $THD$ ,  $\eta_{max}$

If the parameters  $P_{acmax}$  and  $\eta_{max}$  are included, the product data sheet shall specify:

- the conditions at which the maximum AC output power can be delivered;
- the DC and AC voltage and ambient conditions at which the maximum efficiency is reported, tested in accordance with IEC 61683.

## 4.5 Characterisation of the operating performance


**4.5.1** The indication of the rated power ( $P_{ac,r}$ ) refers to the respective rated values of the connected grid (e.g. 230 V/50 Hz). The rated power is given at the rated input voltage, rated power and the ambient temperature of  $(25 \pm 3) ^\circ\text{C}$ . This value shall be obtained after temperature rise test.

<sup>1)</sup> The indication of the start-up input voltage is necessary only if the input voltage is used as switching on criterion for the inverter.

NOTE In addition, the ability of the inverter to supply the rated power even at higher ambient temperatures can be stated together with the time the inverter can supply this power (e.g. 40 °C for 2 h or 35 °C unlimited).


**4.5.2** Night-time power loss is to be specified, including the internal power source.

**4.5.3** The operating efficiency has to be specified in tabular form at least for the three input voltages ( $V_{mppmax}$ ,  $V_{dc,r}$ , and  $V_{mppmin}$ ) and eight output powers (5 %, 10 %, 20 %, 25 %, 30 %, 50 %, 75 %, and 100 %, where these percentages indicate the ratio of  $P_{ac}/P_{ac,r}$ ). A graphical representation is optional (example: Figure 1).

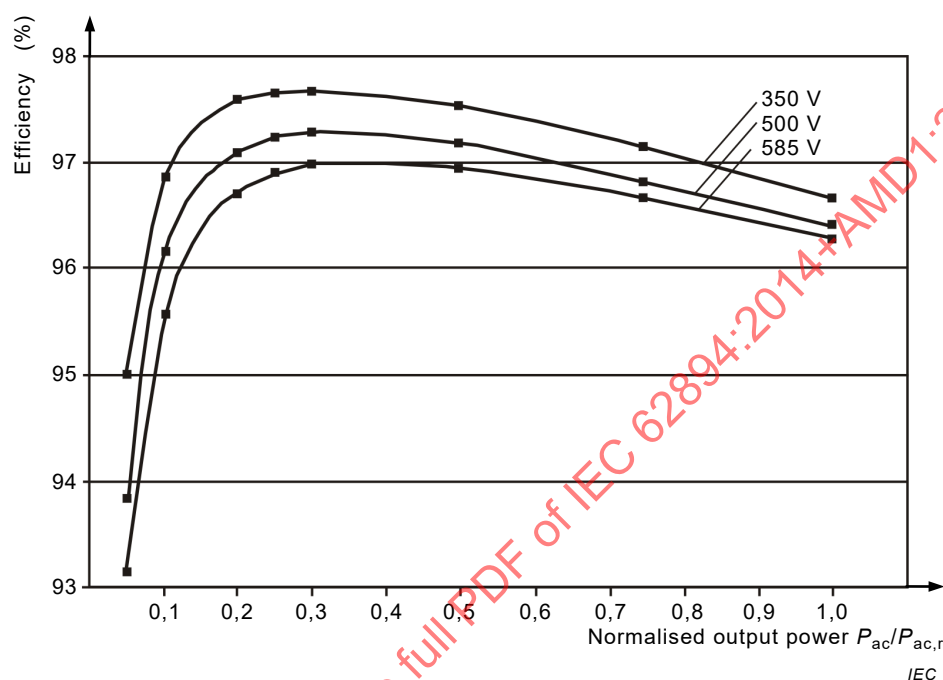

**Figure 1 – Representation of the inverter efficiency**

**4.5.4** For the purpose of self-protection routines can be implemented into the inverter, which prevent a damage (current – power – temperature derating). Any self-protection routine that causes derating shall be described in tabular or graphical form over the entire permitted operation range (see example in Figure 2).

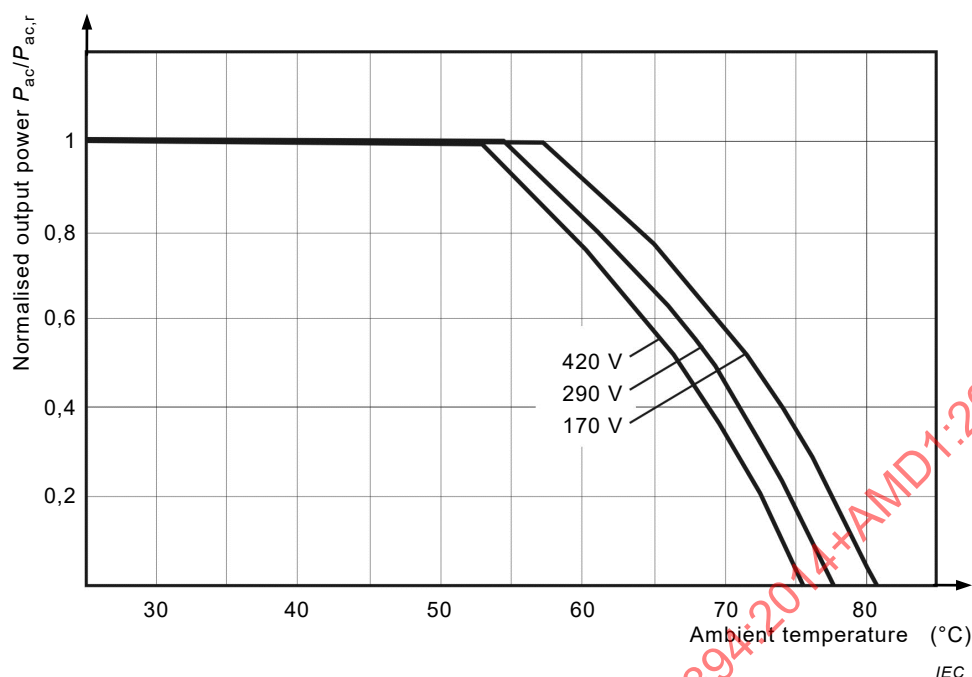

**Figure 2 – Power reduction with increased ambient temperatures**

#### 4.6 Safety

The following data concerning the safety of inverters shall be contained in the data sheet:

- safety class system according to IEC 62109-1;
- data for galvanic separation (with or without transformer);
- kind of integrated utility interface (indication of the sets of local rules, regulations or laws);
- ~~– the method of active detection of loss of mains should be clearly indicated;~~
- ~~– time to reconnect after disconnection due to loss of mains should be indicated.~~

Additional information such as the minimum allowed time for an inverter to reconnect to the grid after disconnection due to loss of mains, or the method of active detection of loss of mains, may be included if useful for the particular country or market.

#### 4.7 Operating conditions

The operating conditions for the inverters are differentiated (unprotected in the open, protected in the open, air-conditioned in interiors, without air-condition in interiors).

The degree of severity depends on the use of the inverter and is to be specified by the manufacturer. For inverters to be used in the outdoor the indication of the appropriate climatic class shall be specified according to IEC 60721-2-1 by the manufacturer. Further data concerning the operating conditions of inverters should be contained in the data sheet:

- rated range of the ambient temperature in which the inverter is to be operated may be according to IEC 60721-2-1;
- permissible maximum value for the relative humidity (non-condensing);
- maximum noise emission, to be given if over 75 dB.

#### 4.8 Fitting and construction

##### 4.8.1 Physical characteristics

- Degree of protection according to IEC 60529.

- Overvoltage category according IEC 60664-1.
- Input and output side connection technology.
- Number of input DC connectors (pairs) and number of input DC connectors per MPP input.
- Physical dimensions including protruding parts (width, depth, height).
- Weight.

If applicable the type and manufacturer of the input and output connector should be given.

#### 4.8.2 Other characteristics

- Existing disconnecting device at the input side (if any).
- Cooling principle (convection, forced cooling).
- Name and address of the manufacturer and of market importer, if applicable.
- Communication protocol(s) used should be indicated as well.

~~– Warranty period should be indicated.~~

### 5 Details on the name plate

The following list represents the minimum required information, which should be contained on a name plate for a photovoltaic inverter. Additional information can however be supplied by the manufacturer.

The minimum requirements for the production of a name plate are according to IEC 62109-1:

- name and origin of the manufacturer and/or market importer;
- model or type name;
- serial number;
- electrical parameters:  $V_{dcmax}$ ,  $V_{mppmin}$ ,  $V_{mppmax}$ ,  $I_{dcmax}$ ,  $P_{ac,r}$ ,  $V_{ac,r}$ ,  $f_r$ ,  $I_{acmax}$ ;
- degree of protection;
- overvoltage category;
- safety class.

Electrical parameters shall be differentiated between input and output values. The arrangement on the name plate should be in such a way that a clear separation is recognizable. The provided data should contain the minimum necessary information, to be able to operate the inverter at a given grid without damage. This shall not substitute the use of the operating instructions.

The name plate (see example in Figure 3) and other inscriptions have to be attached durably on the inverter. ~~The material of the name plate shall be metallic.~~ All inscriptions shall be written in English or in the national language or as understandable, standardized pictograms. The serial number of the product might be located outside of the name plate. In that case the serial number etiquette has to be fully visible around the name plate.

|                                                                                   |       |                                                            |  |
|-----------------------------------------------------------------------------------|-------|------------------------------------------------------------|--|
|  |       | Company<br>Postcode, Town, Country<br>Ph.: +XX XXX XXX XXX |  |
| Type                                                                              |       | S/N XX-XXX-XXXX-XXXX-XXXXXX                                |  |
| DC-Input                                                                          |       | AC-Output                                                  |  |
| Max. Input voltage                                                                | XXX V | Rated output voltage/XXX V/XX Hz                           |  |
| Min. MPP voltage                                                                  | XXX V | Rated output power XXX W                                   |  |
| Max. MPP voltage                                                                  | XXX V | Max. Output current XX A                                   |  |
| Max. Input current                                                                | XX A  |                                                            |  |
| Enclosure IP XX                                                                   |       | Ambient temperature – XX ...+ XX                           |  |
| Safety Class X                                                                    |       | Overvoltage Category                                       |  |
| Pollution Degree                                                                  |       | Altitude                                                   |  |

IEC

Figure 3 – Example of a name plate

## Bibliography

IEC 62262, *Degrees of protection provided by enclosures for electrical equipment against external mechanical impacts (IK code)*

EN 50438, *Requirements for the connection of micro-generators in parallel with public low-voltage distribution networks*

---

IECNORM.COM : Click to view the full PDF of IEC 62894:2014+AMD1:2016 CSV

# FINAL VERSION

Photovoltaic inverters – Data sheet and name plate

IECNORM.COM : Click to view the full PDF of IEC 62894:2014+AMD1:2016 CSV

## CONTENTS

|                                                                      |    |
|----------------------------------------------------------------------|----|
| FOREWORD .....                                                       | 3  |
| 1 Scope .....                                                        | 5  |
| 2 Normative references .....                                         | 5  |
| 3 Terms and definitions .....                                        | 5  |
| 3.1 Input side (PV generator) .....                                  | 5  |
| 3.2 Output side (grid connection) .....                              | 6  |
| 4 Data sheet information .....                                       | 8  |
| 4.1 General .....                                                    | 8  |
| 4.2 Short description .....                                          | 8  |
| 4.3 Conformity .....                                                 | 8  |
| 4.4 Electrical parameters .....                                      | 8  |
| 4.4.1 General .....                                                  | 8  |
| 4.5 Characterisation of the operating performance .....              | 9  |
| 4.6 Safety .....                                                     | 11 |
| 4.7 Operating conditions .....                                       | 11 |
| 4.8 Fitting and construction .....                                   | 11 |
| 4.8.1 Physical characteristics .....                                 | 11 |
| 4.8.2 Other characteristics .....                                    | 11 |
| 5 Details on the name plate .....                                    | 11 |
| Bibliography .....                                                   | 13 |
| Figure 1 – Representation of the inverter efficiency .....           | 10 |
| Figure 2 – Power reduction with increased ambient temperatures ..... | 10 |
| Figure 3 – Example of a name plate .....                             | 12 |

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

### PHOTOVOLTAIC INVERTERS – DATA SHEET AND NAME PLATE

#### FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

#### DISCLAIMER

**This Consolidated version is not an official IEC Standard and has been prepared for user convenience. Only the current versions of the standard and its amendment(s) are to be considered the official documents.**

**This Consolidated version of IEC 62894 bears the edition number 1.1. It consists of the first edition (2014-12) [documents 82/887/FDIS and 82/917/RVD] and its amendment 1 (2016-11) [documents 82/1175/FDIS and 82/1205/RVD]. The technical content is identical to the base edition and its amendment.**

**This Final version does not show where the technical content is modified by amendment 1. A separate Redline version with all changes highlighted is available in this publication.**

International Standard IEC 62894 has been prepared by IEC technical committee 82: Solar photovoltaic energy systems.

This standard has been derived from EN 50524.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IECNORM.COM : Click to view the full PDF of IEC 62894:2014+AMD1:2016 CSV

## PHOTOVOLTAIC INVERTERS – DATA SHEET AND NAME PLATE

### 1 Scope

This International Standard describes data sheet and name plate information for photovoltaic inverters in grid parallel operation.

The object of this standard is to provide minimum information required to configure a safe and optimal system with photovoltaic inverters.

In this context, data sheet information is a technical description separate from the photovoltaic inverter. The name plate is a sign of durable construction on or in the photovoltaic inverter. The name plate may be inside the photovoltaic inverter only if the name plate is visible once a door is opened in normal use.

### 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60529, *Degrees of protection provided by enclosures (IP Code)*

IEC 60664-1, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

IEC 60721-2-1, *Classification of environmental conditions – Part 2-1: Environmental conditions appearing in nature – Temperature and humidity*

IEC 61683, *Photovoltaic systems – Power conditioners – Procedure for measuring efficiency*

IEC 62109-1, *Safety of power converters for use in photovoltaic power systems – Part 1: General requirements*

ISO 216, *Writing paper and certain classes of printed matter – Trimmed sizes – A and B series, and indication of machine direction*

### 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

#### 3.1 Input side (PV generator)

##### 3.1.1

##### maximum input voltage

$V_{dcmax}$

allowed maximum voltage at the inverter input

### 3.1.2

#### minimum input voltage

$V_{dcmin}$

minimum input voltage for the inverter to energize the utility grid, independent of mode of operation

### 3.1.3

#### start-up input voltage

$V_{dcstart}$

input voltage at which the inverter starts energizing the utility grid

### 3.1.4

#### rated input voltage

$V_{dc,r}$

input voltage specified by the manufacturer, to which other data sheet information refers

### 3.1.5

#### maximum MPP voltage

$V_{mppmax}$

maximum voltage at which the inverter can deliver its rated power

### 3.1.6

#### minimum MPP voltage

$V_{mppmin}$

minimum voltage at which the inverter can deliver its rated power

### 3.1.7

#### maximum input current

$I_{dcmax}$

maximum current at which the inverter can operate. If the inverter has multiple MPP inputs,  $I_{dcmax}$  is related to each single input

### 3.1.8

#### maximum short-circuit DC input current

$I_{scmax}$

absolute maximum total PV array short circuit current (DC) that the inverter is rated to have connected to its input terminals, under worst-case conditions of ambient temperature, irradiance, etc.

Note 1 to entry: This term is based on the term  $I_{sc, PV}$  in IEC 62109-1. It refers to the absolute maximum current the DC input to the inverter is designed for under conditions of expected use. This differs from the simple sum of the marked  $I_{sc}$  ratings of the connected PV modules, since those markings are based on short-circuit conditions under standard test conditions, and may be exceeded in temperatures or irradiance levels different from the standard levels.

### 3.1.9

#### rated input power

$P_{dc,r}$

input power (DC) at rated input voltage and rated power (AC)

## 3.2 Output side (grid connection)

### 3.2.1

#### maximum grid voltage

$V_{acmax}$

maximum voltage at which the inverter can energize the grid

### 3.2.2

#### minimum grid voltage

$V_{acmin}$

minimum voltage at which the inverter can energize the grid

### 3.2.3

#### rated grid voltage

$V_{ac,r}$

utility grid voltage to which other data sheet information refers

### 3.2.4

#### maximum output current

$I_{acmax}$

maximum output current that the inverter can deliver

### 3.2.5

#### rated power

$P_{ac,r}$

active power the inverter can deliver in continuous operation

### 3.2.6

#### rated frequency

$f_r$

utility grid frequency at which the inverter performs as specified

### 3.2.7

#### maximum frequency

$f_{max}$

maximum frequency at which the inverter can energize the grid

### 3.2.8

#### minimum frequency

$f_{min}$

minimum frequency at which the inverter can energize the grid

### 3.2.9

#### night-time power loss

power loss of the inverter, which is supplied from the public grid, when no solar generator power is present

### 3.2.10

#### $\cos\phi_{ac,r}$

minimum power factor for which the inverter can output the rated active power

### 3.2.11

#### nominal operation power factor

power factor operating at nominal power

### 3.2.12

#### power factor of operation range

range of power factor for the range operation of the inverter

## 3.3 Other optional parameters

### 3.3.1

#### time to start-up

$t_{start}$

default start-up delay time of the inverter under normal conditions

### 3.3.2

#### rated AC current

$I_{ac,r}$

rated AC current at rated power ( $P_{ac,r}$ ), and rated grid voltage ( $V_{ac,r}$ )

### 3.3.3

#### maximum AC output power

$P_{acmax}$

maximum continuous active power the inverter can deliver under specified voltage or temperature conditions within the inverter's rated range of operation

Note 1 to entry: The maximum AC output power ( $P_{acmax}$ ) may differ from rated power ( $P_{ac,r}$ ) if the inverter is capable of delivering additional power under specific conditions, for example at temperatures below the inverter's maximum ambient temperature rating, or within specified DC voltage ranges.

### 3.3.4

#### total harmonic distortion

$THD$

<current> total harmonic distortion measured in the output current at rated power ( $P_{ac,r}$ ), divided by the full rated fundamental current

Note 1 to entry: This definition of "total harmonic distortion" applies to this document only.

### 3.3.5

#### maximum efficiency

$\eta_{max}$

maximum measured DC to AC efficiency recorded, tested in accordance with IEC 61683

## 4 Data sheet information

### 4.1 General

Technical products are usually brought into the market with a documentation providing information to the user regarding the operating conditions and its intended purpose. A data sheet specifies a product to the extent that the contained data could be consulted for planning or dimensioning. The size and organization of the data sheet are left to the manufacturer. It is however recommendable to be limited to a double-side printed on A4 sheet, according to ISO 216, whereby a topic-specific separation is favourable.

The following subclauses define the minimum required information, which should be included on the datasheet for a photovoltaic inverter. Additional information can however be supplied by the manufacturer.

### 4.2 Short description

In short the characteristics of the inverter are to be described. Special characteristics of the inverters can be mentioned. For better identification of the equipment, its photo or its true design drawing should be included on the data sheet. The internal design of the inverter should be represented in a clear way (e.g. by means of a block diagram).

### 4.3 Conformity

The conformity to relevant norms and standards shall be shown in the data sheet.

### 4.4 Electrical parameters

#### 4.4.1 General

The electrical parameters from 4.4.2 to 4.4.3 are to be regarded as minimum requirement for a professional system integration of an inverter.

**4.4.2** The following parameters of the input side shall be indicated:

$V_{dcmax}$ ,  $V_{dcmin}$ ,  $V_{dcstart}$ <sup>1)</sup>,  $V_{dc,r}$ ,  $V_{mppmax}$ ,  $V_{mppmin}$ ,  $I_{dcmax}$ , number of independent MPP inputs (if applicable),  $I_{scmax}$ ,  $P_{dc,r}$

The maximum voltage of the connected solar generator should be determined in individual cases from the planner. The maximum input voltage of the inverter should not be exceeded at any time.

The specification of maximum and minimum MPP voltage may also be indicated as ranges.

The list of parameters does not include a maximum DC power rating and it is recommended that such a term not be included in product data sheets. This is due to significant inconsistencies in how the term is used, defined, and interpreted. The maximum array size that can be connected to an inverter should be determined by the maximum short-circuit DC input current rating and the maximum input voltage rating.

**4.4.3** The following parameters of the output side shall be indicated:

$V_{acmax}$ ,  $V_{acmin}$ ,  $V_{ac,r}$ ,  $I_{acmax}$ ,  $P_{ac,r}$ ,  $f_r$ ,  $f_{min}$ ,  $f_{max}$ ,  $\cos\phi_{i_{ac,r}}$

The power factor should be displayed over the range of power and not only at rated power. Additionally the number of phases to be connected at the output and the number of phases fed in have to be noted.

The specification of the maximum and minimum output voltages and frequencies may be specified in each case as ranges. If only one value is given, the default status at delivery should be used.

**4.4.4** The following parameters are not required on the product data sheet, but may be included if considered useful:

$t_{start}$ ,  $I_{ac,r}$ ,  $P_{acmax}$ ,  $THD$ ,  $\eta_{max}$

If the parameters  $P_{acmax}$  and  $\eta_{max}$  are included, the product data sheet shall specify:

- the conditions at which the maximum AC output power can be delivered;
- the DC and AC voltage and ambient conditions at which the maximum efficiency is reported, tested in accordance with IEC 61683.

## 4.5 Characterisation of the operating performance

**4.5.1** The indication of the rated power ( $P_{ac,r}$ ) refers to the respective rated values of the connected grid (e.g. 230 V/50 Hz). The rated power is given at the rated input voltage, rated power and the ambient temperature of  $(25 \pm 3) ^\circ\text{C}$ . This value shall be obtained after temperature rise test.

NOTE In addition, the ability of the inverter to supply the rated power even at higher ambient temperatures can be stated together with the time the inverter can supply this power (e.g.  $40 ^\circ\text{C}$  for 2 h or  $35 ^\circ\text{C}$  unlimited).

**4.5.2** Night-time power loss is to be specified, including the internal power source.

<sup>1)</sup> The indication of the start-up input voltage is necessary only if the input voltage is used as switching on criterion for the inverter.