

INTERNATIONAL STANDARD

**Qi Specification version 2.0 –
Part 3: Mechanical, Thermal, and User Interface**

IECNORM.COM : Click to view the full PDF of IEC 63563-3:2025



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2025 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IECNORM.COM : Click to view the full text of IEC 60363-2:2023

INTERNATIONAL STANDARD

**Qi Specification version 2.0 –
Part 3: Mechanical, Thermal, and User Interface**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.240.99; 35.240.99

ISBN 978-2-8327-0186-7

Warning! Make sure that you obtained this publication from an authorized distributor.

INTERNATIONAL ELECTROTECHNICAL COMMISSION

QI SPECIFICATION VERSION 2.0 –
Part 3: Mechanical, Thermal, and User Interface**FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 63563-3 has been prepared by technical area 15: Wireless Power Transfer, of IEC technical committee 100: Audio, video and multimedia systems and equipment. It is an International Standard.

It is based on *Qi Specification version 2.0, Mechanical, Thermal, and User Interface* and was submitted as a Fast-Track document.

The text of this International Standard is based on the following documents:

Draft	Report on voting
100/4256/FDIS	100/4278/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

The structure and editorial rules used in this publication reflect the practice of the organization which submitted it.

This document was developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IECNORM.COM : Click to view the full PDF of IEC 63563-3:2025



Qi Specification

Mechanical, Thermal, and User Interface

Version 2.0

April 2023

IECNORM.COM : Click to view the full PDF of IEC 63563-3:2025

DISCLAIMER

The information contained herein is believed to be accurate as of the date of publication, but is provided “as is” and may contain errors. The Wireless Power Consortium makes no warranty, express or implied, with respect to this document and its contents, including any warranty of title, ownership, merchantability, or fitness for a particular use or purpose. Neither the Wireless Power Consortium, nor any member of the Wireless Power Consortium will be liable for errors in this document or for any damages, including indirect or consequential, from use of or reliance on the accuracy of this document. For any further explanation of the contents of this document, or in case of any perceived inconsistency or ambiguity of interpretation, contact: info@wirelesspowerconsortium.com.

RELEASE HISTORY

Specification Version	Release Date	Description
2.0	April 2023	Initial release of the v2.0 Qi Specification.

Table of Contents

1 General	2
1.1 Structure of the Qi Specification	2
1.2 Scope	3
1.3 Compliance	3
1.4 References	3
1.5 Conventions	4
1.6 Power Profiles	6
2 Power Receiver design requirements	7
3 Mechanical design guidelines (Informative)	8
3.1 Power Transmitter Product	8
3.2 Power Receiver Product	8
3.3 Power Transmitter Product Alignment Aid	9
3.4 Power Receiver Product Alignment Aid	9
4 Interface Surface temperature rise	10
5 User Interface requirements	11
5.1 User interaction with a Power Transmitter Product	11
5.2 User interaction with a Power Receiver Product	12

IECNORM.COM : Click to view the full PDF of IEC 63563-3:2025

1 General

The Wireless Power Consortium (WPC) is a worldwide organization that aims to develop and promote global standards for wireless power transfer in various application areas. A first application area comprises flat-surface devices such as mobile phones and chargers in the Baseline Power Profile (up to 5 W) and Extended Power Profile (above 5 W).

1.1 Structure of the Qi Specification

General documents

- Introduction
- Glossary, Acronyms, and Symbols

System description documents

- Mechanical, Thermal, and User Interface
- Power Delivery
- Communications Physical Layer
- Communications Protocol
- Foreign Object Detection
- NFC Tag Protection
- Authentication Protocol

IECNORM.COM : Click to view the full PDF of IEC 63563-3:2025

1.2 Scope

The *Qi Specification, Mechanical, Thermal, and User Interface* (this document) identifies basic physical design requirements and guidelines for Power Transmitter and Power Receiver Products, including product and system dimensions, alignment of the products, surface temperature rise, and indications to the user.

1.3 Compliance

All provisions in the *Qi Specification* are mandatory, unless specifically indicated as recommended, optional, note, example, or informative. Verbal expression of provisions in this Specification follow the rules provided in ISO/IEC Directives, Part 2.

Table 1: Verbal forms for expressions of provisions

Provision	Verbal form
requirement	“shall” or “shall not”
recommendation	“should” or “should not”
permission	“may” or “may not”
capability	“can” or “cannot”

1.4 References

For undated references, the most recently published document applies. The most recent WPC publications can be downloaded from <http://www.wirelesspowerconsortium.com>.

1.5 Conventions

1.5.1 Notation of numbers

- Real numbers use the digits 0 to 9, a decimal point, and optionally an exponential part.
- Integer numbers in decimal notation use the digits 0 to 9.
- Integer numbers in hexadecimal notation use the hexadecimal digits 0 to 9 and A to F, and are prefixed by "0x" unless explicitly indicated otherwise.
- Single bit values use the words ZERO and ONE.

1.5.2 Tolerances

Unless indicated otherwise, all numeric values in the *Qi Specification* are exactly as specified and do not have any implied tolerance.


1.5.3 Fields in a data packet

A numeric value stored in a field of a data packet uses a big-endian format. Bits that are more significant are stored at a lower byte offset than bits that are less significant. [Table 2](#) and [Figure 1](#) provide examples of the interpretation of such fields.

Table 2: Example of fields in a data packet

	b ₇	b ₆	b ₅	b ₄	b ₃	b ₂	b ₁	b ₀
B ₀	(msb) 16-bit Numeric Data Field (lsb)							
B ₁								
B ₂	Other Field					(msb)		
B ₃	10-bit Numeric Data Field						(lsb)	Field

Figure 1. Examples of fields in a data packet

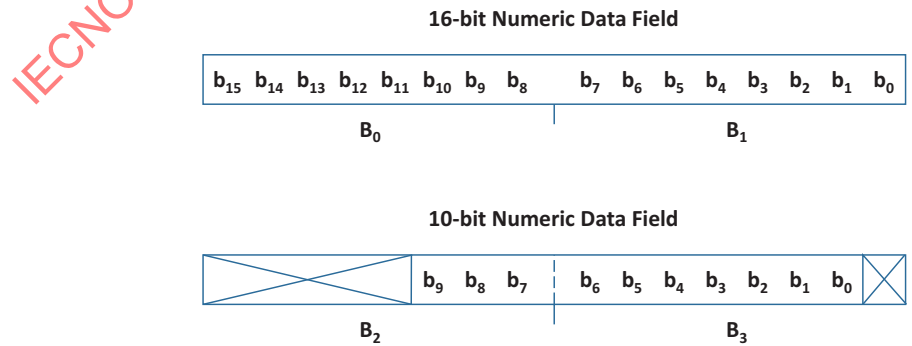

1.5.4 Notation of text strings

Text strings consist of a sequence of printable ASCII characters (i.e. in the range of 0x20 to 0x7E) enclosed in double quotes ("). Text strings are stored in fields of data structures with the first character of the string at the lowest byte offset, and are padded with ASCII NUL (0x00) characters to the end of the field where necessary.

EXAMPLE: The text string "WPC" is stored in a six-byte field as the sequence of characters 'W', 'P', 'C', NUL, NUL, and NUL. The text string "M:4D3A" is stored in a six-byte field as the sequence 'M', ':', '4', 'D', '3', and 'A'.

1.5.5 Short-hand notation for data packets

In many instances, the *Qi Specification* refers to a data packet using the following shorthand notation:

<MNEMONIC>/<modifier>

In this notation, <MNEMONIC> refers to the data packet's mnemonic defined in the *Qi Specification, Communications Protocol*, and <modifier> refers to a particular value in a field of the data packet. The definitions of the data packets in the *Qi Specification, Communications Protocol*, list the meanings of the modifiers.

For example, EPT/cc refers to an End Power Transfer data packet having its End Power Transfer code field set to 0x01.

1.6 Power Profiles

A Power Profile determines the level of compatibility between a Power Transmitter and a Power Receiver. Table 3 defines the available Power Profiles.

- *BPP PTx*: A Baseline Power Profile Power Transmitter.
- *EPP5 PTx*: An Extended Power Profile Power Transmitter having a restricted power transfer capability, i.e. $P_L^{(pot)} = 5 \text{ W}$.
- *EPP PTx*: An Extended Power Profile Power Transmitter.
- *BPP PRx*: A Baseline Power Profile Power Receiver.
- *EPP PRx*: An Extended Power Profile Power Receiver.


Table 3: Capabilities included in a Power Profile

Feature	BPP PTx	EPP5 PTx	EPP PTx	BPP PRx	EPP PRx
Ax or Bx design	Yes	Yes	No	N/A	N/A
MP-Ax or MP-Bx design	No	No	Yes	N/A	N/A
Baseline Protocol	Yes	Yes	Yes	Yes	Yes
Extended Protocol	No	Yes	Yes	No	Yes
Authentication	N/A	Optional	Yes	N/A	Optional

2 Power Receiver design requirements

A Power Receiver design shall include a Secondary Coil and an Interface Surface (see Figure 2). The distance from the Secondary Coil to the Interface Surface of the Power Receiver Product shall not exceed $d_z = 2.5$ mm across the bottom face of the Secondary Coil.

Figure 2. Secondary Coil assembly

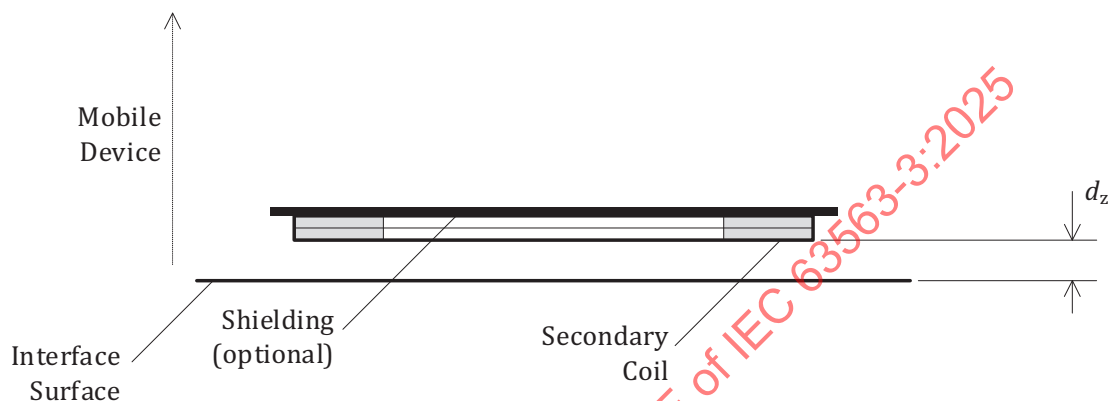

3 Mechanical design guidelines (Informative)

3.1 Power Transmitter Product

For the best user experience with respect to wireless power transfer, it is recommended that:

- The Power Transmitter Product Interface Surface extends higher than its surroundings, or has a size of at least $107 \text{ mm} \times 177 \text{ mm}$ for the Baseline Power Profile.

For the Extended Power Profile, the recommended Power Transmitter Product Interface Surface dimensions is at least $439 \times 329 \text{ mm}^2$.

- The Power Transmitter Product Interface Surface is marked to indicate the location of its Active Area(s)—e.g. by means of the logo or other visual marking, lighting, etc.
- In the case of stand-alone Power Transmitter Products, the Active Area is centered within the Power Transmitter Product Interface Surface.

3.2 Power Receiver Product

The overall shape and size of a Power Receiver Product is dictated by its primary application. For example, cell phones, headsets, and digital (still) cameras, all have substantially different form factors. For the best user experience with respect to wireless power transfer, it is recommended that the mechanical design of a Power Receiver Product follows the guidelines listed below to the extent possible in relation to the primary application of the Power Receiver Product:

- The Power Receiver Product X, Y dimensions do not exceed $107 \text{ mm} \times 177 \text{ mm}$ for the Baseline Power Profile.

For the Extended Power Profile, Power Receiver Product X, Y dimensions do not exceed $439 \times 329 \text{ mm}^2$.

- The Power Receiver Product Interface Surface is flat.
- The Power Receiver Product Interface Surface is marked to indicate the location of its Active Area, e.g. by means of the logo or other visual marking.
- The location of the Active Area is centered within the Power Receiver Product Interface Surface.

3.3 Power Transmitter Product Alignment Aid

In order to ensure proper coupling between a Power Transmitter Product and a Power Receiver Product, it is recommended that the Power Transmitter Product employs one or more of the following Alignment Aids:

- A movable Active Area.
- A fixed visual marking of the Active Area on Interface Surface.
- Lighting that guides the user to align the Power Receiver Product.
- An audible signal that indicates when alignment is achieved.
- Tactile feedback that indicates when alignment is achieved.

3.4 Power Receiver Product Alignment Aid

In order to ensure proper coupling between a Power Transmitter Product and a Power Receiver Product, it is recommended that the Power Receiver Product employs one or more of the following Alignment Aids:

- An audible signal when alignment is achieved.
- Tactile feedback that indicates when alignment is achieved.
- A visual Response; e.g. a screen lighting up within 200 ms to indicate that power is received.
- An indication of wireless charging.

4 Interface Surface temperature rise

The Power Transmitter Product shall limit the top surface temperature of the thermal Test Power Receiver (TPR-THERMAL-5W or TPR-THERMAL-15W) to at most 12 °C above the ambient temperature, while the Test Power Receiver is operating at its desired Control Point for 1 hour in an environment that is shielded against spurious thermal contributions due to air flow, radiation, etc. It is recommended that the Power Transmitter Product limits the Interface Surface temperature to at most 5 °C above the ambient temperature, while powering the Test Power Receiver for 1 hour.

IECNORM.COM : Click to view the full PDF of IEC 63563-3:2025