

PUBLICLY AVAILABLE SPECIFICATION PRE-STANDARD

**Connectors for electronic equipment – Product requirements –
Part 2-107: Circular connectors – Detail specification for circular hybrid
connectors M12 with electrical and fibre-optic contacts with screw-locking**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/customerserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00

PUBLICLY AVAILABLE SPECIFICATION PRE-STANDARD

**Connectors for electronic equipment – Product requirements –
Part 2-107: Circular connectors – Detail specification for circular hybrid
connectors M12 with electrical and fibre-optic contacts with screw-locking**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE



CONTENTS

FOREWORD.....	4
1 General information.....	7
1.1 Scope.....	7
1.2 Recommended method of termination	7
1.3 Ratings and characteristics	7
1.3.1 Electrical contacts	7
1.3.2 Optic contacts	8
1.4 Normative references	8
1.5 Marking.....	9
1.6 Safety aspects.....	9
2 Technical information	9
2.1 Terms and definitions	9
2.1.1 Mounting orientation	9
2.2 Survey of styles and variants.....	9
2.2.1 Fixed connectors	9
2.2.2 Free connectors	10
2.2.3 Adaptor	11
3 Dimensions	12
3.1 General.....	12
3.2 Interface dimensions	12
3.2.1 Pin front view plug connector.....	12
3.3 Engagement (mating) information.....	13
3.4 Gauges for electric contacts	14
4 Characteristics	15
4.1 Climatic category.....	15
4.2 Electrical characteristics (only electrical contacts).....	15
4.2.1 Rated voltage – Impulse voltage – Pollution degree.....	15
4.2.2 Voltage proof.....	15
4.2.3 Current-carrying capacity.....	15
4.2.4 Contact resistance.....	16
4.2.5 Insulation resistance.....	16
4.3 Optic characteristics (only optic contacts).....	16
4.4 Mechanical.....	16
4.4.1 IP degree of protection	16
4.4.2 Mechanical operation	16
4.4.3 Insertion and withdrawal forces	16
4.4.4 Contact retention in insert.....	16
4.4.5 Polarizing method.....	17
4.4.6 Vibration (sinusoidal).....	17
5 Test schedule.....	17
5.1 General.....	17
5.1.1 Arrangement for contact resistance measurements.....	17
5.1.2 Arrangement for dynamic stress tests (vibration)	18
5.2 Test schedule.....	19
5.2.1 Test group P – Preliminary	19
5.2.2 Test group AP – Dynamic/ Climatic.....	21

5.2.3	Test group BP – Mechanical endurance.....	25
5.2.4	Test group CP – Electrical load	28
5.2.5	Test group DP – Chemical resistivity	29
5.2.6	Test group EP – Connection method tests	30
BIBLIOGRAPHY		31

Figure 1 – Fixed connector, electrical female contacts, single hole mounting thread M16 × 1,5 mounting orientation.....	10
Figure 2 – Fixed connector, electrical female contacts, for feed through, single hole mounting thread M16 × 1,5	10
Figure 3 – Free connector, straight version, with locking nut, male contacts	11
Figure 4 – Adaptor, straight version, without locking nut	11
Figure 5 - Pin front view plug connector	12
Figure 6 – Engagement (mating) information	13
Figure 7 – Gauge dimensions	14
Figure 8 – Contact resistance arrangement.....	18
Figure 9 – Dynamic stress test arrangement A.....	18
Figure 10 – Dynamic stress test arrangement B.....	18
Table 1 – Styles of fixed connectors	9
Table 2 – Styles of free connectors.....	10
Table 3 – Styles of adaptors.....	11
Table 4 – Dimensions connectors Type D in mated position.....	13
Table 5 - Gauges	14
Table 6 – Climatic Category.....	15
Table 7 – Rated voltage – Impulse voltage – Pollution degree	15
Table 8 – Voltage proof.....	15
Table 9 – Number of mechanical operations	16
Table 10 – Insertion and withdrawal forces	16
Table 11 – Number of test specimens	17
Table 12 – Test group P.....	19
Table 13 – Test group AP	21
Table 14 – Test group BP	25
Table 15 – Test group CP	28
Table 16 – Test group DP	29
Table 17 – Test group EP	30

INTERNATIONAL ELECTROTECHNICAL COMMISSION

CONNECTORS FOR ELECTRONIC EQUIPMENT – PRODUCT REQUIREMENTS –

Part 2-107: Circular connectors – Detail specification for circular hybrid connectors M12 with electrical and fibre-optic contacts with screw-locking

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

A PAS is a technical specification not fulfilling the requirements for a standard but made available to the public.

IEC PAS 61076-2-107 edition 1 has been prepared by subcommittee 48B: Connectors, of IEC technical committee 48: Electromechanical components and mechanical structures for electronic equipment, in cooperation with subcommittee 86B: Fibre optic interconnecting devices and passive components, of technical committee 86: Fibre optics.

The text of this PAS is based on the following document:

This PAS was approved for publication by the P-members of the committee concerned as indicated in the following document

Draft PAS	Report on voting
48B/1790B/NP	48B/1828/RVN


Following publication of this PAS, which is a pre-standard publication, the technical committee or subcommittee concerned will transform it into an International Standard.

This PAS shall remain valid for an initial maximum period of three years starting from 2007-12. The validity may be extended for a single three-year period, following which it shall be revised to become another type of normative document or shall be withdrawn.

Withdrawn
IECNORM.COM: Click to view the full PDF of IEC PAS 61076-2-107:2007

CONNECTORS FOR ELECTRONIC EQUIPMENT – PRODUCT REQUIREMENTS –

Part 2-107: Circular connectors – Detail specification for circular hybrid connectors M12 with electrical and fibre-optic contacts with screw-locking

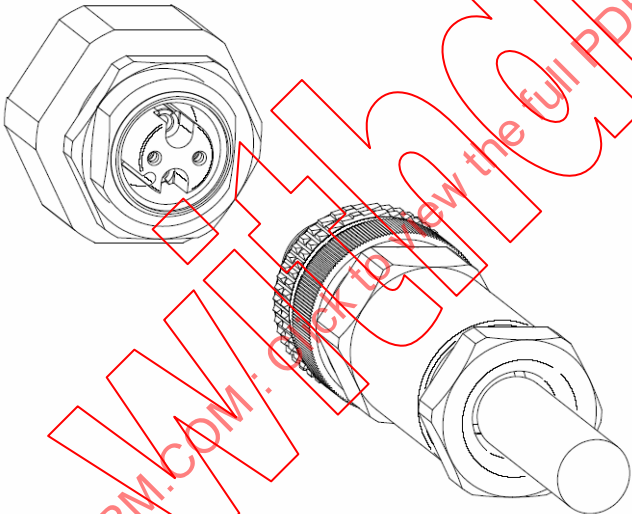IEC SC 48B – Connectors Specification available from: IEC General secretariat or from the addresses shown on the inside cover.	IEC/PAS 61076-2-107
ELECTRONIC COMPONENTS DETAIL SPECIFICATION in accordance with IEC 61076-1	
	Circular hybrid connectors M12-4: with 2 way electrical connections with $\varnothing$ 1,0 male contacts and with 2 way fibre optic connections with $\varnothing$ 1,25 ceramic LC ferrule
	Free cable connectors Straight connectors Fixed connectors Flange mounting Single hole mounting Adapters Feed through

1 General information

This Publicly Available Specification (PAS) has been prepared by SC 48B to support and to be referenced in IEC 61784-5-3:2007.

This PAS is subject to further development of a joint Project Team of SC 48B and SC 86B to publish an International Standard IS.

1.1 Scope

This PAS describes circular M12-connectors typically used for industrial process measurement and control. These connectors consist of fixed and free connectors with screw-locking as well as adaptors.

The connectors are suitable to connect two optic fibres and two electrical wires intended for power transmission to the optionally integrated transmitter and receiver, not specified in this PAS.

Male connectors have round electrical contacts Ø 1,0 mm and cylindrical ceramic optic contacts Ø 1,25 mm according to IEC 61754-20 Type LC for

All-silica optic fibre cables

Single-Mode fibre 9/125 µm

Multi-Mode fibre 50/125 µm or 62,5/125 µm

NOTE M12 is the dimension of the thread of the screw locking mechanism of these circular connectors.

1.2 Recommended method of termination

The electrical contact terminations shall be of the following types: screw, crimp, insulation piercing, insulation displacement, press-in or solder.

The optical contact terminations shall be defined between manufacturer and user. Preferred termination method for the international standard should be developed between SC 48B and SC 86B.

1.3 Ratings and characteristics

1.3.1 Electrical contacts

Rated voltage: 250 V d.c. or a.c.

Rated current: 4 A

Insulation resistance: minimum $10^8 \Omega$

Climatic category: see 4.1, Table 6

Contact spacing: see Clause 3

1.3.2 Optic contacts

Dimensions for ferrule and end face:

- for mono mode fibre, according to Grade 1 of IEC 61754-20
- for multi mode fibre, according to Grade 2 of IEC 61754-20

Insertion loss: Under development between SC 48B and SC 86B

Return loss: Under development between SC 48B and SC 86B

Climatic category : see 4.1, Table 6

Contact spacing : not applicable

1.4 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-581, *International Electrotechnical Vocabulary – Electromechanical components for electronic equipment*

IEC 60068-1:1988, *Environmental testing – Part 1: General and guidance*
Amendment 1 (1992)

IEC 60352 (all parts), *Solderless connections*

IEC 60512 (all parts), *Connectors for electronic equipment – Tests and measurements*

IEC 60512-1-100, *Connectors for electronic equipment – Tests and measurements – Part 1-100: General – Applicable publications*

IEC 60529:2001, *Degrees of protection provided by enclosures (IP code)*

IEC 60664-1, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

IEC 60998-2-1, *Connecting devices for low-voltage circuits for household and similar purposes – Part 2-1: Particular requirements for connecting devices as separate entities with screw-type clamping units*

IEC 60999-2, *Connecting devices – Electrical copper conductors – Safety requirements for screw-type and screwless-type clamping units*

IEC 61076-1:2006, *Connectors for electronic equipment – Product requirements – Part 1: Generic specification*

IEC 61754-20:2002, *Fibre optic connector interfaces – Part 20: Type LC connector family*

ISO 1302, *Geometrical Product Specification (GPS) – Indication of surface texture in technical product documentation*

1.5 Marking

The marking of the connector and the package shall be in accordance with 2.6 of IEC 61076-1:2006.

1.6 Safety aspects

For safety aspects, IEC 61984 shall be considered unless otherwise specified.

2 Technical information

All dimensions in mm.

2.1 Terms and definitions

For the purpose of this Publicly Available Specification, the terms and definitions from IEC 60050 (581) apply.

2.1.1 Mounting orientation

Circular mounting position of the connector in relation to the polarization of the mating interface.

2.2 Survey of styles and variants

For all connector styles with cables, the length L of the cable shall be agreed upon between manufacturer and user.

For interface dimensions, see 3.2.

The interface dimensions of the female styles shall be chosen according to the common characteristics of the male styles.

2.2.1 Fixed connectors

Table 1 – Styles of fixed connectors

Style	Description
AF	Fixed connector, electrical female contacts, single hole mounting thread M16 x 1,5, mounting orientation
BF	Fixed connector, electrical female contacts, for feed through, single hole mounting thread M16 x 1,5

2.2.1.1 Style AF

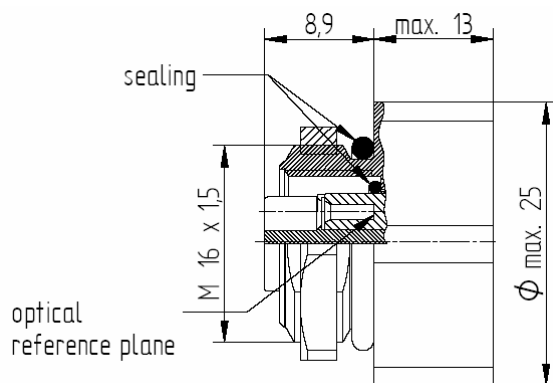


Figure 1 – Fixed connector, electrical female contacts, single hole mounting thread M16 × 1,5 mounting orientation

2.2.1.2 Style BF

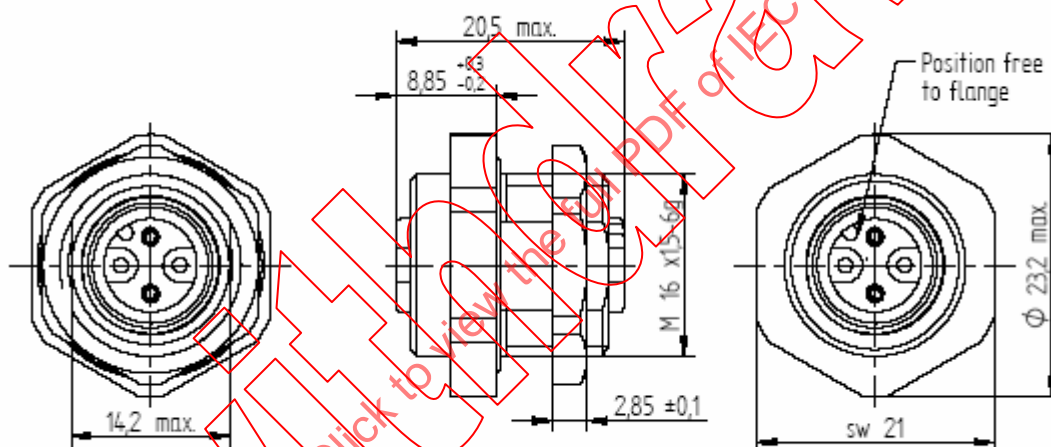



Figure 2 – Fixed connector, electrical female contacts, for feed through, single hole mounting thread M16 × 1,5

2.2.2 Free connectors

Table 2 – Styles of free connectors

Style	Description
CM	Free connector, straight version, with locking nut, male contacts

2.2.2.1 Style CM

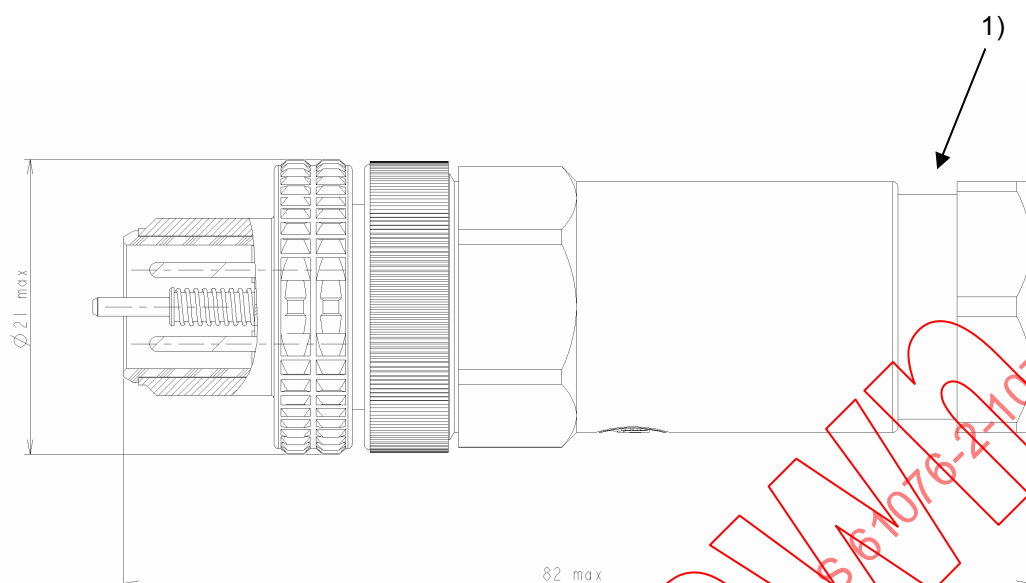

Key

- 1) Cable outlet diameter upon agreement

Figure 3 – Free connector, straight version, with locking nut, male contacts

2.2.3 Adaptor

Table 3 – Styles of adaptors

Style	Description
DF	Adaptor, straight version, without locking nut

2.2.3.1 Style DF

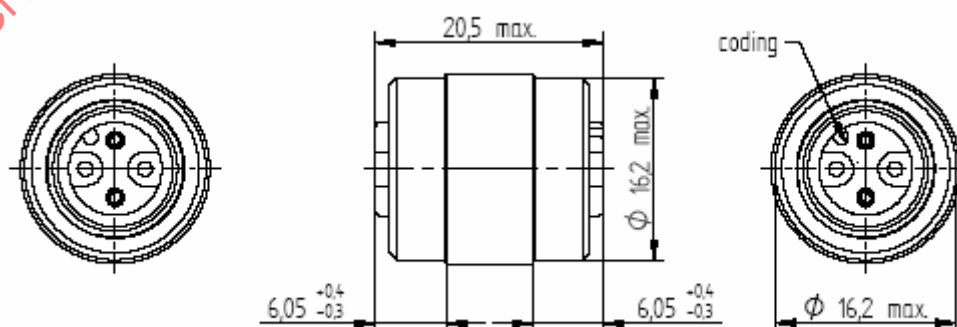


Figure 4 – Adaptor, straight version, without locking nut

3 Dimensions

3.1 General

All original dimensions are in millimeters. Drawings are shown in the first angle projection. The shape of the connectors may deviate from those given in the following drawings as long as the specified dimensions are not influenced.


For connector dimensions and interface dimensions, see 2.2.

Missing dimensions shall be chosen according to common characteristics and intended use.

The contact marking shall be on the termination side of the connector insert as long as the size of the component allows the placement there.

3.2 Interface dimensions

3.2.1 Pin front view plug connector

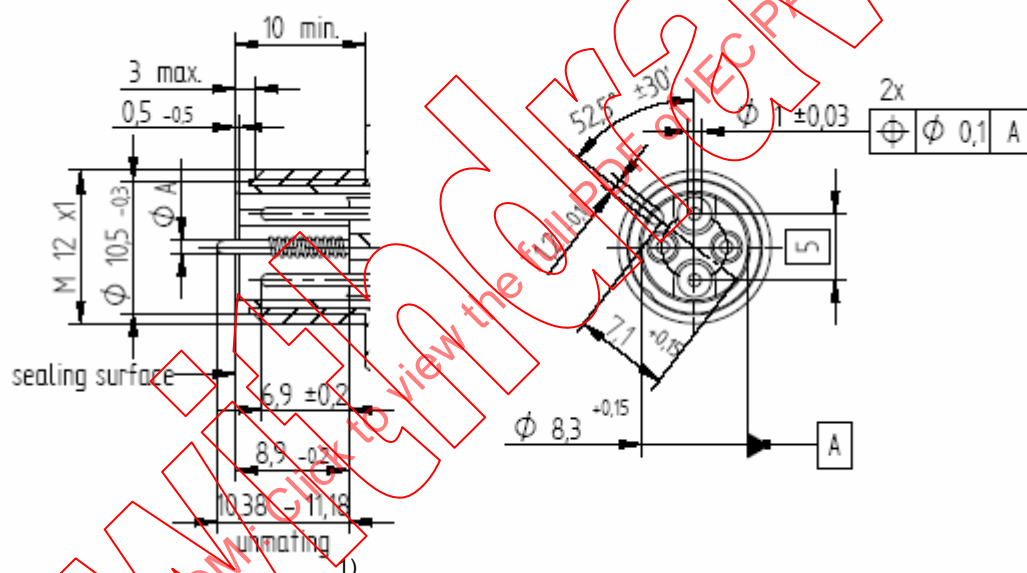

1) 8,9 in mated position (see optical reference plane in Figure 1)

Figure 5 - Pin front view plug connector

NOTE Critical optical dimensions are under development between SC 48B and SC 86B.

3.3 Engagement (mating) information

Arrows in Figure 6 indicate mating direction.

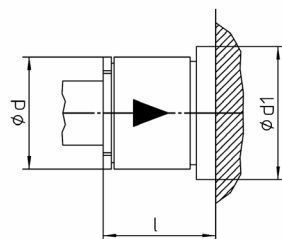


Figure 6a - Housing variant 1




Figure 6b - Housing variant 2

Figure 6 – Engagement (mating) information

Table 4 – Dimensions of connectors Type D in mated position

Figure	Combination of styles	d maximum	d1	l ¹⁾ maximum
6a	AF-CM	Ø 21	Ø 26,2	65
6a	BF-CM	Ø 21	Ø 26,2	65
6b	CM-DF-CM	Ø 21	---	130

¹⁾ Dimensions in mated position, additional space for insertion: 15 mm.

3.4 Gauges for electric contacts

Sizing gauges and retention force gauges

Material: tool steel, hardened

▽ = Surface (clean and free of grease)
roughness according to ISO 1302: Ra = 0,25 µm maximum, 0,15 µm minimum

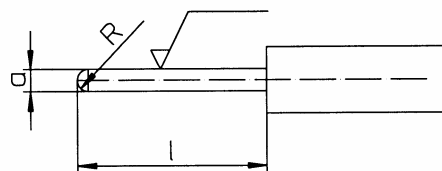


Figure 7 – Gauge dimensions

Table 5 - Gauges

Gauge	Mass g	Application	Ø a mm	l minimum mm	Nom pin Ø
P11	–	Sizing	1,03	10	1,0 ± 0,03
P12	20	Retention force	0,97	10	

4 Characteristics

4.1 Climatic category

Conditions: IEC 60068-1

Table 6 – Climatic category

Climatic category	Category temperature		Damp heat, steady state		Days
	Lower °C	Upper °C	Temperature °C	Relative humidity %	
25/85/21	–25	+85	40	93	21

4.2 Electrical characteristics (only electrical contacts)

4.2.1 Rated voltage – Impulse voltage – Pollution degree

Conditions: IEC 60664-1

The permissible rated voltage depends on the application or specified safety requirement. Reductions in creepage or clearance distances may occur due to the printed board or wiring used and shall be duly taken into account.

Table 7 – Rated voltage – Impulse voltage – Pollution degree

Rated voltage V	Rated impulse voltage kV	Pollution degree
250	2,5	3
NOTE Only in mated and locked condition. Due to the accessibility of the male contacts, the rated voltage shall be reduced to 50 V SELV/PELV.		

4.2.2 Voltage proof

Conditions: IEC 60512, Test 4a
 Standard atmospheric conditions
 Mated connectors

Table 8 – Voltage proof

Between contacts r.m.s. withstand voltage		Between contacts and metal housing	
Fixed connectors kV	Free connectors kV	Fixed connectors kV	Free connectors kV
1,4	1,4	1,4	1,4

4.2.3 Current-carrying capacity

Conditions: IEC 60512, Test 5b
 All contacts
 Values at 40°C 4 A

4.2.4 Contact resistance

Conditions: IEC 60512, Test 2a
Standard atmospheric conditions
connecting points, see 5.1.1

4.2.5 Insulation resistance

Conditions: IEC 60512, Test 3a, Method A
Standard atmospheric conditions
Test voltage 500 V ± 15 V d.c.

4.3 Optic characteristics (only optic contacts)

(Under development between SC 48B and SC 86B)

4.4 Mechanical

4.4.1 IP degree of protection

IP65 and IP67 according to IEC 60529, connectors in mated and locked position.

IP68 as agreed upon between manufacturer and user.

4.4.2 Mechanical operation

Conditions: IEC 60512, Test 9a
Standard atmospheric conditions
Maximum speed of operations = 10 mm/s
Rest: 30 s, unmated

Table 9 – Number of mechanical operations

Contact finish	Mechanical operations
Gold	100
Silver	50
Tin	20
other types	a)
a) Other mating cycles are upon agreement between manufacturer and user.	

4.4.3 Insertion and withdrawal forces

Conditions: IEC 60512, Test 13b
Standard atmospheric conditions
Maximum speed = 10 mm/s

Table 10 – Insertion and withdrawal forces

Total insertion force N	Total withdrawal force N
25	30

4.4.4 Contact retention in insert

Not applicable

For removable crimp type contacts, the introduction of an appropriate requirement is under consideration.

4.4.5 Polarizing method

Conditions: IEC 60512, Test 13e
Insertion force: 35 N minimum.

4.4.6 Vibration (sinusoidal)

Conditions: IEC 60512, Test 6d
Standard atmospheric conditions
Connectors in mated and locked position
The fixed and free connector shall be rigidly installed in a suitable fixture as specified in 5.1.2.
Vibration Severity: 10 to 500 Hz and 0,35 mm or 50 m/s²

5 Test schedule

5.1 General

This test schedule shows the tests and the order in which they shall be carried out, as well as the requirements to be met.

Unless otherwise specified, all tests shall be carried out under standard atmospheric conditions for testing as specified in IEC 60068-1, as directed by the applicable part of IEC 60512.

Unless otherwise specified, mated and locked sets of connectors shall be tested. Care shall be taken to keep a particular combination of connectors together during the complete test sequence, i.e. when unmating is necessary for a certain test, the same connector styles as before shall be mated for the subsequent tests.

In the following, a mated and locked set of connector styles is called a specimen.

When the initial tests have been completed, all the specimens are divided up according to the test groups.

Before testing commences, the connectors shall be stored for at least 24 h in the non-engaged state under standard atmospheric conditions as per IEC 60068-1.

The necessary specimens are stated in Table 11.

Table 11 – Number of test specimens

	Test group					
	P	AP	BP	CP	DP	EP
No. of specimens	12	3	3	3	3	20 single contacts

5.1.1 Arrangement for contact resistance measurements

Conditions: see 4.2.4

The measurement of contact resistance shall be carried out on the number of contacts specified. Any subsequent measurements of contact resistance shall be made on the same contacts.

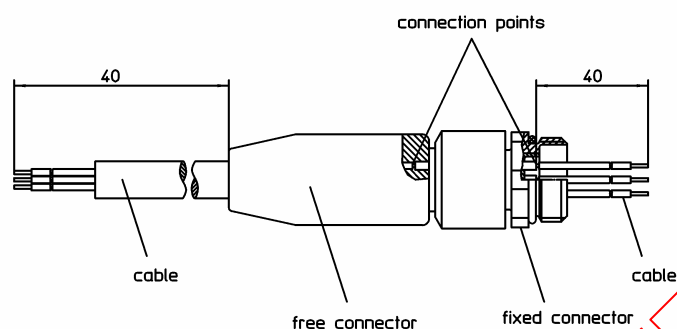


Figure 8 – Contact resistance arrangement

5.1.2 Arrangement for dynamic stress tests (vibration)

Conditions: see 4.4.6

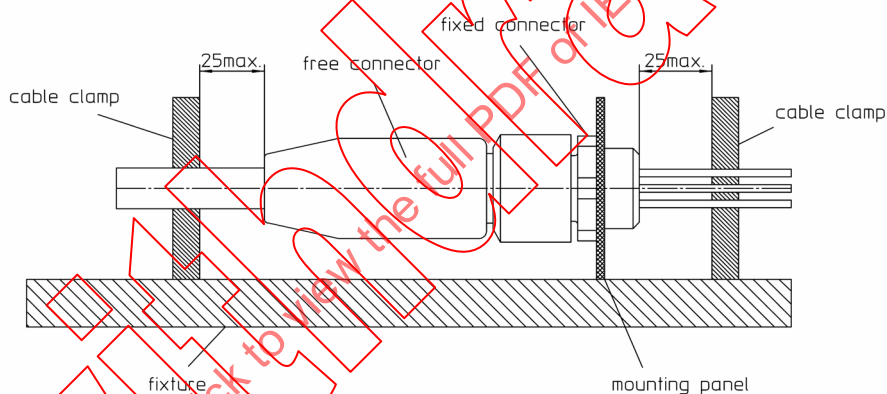


Figure 9 – Dynamic stress test arrangement A

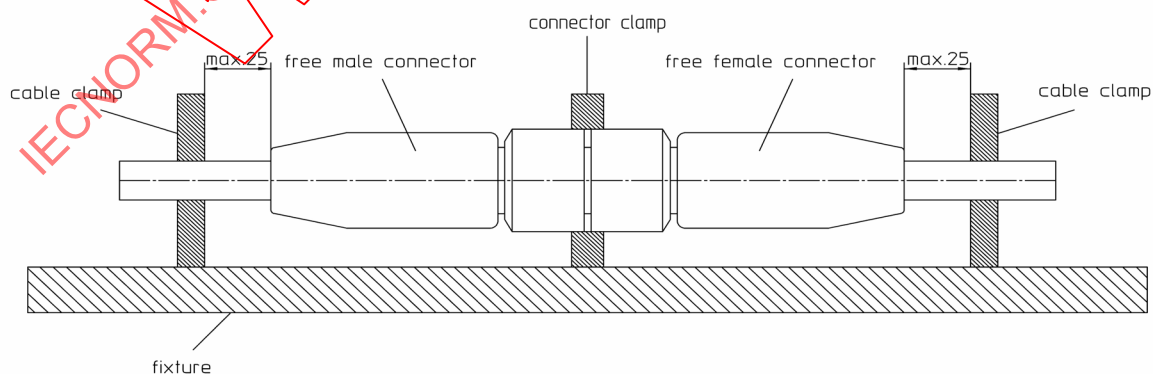


Figure 10 – Dynamic stress test arrangement B

5.2 Test schedule

5.2.1 Test group P – Preliminary

All specimens shall be subject to the following tests.

Table 12 – Test group P

Test phase	Test		Electrical measurement to be performed		Electrical requirements	Optic measurement to be performed		Optic requirements
	Title	IEC 60512 Test No.	Severity or condition of test	Title		IEC 60512 Test No.	Title	
P1	General examination	1	Unmated connectors	Visual examination	1a	(Under development between SC 48B and SC 86B)		
				Dimensional examination	1b			
P2	Polarizing method	13e	see 4.4.5			There shall be no defect that would impair normal operation		
						The dimensions shall comply with those specified in 2.2 and Clause 3		
						It shall be possible to correctly align and mate the appropriate mating connectors		
						It shall not be possible to mate the connectors in any other than the correct manner		

Test phase	Test			Electrical measurement to be performed		Electrical requirements	Optic measurement to be performed		Optic requirements
	Title	IEC 60512 Test No.	Severity or condition of test	Title	IEC 60512 Test No.		Title	Method	
P3	Connection quality (initial value)			Connection points according to 5.1.1 all electrical contacts per specimen, Contact resistance ± Millivolt level method	2a	initial value maximum 10 mΩ	(Under development between SC 48B and SC 86B)		
P4			Test voltage 500 V ± 15 V d.c. Method A	Insulation resistance	3a	Minimum 10 ⁸ Ω			
P5	Return loss (random mated)					No electrical requirement			
P6			Contact/contact same measuring points as for P4	Voltage proof	4a	According to 4.2.2			

The specimen shall be divided into five groups. All connectors in each group shall undergo the tests specified for the relevant group.

5.2.2 Test group AP – Dynamic Climatic

Table 13 – Test group AP

Test phase	Test		Electrical measurement to be performed	Electrical requirements	Optic measurement to be performed		Optic requirements
	Title	IEC 60512 Test No.			Severity or condition of test	Title	
AP1	Insertion and with-drawal force		See 4.4.3	Insertion and withdrawal force	13b	(Under development between SC 48B and SC 86B)	
AP2	Gauge retention force		Female contacts only 2 contacts/ specimen sizing and retention force gauge see 3.3	Engaging and separating forces	16e		
AP3	Vibration	6d	10 Hz - 500 Hz, 0,35 mm resp. 50 m/s² Sweep cycles: 10 Full duration: 6 h	Contact disturbance	2e		
				Contact resistance – Millivolt level method	2a	Rise in relation to initial values maximum 15 mΩ	
				Insertion loss	25b	Maximum 0,5 dB per connector	
				Visual examination	1a	There shall be no defect that would impair normal operation	

Test phase	Test		Electrical measurement to be performed		Electrical requirements	Optic measurement to be performed		Optic requirements
	Title	IEC 60512 Test No.	Severity or condition of test	Title	IEC 60512 Test No.	Title	Method	
AP4	Shock	6c	Arrangement according to 5.1.2 Half sine shock Acceleration 490 m/s ² (50 g) Duration of impact: 11 ms	Contact disturbance Contact resistance – Millivolt level method Visual examination	2e 2a 1a	Duration of disturbance maximum 1 µs Rise in relation to initial values maximum 15 mΩ There shall be no defect that would impair normal operation		(Under development between SC 48B and SC 86B)
AP5	Rapid change of temperature	11d	–15 °C to 85 °C t = 30 min 5 cycles	Contact resistance – Millivolt level method Insulation resistance Voltage proof Visual examination	2a 3a 4a 1a	Rise in relation to initial values maximum 15 mΩ minimum 10 ⁸ Ω According to 4.2.2 There shall be no defect that would impair normal operation		
AP6	Climatic sequence	11a						
AP6.1	Dry heat	11i	Temperature: 85 °C Duration: 16 h	Insulation resistance at high temperature Visual examination	3a 1a	Minimum 10 ⁸ Ω There shall be no defect that would impair normal operation		
AP6.2	Damp heat, cyclic; first cycle	11m	Method Db Temp.: 40 °C Recovery time: 2 h	Visual examination	1a	There shall be no defect that would impair normal operation		

Test phase	Test			Electrical measurement to be performed		Electrical requirements	Optic measurement to be performed		Optic requirements
	Title	IEC 60512 Test No.	Severity or condition of test	Title	IEC 60512 Test No.		Title	Method	
AP6.3	Cold	11j	Temperature: -25 °C Duration: 2 h Recovery time: 2 h	Visual examination	1a	There shall be no defect that would impair normal operation			(Under development between SC 48B and SC 86B)
AP6.4	Damp heat, cyclic; remaining cycles	11m	Conditions according to AP6.2 5 cycles Recovery time: 2 h	Contact resistance – Millivolt level method	2a	Rise in relation to initial values maximum 15 mΩ			
				Insulation resistance	3a	Minimum 10 ⁸ Ω			
				Voltage proof	4a	According to 4.2.2			
AP7	Impacting dust and water								
AP7.1	Second characteristic numeral		Spray-IPX5-IPX7 Test 5 and 7 Test 5: nozzle 6,3 mm Test 7: 1 m, 30 min	IEC 60529:2001 Test 14.2.5 and Test 14.2.7		No leakage on contacts			
AP7.2	First characteristic numeral		Dust IP6X Test 6, Table 7	IEC 60529:2001 Test 6 Table 7		IP6X no deposit of dust on contacts			

Test phase	Test			Electrical measurement to be performed		Electrical requirements	Optic measurement to be performed		Optic requirements
	Title	IEC 60512 Test No.	Severity or condition of test	Title	IEC 60512 Test No.		Title	Method	
AP7.3				Contact resistance – Millivolt level method	2a	Rise in relation to initial values maximum 15 mΩ			(Under development between SC 48B and SC 86B)
				Insulation resistance	3a	Minimum 10 ⁸ Ω			
				Voltage proof	4a	According to 4.2.2			
				Insertion and withdrawal force	13b	Requirements - see 4.4.3			
				Visual examination	1a	There shall be no defect that would impair normal operation			

5.2.2.3 Test group BP – Mechanical endurance

Table 14 – Test group BP

Test phase	Test		Severity or condition of test	Electrical measurement to be performed		Electrical requirements	Optic measurement to be performed		Optic requirements
	Title	IEC 60512 Test No.		Title	IEC 60512 Test No.		Title	Method	
BP1	Gauge retention force		Female contacts only 2 contacts/ specimen sizing and retention force gauge see 3.3	Engaging and separating forces	16e	See 4.4.4			(Under development between SC 48B and SC 86B)
BP2	Mechanical operation (half of the specified number of operations)	9a	Speed: 10 mm/s maximum Rest: 30 s (unmated) Operations see 4.4.2	Contact resistance – Millivolt level method	2a	Rise in relation to initial values maximum 15 mΩ			
BP3				Visual examination	1a	There shall be no defect that would impair normal operation			
	Corrosion industrial atmosphere (salt sprays)	11f	48 h	Visual examination	1a	There shall be no defect that would impair normal operation			

Test phase	Test		Electrical measurement to be performed		Electrical requirements	Optic measurement to be performed		Optic requirements
	Title	IEC 60512 Test No.	Severity or condition of test	Title	IEC 60512 Test No.	Title	Method	
BP4	Mechanical operation (remaining half of specified number of operations)	9a	See BP2	Contact resistance – millivolt level method	2a	Rise in relation to initial values maximum 15 mΩ		
				Insulation resistance	3a			
				Voltage proof	4a			
				Visual examination	1a			
BP5	Gauge retention force		Unmated connectors	Engaging and separating forces	16e	See 4.4.4		
BP6	Fibre / cable retention			Visual examination	1a	There shall be no defect that would impair normal operation		
BP7	Mechanical impact			Visual examination	1a	There shall be no defect that would impair normal operation		
BP8	Torsion			Visual examination	1a	There shall be no defect that would impair normal operation		

(Under development between SC 48B and SC 86B)