

**PRE-STANDARD**

**Fibre optic connector interfaces –**

**Part 18:  
Type MT-RJ connector family**

**PUBLICLY AVAILABLE SPECIFICATION**



INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

Reference number  
IEC/PAS 61754-18

IECNORM.COM . Click to view the full PDF of IEC PAS 61754-18:2007

**PRE-STANDARD**

**Fibre optic connector interfaces –**

**Part 18:  
Type MT-RJ connector family**

**PUBLICLY AVAILABLE SPECIFICATION**

---

---



INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

**Reference number**  
**IEC/PAS 61754-18**

## CONTENTS

|                    |   |
|--------------------|---|
| FOREWORD.....      | i |
| 1 Scope.....       | 1 |
| 2 Description..... | 1 |
| 3 Interfaces.....  | 1 |

IECNORM.COM . Click to view the full PDF of IEC PAS 61754-18:2001

Withdrawn

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

## FIBRE OPTIC CONNECTOR INTERFACES –

## Part 18: Type MT-RJ connector family

## FOREWORD

A PAS is a technical specification not fulfilling the requirements for a standard, but made available to the public and established in an organization operating under given procedures.

IEC-PAS 61754-18 has been processed by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics.

The text of this PAS is based on the following document:

This PAS was approved for publication by the P-members of the committee concerned as indicated in the following document:

| Draft PAS    | Report on voting |
|--------------|------------------|
| 86B/1451/PAS | 86B/1501/RVD     |

Following publication of this PAS, the technical committee or subcommittee concerned will investigate the possibility of transforming the PAS into an International Standard.

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical specifications, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.
- 6) Attention is drawn to the possibility that some of the elements of this PAS may be the subject of patent rights. The IEC shall not be held responsible for identifying any or all such patent rights.

## FIBRE OPTIC CONNECTOR INTERFACES –

### Part 18: Type MT-RJ Connector family

#### 1 Scope

This part of IEC 61754 defines the standard interface dimensions for the type MT-RJ family of connectors.

#### 2 Description

The parent connector for the type MT-RJ connector family is a plug connector having single or multiple fibres in a rectangular ferrule nominally  $4,4 \times 2,5$  mm aligned by two 0,7 mm diameter pins and corresponding holes. The connector includes a single coupling latch and a ferrule spring loaded in the direction of the optical axis. The plug connector has a single male key which may be used to orientate the connector and the component to which it is mated.

Connector interfaces are configured as a plug without pins, an adaptor and a plug with pins or alternatively as a plug without pins and a receptacle with pins. Adaptors use ribs to pre-align ferrules. Receptacles with and without ribs are defined.

#### 3 Interfaces

Subsequent pages define the standard interfaces for the type MT-RJ connector family.

This standard contains the following standard interfaces:

Interface **61754-18-1** MT-RJ plug connector interface, without pins, consisting of,

Interface 61754-18-1-1 for single fibre

Interface 61754-18-1-2 for two fibres with a pitch of 0.25 mm

Interface 61754-18-1-3 for two fibres with a pitch of 0.75 mm

Interface 61754-18-1-4 for four fibres with a pitch of 0.25 mm

Interface **61754-18-2** MT-RJ plug connector interface, with pins, consisting of,

Interface 61754-18-2-1 for single fibre

Interface 61754-18-2-2 for two fibres with a pitch of 0.25 mm

Interface 61754-18-2-3 for two fibres with a pitch of 0.75 mm

Interface 61754-18-2-4 for four fibres with a pitch of 0.25 mm

Interface **61754-18-3** MT-RJ adaptor interface

Interface **61754-18-4** MT-RJ receptacle interface, with pins, without ribs, consisting of,

Interface 61754-18-4-1 for single fibre

Interface 61754-18-4-2 for two fibres with a pitch of 0.25 mm

Interface 61754-18-4-3 for two fibres with a pitch of 0.75 mm

Interface 61754-18-4-4 for four fibres with a pitch of 0.25 mm

Interface **61754-18-5** MT-RJ receptacle interface, with pins, with ribs, consisting of,

Interface 61754-18-5-1 for single fibre

Interface 61754-18-5-2 for two fibres with a pitch of 0,25 mm

Interface 61754-18-5-3 for two fibres with a pitch of 0,75 mm

Interface 61754-18-5-4 for four fibres with a pitch of 0,25 mm

The following standards are intermateable.

### 3.1 Plug-Adaptor-Plug


| Plug,<br>without pins | Adaptor    | Plug,<br>with pins |
|-----------------------|------------|--------------------|
| 61754-18-1-1          | 61754-18-3 | 61754-18-2-1       |
| 61754-18-1-2          | 61754-18-3 | 61754-18-2-2       |
| 61754-18-1-3          | 61754-18-3 | 61754-18-2-3       |
| 61754-18-1-4          | 61754-18-3 | 61754-18-2-4       |

### 3.2 Plug-Receptacle, without ribs

| Plug,<br>without pins | Receptacle,<br>with pins |
|-----------------------|--------------------------|
| 61754-18-1-1          | 61754-18-4-1             |
| 61754-18-1-2          | 61754-18-4-2             |
| 61754-18-1-3          | 61754-18-4-3             |
| 61754-18-1-4          | 61754-18-4-4             |

### 3.3 Plug-Receptacle, with ribs

| Plug,<br>without pins | Receptacle,<br>with pins |
|-----------------------|--------------------------|
| 61754-18-1-1          | 61754-18-5-1             |
| 61754-18-1-2          | 61754-18-5-2             |
| 61754-18-1-3          | 61754-18-5-3             |
| 61754-18-1-4          | 61754-18-5-4             |

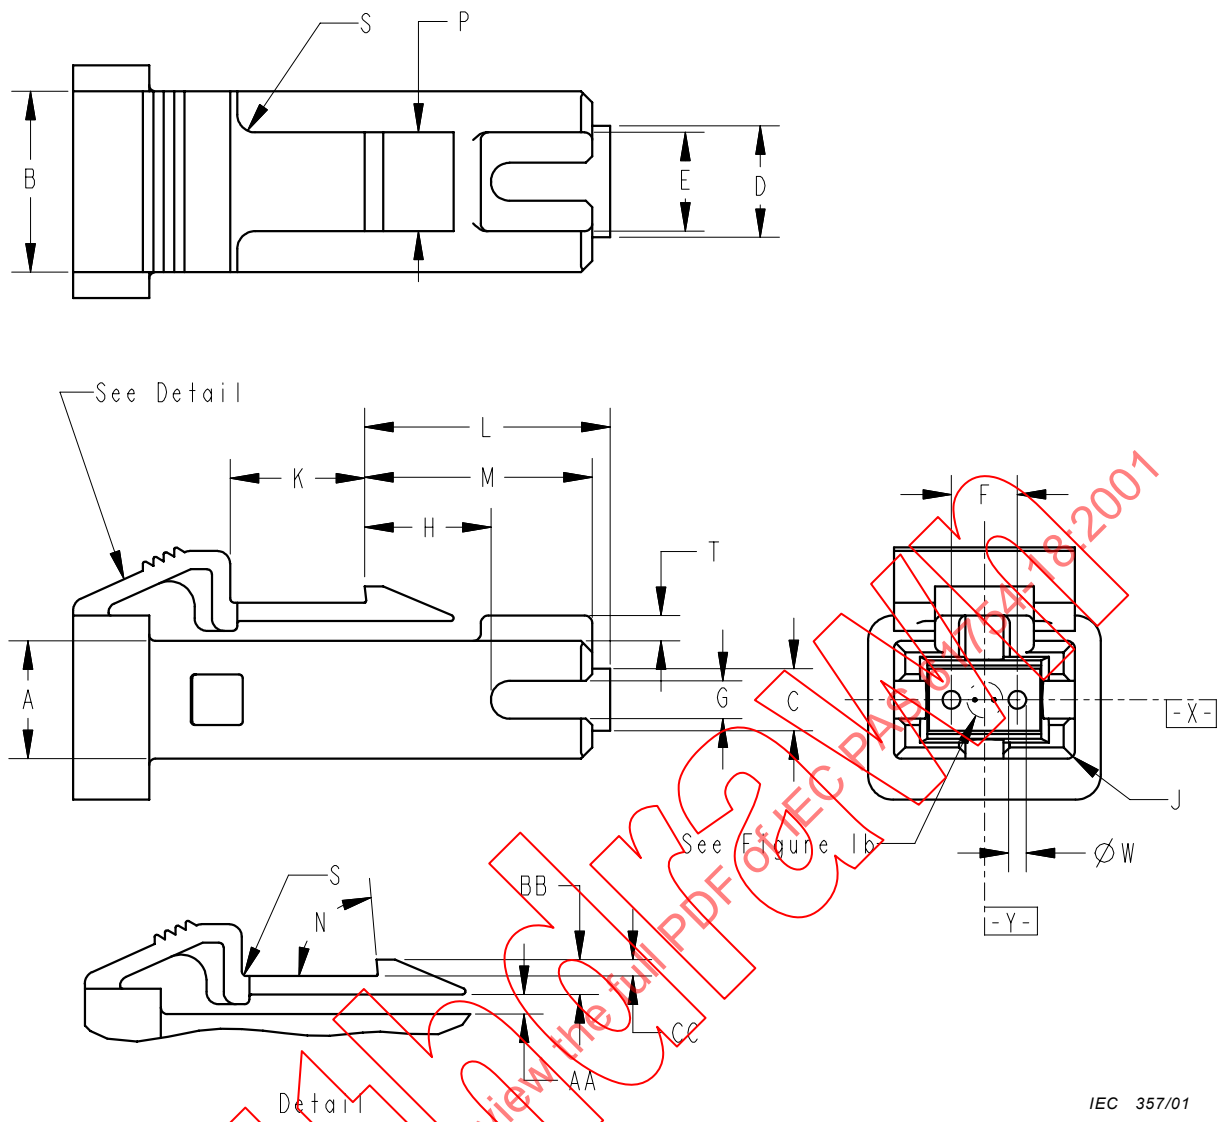

**Figure 1 – Plug connector interface, without guide pins**

IEC 357/01

**Table 1 – Plug connector interface dimensions—without guide pins**


| Reference | Dimensions (mm) |         | Notes                              |
|-----------|-----------------|---------|------------------------------------|
|           | Minimum         | Maximum |                                    |
| A         | 4,61            | 4,69    |                                    |
| B         | 7,11            | 7,19    |                                    |
| C         | 2,4             | 2,5     |                                    |
| D         | 4,35            | 4,45    |                                    |
| E         | 3,8             | 4       |                                    |
| F         | 2,597           | 2,603   |                                    |
| G         | 1,45            | 1,55    |                                    |
| H         | –               | 5,3     |                                    |
| J         | 0,25            | 0,5     | Radius                             |
| K         | 5,1             | –       |                                    |
| L         | 9,35            | 9,75    | 1                                  |
| M         | 7,9             | 9       |                                    |
| N         | 82              | 88      | Degrees                            |
| P         | 3,8             | 4       |                                    |
| S         | –               | 0,8     | Radius                             |
| T         | 0,9             | 1,1     |                                    |
| W         |                 |         | Diameter see tolerance grade table |
| AA        | 0,63            | 1,2     |                                    |
| BB        | 1,27            | 1,42    |                                    |
| CC        | 0,6             | 0,77    |                                    |

**Table 1a – Tolerance grade table**


| Reference | Dimensions (mm) |         | Notes |
|-----------|-----------------|---------|-------|
|           | Minimum         | Maximum |       |
| 1         | 0,699           | 0,700   | 2,4   |
| 2         | 0,699           | 0,701   | 2,4   |

Notes


1. When Reference L = 9,1 mm the force exerted by the ferrule must be less than or equal to 11,8 N and when Reference L = 9,3 mm the force exerted by the ferrule must be greater than or equal to 7,8 N.
2. Append tolerance grade number to the interface number.
3. Dimensions apply after termination.
4. Each pin-hole shall accept a gauge as shown in Figure 1c to a depth of 5,5 mm with a maximum force of 1,7 N. In addition, both pin-holes of a plug shall accept a gauge as shown in Figure 1d to a depth of 5,5 mm with a maximum force of 3,4 N.




1-One fibre



2-Two fibres, 0,25mm pitch

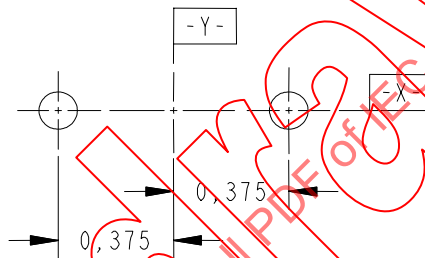

3-Two fibres, 0,75mm pitch

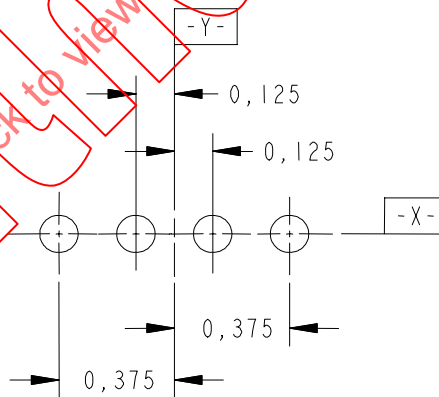


4-Four fibres, 0,25mm pitch

IEC 358/01

**Figure 1b – Optical datum target location diagram**

**Note**

The optical datum target diagram is shown in the figure. The optical datum targets are located on a line X passing through the two pin-hole centres and located on or symmetrically about a line Y perpendicular to line X located midway between the two pin-hole centres.

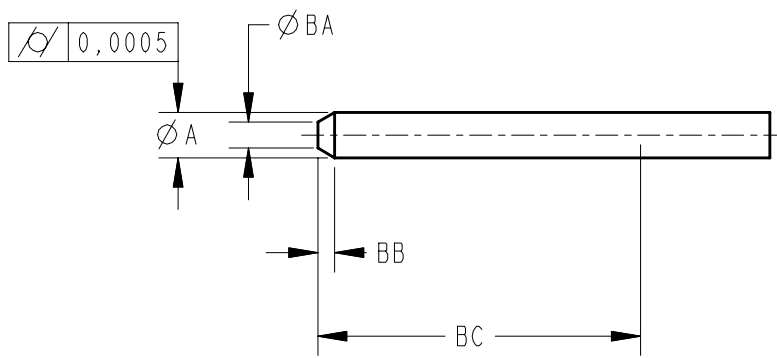

IEC 359/01

Figure 1c – Gauge pin

Table 1c – Dimensions of gauge pin

| Reference | Dimensions (mm) |         | Notes |
|-----------|-----------------|---------|-------|
|           | Minimum         | Maximum |       |
| A         | 0,6985          | 0,699   | 1     |
| BA        | 0,2             | 0,4     |       |
| BB        | 0,2             | 0,5     |       |
| BC        | 5,5             | —       |       |

Note

1. Surface roughness 0,1  $\mu\text{m}$  Ra for the length of dimension BC

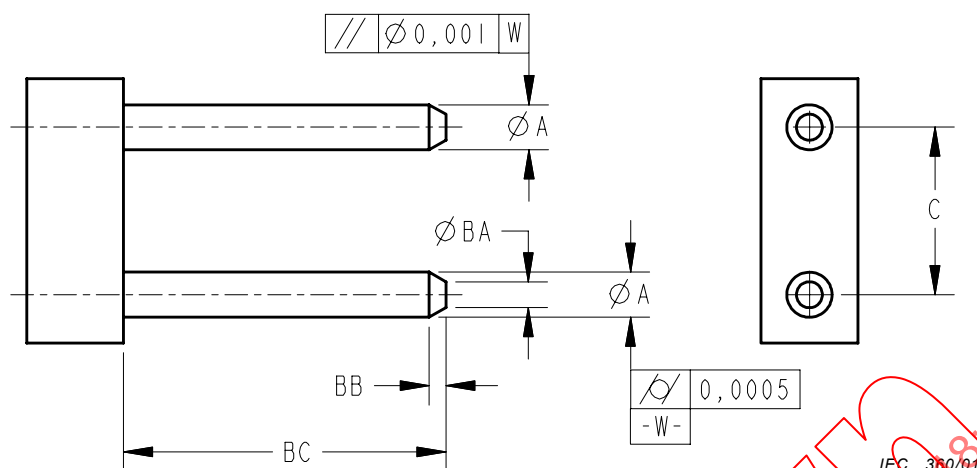



Figure 1d – Plug gauge

Table 1d – Dimensions of plug gauge

| Reference | Dimensions (mm) |         | Notes |
|-----------|-----------------|---------|-------|
|           | Minimum         | Maximum |       |
| A         | 0,6985          | 0,699   | 1     |
| C         | 2,5995          | 2,6005  |       |
| BA        | 0,2             | 0,4     |       |
| BB        | 0,2             | 0,5     |       |
| BC        | 6               | 6,5     |       |

Note

1. Surface roughness  $0,1 \mu\text{m Ra}$  for the length of dimension BC

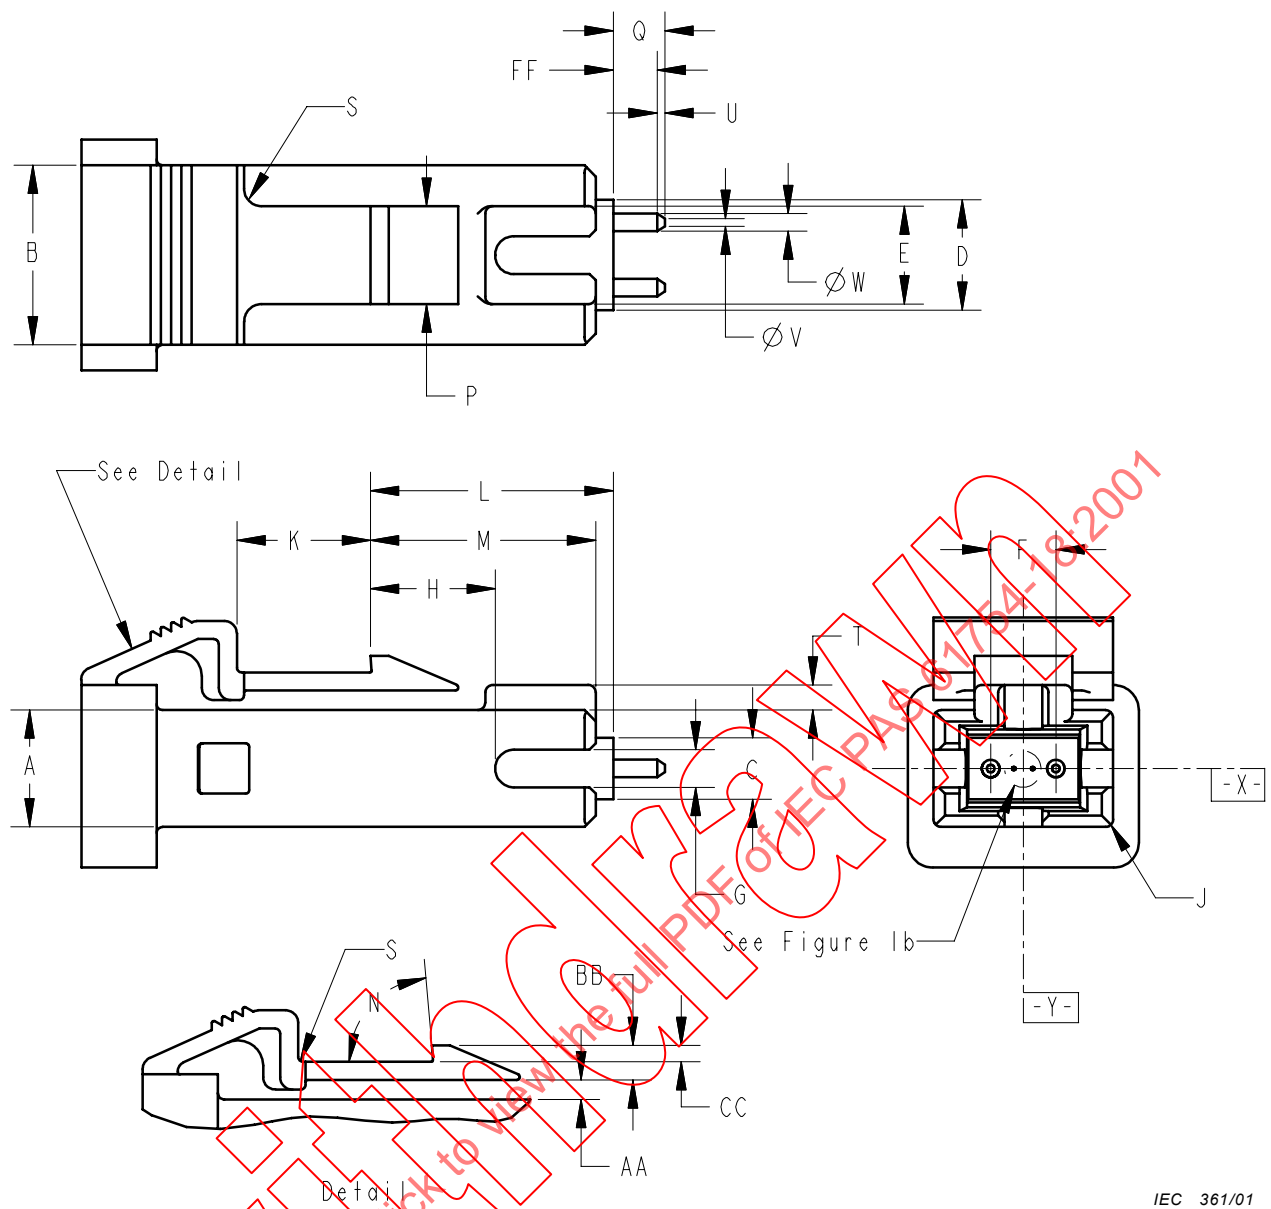

IEC 361/01

Figure 2 – Plug connector interface, with guide pins

**Table 2 – Plug connector interface dimensions, with guide pins**


| Reference | Dimensions (mm) |         | Notes                     |
|-----------|-----------------|---------|---------------------------|
|           | Minimum         | Maximum |                           |
| A         | 4,61            | 4,69    |                           |
| B         | 7,11            | 7,19    |                           |
| C         | 2,4             | 2,5     |                           |
| D         | 4,35            | 4,45    |                           |
| E         | 3,8             | 4       |                           |
| F         | 2,597           | 2,603   |                           |
| G         | 1,45            | 1,55    |                           |
| H         | –               | 5,3     |                           |
| J         | 0,25            | 0,5     | Radius                    |
| K         | 5,1             | –       |                           |
| L         | 9,35            | 9,75    | 1                         |
| M         | 7,9             | 9       |                           |
| N         | 82              | 88      | Degrees                   |
| P         | 3,8             | 4       |                           |
| Q         | –               | 2,25    |                           |
| S         | –               | 0,8     | Radius                    |
| T         | 0,9             | 1,1     |                           |
| U         | 0,15            | –       |                           |
| V         | –               | 0,4     |                           |
| W         |                 |         | See tolerance grade table |
| AA        | 0,63            | 1,2     |                           |
| BB        | 1,27            | 1,42    |                           |
| CC        | 0,6             | 0,77    |                           |
| FF        | 1,5             | –       |                           |

**Table 2A – Tolerance grade table**

| Reference | Dimensions (mm) |         | Notes |
|-----------|-----------------|---------|-------|
|           | Minimum         | Maximum |       |
| 1         | 0,698           | 0,699   | 2     |
| 2         | 0,697           | 0,699   | 2     |

Notes

1. When Reference L = 9,1 mm the force exerted by the ferrule must be less than or equal to 11,8 N and when Reference L = 9,3 mm the force exerted by the ferrule must be greater than or equal to 7,8 N.
2. Append tolerance grade number to the interface number.
3. Dimensions apply after termination.

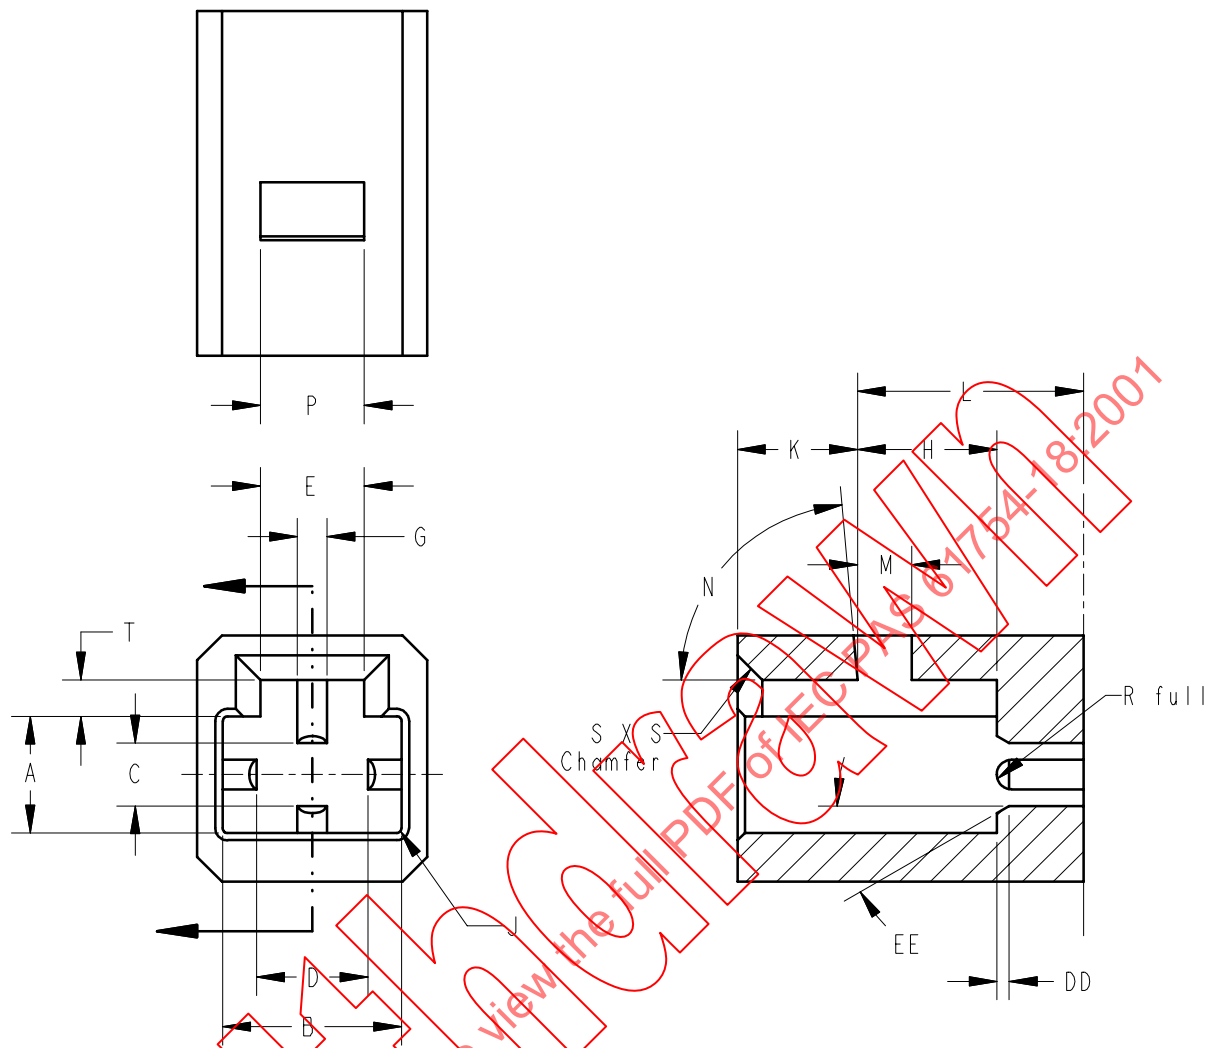


IEC 362/01

Figure 3 – Adaptor connector interface

**Table 3 – Adaptor connector interface dimensions**

| Reference | Dimensions (mm) |         | Notes   |
|-----------|-----------------|---------|---------|
|           | Minimum         | Maximum |         |
| A         | 4,7             | 4,78    |         |
| B         | 7,2             | 7,28    |         |
| C         | 2,51            | 2,61    |         |
| D         | 4,46            | 4,56    |         |
| E         | 4,1             | 5       |         |
| G         | 1,15            | 1,25    |         |
| H         | 5,45            | 5,85    |         |
| J         | –               | 0,25    | Radius  |
| K         | –               | 5       |         |
| L         | 9,1             | 9,3     |         |
| M         | 2,1             | –       |         |
| N         | 82              | 88      | Degrees |
| P         | 4,1             | –       |         |
| S         | 0,8             | –       |         |
| T         | 1,43            | 1,53    |         |
| DD        | 0,45            | 0,55    |         |
| EE        | 25              | 35      | Degrees |

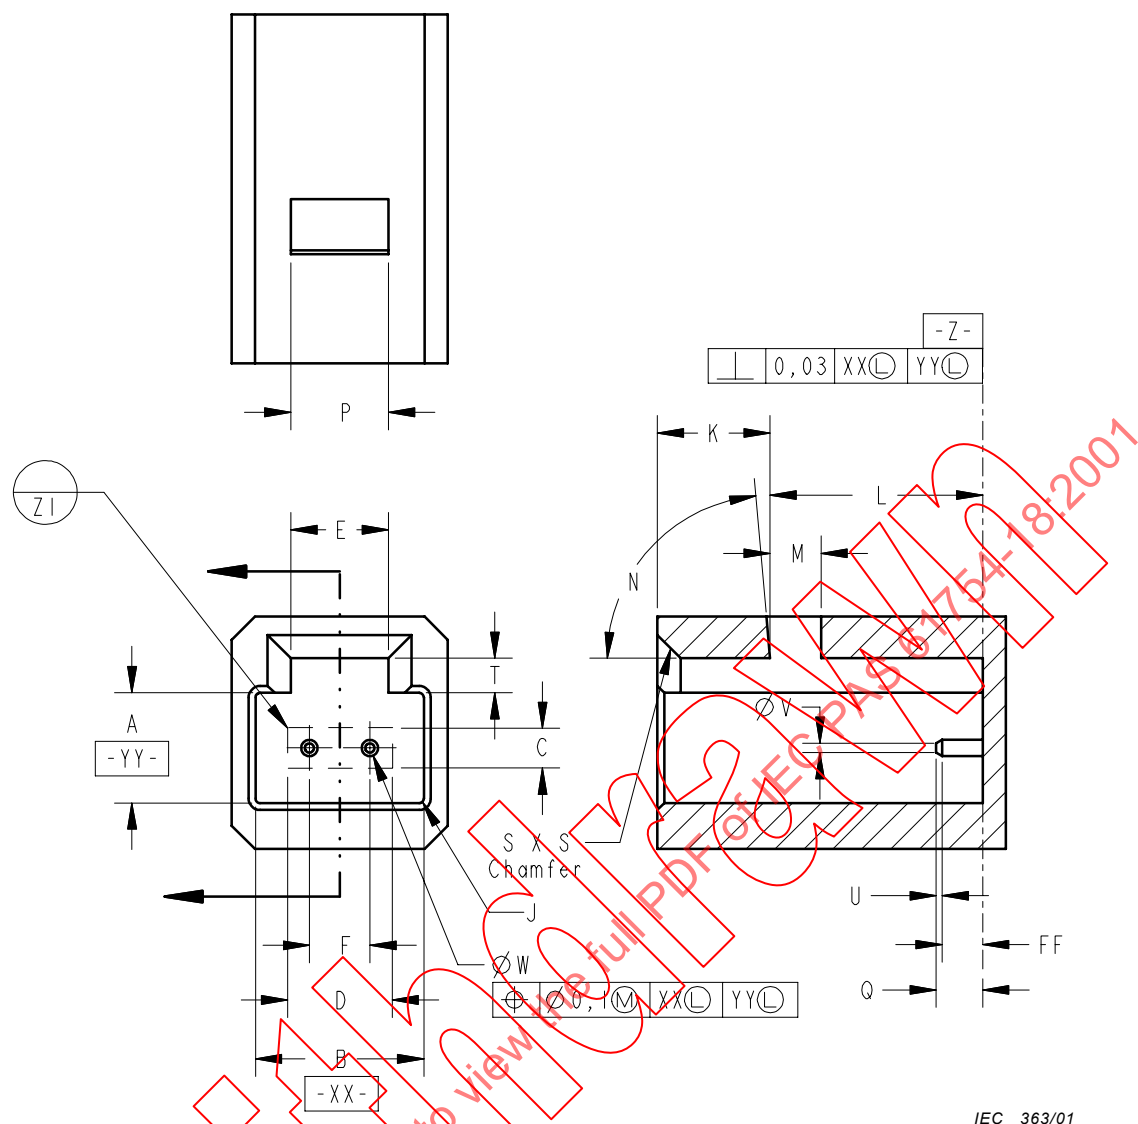

IEC 363/01

Dimensions in mm

Figure 4 – Receptacle connector interface, without ribs