

TECHNICAL REPORT

IEC
TR 62434

First edition
2006-03

pH measurements in difficult media – Definitions, standards and procedures

IECNORM.COM : Click to view the full PDF of IEC TR 62434:2006



Reference number
IEC/TR 62434:2006(E)

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site** (www.iec.ch)

- **Catalogue of IEC publications**

The on-line catalogue on the IEC web site (www.iec.ch/searchpub) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

- **IEC Just Published**

This summary of recently issued publications (www.iec.ch/online_news/justpub) is also available by email. Please contact the Customer Service Centre (see below) for further information.

- **Customer Service Centre**

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

TECHNICAL REPORT

IEC
TR 62434

First edition
2006-03

pH measurements in difficult media – Definitions, standards and procedures

IECNORM.COM : Click to view the full PDF of IEC TR 62434:2006

© IEC 2006 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE

U

For price, see current catalogue

CONTENTS

FOREWORD.....	3
1 Scope and object.....	5
2 Normative references	5
3 General principles	5
3.1 Terms and definitions	5
3.2 Symbols	5
3.3 pH value.....	5
3.4 Standard reference buffer solutions (primary and secondary pH standards).....	7
3.5 Widths of normal pH scales or normal pH ranges in the general solvents Z	10
3.6 Electrodes and operating conditions	12
4 Solvent media of applicability	14
5 Procedure for specification	14
6 Recommended standard values and ranges of influence quantities	14
7 Verification of values	14
8 Other difficult media for pH determinations	15
Annex A (informative) Values of the Nernstian slope factor $k = 2,3026 RT/F$	16
Annex B (informative)	17
Annex C (informative)	22
Annex D (informative)	23
Annex E (informative)	26
Annex F (informative)	27
Bibliography.....	28
Figure 1 – Schematic structure of the hydrogen gas electrode and of the AgCl electrode forming the cell (13)	9
Figure 2 – Intercomparing widths and relative positions of normal pH scales (with neutral points indicated by halving dots) in different solvents	11
Table A.1 – Values of the Nernstian slope factor $k = 2,3026 RT/F$	16

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**pH MEASUREMENTS IN DIFFICULT MEDIA –
DEFINITIONS, STANDARDS AND PROCEDURES**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC 62434, which is a technical report, has been prepared by subcommittee 65D: Analyzing equipment, of IEC technical committee 65: Industrial-process measurement and control.

The text of this technical report is based on the following documents:

Enquiry draft	Report on voting
65D/121/DTR	65D/124/RVC

Full information on the voting for the approval of this technical report can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this Technical report may be issued at a later date.

IECNORM.COM : Click to view the full PDF of IEC TR 62434:2006

pH MEASUREMENTS IN DIFFICULT MEDIA – DEFINITIONS, STANDARDS AND PROCEDURES

1 Scope and object

This Technical Report concerns analyzers, sensor units and electronic units used for the determination of pH in non-aqueous solvents and aqueous organic solvent mixtures using glass electrodes. IEC 60746-1 includes further definition of the scope and provides for the general aspects of all electrochemical analyzers, including pH. It is worthwhile to remind that IEC 60746-2 contains specifications for simulators used for testing pH electronic units.

This technical report specifies the terminology, definitions, methodology, requirements for statements by manufacturers and performance tests for analyzers, sensor units and electronic units used for the determination of pH value in non-aqueous and aqueous-organic solvent mixtures.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60746-1, *Expression of performance of electrochemical analyzers – Part 1: General*

IEC 60746-2, *Expression of performance of electrochemical analyzers – Part 2: pH value*

3 General principles

3.1 Terms and definitions

The required definitions will be given following on the order of appearance of the relevant physical quantities in the text, and they comply with the pertinent IUPAC documents [1,2]¹ and IEC 60746-2.

3.2 Symbols

The meaning of each symbol used here is given immediately after its first appearance in the relevant equation and it is conform to the pertinent IUPAC documents [1,2] and IEC 60746-2.

3.3 pH value

3.3.1 General

A measure of the conventional hydrogen ion activity a_{H^+} in solution given by the expression

$$\text{pH} = -\log a_{\text{H}^+} = -\log(m_{\text{H}^+} \gamma_{\text{H}^+}) \quad (1)$$

where γ_{H^+} is the activity coefficient of the H^+ ion at the molality m_{H^+} (moles of H^+ per kg of solvent). pH is a dimensionless quantity; it is not correct to write the logarithm of a quantity other than a dimensionless number, and the full form of equation (1) is

¹ Numbers in square brackets refer to the bibliography.

$$\text{pH} = -\log a_{\text{H}^+} = -\log(m_{\text{H}^+} \gamma_{\text{H}^+}/m^\circ) \quad (2)$$

where $m^\circ = 1 \text{ mol kg}^{-1}$ is the standard-state reference molality. This definition is in terms of the molal scale, which is that recommended by IUPAC for a key reason, i.e. the molality of a solution is temperature-independent, which saves much repetitive work of cell construction and filling. However, if one wants to treat pH in terms of the amount-of-substance concentration c (formerly “molarity”) in mol dm^{-3} , the equation (2) would take the form

$$\text{pH}_c = -\log(a_{\text{H}^+})_c = -\log(c_{\text{H}^+} \gamma_{\text{H}^+}/c^\circ) \quad (3)$$

where γ_{H^+} is the activity coefficient of H^+ at concentration c_{H^+} (moles of H^+ per dm^3 of solvent). It is worthwhile to recall that pH and pH_c are interrelated by the equation

$$\text{pH}_c = \text{pH} - \log [\rho/(\text{kg dm}^{-3})] \quad (4)$$

where ρ is the relative density of the solvent.

Although equation (2), or alternatively (4), can be used to give an interpretation to pH values under certain limiting conditions, a_{H^+} cannot be rigorously obtained by any method, for example from potential difference measurements, because it involves such a non-thermodynamic quantity as the single- H^+ -ion activity coefficient γ_{H^+} , and instead an operational definition is adopted in terms of pH values assigned to certain reference buffers (primary or secondary pH standards). The pH measurement is performed by measuring the potential difference (electromotive force) E_X between a pair of electrodes immersed in the sample at unknown pH_X in the (non-aqueous or aqueous-organic) solvent Z, according to the cell scheme:

Reference electrode in solvent Z	Concentrated equitransferent salt bridge in solvent Z	Sample at unknown pH_X in solvent Z	H^+ -sensing electrode (hydrogen gas electrode, or glass electrode)
----------------------------------	---	--	--

(5)

and measuring the potential difference E_S with the same electrode pair, the same salt bridge of the same composition and solvent Z, and at the same temperature, in a reference buffer solution of known standard pH_{PS} or pH_{SS} , according to:

Reference electrode in solvent Z	Concentrated equitransferent salt bridge in solvent Z	Standard pH_{PS} or pH_{SS} in solvent Z	H^+ -sensing electrode (hydrogen gas electrode, or glass electrode)
----------------------------------	---	--	--

(6)

E_X , E_S , etc. are all defined as the difference of the potential of the right-hand (glass electrode) minus the potential of the left-hand electrode (reference electrode). Considering the Nernstian expressions for E_X and E_S , the sought pH_X of the sample in question is given by:

$$\text{pH}_X = \text{pH}_{\text{SS}} - (E_X - E_S)/k + (E_{\text{JX}} - E_{\text{JS}})/k \quad (7)$$

where $k = 2,302 \ 6 \ RT/F$, and E_{JX} and E_{JS} are the liquid junction potentials (see 3.3.2) arising at the junctions between reference electrode and unknown pH_X and between reference electrode and the known standard pH_{PS} , respectively. The concentrated equitransferent salt bridge in solvent Z (see 3.6.5) duly minimizes E_{JX} and E_{JS} , so that their difference ($E_{\text{JX}} - E_{\text{JS}}$) (the so-called “residual liquid junction potential”) can be ignored, and the following operational equation is now internationally endorsed for the determination of pH_X :

$$\text{pH}_X = \text{pH}_{\text{SS}} - (E_X - E_S)/k \quad (8)$$

At extreme acidities or alkalinities, or with high salinities (ionic strengths) of the sample, the residual liquid junction potential may be significant and requires careful consideration for the assessment of the accuracy level of the measured pH_X .

The cell diagrams (5) and (6), respectively, represent the well known “measure” and “calibration” configurations of the “pH operational cell”. Numerical values for k , the “Nernstian coefficient” or “theoretical slope factor”, at temperatures from (0 to 100) °C, are given in Annex A.

Upon aging, the glass electrodes show an irreversible decrease of the slope factor, which thus becomes the “practical slope factor” $k' < k$ and should consequently be accounted for in the operational equation (8). This is currently accomplished by the “bracketing standards procedure” (or “two standards calibration”). This requires use of two standards, one (pH_{PS1}) below and one (pH_{PS2}) above the expected pH_X . The corresponding measurements of E_X , E_{S1} , and E_{S2} , are then combined to give the following equations:

$$k' = -(E_{\text{S2}} - E_{\text{S1}})/(\text{pH}_{\text{S2}} - \text{pH}_{\text{S1}}) \quad (9)$$

$$\text{pH}_X = \text{pH}_{\text{S1}} + (E_X - E_{\text{S1}})(\text{pH}_{\text{S2}} - \text{pH}_{\text{S1}})/(E_{\text{S2}} - E_{\text{S1}}) \quad (10)$$

3.3.2 Liquid junction potential

Electric potential difference arising across any junction between two electrolyte solutions of different insertion. This potential difference is, in current practice, minimized (even if by no means exactly) by insertion of a salt bridge (see 3.6.5). When the junction is between two solutions differing not only in the electrolyte composition, but also in the solvent (“heterosolvental junction”) the intervening liquid junction potential is composed of a *ionic* liquid junction potential (minimizable by insertion of an appropriate salt bridge – see 3.6.5) and a *solvental* liquid junction potential which can by no means be minimized and may amount to several tens of mV.

3.4 Standard reference buffer solutions (primary and secondary pH standards)

3.4.1 Reference buffer solution preparation

3.4.1.1 General

A reference buffer solution (pH standard) is prepared according to a specified formula, using recognized analytical-grade chemicals and solvents (non-aqueous or aqueous-organic) appropriately redistilled, if pH_X is required to not better than $\pm 0,05$. The pH value of reference buffer solutions may, because of the variation in the purity of available commercial chemicals, differ by as much $\pm 0,01$ from accepted values. For higher accuracy (for example to $\pm 0,002$), solutions may be prepared with chemicals that have been characterized and declared as Certified Reference Materials (CRM, see 3.4.1.4) by a national standards laboratory, and solvents (non-aqueous or aqueous-organic) characterized by the most severe procedures and tests (including conductivity, if applicable) of purification.

3.4.1.2 Primary standards (pH_{PS})

Certain substances which meet the criteria of:

- preparation in highly pure state reproducibly, and availability as certified reference materials (see 3.4.1.4);
- stability of solution over a reasonable period of time;
- having low value of the residual liquid junction potential – see 3.3.2, shall be designated as *primary reference standards* (pH_{PS}) in solution of specified concentration in the appropriate solvent Z.

The pH_{PS} values assigned to these primary standards are specifically derived from measurements on the following reversible cell (“Harned’s cell”):

Pt	H_2 (gas, $p = 101325$ Pa)	$\text{pH}_{\text{PS}} + \text{KCl}$, in Z	AgCl	Ag	Pt
----	-------------------------------------	---	------	----	----

(11)

whose structure (and that of the parallel cell (13)) is represented schematically in Figure 1. Best values of pH_{PS} for various standard buffer solutions in some 45 nonaqueous or aqueous-organic solvents at various temperatures are given in Annexes B, C and D, together with directions for proper preparation of the chemicals.

The potential difference E of cell (11), omitting to write the term $m^\circ = 1 \text{ mol kg}^{-1}$ for convenience, is given by:

$$E = E^\circ - k \log[m_{\text{H}^+} m_{\text{Cl}^-} \gamma_{\text{H}^+} \gamma_{\text{Cl}^-}] \quad (12)$$

where the standard potential difference E° is derived separately from measurements on the cell (13):

Pt	H_2 (gas, $p = 101325\text{Pa}$)	HCl (m), in Z	AgCl	Ag	Pt
----	--	-------------------	------	----	----

(13)

and calculated from equation (12) using $\gamma_{\text{H}^+} \gamma_{\text{Cl}^-} = \gamma_{\pm}^2$ where $\gamma_{\pm}$ is the independently known mean ionic activity coefficient of HCl at molality $m = 0,01 \text{ mol kg}^{-1}$. From equation (12) one gets:

$$\text{pH} = (E - E^\circ)/k + \log(m_{\text{Cl}^-}) + \log(\gamma_{\text{Cl}^-}) \quad (14),$$

in which $\log(\gamma_{\text{Cl}^-})$ is obtained from the IUPAC-endorsed Bates-Guggenheim equation (15) [1]:

$$\log(\gamma_{\text{Cl}^-}) = -A_Z I^{1/2} / [1 + 1,5 (I \epsilon_W \rho_Z / \epsilon_Z \rho_W)^{1/2}] \quad (15)$$

where I is the ionic strength of solution, A_Z is the classical Debye-Hückel constant appropriate to the (single or aqueous-organic) solvent Z, and ϵ and ρ are respectively permittivities and densities of the water (W) and the solvent Z as indicated by the subscripts. (If the solvent Z is water itself, equation (15) would reduce to $\log(\gamma_{\text{Cl}^-}) = -A_W I^{1/2} / [1 + 1,5 I^{1/2}]$, which is the form of Bates-Guggenheim equation used for the pH standardization in pure water medium [1]). The pH values obtained from (14) are found to vary slightly with m_{Cl^-} due to the ionic interactions between the pH_{PS} buffer and KCl in the mixed electrolyte in cell (11). Therefore these pH values are plotted against m_{Cl^-} , and the intercept at $m_{\text{Cl}^-} = 0$ is finally recognized as primary standard pH_{PS} .

Values of the required ancillary quantities A_Z , $\gamma_{\pm}$, and E° are available (see [1] and literature cited therein).

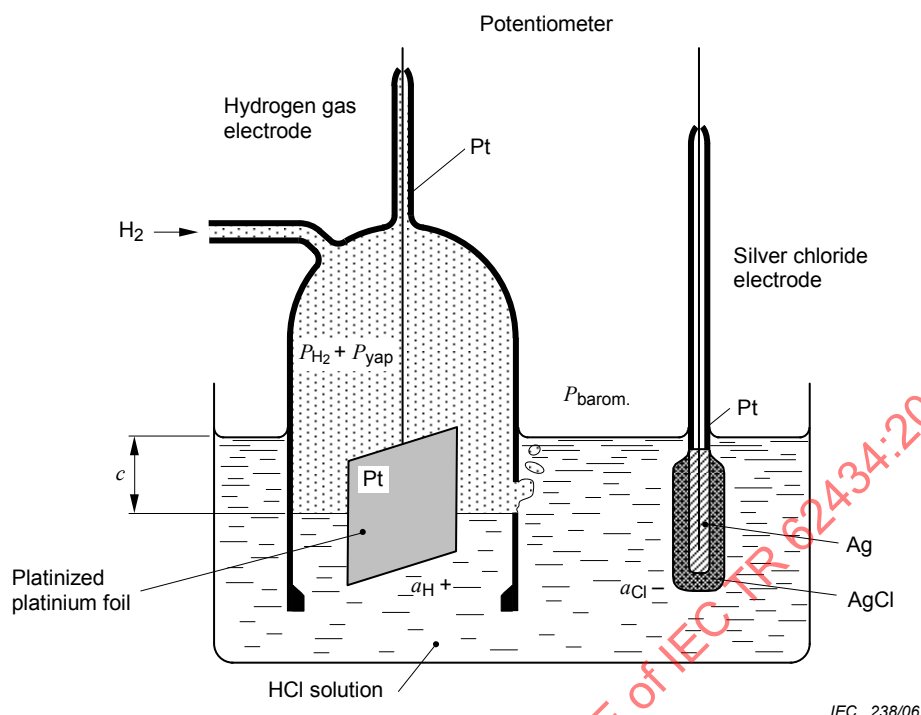


Figure 1 – Schematic structure of the hydrogen gas electrode and of the AgCl electrode forming the cell (13)

3.4.1.3 Secondary standards (pH_{SS})

Certain substances which meet the criteria of:

- preparation in highly pure state reproducibly;
- stability of solution over a reasonable period of time, shall be designated as *secondary standards* (pH_{SS}) in solution of specified concentration in the general (non-aqueous or aqueous-organic) solvent Z.

The values of pH_{SS} can be assigned by comparison with the pH_{PS} values in cells with liquid junction of the type

Pt	H_2	$\text{pH}_{\text{PS}} \text{ in Z} \parallel \text{Salt bridge in Z} \parallel \text{pH}_{\text{SS}} \text{ in Z}$	H_2	Pt
----	--------------	---	--------------	----

(16)

where pH_{SS} may either have the same nominal composition of pH_{PS} or be of quite different composition, and it is desirable that the junctions be formed within capillary tubes so that the geometry of the liquid junction is well defined and the potential values reproducible. If E_{16} denotes the potential difference of cell (16), and the liquid junction potentials can be safely ignored, then the values of pH_{SS} are given by

$$\text{pH}_{\text{SS}} = \text{pH}_{\text{PS}} - E_{16}/k \quad (17)$$

An alternative IUPAC-endorsed method of obtaining pH_{SS} makes use of a variant of cell (11) in which the glass electrode (which is simply a H^+ -sensing membrane electrode, namely a non-thermodynamic electrode) replaces the H^+ -reversible hydrogen-gas electrode:

Pt	Glass electrode	$\text{pH}_{\text{SS}} + \text{KCl, in Z}$	AgCl	Ag	Pt
----	-----------------	--	------	----	----

(18)

thus obtaining a non-reversible cell, of potential difference E_{18} . The procedure of processing the E_{18} data is wholly analogous to that described by the equations (12) to (15) above. The procedure followed (that based on cell (16) or that based on cell (18)) should be stated in any case.

3.4.1.4 Certified reference materials

Selected chemicals which were certified by a national metrological institution. Certainly, in order for a particular buffer to be considered a primary buffer solution, it should be of the highest metrological quality, in accordance with the definition of a primary standard. Therefore, the best conditions would be that the primary and the secondary standard materials should be accompanied by certificates from national metrological institutes in order for them to be described as Certified Reference Materials (CRMs).

3.4.1.5 Storage of standard pH buffers in certain solvents

When stocks of pH_{PS} or pH_{SS} buffer solutions in alcohols, glycols and glycerols (and in their mixtures with water) have been prepared for long-duration service or conservation, it is recommended to store them at freezer temperatures ($\approx -15\text{ }^{\circ}\text{C}$) to prevent any undesired esterification.


3.4.2 Measurement of pH_{X} - Choice of the standard reference solutions

Unlike in the case of the purely aqueous solutions, where there is abundance of primary and secondary standards, for the general (non-aqueous or aqueous-organic) solvent Z there are few or no standards, with the only exceptions of methanol+water and ethanol+water mixtures, in which it is evident that electrochemists have concentrated their efforts almost exclusively. In fact, for aqueous mixtures with 2-propanol, ethylene glycol, glycerol, methylcellosolve, acetonitrile, 1,4-dioxane, dimethylsulfoxide, ethylene carbonate, propylene carbonate, and formamide, for a total of some 40 mixed solvent systems, beside the pure deuterium oxide solvent (D_2O , see Annex C), there are available the pH_{PS} values for the 0,05 mol kg^{-1} potassium hydrogen phthalate buffer [3 to 7], as collected in Annex B, plus sparse pH_{PS} values for a handful of other buffers to be seen in Annex D. Secondary standard pH_{SS} values for the same buffers mentioned above are now available in tetrahydrofuran+water mixtures [8] (Annex E). This very poor availability of pH standards, for now at least, impairs the possibility of applying the bracketing standards procedure (equations (9) and (10)) to compensate for deficiencies in the electrodes and measuring systems. Clearly, acquisition and systematisation of pH_{PS} as well as pH_{SS} values is overdue and urgently required.

3.5 Widths of normal pH scales or normal pH ranges in the general solvents Z

3.5.1 General

Each solvent Z has a parameter of great concern for the pH domain: this is the temperature-dependent autoprotolysis constant K_{Z} , which expresses the ability of Z to self-ionize to release H^+ ions. It is precisely the negative logarithm of K_{Z} , symbolized as $\text{p}K_{\text{Z}} = -\log K_{\text{Z}}$, at 25 $^{\circ}\text{C}$ that conventionally defines the **width of normal pH scale** (or **normal pH range**) in each solvent Z [9]. Values of $\text{p}K_{\text{Z}}$ for a number of nonaqueous or aqueous-organic solvents can be found in the *ad hoc* IUPAC document [10]. The **mid-scale point (neutral pH point)** is 0,5 $\text{p}K_{\text{Z}}$. It is well known that in water $\text{p}K_{\text{Z}} = 14$, so that the normal pH scale in aqueous medium is 14 units wide, and the neutral point is at pH 7. Instead, in acetonitrile $\text{p}K_{\text{Z}} = 28$, and the neutral point is at pH 14; see Figure 2. Thus there emerges the problem of intercomparing pH values measured in different solvents Z: this is strictly linked with the determination of the so-called **primary medium effect on the H^+ ion**, which is described below.

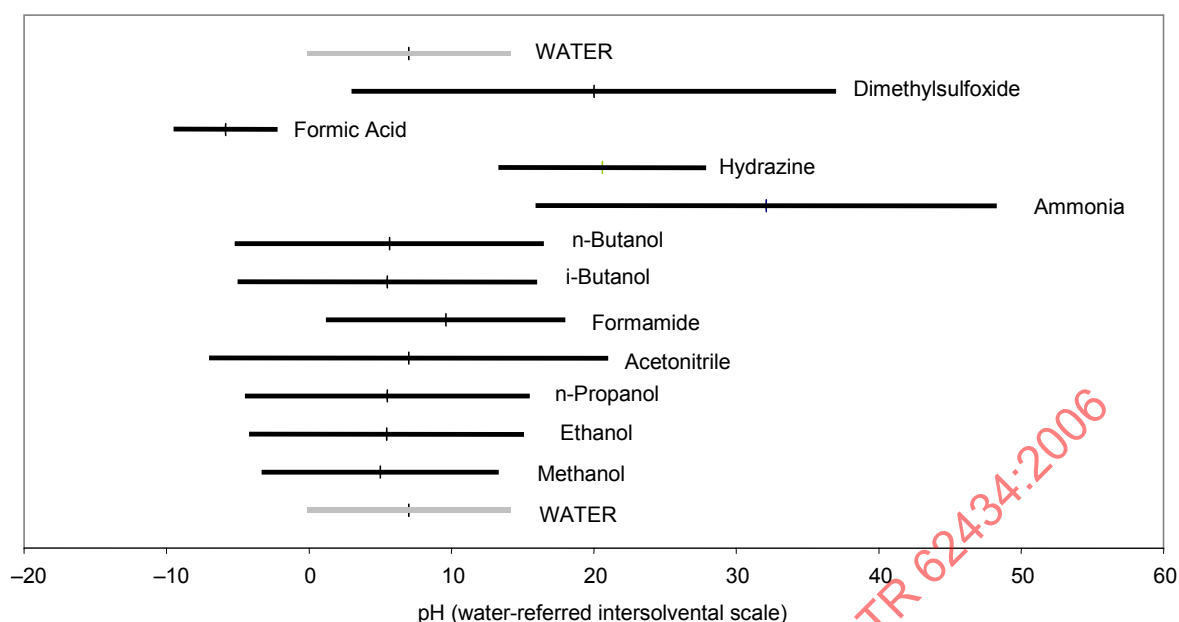

IEC 239/06

Figure 2 – Intercomparing widths and relative positions of normal pH scales (with neutral points indicated by halving dots) in different solvents

3.5.2 Conditions for comparability of pH scales in different solvents Z with the aqueous pH scale: definition of an intersolvental scale of pH

Any pH_{PS} or pH_{SS} standard, and any pH value measured in solvent Z, is only valid for the pH scale in that solvent and are *not* physically comparable with pH_{PS} or pH_{SS} standards and any pH value measured in water. It can be shown [9] that, to make pH_Z (in solvent Z) physically comparable with pH_W (in water) on one **intersolvental pH scale**, pH_Z should be converted to $\text{pH}_{Z/W}$ as expressed by equation (20):

$$\text{pH}_{Z/W} = \text{pH}_Z - \log(\gamma_T) = \text{pH}_Z + [(E^\circ_{\text{H}})_W - (E^\circ_{\text{H}})_Z]/k \quad (20)$$

where γ_T is the so-called “transfer activity coefficient” of H^+ , or **primary medium effect upon H^+** , namely, $\log(\gamma_T)$ is a measure of the change of standard Gibbs free energy accompanying the transfer of the H^+ ion from water (W) to solvent Z. It is quantified in terms of the difference $[(E^\circ_{\text{H}})_W - (E^\circ_{\text{H}})_Z]$ of the standard **absolute** potential of the H^+ -sensing electrode in W and Z, respectively. Since there cannot be any thermodynamically correct method of determining the above difference, recourse to extrathermodynamic methods or assumptions is unavoidable, and unfortunately there is remarkable discrepancy between the $\log(\gamma_T)$ values estimated by the various authors. Thus the conversion expressed by equation (20) is still belonging to the theoretical domain only, and to the users, each pH_Z scale is at this point not comparable with the aqueous pH_W scale. The situation depicted in Figure 2 represents the best overview available now but has only qualitative value.

3.5.3 Incorrect use of two-solvent cells for pH measurements

An unproductive, but all too frequently tried, approach to obtaining a comparability of pH_Z with pH_W is that [see 11] which is based on measuring the potential difference $(E_X)_Z$ of the cell (21):

Reference electrode in solvent Z	Salt bridge in solvent Z	Sample at unknown pH_X in solvent Z	H^+ -sensing electrode (hydrogen gas electrode, or glass electrode)
----------------------------------	--------------------------	--	--

(21)

the Nernstian expression of which is expressed by:

$$(E_X)_Z = U_Z - k (\text{pH}_X)_Z + (E_{JX})_Z \quad (22)$$

after a deceptive “calibration” based on measuring the special potential difference *E_S of the two-solvent (“heterosolvental”) cell (23):

Reference electrode in solvent Z	Salt bridge in solvent Z	Standard at known pH_{PS} in water	H ⁺ -sensing electrode (hydrogen gas electrode, or glass electrode)
----------------------------------	--------------------------	---	--

which is expressed by

$$^*E_S = ^*U - k (\text{pH}_S)_W + ^*E_{JS} \quad (23)$$

From equations (22) and (23), a new supposed “operational” equation is derived:

$$(\text{pH}_X)_Z = (\text{pH}_S)_W - [(E_X)_Z - ^*E_S]/k \quad (24)$$

and relied upon as one ensuring pH_Z to be directly measurable and physically comparable with the aqueous standard $(\text{pH}_S)_W$. However, subtraction of (23) from (22) to obtain (24) is illegitimate. In fact, U_Z and *U are quite different (and cannot be dropped in the difference) because of $(E^\circ_H)_W \neq (E^\circ_H)_Z$ and $(a_{H^+})_W$ being not comparable with $(a_{H^+})_Z$; and the liquid junction potential $^*E_{JS}$ contains a *solvental* contribution not included in $(E_{JX})_Z$, so that they also cannot be dropped in the difference.

However, a heterosolvental cell configuration of the type:

Reference electrode in water	Salt bridge in water	Various samples at unknown $(\text{pH}_X)_Z$'s in same solvent Z	H ⁺ -sensing electrode in same solvent Z
------------------------------	----------------------	---	---

(25)

whose potential difference can be expressed as:

$$^*E_X = ^*U - k (\text{pH}_X)_Z + ^*E_{JX} \quad (26)$$

can be **correctly** applied to measure $(\text{pH}_X)_Z$ variations, $\Delta(\text{pH}_X)_Z$, among various samples **in the same solvent Z**. In fact, as shown by equation (26), $\Delta(\text{pH}_X)_Z = \Delta^*E_X/k$, because the heterosolvental terms (i.e. the constant *U and the liquid junction potential $^*E_{JX}$) cancel out in the difference. However, if the cell (25) is switched from solvent Z to another, different solvent Z' (while retaining the same aqueous reference electrode), the $\Delta(\text{pH}_X)_{Z'}$ values observed in Z' are **not** physically correlatable with the $\Delta(\text{pH}_X)_Z$ values observed in Z, because the solvental part of the liquid junction potential $^*E_{JX}$ is changed.

3.6 Electrodes and operating conditions

3.6.1 pH sensor (pH glass electrode)

The most commonly used pH sensor is the glass electrode [9], other potentiometric sensors, for example, the antimony electrode are only adopted when its use is precluded. The pH isfet (ion selective field effect transistor) sensor is an alternative to potentiometric sensors, necessitating manufacturer-specific instrumentation.

3.6.2 Hydrogen gas electrode

This is a thin foil of platinum electrolytically coated with finely divided deposit of platinum or palladium metal, which catalyses the electrode reaction $\text{H}^+ + \text{e} = \frac{1}{2} \text{H}_2$ in solution saturated with hydrogen gas [9,12], see schematic representation in Figure 1. This electrode, which does not lend itself to routine measurements, is the precision H⁺-sensing electrode, whose use is mandatory for thermodynamic studies or determinations of pH standards (see above).

However, in certain non-aqueous solvents (for example acetonitrile, dimethylsulfoxide) the hydrogen electrode does not work properly and should be replaced by another appropriate H^+ -sensing electrode, for example the quinhydrone electrode described in 3.6.3.

3.6.3 Quinhydrone electrode

This is a wire of noble metal (platinum or gold) placed in a solution to which a small amount ($\approx 0,1$ g) of quinhydrone has been added to saturate the solution with equimolal amounts of quinone and hydroquinone [9,12]. The quinhydrone electrode can replace the hydrogen electrode in certain nonaqueous solvents (for example acetonitrile, dimethylsulfoxide) where the hydrogen gas electrode shows erratic behaviour, for the purpose of determination of pH standards. Under certain conditions (neutral or acidic pH, absence of strong oxidizing and reducing agents and of large concentrations of added salts) the quinhydrone electrode may also replace the glass electrode for routine pH measurements.

3.6.4 Reference electrode

This is an appropriate half-cell providing a stable potential at constant temperature [12] against which the potential of the pH sensor is measured. Electrical contact with the sample is made at a liquid junction with the reference electrolyte or an interposed salt-bridge solution.

3.6.5 Salt bridge

3.6.5.1 General

This is a concentrated solution of a binary electrolyte MX having cation M^+ and anion X^- of equal mobility ("equitransferent concentrated bridge" in common terminology, with $M^+ = K^+, NH_4^+, Rb^+, Cs^+$, and $X^- = Cl^-, Br^-, I^-, NO_3^-$) to be inserted between the internal filling solution of the reference electrode and the sample solution at pH_X (or the reference standard at pH_{PS}) under study, of course *in the same solvent Z*, in order to minimize the residual liquid junction potential error [9,12], a common practice first introduced by Guggenheim [9,12,20]. Most popular examples are: saturated KCl, RbCl, CVsCl, and NH_4Cl in water or in several water-rich aqueous-organic solvents. Whenever possible, for example in the cases of the alkali halides mentioned above, the salt bridge directly constitutes the internal filling solution of the appropriate halide-reversible second-kind reference electrode ("built-in salt bridge") thus simplifying the electrode design and function. When the solvent changes from pure water to an aqueous-organic mixture or a pure nonaqueous solvent, the equitransference properties of some of the above MX salts may be lost. For instance, changing from pure water to pure formamide, the only acceptably equitransferent salt bridge is NH_4Cl whereas the others fail, as was demonstrated by a recent systematic study [18]. The appropriateness and efficiency of the NH_4Cl bridge extends also over the other amides and N-alkylamides of extremely high permittivities, and also to such mixed solvents as water+alcohol, water+glycol, and water+acetonitrile. When the halide-based salt-bridge is chemically incompatible with certain ions (for example the Ag^+ , Tl^+ or Hg^{2+} cations) of the sample solution, the Li_2SO_4 salt bridge [19] in conjunction with a Hg_2SO_4 or a Pb_2SO_4 -based reference electrode can be used in certain solvents [19]. In commercial reference electrodes, the pertinent salt bridge is incorporated in the electrode design.

3.6.5.2 Second bridge, or bridge solution (of a double-junction reference electrode)

Another (concentrated) solution of an inert binary electrolyte having cation and anion of equal mobility, optionally interposed between regular salt bridge 3.6.5.1 and both the sample pH_X and standard pH_{PS} solutions, when there arises a chemical incompatibility (see also 3.6.5.1). Of course, the second bridge should be in the same solvent of the salt bridge 3.6.5.1. As second bridges, KNO_3 , NH_4NO_3 , $RbNO_3$, $CsNO_3$, Li_2SO_4 , or Lithium Acetate can be used in water, but extended research is still needed to ascertain if, like Li_2SO_4 [19], they were also appropriate to nonaqueous or aqueous-organic solvents.

4 Solvent media of applicability

pH standardization in non-aqueous solvents and aqueous-organic solvent mixtures [1] shows a number of features some of which are shared with the pH standardization in aqueous solutions (see [2] and IEC 60746-2). In fact:

- a) While water, with its relative permittivity of ≈ 78 at 25 °C, is a typical ionizing solvent, organic solvents range from benzene and 1,4-dioxane with relative permittivities of ≈ 2 and no ionizing power to N-methylacetamide with relative permittivity of ≈ 182 and strong ionizing power. Within the above range, there are several tens of non-aqueous solvents very popular in the areas of industrial chemistry, analytical chemistry, engineering and corrosion (i.e. alcohols, glycols, glycerols, ethers, amides, ketones, nitriles, etc.); and, of course, there are several hundreds of binary aqueous-organic solvent mixtures which are as important. In reality, an almost unlimited domain exists.
- b) It is necessary to define the width of the “normal pH scale” (or “normal pH range”) (see 3.4) in each (non-aqueous or mixed) solvent for obvious comparison purposes. For example, if the above normal range in water is 14 pH units wide, with the neutrality point (midscale) at pH 7, in acetonitrile such normal range embraces 28 pH units, with the neutrality point at pH 14 (which is, of course, absolutely not physically comparable with pH 14 in water); etc.
- c) Once each normal pH scale in each (non-aqueous or mixed) solvent is defined, it would be desirable to fix the relative positions of these pH scales (with their appropriate acidic and alkaline ends) with ultimate reference to water (because of obvious and undisputable key role of water with respect to any other solvent, or solvent mixture of water itself) so as to constitute one “intersolvental” scale of pH which would provide physically interrelated and comparable pH data. A sketch of the situation is to be seen in Figure 2, and a description of the key features is given in 3.4.
- d) It is indispensable to provide for as many primary pH standards, pH_{PS} , as necessary to cover the normal pH scale in each (non-aqueous or mixed) solvent, within the usual range of temperatures. However, such pH_{PS} standards are only available for a limited number of solvents so far, even if systematic determinations of primary standards (pH_{PS}) as well as secondary standards (pH_{SS}) are being carried out with promising speed in specialised laboratories.
- e) IUPAC (International Union of Pure and Applied Chemistry) has recently recommended criteria and procedures [1] for the determination of the above primary and secondary pH standards in non-aqueous solvents and aqueous-organic solvent mixtures of relative permittivities higher than about 25 to 30 in the temperature range (0 to 100) °C, namely, under conditions of negligible or no ionic association in the solutions. The above range comprises nearly all such popular, ionizing solvents such as alcohols, glycols, glycerols, amides, nitriles, and their mixtures with water. The IUPAC-endorsed, [3] primary standards pH_{PS} hitherto available are collected in the Annexes B, C and D.

5 Procedure for specification

See Clause 4 in IEC 60746-2.

6 Recommended standard values and ranges of influence quantities

All the relevant data are to be found in Annexes B, C, D, E, and F.

7 Verification of values

See Clause 4 in IEC 60746-2.

8 Other difficult media for pH determinations

Significant methodological difficulties in pH measurements are not only faced in the non-aqueous or aqueous-organic media dealt with in the previous clauses, but they also arise in special “aquatic” media such as the physiological solutions [9], the low-ionic-strength freshwaters [13], the estuarine waters [14], and seawaters and highly saline waters [15,16]. The difficulties caused by these media concern:

- a) interpretation of acid-base equilibria interacting with other dissociative equilibria;
- b) selection or adaptation of pH-metric standards;
- c) choice and design of salt bridges at liquid junctions;
- d) choice of reference electrodes;
- e) type and design of operational pH-metric cells; (vi) control of influence quantities.

All these problems, and the related methodological recommendations, are dealt with exhaustively in specific IUPAC documents [13 to 16], and need not be redescribed here.

IECNORM.COM : Click to view the full PDF of IEC TR 62434:2006

Annex A (informative)

Values of the Nernstian slope factor $k = 2,3026 RT/F$

See Table A.1

Table A.1 – Values of the Nernstian slope factor $k = 2,3026 RT/F$

$t / ^\circ\text{C}$	k / V	$t / ^\circ\text{C}$	k / V
0	0,054 199	50	0,064 120
5	0,055 191	55	0,065 112
10	0,056 183	60	0,066 104
15	0,057 175	65	0,067 097
20	0,058 168	70	0,068 089
25	0,059 160	75	0,069 081
30	0,060 152	80	0,070 073
35	0,061 144	85	0,071 065
40	0,062 136	90	0,072 057
45	0,063 128	95	0,073 049
		100	0,074 041
Fundamental constants: $R = 8,314\,51\text{ J K}^{-1}\text{ mol}^{-1}$ $F = 96\,485,3\text{ C mol}^{-1}$ $T = (t + 273,15) = \text{thermodynamic temperature in K}$			

Annex B

(informative)

Values of primary pH-metric standards (pH_{PS}), with overall estimated standard errors δ , for the **0,05 m Potassium Hydrogen Phthalate buffer** in **aqueous-organic solvent mixtures** at various mass percent concentrations of nonaqueous component (with corresponding mole fractions x), at different temperatures $t/^{\circ}\text{C}$ [3 to 7].

		Mass percent of nonaqueous solvent in admixture with water										
	x $t/^{\circ}\text{C}$	5	10	15	20	30	40	50	64	70	80	84,2
			0,058 8		0,123 2			0,359 9	0,499 9			0,749 8
METHANOL	10		4,254		4,490			5,151	5,488			6,254
	25		4,243		4,468			5,125	5,472			6,232
	40		4,257		4,472			5,127	5,482			6,237
	δ		$\pm 0,003$		$\pm 0,003$			$\pm 0,003$	$\pm 0,003$			$\pm 0,003$
ETHANOL	x $t/^{\circ}\text{C}$		0,041 6		0,089 1		0,206 8			0,477 1		
	-5		4,278		4,567		5,113			5,530		
	0		4,261		4,544		5,078			5,505		
	10		4,238		4,510		5,022			5,474		
	25		4,230		4,488		4,973			5,466		
	40		4,248		4,494		4,959			5,499		
	δ		$\pm 0,002$		$\pm 0,002$		$\pm 0,002$			$\pm 0,002$		
2-PROPANOL	x $t/^{\circ}\text{C}$		0,032 2			0,1139		0,230 6		0,411 6		
	15		4,259			4,881		5,247		5,510		
	25		4,249			4,850		5,210		5,522		
	35		4,253			4,834		5,189		5,548		
	45		4,270			4,833		5,182		5,584		
	δ		$\pm 0,002$			$\pm 0,002$		$\pm 0,003$		$\pm 0,004$		

Mass percent of nonaqueous solvent in admixture with water												
		5	10	15	20	30	40	50	64	70	80	84,2
1,2-ETHANE-DIOL ^{a)}	X t/°C		0,0312			0,1106		0,225 0		0,403 8		
	-10		-			4,441		4,845		-		
	-5		-			4,432		4,827		-		
	5		4,122			4,419		4,802		-		
	15		4,121			4,416		4,790		5,254		
	25		4,127			4,419		4,790		5,238		
	35		4,139			4,421		4,799		5,241		
	45		4,156			4,450		4,817		5,261		
	δ		±0,002			±0,002		±0,002		±0,002		
	X t/°C				0,055 9			0,191 4			0,486 4	
2-METHOXY-ETHANOL ^{b)}	-10				-			5,534			6,878	
	-5				4,546			-			-	
	0											
	10				4,526			5,470			6,819	
	25				4,515			5,422			6,757	
	35				4,505			5,380			6,715	
	37							5,363			6,716	
	45				4,514			-			-	
	δ				±0,003			±0,002			±0,003	
	X t/°C	0,0226		0,071 9		0,1583		0,305 0		0,505 9		
ACETO-NITRILE	15	4,163		4,533		5,001		5,456		6,159		
	25	4,166		4,533		5,000		5,461		6,194		
	35	4,178		4,542		5,008		5,475		6,236		
	δ	±0,005		±0,005		±0,005		±0,005		±0,005		

		Mass percent of nonaqueous solvent in admixture with water										
		5	10	15	20	30	40	50	64	70	80	84,2
1,4-DIOXANE	X $t/^\circ\text{C}$		0,022 2			0,080 6		0,169 7				
	15		4,330			5,034		5,779				
	25		4,329			5,015		5,782				
	35		4,337			5,007		5,783				
	45		4,365			5,008		5,783				
	δ		$\pm 0,002$			$\pm 0,002$		$\pm 0,002$				
DIMETHYL-SULFOXIDE	X $t/^\circ\text{C}$				0,054 5	0,089 9						
	-12				-	4,870						
	+25				4,471	4,761						
	δ				$\pm 0,002$	$\pm 0,002$						
a) ethylene glycol.												
b) methyl cellosolve.												

IECNORM.COM: Click to view the full PDF of IEC TR 62434:2006

[illegible][illegible]

		Mass percent of nonaqueous solvent in water mixture										
N-METHYL-FORMAMIDE	$X_t/^\circ\text{C}$	8	10	16	20	30	40	50	64	70	80	100
	18							0,233 7				1,000 0
	25							4,525				6,138
	40							4,467				6,089
								4,433				6,103
	δ							$\pm 0,007$				$\pm 0,007$
N-METHYL-ACETAMIDE	$X_t/^\circ\text{C}$							0,233 7				1,000 0
	25							4,290				
	35							4,193				4,649
	40											4,314
	45							4,211				4,501
	50											4,623
								$\pm 0,009$				$\pm 0,020$
a) 1,3-Dioxolan-2-one. b) 4-Methyl-1,3-dioxolan-2-one.												

IECNORM.COM : Click to view the full PDF of IEC TR 62434:2006

Annex C

(informative)

Values of primary pD-metric standards (pD_{PS}), with overall estimated uncertainty δ , for the **0,05 m Potassium Deuterium Phthalate buffer in Deuterium Oxide (D_2O)** at different temperatures $t/^\circ\text{C}$

$t/^\circ\text{C}$	5	10	15	20	25	30	35	40	45	50
pD_{PS}	4,546	4,534	4,529	4,522	4,521	4,523	4,528	4,532	4,542	4,552
δ	$\pm 0,007$									

IECNORM.COM : Click to view the full PDF of IEC TR 62434:2006

Annex D

(informative)

Values of primary standards (pH_{ps}) of various buffers for pH measurements in different solvents or aqueous-organic solvent mixtures at various temperatures. The concentrations of the organic components of the solvent mixtures are expressed in mass percent. [3, 17, 18]

BUFFERS	ACETATE <i>a</i>	SUCCINATE <i>b</i>	PHOSPHATE <i>c</i>	TRIS+ TRIS HCl <i>d</i>	AmPy+ AmPy HCl <i>e</i>		OXALATE <i>f</i>	SUCCINATE <i>g</i>
SOLVENT <i>t/°C</i>	METHANOL							
10	5,518	5,720	7,937	8,436	9,116	25	39,14	2,374
15	5,506	5,697	7,916	8,277	8,968	25	43,30	4,938
20	5,498	5,680	7,898	8,128	8,829	25	64	5,398
25	5,493	5,666	7,884	7,985	8,695	25	70	2,771
30	5,493	5,656	7,872	7,850	8,570	25	84,20	3,358
35	5,496	5,650	7,863	7,720	8,446	25	84,40	6,289
40	5,502	5,648	7,858	7,599	8,332	25	90	3,729
						25	94,20	7,147
						25	94,29	4,133
						25	100	5,79
						25		8,75

BUFFERS	ACETATE <i>h</i>				PHOSPHATE <i>i</i>			TRIS+d TRIS HCl	SALICY LATE <i>j</i>	BARBITU RATE <i>k</i>			OXALATE <i>l</i>	SUCCINATE <i>g</i>
SOLVENT	ETHANOL													
% <i>t</i> /°C	10	20	40	10	20	40	50	100	100		<i>t</i> /°C	%		
-10		5,075	5,498	7,376	7,638		8,912				25	30	2,298	4,668
-5	4,881	5,044	5,470	7,315	7,569		8,739				25	50	2,478	5,040
0	4,861	5,021	5,445	7,263	7,508		8,571				25	71,89	2,947	5,673
+5							8,411							
10							8,258							
15							8,114							
20							7,977							
25	4,822	4,967	5,395	7,104	7,310	7,597	7,845	8,31	13,23					