

TECHNICAL SPECIFICATION



Measurement procedures of magnetic field levels generated by electronic and electrical equipment in the automotive environment with respect to human exposure –

Part 1: Low frequency magnetic fields

IECNORM.COM : Click to view the full PDF of IEC TS 62764-1:2019



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2019 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IECNORM.COM : Click to view the full text of IEC 61827-1:2019

TECHNICAL SPECIFICATION



**Measurement procedures of magnetic field levels generated by electronic and electrical equipment in the automotive environment with respect to human exposure –
Part 1: Low frequency magnetic fields**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 17.220.20

ISBN 978-2-8322-7248-0

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references	7
3 Terms, definitions and abbreviated terms	7
3.1 Terms and definitions.....	7
3.2 Abbreviated terms.....	8
4 Measurement procedure	8
4.1 Measurement phases.....	8
4.2 Measuring conditions	8
4.3 Test site.....	9
4.4 Vehicle set-up.....	9
4.5 Measurement locations	9
4.5.1 General	9
4.5.2 Inside the vehicle.....	9
4.5.3 Outside the vehicle	10
5 Measurement technique	11
5.1 Measuring equipment.....	11
5.2 Measurement of the magnetic field exposure	11
6 Measurement procedure	11
6.1 Vehicle in stationary mode	11
6.1.1 General	11
6.1.2 Flowchart.....	11
6.1.3 Phase 1: vehicle preparation	12
6.1.4 Phase 2: vehicle set-up	12
6.1.5 Phase 3: vehicle measurement	12
6.2 Vehicle in driving mode.....	13
6.2.1 General	13
6.2.2 Flowchart.....	13
6.2.3 Phase 1: vehicle preparation	13
6.2.4 Phase 2: vehicle set-up	13
6.2.5 Phase 3: vehicle measurement (at constant speed)	13
6.2.6 Phase 4: optional measurements	14
6.3 Vehicle in acceleration mode	14
6.3.1 General	14
6.3.2 Flowchart.....	14
6.3.3 Phase 1: vehicle preparation	14
6.3.4 Phase 2: vehicle set-up	14
6.3.5 Phase 3: vehicle measurement (in acceleration)	14
6.4 Vehicle in plug-in charging mode	15
6.4.1 General	15
6.4.2 Flowchart.....	15
6.4.3 Phase 1: vehicle preparation	15
6.4.4 Phase 2: vehicle set-up	16
6.4.5 Phase 3: vehicle measurement	16
7 Test report.....	16

8	Assessment.....	16
	Annex A (informative) Practical measurement advice.....	17
	A.1 Motivation	17
	A.2 Measurement adaptor	17
	Annex B (informative) Maximum extents of measurement volumes inside the vehicle	18
	B.1 Motivation	18
	B.2 Anthropometrical information	18
	B.3 Maximum extents of measurement volumes	19
	Bibliography.....	20
	Figure 1 – Example of test volumes taking account of all body parts for a left-hand drive vehicle	10
	Figure 2 – Specific stationary mode set-up and test.....	12
	Figure 3 – Specific driving mode set-up and test.....	13
	Figure 4 – Specific acceleration mode set-up and test	14
	Figure 5 – Specific plug-in charging mode set-up and test	15
	Figure 6 – Plug-in charging supply cable positioning.....	16
	Figure A.1 – Disc spacer around two types of measurement probes.....	17
	Figure A.2 – Hemispherical spacer around two types of measurement probes	17
	Figure B.1 – Summary of relevant anthropometrical data	18

IECNORM.COM : Click to view the full PDF of IEC TS 62764-1:2019

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**MEASUREMENT PROCEDURES OF MAGNETIC FIELD LEVELS
GENERATED BY ELECTRONIC AND ELECTRICAL EQUIPMENT IN THE
AUTOMOTIVE ENVIRONMENT WITH RESPECT TO HUMAN EXPOSURE –****Part 1: Low frequency magnetic fields****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. In exceptional circumstances, a technical committee may propose the publication of a Technical Specification when

- the required support cannot be obtained for the publication of an International Standard, despite repeated efforts, or
- the subject is still under technical development or where, for any other reason, there is the future but no immediate possibility of an agreement on an International Standard.

Technical Specifications are subject to review within three years of publication to decide whether they can be transformed into International Standards.

IEC TS 62764-1, which is a Technical Specification, has been prepared by IEC technical committee 106: Methods for the assessment of electric, magnetic and electromagnetic fields associated with human exposure.

The text of this Technical Specification is based on the following documents:

Draft TS	Report on voting
106/477/DTS	106/493/RVDTS

Full information on the voting for the approval of this Technical Specification can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62764 series, published under the general title *Measurement procedures of magnetic field levels generated by electronic and electrical equipment in the automotive environment with respect to human exposure*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This document specifies a methodology for determining the exposure to multiple magnetic field sources for passenger cars and light commercial vehicles including standardized operating conditions and measurement volumes and/or surfaces.

IECNORM.COM : Click to view the full PDF of IEC TS 62764-1:2019

MEASUREMENT PROCEDURES OF MAGNETIC FIELD LEVELS GENERATED BY ELECTRONIC AND ELECTRICAL EQUIPMENT IN THE AUTOMOTIVE ENVIRONMENT WITH RESPECT TO HUMAN EXPOSURE –

Part 1: Low frequency magnetic fields

1 Scope

This part of IEC 62764 applies to the assessment of human exposure to low frequency magnetic fields generated by automotive vehicles. For plug-in vehicles, this includes the electric vehicle supply equipment (EVSE) and associated cables provided by the car manufacturer.

The scope of this document establishes the measurement procedure for the evaluation of magnetic field levels in the automotive environment, for passenger cars and commercial vehicles of categories M1 and N1 as defined in ECE/TRANS/WP.29/78/Rev.3 [1]¹, with respect to human exposure. It provides standardized operating conditions and defines recommended measurements to assess compliance to the applicable exposure requirements.

This document covers the frequency range 1 Hz to 400 kHz and is applicable to any type of engine and/or internal energy source.

It is not the scope of this document to define procedures for wireless power transfer (WPT). Human exposure due to WPT is covered by IEC 61980-1 [2].

Abnormal operation of the vehicle or equipment under test is not taken into consideration.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61786-1:2013, *Measurement of DC magnetic, AC magnetic and AC electric fields from 1 Hz to 100 kHz with regard to exposure of human beings – Part 1: Requirements for measuring instruments*

IEC 62311:2019, *Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz to 300 GHz)*

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

¹ Numbers in square brackets refer to the Bibliography.

3.1.1

applicable requirement

particular requirement regarding human exposure to low-frequency magnetic fields against which the vehicle under test is to be assessed using the methods outlined in this document

Note 1 to entry: Examples of such requirements can be found in [3] to [9].

3.1.2

magnetic field exposure

specific metric(s) that are used to quantify human exposure to low-frequency magnetic fields in the applicable requirements

Note 1 to entry: Examples of such metrics can be found in [3] to [9].

3.1.3

powertrain

main system that generates power and delivers it to the road surface

3.2 Abbreviated terms

EV	electric vehicle
EVSE	electric vehicle supply equipment
HEV	hybrid electric vehicle, including mild hybrid electric vehicle (MHEV)
ICEV	internal combustion engine vehicle
SOC	state of charge indicated to the driver
WPT	wireless power transfer

4 Measurement procedure

4.1 Measurement phases

The measurement procedure is divided into four parts regarding the operational vehicle use:

- 1) vehicle in stationary mode;
- 2) vehicle in driving mode;
- 3) vehicle in acceleration mode;
- 4) vehicle in plug-in charging mode.

These four parts are described in detail in Clause 6.

4.2 Measuring conditions

The measurements cover only sources of persistent magnetic field exposure. Continuous occurring sources, or repetitive transient sources such as fan, wipers are included. Transient electrical functions of short duration activated occasionally by the driver, passengers or the vehicle itself are not considered in this document, in particular the horn, the motorized mirror and the door-lock motor.

NOTE The rotation of the tyres can produce low-frequency magnetic fields (typically below 50 Hz, depending on the speed of the vehicle) in and surrounding the vehicle, due to the static magnetization of the tyres [10][11]. This can only contribute to measurements inside the vehicle (since no measurements are to be performed around the vehicle in dynamic mode).

The measurements are performed in the vehicle's standard modes of operation, generating the expected highest levels of magnetic field exposure in measuring volumes that are representative of the occupant (Annex B) and bystander locations.

4.3 Test site

Measurements shall be performed in an area having ambient magnetic field exposure values of less than 10 % of the values given in the requirements in the measurement volumes.

The ambient magnetic field exposure shall be measured with or without the vehicle under test, but in conditions that are representative of the vehicle test. This measurement can be performed before each test or periodically in accordance with the laboratory's quality management processes.

A dynamometer (or roller bench) may be used if it rotates all the driven wheels of the vehicle. It shall be set to simulate the outdoor dynamics of the vehicle including at least its steady-state torque in driving mode and its inertial mass during acceleration mode.

If an outdoor track is used, the grade of the portion used for the tests shall be in the range ± 2 %.

NOTE In the case of a dynamometer, the ambient magnetic field exposure can depend on the torque and/or speed of the dynamometer.

4.4 Vehicle set-up

The following configuration is recommended within the passenger compartment, where practicable:

- all seats except the rearmost seats, if adjustable, centre-positioned horizontally and at the lowest position vertically;
- the rearmost seats, if horizontally adjustable, in their rearmost position;
- the headrests in the fully-back position;
- all seat backs except for the rearmost seats, if adjustable, approximately 15° back from the vertical;
- all seat backs of the rearmost seats, if adjustable, fully tilted backwards;
- the steering wheel centre-positioned vertically and horizontally.

Details of the configuration actually applied during the measurements shall be indicated in the test report, highlighting any deviations from the recommended settings outlined above.

4.5 Measurement locations

4.5.1 General

Measurements are performed in all regions of the vehicle that are accessible by the driver and passengers, and in the immediate vicinity of the vehicle for bystanders. These include the driver and passenger area (cabin), the cargo storage area, the engine and/or the electric powertrain areas, and the areas around the outside of the vehicle.

The measurement distance between the surface of any part of the vehicle and the centre of the probe shall be 0,20 m (see Annex A).

4.5.2 Inside the vehicle

Measurements shall be performed throughout the volumes accessible in normal vehicle use cases by parts of the human body to which the applicable exposure requirements apply. For example, in the passenger compartment, occupants are assumed to be seated in positions where restraint systems are provided.

Measurements are not required where the components are mounted (no components or parts have to be removed to perform the measurements).

An example of test volumes taking account of all body parts is illustrated in Figure 1.

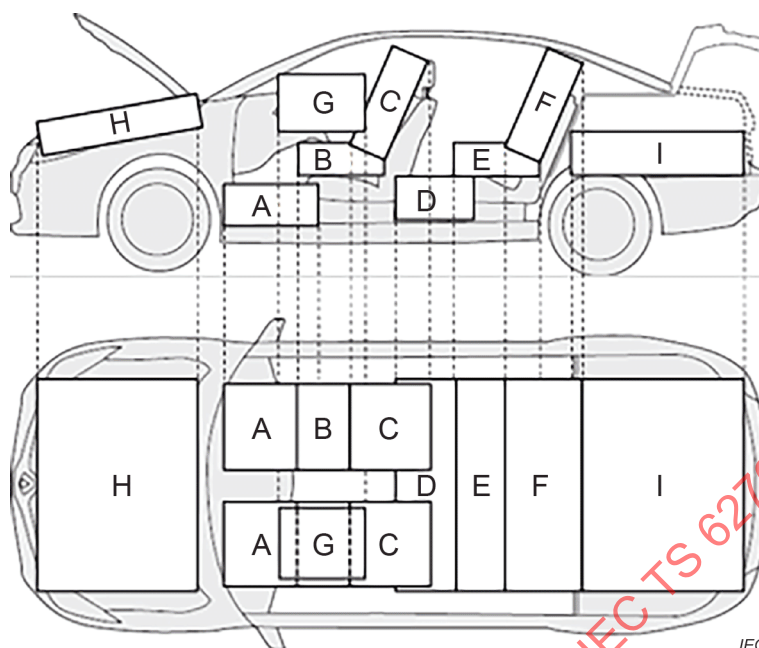


Figure 1 – Example of test volumes taking account of all body parts for a left-hand drive vehicle

In the example shown in Figure 1, the following apply.

- For individual seats, the occupants are represented by three volumes corresponding to (A) the feet, (B) the legs, and (C) the trunk and head. For bench seats, the occupants are represented by three common volumes: D, E and F.
- The volume G represents the arms and hands on the steering wheel (which can be on either or both the left-hand side and right-hand side of the vehicle, or in the centre).
- Measurements can also have to be performed over the engine and/or the electric powertrain in H and/or I only in stationary and charging modes and if people are permitted to access these areas while the engine is running and/or the electric powertrain is active. The bottom of H can be a smooth envelope above all contained components.

Volumes B, C, E and F could also take into account the positions of babies and infants.

NOTE These test volumes are examples defined with consideration of all body parts (including potential exposure of extremities in volumes A, D, G, H and I), but it is possible that some standards or regulations do not apply to the whole body.

Measurement in the areas of the driver's position can be achieved by different means including the use of a dynamometer. Appropriate safety measures shall be employed to avoid accidents due to operation of the dynamometer during measurements.

4.5.3 Outside the vehicle

Measurements shall be performed around the outside of the vehicle in all areas accessible to parts of the human body identified in the applicable requirements. Details of the areas shall be indicated in the test report.

5 Measurement technique

5.1 Measuring equipment

The measuring equipment shall include a probe covering the frequency range defined in Clause 1. The probe shall comply with the requirements of IEC 61786-1.

NOTE For measurements outside the range 1 Hz to 100 kHz, the provisions of IEC 61786-1 can still apply with appropriate calibration in the range 100 kHz to 400 kHz.

The area of the probe shall be at most 100 cm².

The complete measurement chain shall be verified to validate its performance and accuracy before each measurement programme.

5.2 Measurement of the magnetic field exposure

For each volume, the measurement of the magnetic field exposure shall be performed in two steps:

- 1) an initial scan of the entire volume to determine the location of the maximum magnetic field exposure;
- 2) a final measurement at the location of the maximum magnetic field exposure.

To scan the measurement volumes, the probe shall be moved sufficiently slowly to ensure that the spatial maximum is correctly located, especially when measuring sources between 1 Hz and 10 Hz.

The position of the probe relative to the vehicle structure shall remain constant during the final measurement.

6 Measurement procedure

6.1 Vehicle in stationary mode

6.1.1 General

In this step, measurements are performed with the vehicle under test stationary.

For ICEVs, EVs and HEVs, these measurements are not required if all the relevant vehicle functions can be tested simultaneously in driving mode.

6.1.2 Flowchart

The overall procedure is split into three phases as shown in Figure 2.

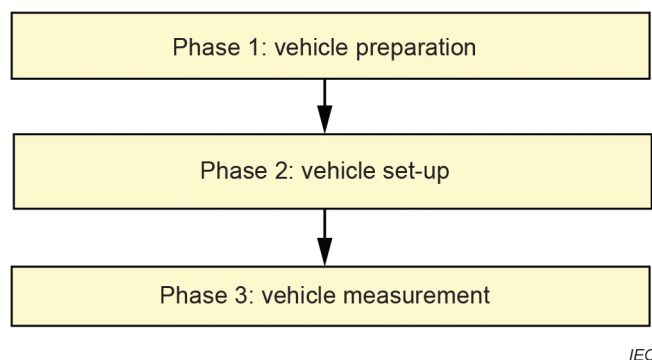


Figure 2 – Specific stationary mode set-up and test

6.1.3 Phase 1: vehicle preparation

The following conditions shall be applied.

- For ICEVs: idle (engine running).
- For EVs: ready to drive.
- For HEVs: ready to drive and/or idle (engine running).
- Vehicle parking brake enabled only if all functions can still be activated, otherwise utilize appropriate means to restrain the vehicle.
- Start/stop function (if present) disabled (with engine continuously running).
- Seats and steering wheel set as defined in 4.4.
- Front and rear openings of vehicle (e.g. cargo storage area, hood) closed except when measuring in associated volumes (e.g. H or I).

6.1.4 Phase 2: vehicle set-up

- Switch on the items of electrical equipment that are considered in 4.2.
- Where a range of settings are available (blower motor, heating), the worst-case mode of operation shall be used.

NOTE The worst-case mode of operation of an electrical system of the vehicle corresponds to the one producing the highest magnetic field exposure in the test volumes described in 4.5. The worst-case mode of operation can be specified by the car manufacturer in his own test plan, since it will depend on his type of vehicle. Otherwise, as noted in IEC 62311:2019, 5.3, "For practical reasons it is acceptable to perform the assessment with the equipment being operated with settings that produce the maximum exposure levels (e.g., maximum rated load, maximum rated power consumption, maximum speed or other), consistent with reasonably foreseeable use. The equipment is operated for a sufficient period to ensure that the conditions of operation are stable."

- Operate the engine for ICEV (engine idle) with transmission disengaged (neutral) for both manual and automatic gearboxes.
- Switch on the electric powertrain for EVs and HEVs.

Caution: The engine fan or other equipment could start automatically without any warning.

6.1.5 Phase 3: vehicle measurement

Perform the measurement of magnetic field exposure in all volumes defined in 4.5 that are required by the applicable regulation being assessed.

NOTE Examples of such regulations can be found in [3] to [9].

During the measurements, the state of charge (SOC) indicated to the driver shall be kept above 20 % of the maximum SOC for vehicles having an electrical powertrain.

6.2 Vehicle in driving mode

6.2.1 General

In this step, measurements are performed when the vehicle is in dynamic mode (moving).

6.2.2 Flowchart

The overall procedure is split into four phases as shown in Figure 3.

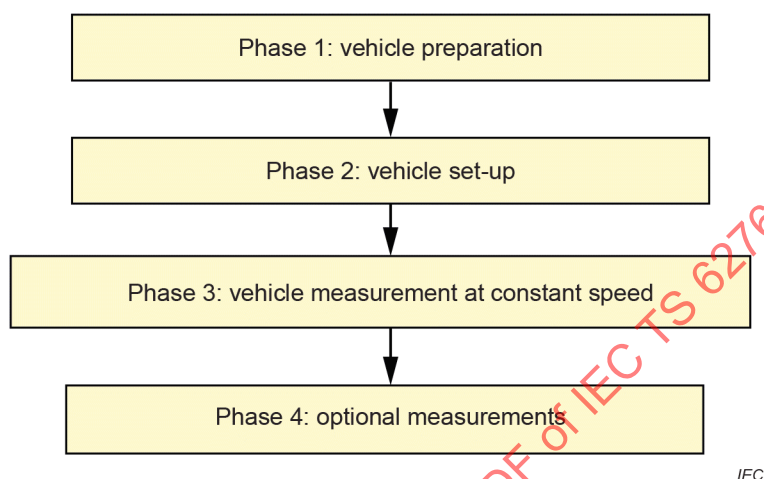


Figure 3 – Specific driving mode set-up and test

6.2.3 Phase 1: vehicle preparation

The following conditions shall be applied:

- Seats and steering wheel set as defined in 4.4.

6.2.4 Phase 2: vehicle set-up

- Switch on the items of electrical equipment that are considered in 4.2.
- Where a range of settings are available (blower motor, heating), the worst-case mode of operation shall be used. See note in 6.1.4.

6.2.5 Phase 3: vehicle measurement (at constant speed)

For ICEVs and EVs, drive the vehicle at a constant speed of (40 ± 8) km/h as indicated to the driver: a cruise control regulator could be used.

For HEVs, drive the vehicle:

- either in single mode (e.g. serial hybrid) with both the electrical and the internal combustion propulsion systems functioning to operate the vehicle at (40 ± 8) km/h. The value of the engine speed shall be recorded in the test report;
- or in two separate modes (e.g. parallel hybrid): internal combustion engine operating alone, electric propulsion system operating alone.

In all cases, if the vehicle cannot reach (40 ± 8) km/h, the maximum speed shall be chosen and recorded in the test report.

During driving mode, the vehicle functions activated in stationary mode shall also be activated simultaneously when possible.

Perform the measurement of magnetic field exposure in all volumes defined in 4.5.

During the measurements, the state of charge (SOC) indicated to the driver shall be kept above 20 % of the maximum SOC for vehicles having an electrical powertrain.

6.2.6 Phase 4: optional measurements

If required in the test plan, complementary measurements may be carried out in different vehicle driving conditions suspected to generate high magnetic field exposure.

6.3 Vehicle in acceleration mode

6.3.1 General

In this step, measurements are performed when the vehicle is accelerating.

6.3.2 Flowchart

The overall procedure is split into three phases as shown in Figure 4.

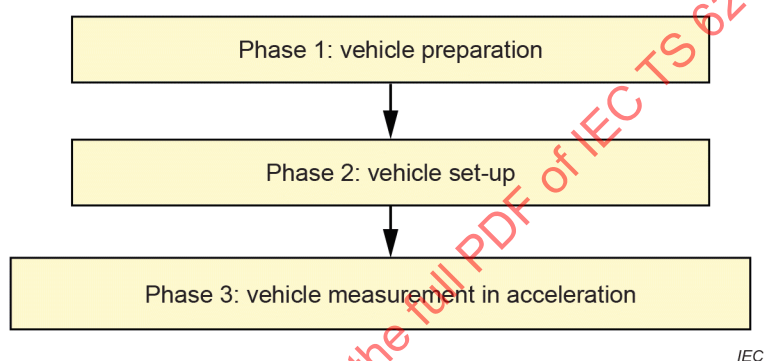


Figure 4 – Specific acceleration mode set-up and test

6.3.3 Phase 1: vehicle preparation

The following conditions shall be applied.

- Seats and steering wheel set as defined in 4.4.

6.3.4 Phase 2: vehicle set-up

- Switch on the items of electrical equipment that are considered in 4.2.
- Where a range of settings are available (blower motor, heating), the setting assumed to produce the highest magnetic field exposure level shall be used.

6.3.5 Phase 3: vehicle measurement (in acceleration)

For each location of the maximum magnetic field exposure determined in the vehicle driving mode test, perform an acceleration and deceleration cycle and measure the maximum magnetic field exposure level during the acceleration stage.

The acceleration stage shall be performed from 0 km/h to 90 km/h, achieving at least 2,5 m/s² between 10 km/h and 75 km/h. In case the vehicle cannot maintain the specified acceleration for reasons other than power limitations due to battery temperature, or cannot reach the maximum speed due to the vehicle's capabilities (and not due to the limitations of the test facility), the achieved acceleration and/or the maximum speed shall be indicated in the test report. Otherwise another test facility allowing the vehicle to reach the specified acceleration shall be chosen.

NOTE 1 Storage of the vehicle at room temperature for at least 8 h prior to performing the test can prevent power limitations due to battery temperature.

For vehicles having an electrical powertrain, the minimum and maximum values of the SOC shall be chosen so that the electric mode of acceleration is fully exercised. These values shall be specified in the test plan and shall be recorded in the test report.

NOTE 2 Measurements during deceleration are not required because significant acceleration has generally been found to cause the highest magnetic field exposure from automotive electrified powertrains and is more reproducible than deceleration in terms of electric mode activation.


6.4 Vehicle in plug-in charging mode

6.4.1 General

This step is specific to vehicles equipped with an on-board rechargeable electrical energy storage system (EV, plug-in vehicle, etc.). The measurements are performed for each charging supply system and associated charging modes.

6.4.2 Flowchart

The overall procedure is split into three phases as shown in Figure 5.

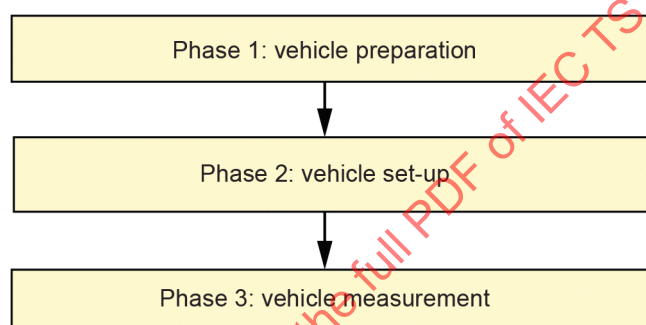

IEC

Figure 5 – Specific plug-in charging mode set-up and test

6.4.3 Phase 1: vehicle preparation

The following conditions shall be applied.

- At the beginning of the measurements, the state of charge (SOC) indicated to the driver shall be below 20 % of the maximum SOC for vehicles having an electrical powertrain.
- Vehicle parking brake enabled.
- Seats and steering wheel set as defined in 4.4.
- Cable(s) of the plug-in charging supply system(s) hanging vertically at a distance of 0,1 m ($^{+0,2}_{-0}$ m) from the vehicle body as described in the examples in Figure 6 a) and Figure 6 b).
- The closures of volumes H and/or I closed unless measuring in those volumes.

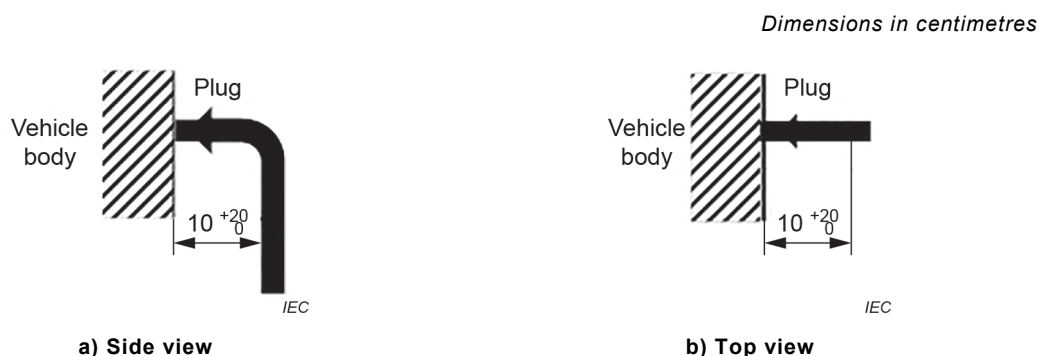


Figure 6 – Plug-in charging supply cable positioning

6.4.4 Phase 2: vehicle set-up

- Key off.
- Switch off all electrical equipment.

6.4.5 Phase 3: vehicle measurement

Perform the measurement of magnetic field exposure in all volumes defined in 4.5 for each charging supply system and associated charging modes with a SOC less than 80 %.

A measurement shall be performed around the socket of each charging supply system. For each cable supplied by the car manufacturer, a measurement shall also be performed along and around the cable over its first 0,50 m. For cables including EVSE, measurements shall also be performed over the surface of the EVSE.

During the measurements, the state of charge (SOC) indicated to the driver shall be kept between 20 % and 80 % of the maximum SOC for vehicles having an electrical powertrain.

Care should be taken not to measure other sources, such as the wall-box or charging station.

7 Test report

The results of each assessment, test or measurement carried out shall be reported accurately, clearly, unambiguously and objectively and in accordance with any specific instructions in the required method(s). An example for the structure of the report can be found in [12].

All the information needed for performing repeatable assessments, tests, calculations, or measurements shall be summarized in a test report.

The test report shall include the information described in IEC 62311:2019, Clause 7, and in particular the combined uncertainty due to frequency response flatness, isotropy, linearity and calibration accuracy of the probe.

8 Assessment

If the magnetic field exposure measurement exceeds the applicable requirement, further investigations may be necessary in order to check the conformity with applicable limits on physical in-body quantities more directly related to the established health effects. Examples can be found in [13] and [14].

Annex A (informative)

Practical measurement advice

A.1 Motivation


In 4.5.1, the measurement locations concern all regions of the vehicle that are accessible by the driver and passengers, and in the immediate vicinity of the vehicle for bystanders. These include the driver and passenger area (cabin), the cargo storage area, the engine and/or the electric powertrain areas, and the areas around the outside of the vehicle.

The measurement distance between the surface of any part of the vehicle and the centre of the probe is 0,20 m.

Annex A suggests a practical way of ensuring this distance.


A.2 Measurement adaptor

To ensure a distance of 0,20 m, a disc or hemispherical spacer can be added to the measurement probe in order to extend the physical boundaries of the probe to the required measurement distance $d = 0,20$ m, as shown in Figures A.1 and A.2.

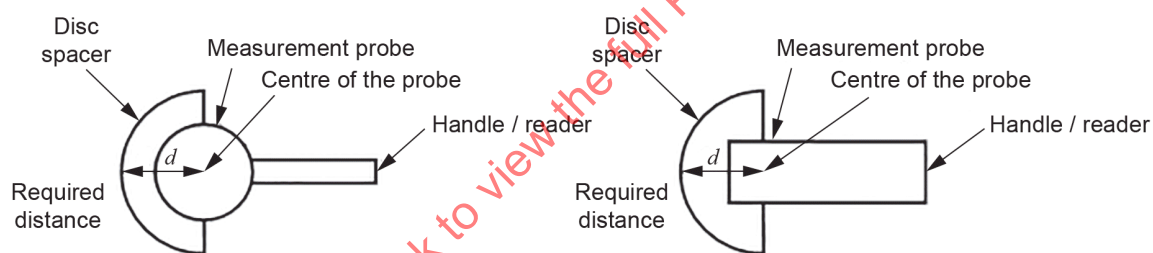

IEC

Figure A.1 – Disc spacer around two types of measurement probes

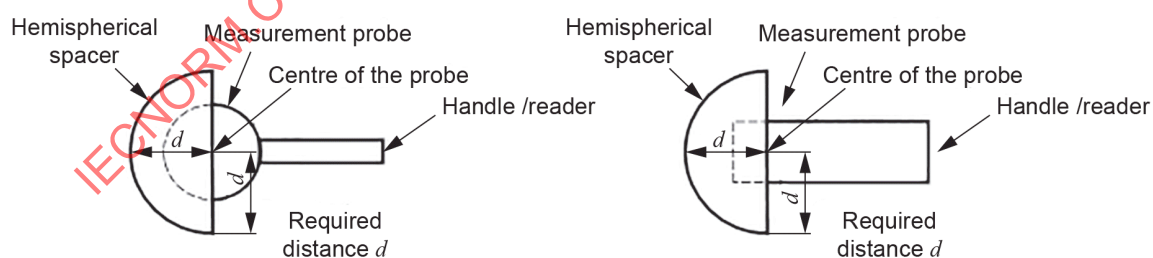

IEC

Figure A.2 – Hemispherical spacer around two types of measurement probes

The spacer is made of non-conductive and non-magnetic material. The relative permittivity of the different parts of the spacer is less than 1,4. The relative permeability of the different parts of the spacer is equal to 1.

Annex B (informative)

Maximum extents of measurement volumes inside the vehicle

B.1 Motivation

Vehicles in the target classes of this document (i.e. M1 and N1) vary significantly in terms of their internal dimensions and geometry. This makes detailed specification of the locations and extents of the measurement volumes, as outlined in 4.5.2, impossible for a generic standard.

Annex B therefore provides a summary of some relevant anthropometrical data to help guide the user in defining the maximum extents of the volumes to be investigated for any specific vehicle.

B.2 Anthropometrical information

The most relevant anthropometrical parameters for this application are illustrated and quantified in Figure B.1.

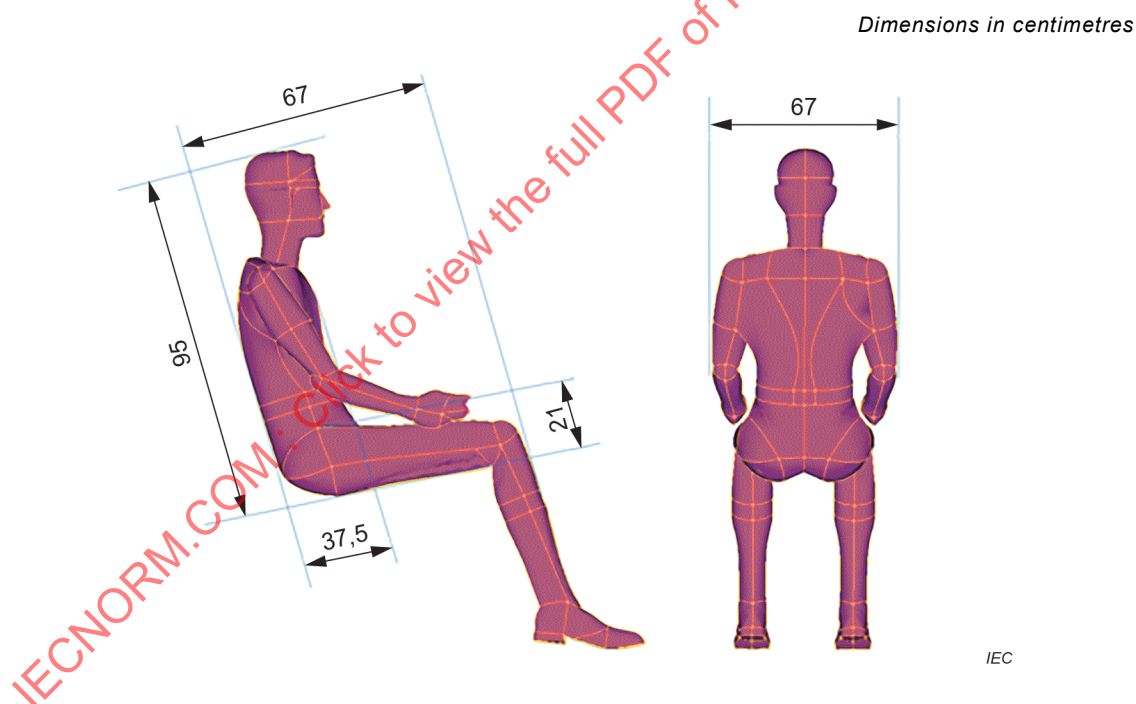


Figure B.1 – Summary of relevant anthropometrical data

People of European descent show the greatest standing and sitting heights (see Figure 9.1 of [15]) and the Dutch are reported to be the tallest group in Europe ([15], p. 174).

The parameters illustrated on the left of Figure B.1 are the maxima of the 95th percentile male and female values for:

- seat to top of head – Dutch adults aged 20–60 (Table 10.8 of [15]);
- torso depth – Dutch adults aged 20–60 (Table 10.8 of [15]);
- thigh thickness – French drivers (Table 10.9 of [15]);
- thigh length – US army personnel ([16], p. 81).