

---

---

**Identification cards — Optical memory  
cards — Holographic recording  
method —**

**Part 3:  
Optical properties and characteristics**

*Cartes d'identification — Cartes à mémoire optique — Méthode  
d'enregistrement holographique —*

*Partie 3: Propriétés et caractéristiques optiques*

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

IECNORM.COM : Click to view the full PDF of ISO/IEC 11695-3:2008



**COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

|                                                           |    |
|-----------------------------------------------------------|----|
| Foreword.....                                             | iv |
| Introduction .....                                        | v  |
| 1     Scope .....                                         | 1  |
| 2     Normative references .....                          | 1  |
| 3     Terms and definitions.....                          | 1  |
| 4     Optical properties and characteristics .....        | 2  |
| 4.1   Surface roughness/scattering .....                  | 2  |
| 4.2   Reflectivity of blank accessible optical area ..... | 2  |
| 4.3   Spatial resolution.....                             | 3  |
| Annex A (normative) Reading/writing test conditions ..... | 4  |

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

ISO/IEC 11695-3 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Cards and personal identification*.

ISO/IEC 11695 consists of the following parts, under the general title *Identification cards — Optical memory cards — Holographic recording method*:

- *Part 1: Physical characteristics*
- *Part 2: Dimensions and location of accessible optical area*
- *Part 3: Optical properties and characteristics*

## Introduction

ISO/IEC 11695 is one of a series of International Standards defining the parameters for optical memory cards and the use of such cards for the storage and interchange of digital data.

These International Standards recognize the existence of different methods for recording and reading information on optical memory cards, the characteristics of which are specific to the recording method employed. In general, these different recording methods will not be compatible with each other. Therefore, these International Standards are structured to accommodate the inclusion of existing and future recording methods in a consistent manner.

ISO/IEC 11695 is specific to optical memory cards using the holographic recording method. Characteristics which apply to other specific recording methods are found in separate International Standards.

This part of ISO/IEC 11695 defines the optical properties and characteristics and the extent of compliance with, addition to, and/or deviation from the relevant base document, ISO/IEC 11693.

The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draw attention to the fact that it is claimed that compliance with this document may involve the use of patents.

The ISO and IEC take no position concerning the evidence, validity and scope of these patent rights.

The holders of these patent rights have assured the ISO and IEC that they are willing to negotiate licenses under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the Statements of the holders of these patent rights are registered with the ISO and IEC. Information may be obtained from:

Certego GmbH  
Lichtenbergstrasse 8  
85748 Garching  
Germany

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

IECNORM.COM : Click to view the full PDF of ISO/IEC 11695-3:2008

# Identification cards — Optical memory cards — Holographic recording method —

## Part 3: Optical properties and characteristics

### 1 Scope

This part of ISO/IEC 11695 specifies the optical properties and characteristics of optical memory cards using the holographic recording method.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 11695-1, *Identification cards — Optical memory cards — Holographic recording method — Part 1: Physical characteristics*

ISO/IEC 11695-2, *Identification cards — Optical memory cards — Holographic recording method — Part 2: Dimensions and location of accessible optical area*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 11695-1, ISO/IEC 11695-2 and the following apply.

#### 3.1

##### **reflectivity**

ratio of reflected light to the light incident at a specified wavelength measured at a normal incidence on the holographic memory card

NOTE Reflectivity is generally expressed as a percentage.

#### 3.2

##### **scattering**

deviation of reflected radiation from the angle predicted by the law of reflection

NOTE Reflections that undergo scattering are called diffuse reflections. Diffuse reflections are measured by means of an integration sphere, while properly averaging over all angles of illumination and observation.

#### 3.3

##### **spatial resolution**

ability of the storage material to distinguish and/or record physical details by electromagnetic means

NOTE The (spatial) resolution is typically expressed in line pairs per millimetre.

### 3.4

#### **contrast transfer function**

##### **CTF**

mathematical function that expresses the ability of an optical device to transfer signals faithfully as a function of the spatial or temporal frequency of the signal

NOTE The CTF is the ratio of percentage modulation of a square wave signal leaving to that entering the device over the range of frequencies of interest. The CTF is usually presented as a graph of CTF versus log (frequency).

### 3.5

#### **diffraction**

interference effects occurring when light is incident on a hologram

NOTE The light is reflected or transmitted in discrete directions, called diffraction orders.

### 3.6

#### **diffraction efficiency**

relation of the power of the diffracted light beam ( $P_{\text{diff}}$ ) to the incident power of the read-out beam ( $P_{\text{inc}}$ ):

$$\eta = \frac{P_{\text{diff}}}{P_{\text{inc}}}$$

NOTE The diffraction efficiency is dependent upon the holographic storage medium. It varies between 0 and 1.

### 3.7

#### **diffraction grating**

device having periodical variations of absorption index and/or refractive index and/or optical path length

### 3.8

#### **read power**

laser power used to read out holograms from the accessible optical area

NOTE Read power is usually expressed in milliwatts.

### 3.9

#### **write power**

laser power required to write information to the accessible optical area at a specified wavelength and beam size

NOTE Write power is usually expressed in milliwatts.

## **4 Optical properties and characteristics**

### **4.1 Surface roughness/scattering**

The substrate shall provide a flat and smooth surface as the carrier for the reflective and optical storage layers. The surface roughness ( $R_a$ ) shall be less than 100 nm: higher values can cause substantial scattering of the read-out beam. Scattered light shall be less than 10 % for wavelengths between 500 nm and 1 000 nm.

### **4.2 Reflectivity of blank accessible optical area**

The reflective layer enables reading of holographic memory cards in reflection mode. The reflectivity of the blank accessible optical area (not containing holograms) shall be greater than 90 % for wavelengths between 500 nm and 1 000 nm.

### 4.3 Spatial resolution

The limiting resolution of the holographic memory card is measured by determining the smallest group of bars, both vertically and horizontally, for which the correct number of bars can be recorded and/or seen. By calculating the contrast between the black and white areas at several different frequencies, points of the contrast transfer function (CTF) can be determined with the contrast equation.

$$Contrast = \frac{C_{\max} - C_{\min}}{C_{\max} + C_{\min}}$$

where

$C_{\max}$  is the normalized value of the maximum (for example, the voltage or grey value of the white area);

$C_{\min}$  is the normalized value of the minimum (for example, the voltage or grey value of the black area).

When the system can no longer resolve the bars, the black and white areas have the same value, so  $Contrast = 0$ . At very low spatial frequencies,  $C_{\max} = 1$  and  $C_{\min} = 0$  so  $Contrast = 1$ .

For the holographic memory card the minimum  $Contrast$  shall be 1, up to a density of 1 000 line pairs per millimetre.

## Annex A (normative)

### Reading/writing test conditions

In order to verify the optical properties and characteristics of the optical memory card – holographic recording method the characteristics of the illumination sources are detailed below.

NOTE 1 It is intended that the reading / writing test conditions will become part of ISO 10373, describing the conditions for optical memory cards – holographic recording method.

NOTE 2 These test conditions apply to all tests unless otherwise specified.

#### A.1 Illumination source

The illumination source shall be a semiconductor laser diode having a wavelength between 630 nm and 680 nm. The beam shall be collimated. The beam shall have a circularly symmetric Gaussian intensity profile. Depending on the material used as storage layer, the light can be polarized.

#### A.2 Illumination beam diameter

The collimated beam at the surface of the accessible optical layer shall be measured at the  $1/e^2$  point. The beam diameter shall be 110–150 % of the period of the diffraction grating.

#### A.3 Read power

The read power at the surface of the accessible optical layer shall be less than 0,50 mW.

#### A.4 Default test environment and conditioning


For testing the holographic memory card, diffraction gratings shall be recorded in the storage layer. The diffraction gratings shall be read out with a read-out beam and the intensity of the diffracted beams shall be measured by means of a light-sensitive sensor (camera, photodiode).

The gratings shall be produced by means of interference of two coherent plane waves O and R, with wavelength  $\lambda$ , intensity  $I_O$  and  $I_R$  at angles of incidence  $\theta_O$  and  $\theta_R$ .

The period of the grating  $\Lambda$  is related to the angles of incidence (Figure A.1).

$$\Lambda = \frac{\lambda}{\sin \theta_O - \sin \theta_R}$$

The resulting profile of the single rulings forming the grating is sinusoidal.

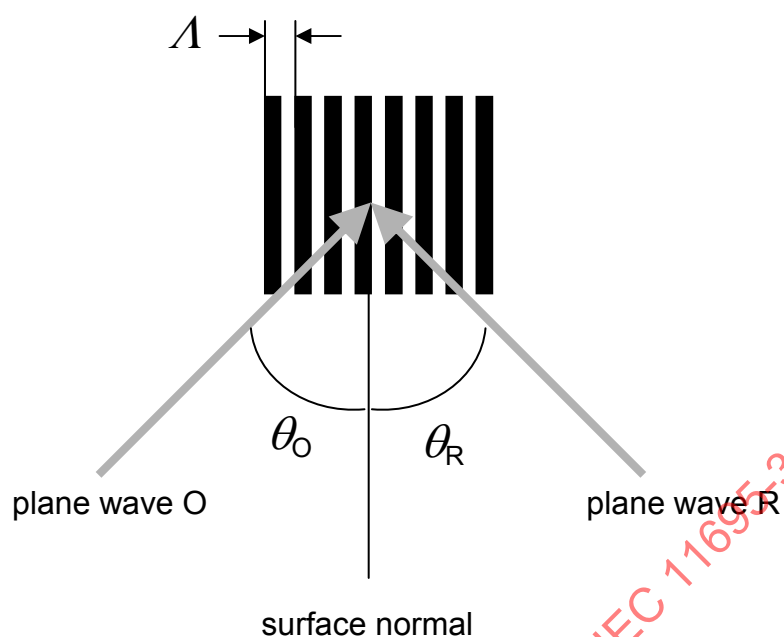

NOTE  $\theta_R < 0$  in the case of Figure A.1.

#### Figure A.1 — Recording of a diffraction grating in the storage layer by interference of two plane waves

For the test a grating period of  $2\ \mu\text{m}$  shall be used, meaning 500 line pairs per millimetre are recorded in the storage layer. The size of the grating shall be between  $1\ \text{mm} \times 1\ \text{mm}$  and  $2\ \text{mm} \times 2\ \text{mm}$ .

The conditions for recording the diffraction gratings in the holographic memory card (write power, etc.) are dependent upon the material used as the storage layer.

When a beam is incident on a grating with an angle  $\alpha$  (measured from the normal of the grating), it is diffracted into several beams. The beam that corresponds to direct transmission (or specular reflection in the case of a reflection grating) is called the zero order, and is denoted  $i = 0$ . The other orders correspond to diffraction angles which are represented by non-zero integers  $i$ . For a groove period  $d$  and an incident wavelength  $\lambda$ , the grating equation gives the value of the diffracted angle  $\beta_i(\lambda)$  in the order  $i$  (Figure A.2).

$$d(\sin \beta_i(\lambda) + \sin \alpha) = m\lambda$$

NOTE  $i$  can be positive or negative, resulting in diffracted orders on both sides of the zero order beam. The angles of the diffracted orders depend only on the pitch of the rulings, and not on their shape.