

INTERNATIONAL STANDARD

ISO
10458

First edition
1993-02-01

Textile machinery — Square bars for winding devices relating to dyeing and finishing machines — Dimensions

*Matériel pour l'industrie textile — Barres carrées pour enrouleurs relatives
aux matériels de teinture et de finissage — Dimensions*



Reference number
ISO 10458:1993(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 10458 was prepared by Technical Committee ISO/TC 72, *Textile machinery and allied machinery and accessories*, Sub-Committee SC 4, *Dyeing, finishing and allied machinery and accessories*.

STANDARDSISO.COM : Click to view the full PDF of ISO 10458:1993

© ISO 1993

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization

Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Textile machinery — Square bars for winding devices relating to dyeing and finishing machines — Dimensions

1 Scope

This International Standard specifies the dimensions of the square section of bars of types A and B for winding devices relating to dyeing and finishing machines.

2 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 1505:—¹⁾, *Textile machinery — Widths relating to dyeing and finishing machines — Definitions and range of nominal widths*.

3 Types

See figure 1.

4 Dimensions

See table 1.

5 Designation

The designation of a square bar for winding devices shall include the following information in the order given:

- "Square-bar";
- reference to this International Standard (i.e. ISO 10458);
- type of square bar (A or B);
- dimension b , in millimetres;
- dimension l_1^{**} , in millimetres;
- dimension l_2^{**} (only for type A), in millimetres;
- dimension l_3^{**} (only for type A), in millimetres.

EXAMPLE 1

A square bar for winding device, type A, with $b = 30$ mm, $l_1 = 1\,800$ mm, $l_2 = 300$ mm and $l_3 = 200$ mm shall be designated as follows:

Square bar ISO 10458 - A30 × 1 800 × 300 × 200

EXAMPLE 2


A square bar for winding device, type B, with $b = 40$ mm and $l_1 = 1\,600$ mm shall be designated as follows:

Square bar ISO 10458 - B40 × 1 600

1) To be published. (Revision of ISO 1505:1982)

*) Preferably chosen from the values given in ISO 1505.

**) To be agreed between the user and manufacturer.

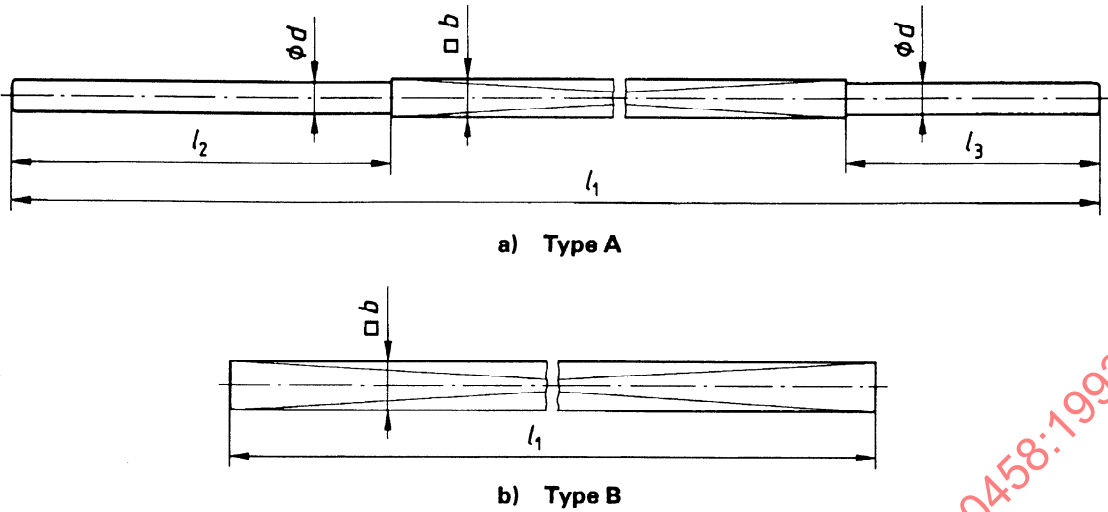

NOTE — The values for l_1 , l_2 and l_3 depend on the construction and the nominal width of the machine and shall be agreed between the user and manufacturer.

It is recommended that the values of l_1 be chosen from the nominal widths given in ISO 1505.

Figure 1 — Square bars

Table 1 — Dimensions of square bars
Dimensions in millimetres

b	d ¹⁾
25	20
30	25
40	35
50	45
Further steps shall be in increments of 10 mm	
¹⁾ Recommended values. Other values may be agreed between the user and manufacturer.	

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO 10458:1993

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO 10458:1993