

First edition
2013-07-15

AMENDMENT 1
2018-08

**Gas cylinders — Refillable composite
reinforced tubes of water capacity
between 450 L and 3000 L — Design,
construction and testing**

AMENDMENT 1

*Bouteilles à gaz — Bouteilles tubulaires en composite renforcé
rechargeables d'une capacité de 450 L à 3000 L — Conception,
construction et essais*

AMENDEMENT 1



Reference number
ISO 11515:2013/Amd.1:2018(E)

© ISO 2018



COPYRIGHT PROTECTED DOCUMENT

© ISO 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see: www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 58, *Gas cylinders*, Subcommittee SC 3, *Cylinder design*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

STANDARDSISO.COM : Click to view the full PDF of ISO 11515:2013/Amd 1:2018

Gas cylinders — Refillable composite reinforced tubes of water capacity between 450 L and 3000 L — Design, construction and testing

AMENDMENT 1

8.5.8 Blunt impact test

Replace the text in 8.5.8 with the following:

8.5.8.1 Procedure

For Type 2 tubes, one empty tube, and if necessary, a second empty tube, shall be subjected to two impacts:

- a) one at the tube sidewall midway between the ends;
- b) one at the termination of the overwrap near the domes.

For Type 3 and 4 tubes, one empty tube and if necessary a second empty tube, shall be subjected to two impacts:

- a) one at the tube sidewall midway between the ends;
- b) one at an angle of 45° to strike the shoulder of the tube (mid arc length at the dome).

See Figure 2.

The impact can be conducted by dropping a suitable weight or by a pendulum impact.

The tube shall be secured to ensure it does not move during the impact. The impactor shall be made from a steel bar and have a diameter of between 110 and 120 mm.


Test one — an impactor with a potential energy of 1 200 J shall strike the tube at the positions identified above.

Test two — (if necessary) an impactor with a potential energy of 488 J shall strike the tube at the positions identified above.


The tube shall then be subjected to the appropriate ambient cycle test as described in 8.5.5.

Parameters to monitor and record are:


- a) visual appearance after each impact – record position and dimensions of impact damage;
- b) parameters specified in 8.5.5.

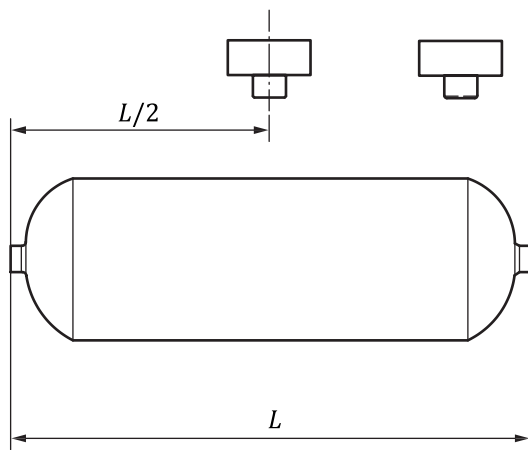

a) Type 2 tubes



b) Example of impactor

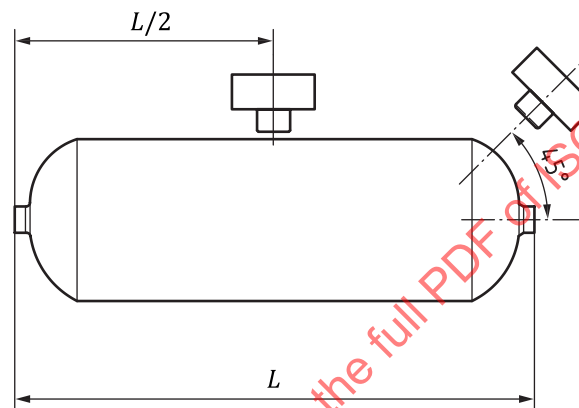

c) Type 3 and Type 4 tubes

Key

1 steel

Figure 2 — Blunt impact test procedure

8.5.8.2 Criteria

The tubes shall withstand 3 000 pressurisation cycles at maximum developed pressure $p_{\max}$ without failure by burst or leakage. The test shall continue for additional cycles representing its specified lifetime, or until the tube fails by leakage, whichever is the sooner. In either case the tube shall be deemed to have passed the test. However if failure during this second part of the test is by burst, then the tube shall have failed the test.

A tube passing the test at an energy level of 1 200 J shall be identified as achieving impact resistance level 2, which shall be reported in the qualification report and on the label (see 7.2.1). If the tube does not pass the blunt impact test at this level, a second tube shall be tested at an energy level of 488 J. A tube passing the test at an energy level of 488 J shall be identified as achieving impact resistance level 1, which shall be reported on the qualification report and on the label (see 7.2.1). A tube that does not pass at an energy level of 488 J shall not be approved.