
**Plain bearings — Hydrodynamic plain
thrust pad bearings under steady-
state conditions —**

**Part 2:
Functions for the calculation of thrust
pad bearings**

*Paliers lisses — Butées hydrodynamiques à patins géométrie fixe
fonctionnant en régime stationnaire —*

Partie 2: Fonctions pour le calcul des butées à segments



STANDARDSISO.COM : Click to view the full PDF of ISO 12131-2:2016



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope	1
2 Normative references	1
3 Functions for the thrust pad bearing	1
4 Effective dynamic viscosity of the lubricant, η_{eff}, as a function of the effective lubricant film temperature, T_{eff}	7
Bibliography.....	10

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is ISO/TC 123, *Plain bearings*.

This second edition cancels and replaces the first edition (ISO 12131-2:2001), of which it constitutes a minor revision.

ISO 12131 consists of the following parts, under the general title *Plain bearings — Hydrodynamic plain thrust pad bearings under steady-state conditions*:

- *Part 1: Calculation of thrust pad bearings*
- *Part 2: Functions for the calculation of thrust pad bearings*
- *Part 3: Guide values for the calculation of thrust pad bearings*

Introduction

Assuming hydrodynamic conditions with full lubrication, the functions of the type covered by this part of ISO 12131 are necessary for the calculation of oil-lubricated pad thrust bearings in accordance with ISO 12131-1. They are based on the premises and boundary conditions specified. The values necessary for the calculation can be determined by means of the given formulae, as well as from diagrams and tables. The formulae in this part of ISO 12131 are approximations of the numerically determined values traced as curves according to Reference [2]. The explanation of the symbols, as well as examples for the calculation, are included in ISO 12131-1.

STANDARDSISO.COM : Click to view the full PDF of ISO 12131-2:2016

STANDARDSISO.COM : Click to view the full PDF of ISO 12131-2:2016

Plain bearings — Hydrodynamic plain thrust pad bearings under steady-state conditions —

Part 2:

Functions for the calculation of thrust pad bearings

1 Scope

This part of ISO 12131 specifies functions for thrust pad bearings. It also covers the effect of dynamic viscosity on lubricant film temperature.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 12131-1, *Plain bearings — Hydrodynamic plain thrust bearings under steady-state conditions — Part 1: Calculation of thrust pad bearings*

3 Functions for the thrust pad bearing

3.1 Characteristic value of load carrying capacity, F_B^* , as a function of the relative bearing length, B/L , and the relative minimum lubricant film thickness, $h_{\min}/C_{\text{wed}}$

Approximation of the curves of Figure 1 (range of application: $0,1 \leq \frac{h_{\min}}{C_{\text{wed}}} \leq 10$).

$$F_B^* = 5 \times \left[\left(\frac{l_{\text{wed}}}{L} \right)^2 \times \left(\frac{h_{\min}}{C_{\text{wed}}} \right)^2 \times \ln \frac{1 + h_{\min}/C_{\text{wed}}}{h_{\min}/C_{\text{wed}}} + \frac{\frac{l_{\text{wed}}}{L} \times \frac{1}{h_{\min}/C_{\text{wed}}} \times \left(1 - \frac{l_{\text{wed}}}{L} \right)^2 - 2 \times \left(\frac{l_{\text{wed}}}{L} \right)^2 \times \left[2 \times \frac{h_{\min}}{l_{\text{wed}}} + 3 \times \left(1 - \frac{l_{\text{wed}}}{L} \right) \right]}{4 + 2 \times \left(4 - 3 \frac{l_{\text{wed}}}{L} \right) \times \frac{1}{h_{\min}/C_{\text{wed}}} + 4 \times \left(1 - \frac{l_{\text{wed}}}{L} \right) \times \left(\frac{1}{h_{\min}/C_{\text{wed}}} \right)^2} \right]$$

$$\times \frac{A^* + B^* \times \left(1 - \frac{1}{h_{\min}/C_{\text{wed}}} \right) + C^* \times \left(1 - \frac{1}{h_{\min}/C_{\text{wed}}} \right)^2}{1 + \alpha \times \left(\frac{B}{L} \right)^{-2}} \times \left(\frac{1}{h_{\min}/C_{\text{wed}}} \right)^2$$

$$\alpha = \frac{10}{\left(1 + 2 \times \frac{h_{\min}}{C_{\text{wed}}} \right)^2} \times \left[\left[\frac{h_{\min}}{C_{\text{wed}}} + \left(\frac{h_{\min}}{C_{\text{wed}}} \right)^2 \right]^2 + \frac{1 - 2 \times \left[\frac{h_{\min}}{C_{\text{wed}}} + \left(\frac{h_{\min}}{C_{\text{wed}}} \right)^2 \right]}{12 \times \left[\left(1 + 2 \times \frac{h_{\min}}{C_{\text{wed}}} \right) \times \ln \frac{1 + h_{\min}/C_{\text{wed}}}{h_{\min}/C_{\text{wed}}} - 2 \right]} \right]$$

$$A^* = 1,2057 - 0,24344 \times \left(\frac{B}{L}\right) + 0,12625 \times \left(\frac{B}{L}\right)^2 - 0,021554 \times \left(\frac{B}{L}\right)^3$$

$$B^* = -0,25634 + 0,36114 \times \left(\frac{B}{L}\right) - 0,19958 \times \left(\frac{B}{L}\right)^2 + 0,038633 \times \left(\frac{B}{L}\right)^3$$

$$C^* = -0,010765 + 0,0093501 \times \left(\frac{B}{L}\right) - 0,0027527 \times \left(\frac{B}{L}\right)^2 + 0,00018446 \times \left(\frac{B}{L}\right)^3$$

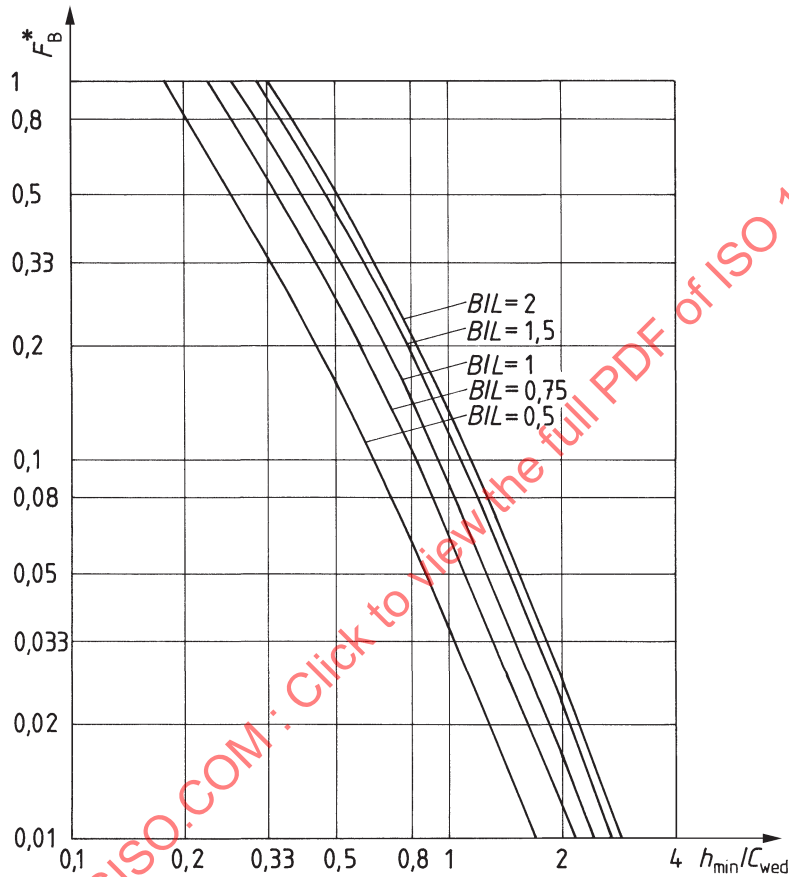


Figure 1 — Characteristic value of load carrying capacity for thrust pad bearings, F_B^* , as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, $h_{\min}/C_{\text{wed}}$, for $l_{\text{wed}}/L = 0,75$

Table 1 — Values to [Figure 1](#) where $F_B^* = f(B/L, h_{\min}/C_{\text{wed}}, l_{\text{wed}}/L = 0,75)$

$h_{\min}/C_{\text{wed}}$	B/L				
	2	1,5	1	0,75	0,5
10	0,000 3	0,000 3	0,000 2	0,000 2	0,000 1
2	0,026 7	0,023 0	0,016 7	0,012 1	0,006 8
1	0,134 1	0,116 9	0,086 5	0,063 7	0,036 4
0,5	0,522	0,462 8	0,355 2	0,27	0,161 2
0,33	1,010 7	0,908 1	0,716 4	0,559 8	0,348 3
0,2	2,067 5	1,887 5	1,547 5	1,252 5	0,83
0,1	4,52	4,21	3,62	3,08	2,24

3.2 Characteristic value of friction for thrust pad bearings, f_B^* , as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, $h_{\min}/C_{\text{wed}}$

Approximation of the curves of [Figure 2](#) (range of application: $0,1 \leq \frac{h_{\min}}{C_{\text{wed}}} \leq 10$).

$$f_B^* = \left[4 \times \frac{l_{\text{wed}}}{L} \times \frac{h_{\min}}{C_{\text{wed}}} \times \ln \frac{1 + h_{\min}/C_{\text{wed}}}{h_{\min}/C_{\text{wed}}} + \left(1 - \frac{l_{\text{wed}}}{L} \right) - \frac{3 \times \frac{l_{\text{wed}}}{L} \times \frac{h_{\min}}{C_{\text{wed}}} \times \left[2 \times \frac{h_{\min}}{C_{\text{wed}}} + 3 \times \left(1 - \frac{l_{\text{wed}}}{L} \right) \right]}{2 \times \left(\frac{h_{\min}}{C_{\text{wed}}} \right)^2 + \left(4 - 3 \times \frac{l_{\text{wed}}}{L} \right) \times \frac{h_{\min}}{C_{\text{wed}}} + 2 \times \left(1 - \frac{l_{\text{wed}}}{L} \right)} \right]$$

$$\times \frac{6}{5} \times \left[1 + \left(\frac{B}{L} \right)^{-2} \times \alpha \right] \times A^* \times \frac{1}{h_{\min}/C_{\text{wed}}} \times B^*$$

$$\alpha = \frac{10}{\left(1 + 2 \times \frac{h_{\min}}{C_{\text{wed}}} \right)^2} \times \left[\frac{\frac{h_{\min}}{C_{\text{wed}}} + \left[\frac{h_{\min}}{C_{\text{wed}}} \right]^2}{\left[\frac{h_{\min}}{C_{\text{wed}}} + \left[\frac{h_{\min}}{C_{\text{wed}}} \right]^2} \right]^2} + \frac{1 - 2 \times \left[\frac{h_{\min}}{C_{\text{wed}}} + \left[\frac{h_{\min}}{C_{\text{wed}}} \right]^2 \right]}{12 \times \left[\left(1 + 2 \times \frac{h_{\min}}{C_{\text{wed}}} \right) \times \ln \frac{1 + h_{\min}/C_{\text{wed}}}{h_{\min}/C_{\text{wed}}} - 2 \right]} \right]$$

$$A^* = -0,21459 + 0,88071 \times \left(\frac{B}{L} \right) - 0,29760 \times \left(\frac{B}{L} \right)^2 + 0,03791 \times \left(\frac{B}{L} \right)^3$$

For $h_{\min}/C_{\text{wed}} \geq 0,2$ is $B^* = 1$

For $h_{\min}/C_{\text{wed}} < 0,2$ is $B^* = 1,1251 \times \left(\frac{B}{L} \right)^{-0,12939}$

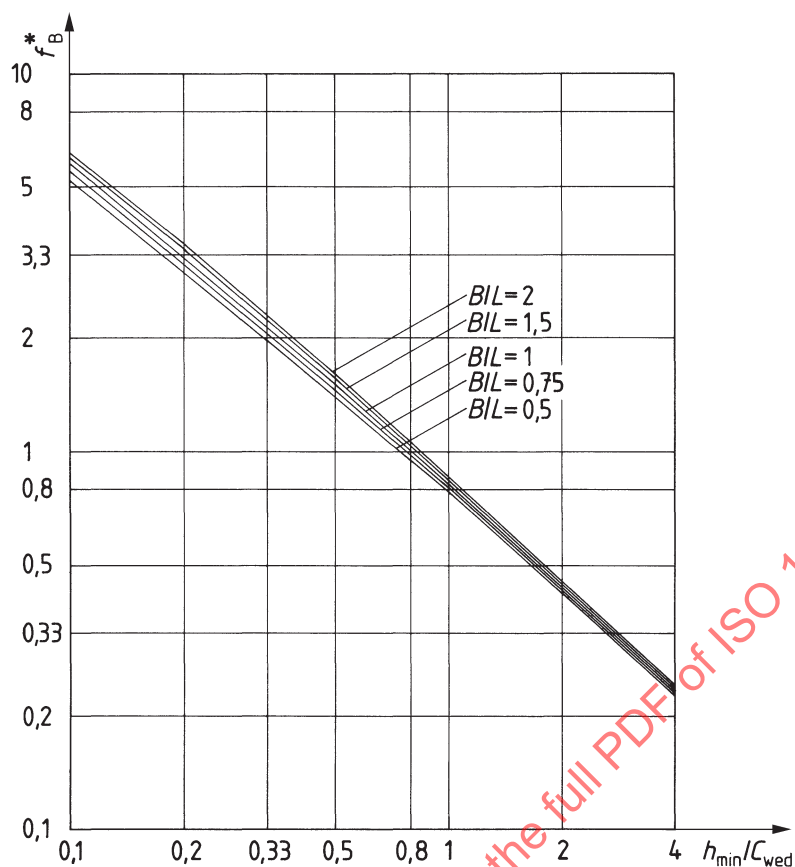


Figure 2 — Characteristic value of friction for pad thrust bearings, f_B^* , as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, $h_{\min}/C_{\text{wed}}$, for $l_{\text{wed}}/L = 0,75$

Table 2 — Values to Figure 2 where $f_B^* = f(B/L, h_{\min}/C_{\text{wed}}, l_{\text{wed}}/L = 0,75)$

$h_{\min}/C_{\text{wed}}$	B/L				
	2	1,5	1	0,75	0,5
10	0,096 7	0,096 6	0,096 6	0,096 6	0,096 5
2	0,444 3	0,442 2	0,438 7	0,436 1	0,433 1
1	0,844	0,834 6	0,818	0,805 6	0,790 6
0,5	1,599 2	1,568 2	1,511 8	1,467 2	1,410 6
0,33	2,301 6	2,249 1	2,151 3	2,071 5	1,965
0,2	3,574 5	3,488 5	3,324 5	3,185	2,987 5
0,1	6,194	6,061	5,804	5,574	5,223

3.3 Relative lubricant flow rates, Q_1^* and Q_3^* , as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, $h_{\min}/C_{\text{wed}}$

Approximation of the curves of [Figures 3](#) and [4](#) (range of application: $0,1 \leq \frac{h_{\min}}{C_{\text{wed}}} \leq 10$).

$$Q_i^* = \frac{\left(1 + \frac{h_{\min}}{C_{\text{wed}}}\right) \times \left(1 - \frac{l_{\text{wed}}}{L} + \frac{h_{\min}}{C_{\text{wed}}}\right) \times \left[A_i + B_i \times \left(1 - \frac{1}{h_{\min}/C_{\text{wed}}}\right)\right]}{\left(1 + 2 \times \frac{h_{\min}}{C_{\text{wed}}}\right) \times \frac{l_{\text{wed}}}{L} \times \frac{h_{\min}}{C_{\text{wed}}} + 2 \times \left(1 + \frac{h_{\min}}{C_{\text{wed}}}\right)^2 \times \left(1 - \frac{l_{\text{wed}}}{L}\right)}$$

with constants A_i and B_i

for $Q_i^* = Q_1^*$:

$$A_i = A_1 = 1,7655 - 0,52423 \times \left(\frac{B}{L}\right) + 0,11805 \times \left(\frac{B}{L}\right)^2$$

$$B_i = B_1 = -1,0048 + 0,78880 \times \left(\frac{B}{L}\right) - 0,19357 \times \left(\frac{B}{L}\right)^2$$

for $Q_i^* = Q_3^*$:

$$A_i = A_3 = 2 \times \left[0,4348 - 0,30823 \times \left(\frac{B}{L}\right) + 0,06952 \times \left(\frac{B}{L}\right)^2\right]$$

$$B_i = B_3 = 2 \times \left[-0,4704 + 0,37567 \times \left(\frac{B}{L}\right) - 0,09217 \times \left(\frac{B}{L}\right)^2\right]$$

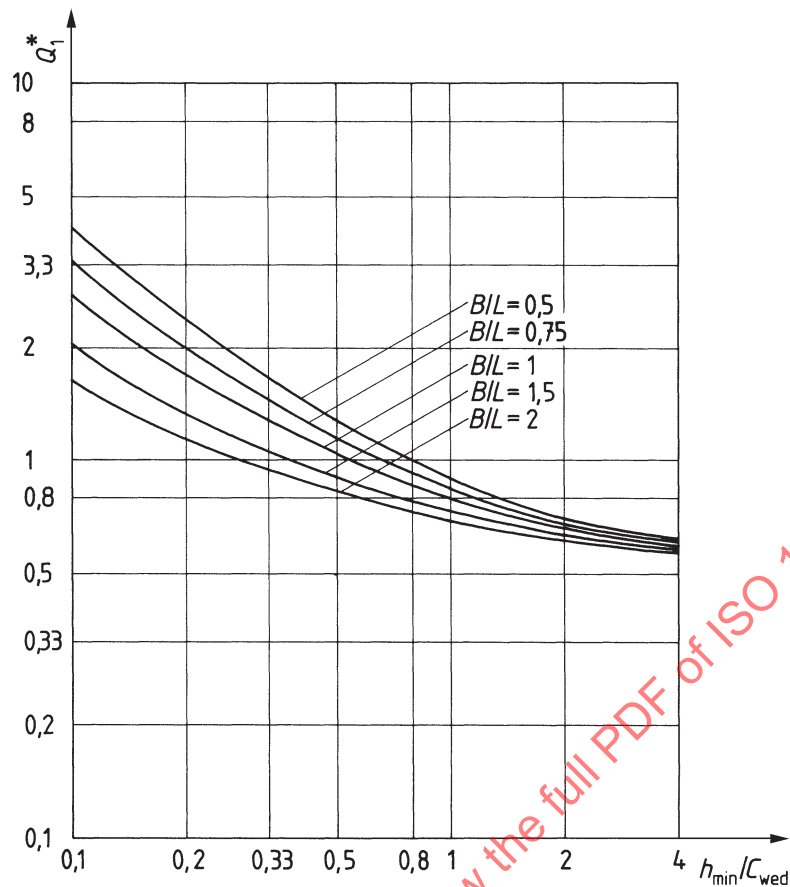


Figure 3 — Relative lubricant flow rate, Q_1^* , as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, $h_{\min}/C_{\text{wed}}$, for $l_{\text{wed}}/L = 0,75$

Table 3 — Values to Figure 3 where $Q_1^* = f(B/L, h_{\min}/C_{\text{wed}}, l_{\text{wed}}/L = 0,75)$

$h_{\min}/C_{\text{wed}}$	B/L				
	2	1,5	1	0,75	0,5
10	0,526 5	0,529 2	0,533 8	0,537 3	0,541 5
2	0,614 2	0,63	0,657 5	0,678	0,702 9
1	0,698 1	0,733 2	0,794 9	0,841 6	0,898 5
0,5	0,828 1	0,904 1	1,041	1,147 3	1,278 8
0,33	0,942	1,06	1,276 1	1,447 6	1,663
0,2	1,144 3	1,340 7	1,706 6	2,004 8	2,387 8
0,1	1,646	2,034 9	2,771 8	3,390 1	4,208 4

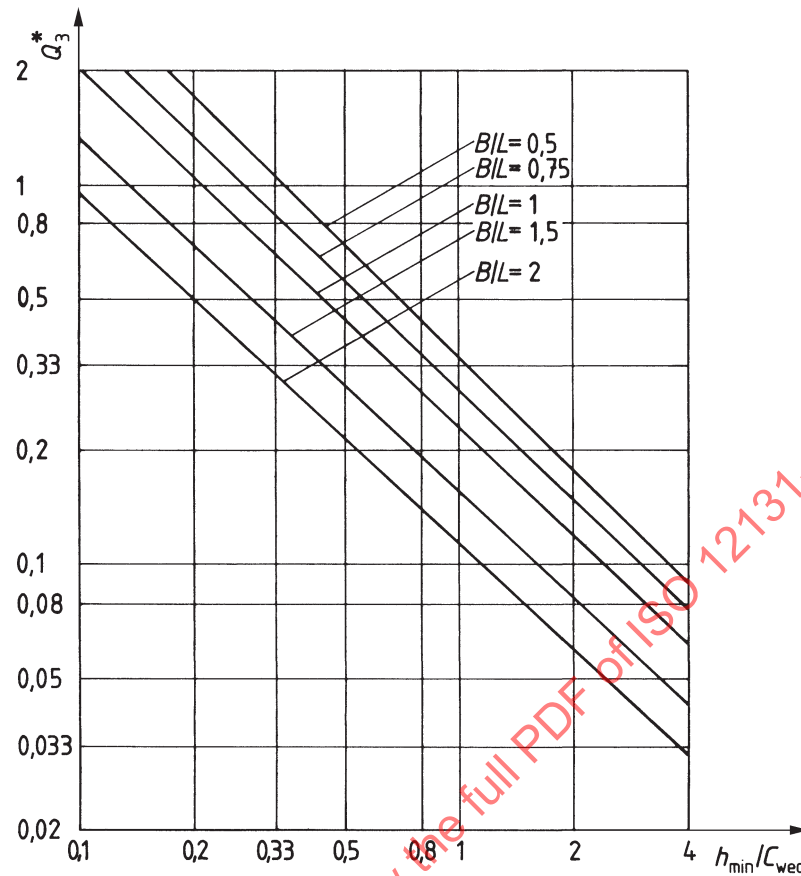


Figure 4 — Relative lubricant flow rate, Q_3^* , as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, $h_{\min}/C_{\text{wed}}$, for $l_{\text{wed}}/L = 0,75$

Table 4 — Values to Figure 4 where $Q_3^* = \times(B/L, h_{\min}/C_{\text{wed}}, l_{\text{wed}}/L = 0,75)$

$h_{\min}/C_{\text{wed}}$	B/L				
	2	1,5	1	0,75	0,5
10	0,012 8	0,016 4	0,025 2	0,030 8	0,037 2
2	0,061 2	0,083 4	0,121 8	0,15	0,183 4
1	0,117	0,160 2	0,236 2	0,293 4	0,362 4
0,5	0,220 2	0,303 4	0,453 0	0,569 4	0,713 4
0,33	0,320 6	0,443 4	0,667 4	0,845 4	1,07
0,2	0,506	0,701 8	1,065 6	1,362 2	1,744
0,1	0,963 2	1,340 2	2,051 6	2,647 4	3,434 8

4 Effective dynamic viscosity of the lubricant, η_{eff} , as a function of the effective lubricant film temperature, T_{eff}

For liquid lubricants, the Vogel formula is generally applicable.[3]

$$\eta = K_1 \times \exp\left(\frac{K_2}{T + K_3}\right)$$

For mineral oils, this formula can be completed with sufficient accuracy by the constant $K_3 = 95 \text{ }^\circ\text{C}$.[4]

Reference [2] shows the operational viscosity, η , for mineral oils can also be calculated directly from the ISO VG.

With density, ρ , in kg/m³, it gives:

$$\ln \frac{\eta}{\eta_x} = \left(\frac{159,56}{T + 95^\circ\text{C}} - 0,181\,913 \right) \times \ln \frac{\rho \times \text{VG}}{10^6 \times \eta_x}$$

In this formula, $\eta_x = 0,18 \times 10^{-3}$ Pas, and is a constant coefficient.

The viscosity of ISO-compliant oils is given for a mean density $\rho = 900$ kg/m³ in [Figure 5](#).

Engine and gear box oils for road vehicles are standardized according to international viscosity classes SAE.

The SAE classification of these lubricants can only be compared incompletely with the ISO VG classification. The classification is inaccurate that for especially precise calculations, the supplier is requested to supply viscosity data.

As compared with pure mineral oils, multi-grade oils have more even viscosity-temperature behaviour.

Synthetic oils very often reach such conditions without intrinsically viscous additives as required for mineral oils.