
**Non-destructive testing — Acoustic
emission inspection — Vocabulary**

Essais non destructifs — Contrôle par émission acoustique — Vocabulaire



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 12716:2001

© ISO 2001

The reproduction of the terms and definitions contained in this International Standard is permitted in teaching manuals, instruction booklets, technical publications and journals for strictly educational or implementation purposes. The conditions for such reproduction are: that no modifications are made to the terms and definitions; that such reproduction is not permitted for dictionaries or similar publications offered for sale; and that this International Standard is referenced as the source document.

With the sole exceptions noted above, no other part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 12716 was prepared by Technical Committee ISO/TC 135, *Non-destructive testing*, Subcommittee SC 3, *Acoustical methods*.

STANDARDSISO.COM : Click to view the full PDF of ISO 12716:2001

Introduction

This International Standard is a compilation of terms to provide a precise understanding or interpretation of acoustic emission inspection. These terms serve to secure the foundation of acoustic emission technology growth within the academic and industrial communities.

STANDARDSISO.COM : Click to view the full PDF of ISO 12716:2001

Non-destructive testing — Acoustic emission inspection — Vocabulary

1 Scope

This International Standard defines the terminology that is used in acoustic emission inspection and forms a common basis for standards and general use.

2 Terms and definitions

2.1

acoustic emission

AE

class of phenomena whereby transient elastic waves are generated by the rapid release of energy from localized sources within a material, or the transient waves so generated

NOTE Acoustic emission is the recommended term for general use. Other terms that have been used in AE literature include:

- a) stress wave emission;
- b) microseismic activity;
- c) emission or acoustic emission with other qualifying modifiers.

2.2

acousto-ultrasonics

AU

nondestructive examination method that uses induced stress waves to detect and assess diffuse defect states, damage conditions and variations of mechanical properties of a test structure combining aspects of acoustic emission (AE) signal analysis with ultrasonic materials characterization techniques

2.3

AE signal duration

time interval between AE signal start and AE signal end

2.4

AE signal end

recognized termination of an AE signal, usually defined as the last crossing of the threshold by that signal

2.5

AE signal generator

device which can repeatedly induce a specified transient signal into an AE instrument

2.6

AE signal rise time

time interval between AE signal start and the peak amplitude of that AE signal

2.7

AE signal start

beginning of an AE signal as recognized by the system processor, usually defined by an amplitude excursion exceeding threshold

2.8

array

group of two or more AE sensors positioned on a structure for the purposes of detecting and locating sources that would normally be within the array

2.9

attenuation

decrease in AE amplitude per unit distance, normally expressed in dB per unit length

2.10

average signal level

rectified, time-averaged AE logarithmic signal, measured on the AE amplitude logarithmic scale and reported in dB_{AE} units (where 0 dB_{AE} refers to 1 µV at the preamplifier input)

2.11

channel, acoustic emission

acoustic emission channel

assembly of a sensor, preamplifier or impedance matching transformer, filters, secondary amplifier or other instrumentation as needed, connecting cables, and detector or processor

NOTE A channel for examining fiberglass reinforced plastic (FRP) may utilize more than one sensor with associated electronics. Channels may be processed independently or in predetermined groups having similar sensitivity and frequency characteristics.

2.12

count, acoustic emission

acoustic emission count

count, ring-down

ring-down count

emission count

N

number of times the acoustic emission signal exceeds a preset threshold during any selected portion of a test

2.13

count, event

event count

N_e

number obtained by counting each discerned acoustic emission event once

2.14

count rate, acoustic emission

acoustic emission count rate

emission rate

count rate

$\dot{N}$

time rate at which emission counts occur

2.15

couplant

material used at the structure-to-sensor interface to improve the transmission of acoustic energy across the interface during acoustic emission monitoring

2.16dB_{AE}

logarithmic measure of acoustic emission signal amplitude, referenced to 1 µV

Signal peak amplitude (dB_{AE}) = $20 \log_{10}(A_1/A_0)$

where

 A_0 is equal to 1 µV at the sensor output (before amplification); A_1 is the peak voltage of the measured acoustic emission signal.

Acoustic emission reference scale:

dB _{AE} value	Voltage at sensor output
0	1 µV
20	10 µV
40	100 µV
60	1 mV
80	10 mV
100	100 mV

2.17**dead time**

instrumentation dead time

any interval during data acquisition when the instrument or system is unable to accept new data for any reason

2.18**distribution, amplitude, cumulative (acoustic emission)**

cumulative (acoustic emission) amplitude distribution

 $F(V)$ number of acoustic emission events with signals that exceed an arbitrary amplitude as a function of amplitude V **2.19****distribution, threshold crossing, cumulative (acoustic emission)** $F_t(V)$

cumulative (acoustic emission) threshold crossing distribution

number of times the acoustic emission signal exceeds an arbitrary threshold as a function of the threshold voltage V **2.20****distribution, differential (acoustic emission) amplitude**

differential (acoustic emission) amplitude distribution

 $f(V)$ number of acoustic emission events with signal amplitudes between amplitudes of V and $V + \Delta V$ as a function of the amplitude V where $f(V)$ is the absolute value of the derivative of the cumulative amplitude distribution $F(V)$ **2.21****distribution, differential (acoustic emission) threshold crossing**

differential (acoustic emission) threshold crossing distribution

 $f_t(V)$ number of times the acoustic emission signal waveform has a peak between thresholds V and $V + \Delta V$ as a function of the threshold V where $f_t(V)$ is the absolute value of the derivative of the cumulative threshold crossing distribution $F_t(V)$

2.22

distribution, logarithmic (acoustic emission) amplitude

logarithmic (acoustic emission) amplitude distribution

$g(V)$

number of acoustic emission events with signal amplitudes between V and αV (where α is a constant multiplier) as a function of the amplitude

NOTE This is a variant of the differential amplitude distribution, appropriate for logarithmically windowed data.

2.23

dynamic range

difference, in decibels, between the overload level and the minimum signal level (usually fixed by one or more of the noise levels, low-level distortion, interference or resolution level) in a system or sensor

2.24

effective velocity

velocity calculated on the basis of arrival times and propagation distances determined by artificial AE generation and used for computed location

2.25

emission, burst

burst emission

qualitative description of the discrete signal related to an individual emission event occurring within the material

NOTE Use of the term "burst emission" is recommended only for describing the qualitative appearance of emission signals. Figure 1 shows an oscilloscope trace of burst emission at two different sweep rates.

2.26

emission, continuous

continuous emission

qualitative description of the sustained signal level produced by rapidly occurring acoustic emission events

NOTE Use of the term "continuous emission" is recommended only for describing the qualitative appearance of emission signals. Figure 2 shows oscilloscope traces of a continuous emission signal at two different sweep rates.

2.27

energy, acoustic emission event

acoustic emission event energy

total elastic energy released by an emission event

2.28

evaluation threshold

threshold value used for analysis of the examination data

NOTE Data may be recorded with a system examination threshold lower than the evaluation threshold. For analysis purposes, dependence of measured data on the system examination threshold must be taken into consideration.

2.29

event, acoustic emission (emission event)

acoustic emission event

local material change giving rise to acoustic emission

2.30

examination area

that portion of a structure being monitored using acoustic emission

2.31

examination region

that portion of the test article evaluated using acoustic emission technology

2.32**Felicity effect**

presence of detectable acoustic emission at a fixed predetermined sensitivity level at stress levels below those previously applied

2.33**Felicity ratio**

ratio of the stress at which the Felicity effect occurs to the previously applied maximum stress

NOTE

The fixed sensitivity level will usually be the same as was used for the previous loading or test.

2.34**floating threshold**

any threshold with amplitude established by a time average measure of the input signal

2.35**hit**

any signal that exceeds the threshold and causes a system channel to accumulate data

2.36**interval, arrival time**

arrival time interval

Δt_{ij}

time interval between the detected arrivals of an acoustic emission wave at the i th and j th sensors of a sensor array

2.37**Kaiser effect**

absence of detectable acoustic emission at a fixed sensitivity level, until previously applied stress levels are exceeded

2.38**location, cluster**

location method based upon a specified amount of AE activity located within a specified length or area, e.g. 5 events within 12 linear units (e.g. cm) or 12 square units (e.g. cm²)

2.39**location, computed**

adaptive location

source location method based on algorithmic analysis of the difference in arrival times among sensors

NOTE

Several approaches to computed location are used, including linear location, planar location, three dimensional location and adaptive location.

2.39.1**linear location**

one-dimensional source location requiring two or more channels

2.39.2**planar location**

two-dimensional source location requiring three or more channels

2.39.3**3-D location**

three-dimensional source location requiring five or more channels

2.39.4**adaptive location**

source location by iterative use of simulated sources in combination with computed location

2.40

location, continuous AE signal

method of location based on continuous AE signals, as opposed to hit or difference in arrival time location methods

NOTE This type of location is commonly used in leak location due to the presence of continuous emission. Some common types of continuous signal location methods include signal attenuation and correlation analysis methods.

2.40.1

signal attenuation-based source location

source location method that relies on the attenuation versus distance phenomenon of AE signals; by monitoring the AE signal magnitudes of the continuous signal at various points along the object, the source is determined based on the highest magnitude or by interpolation or extrapolation of multiple readings

2.40.2

correlation-based source location

source location method that compares the changing AE signal levels (usually waveform based amplitude analysis) at two or more points surrounding the source and determines the time displacement of these signals, this time displacement data being used with conventional hit-based location techniques to arrive at a solution for the source site

2.41

location, source

any of several methods of evaluating AE data to determine the position on the structure from which it originated

NOTE Several approaches to source location are used, including zone location, computed location, and continuous location.

2.42

location, zone

first-hit location

any of several techniques for determining the general region of an acoustic emission source, e.g. total AE counts, energy, hits, etc.

NOTE Several approaches to zone location are used, including independent channel zone location, first-hit zone location and arrival sequence zone location.

2.42.1

independent channel zone location

zone location technique that compares the gross amount of activity from each channel

2.42.2

first-hit zone location

zone location technique that compares only activity from the first-hit channel among a group of channels

2.42.3

arrival sequence zone location

zone location technique that compares the order of arrival among sensors

2.43

location accuracy

comparison of the actual position of an AE source (or simulated AE source) to the computed location

2.44

overload recovery time

interval of nonlinear operation of an instrument caused by a signal with amplitude in excess of the instrument's linear operating range

2.45**processing capacity**

number of hits that can be processed at the processing speed before the system must interrupt data collection to clear buffers or otherwise prepare for accepting additional data

2.46**processing speed**

sustained rate in hits per second, as a function of the parameter set and number of active channels, at which AE signals can be continuously processed by a system without interruption for data transport

2.47**rate, event count**

event count rate

$$\dot{N}_e$$

time rate of the event count

2.48**sensor, acoustic emission**

acoustic emission transducer

acoustic emission sensor

detection device, generally piezoelectric, that transforms the particle motion produced by an elastic wave into an electrical signal

2.49**signal, acoustic emission**

acoustic emission signal

emission signal

electrical signal obtained by detection of one or more acoustic emission events

2.50**signal amplitude, acoustic emission**

acoustic emission signal amplitude

peak voltage of the largest excursion attained by the signal waveform from an emission event

2.51**signal overload level**

that level above which operation ceases to be satisfactory as a result of signal distortion, overheating or damage

2.52**signal overload point**

maximum input signal amplitude at which the ratio of output to input is observed to remain within a prescribed linear operating range

2.53**signature, acoustic emission**

acoustic emission signature

signature

characteristic set of reproducible attributes of acoustic emission signals associated with a specific test article as observed with a particular instrumentation system under specified test conditions

2.54**stimulation**

application of a stimulus such as force, pressure, heat, etc., to a test article to cause activation of acoustic emission sources

2.55**system examination threshold**

electronic instrument threshold (see **evaluation threshold**) at which data will be detected

2.56

transducers, acoustic emission

active element in an acoustic emission sensor, usually piezoelectric

2.57

voltage threshold

voltage level on an electronic comparator above which signals will be recognized

NOTE The voltage threshold may be user-adjustable, fixed or automatic floating.

2.58

waveguide, acoustic emission

acoustic emission waveguide

device that couples elastic energy from a structure or other test object to a remotely mounted sensor during AE monitoring

NOTE An example of an acoustic emission waveguide would be a solid wire or rod that is coupled at one end to a monitored structure, and to a sensor at the other end.

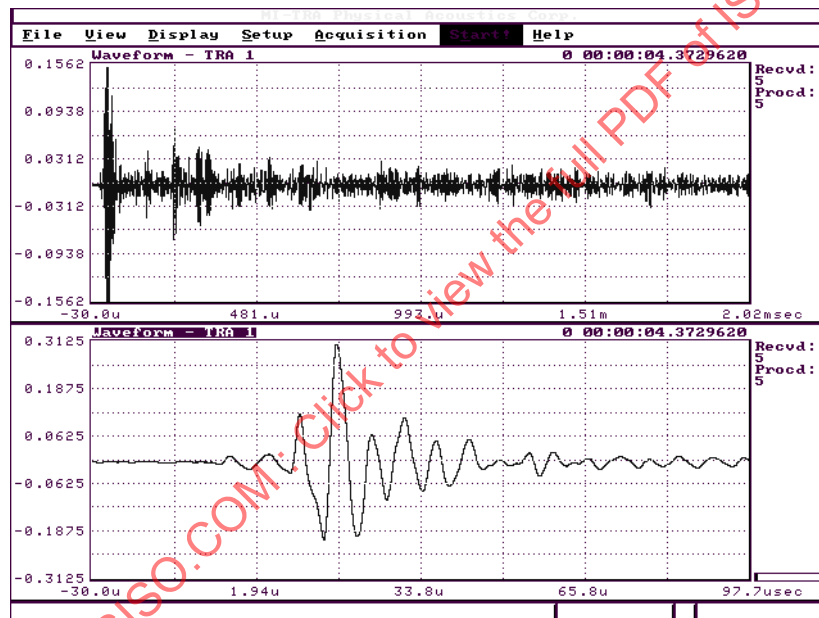


Figure 1 — Same burst emission signal at two different sweep rates