
**Glass packaging — Standard
tolerances for flaconnage**

Emballages en verre — Tolérances standard pour flaconnage

STANDARDSISO.COM : Click to view the full PDF of ISO 12818:2013



STANDARDSISO.COM : Click to view the full PDF of ISO 12818:2013



COPYRIGHT PROTECTED DOCUMENT

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Product group bottles and other glass containers.....	1
3 Brimful capacity tolerances.....	1
4 Height tolerances.....	3
5 Diameter and width tolerances.....	4
6 Verticality tolerances.....	6
Bibliography.....	9

STANDARDSISO.COM : Click to view the full PDF of ISO 12818:2013

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. www.iso.org/directives

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. www.iso.org/patents

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

This document was prepared by CEN/TC 261 *Packaging*, as EN 15904:2010 and was adopted, under a special “fast-track procedure”, by ISO/TC 63, *Glass containers*, in parallel with its approval by the ISO member bodies.

STANDARDSISO.COM : Click to view the full PDF of ISO 12818:2013

Introduction

This International Standard is based on CE.T.I.E. (International Technical Centre for Bottling and related Packaging) data sheet DT 15.00 series.

Efficient packaging is of great importance for the distribution and the protection of goods. Insufficient or inappropriate packaging can lead to damage or wastage of the contents of the pack.

STANDARDSISO.COM : Click to view the full PDF of ISO 12818:2013

STANDARDSISO.COM : Click to view the full PDF of ISO 12818:2013

Glass packaging — Standard tolerances for flaconnage

1 Scope

This International Standard specifies the tolerances for the bottles intended to be used for pharmaceutical products, cosmetic and perfumery products and chemical products.

The following tolerances are concerned:

- brimful capacity;
- height;
- diameter and width;
- verticality.

The following types of bottles are excluded from this International Standard:

- “miniatures”;
- small bottles for extracts, essences, etc.;
- small jars (e.g. individual portions of jam).

2 Product group bottles and other glass containers

Three groups of bottles have been identified:

- a) Flacons for pharmaceutical purpose and medicine bottles of all kinds

This group includes, for example, injection containers, drop bottles, infusion bottles, cough syrup bottles and other bottles and jars (ointment jars) used for pharmaceutical products.

- b) Flacons for cosmetics

This group includes all bottles and similar containers used for cosmetic products, e.g. nail varnish, hair tonic, perfume and also cream jars.

- c) Flacons for techno-chemical purposes

This group includes, for example, bottles for ink, varnish, glue, heavy chemicals, furniture polish stain remover, pest destruction agents and denatured alcohol.

3 Brimful capacity tolerances

The brimful capacity tolerances shall be as given in [Table 1](#).

Table 1 — Brimful capacity tolerances

Brimful capacity C ml		Tolerances T _c ml ±		Brimful capacity		Tolerances T _c ml ±		Brimful capacity C ml		Tolerances T _c ml ±	
Over	Up to and including	∅ Round	 ^a Non-round	Over	Up to and including	∅ Round	 ^a Non-round	Over	Up to and including	∅ Round	 ^a Non-round
1	3	0,6	0,7	191	198	3,9	4,7	454	464	7,2	8,6
3	8	0,7	0,8	198	205	4	4,8	464	474	7,3	8,8
8	13	0,8	1	205	211	4,1	4,9	474	484	7,4	8,9
13	18	0,9	1,1	211	218	4,2	5	484	495	7,5	9
18	24	1	1,2	218	225	4,3	5,2	495	507	7,6	9,1
24	30	1,1	1,3	225	232	4,4	5,3	507	519	7,7	9,2
30	36	1,2	1,4	232	239	4,5	5,4	519	530	7,8	9,4
36	41	1,3	1,6	239	246	4,6	5,5	530	541	7,9	9,5
41	47	1,4	1,7	246	253	4,7	5,6	541	554	8	9,6
47	52	1,5	1,8	253	260	4,8	5,8	554	568	8,1	9,7
52	57	1,6	1,9	260	267	4,9	5,9	568	580	8,2	9,8
57	63	1,7	2	267	274	5	6	580	595	8,3	9,9
63	69	1,8	2,2	274	282	5,1	6,1	595	609	8,4	10
69	75	1,9	2,3	282	289	5,2	6,2	609	624	8,5	10,2
75	81	2	2,4	289	297	5,3	6,4	624	640	8,6	10,3
81	86	2,1	2,5	297	305	5,4	6,5	640	655	8,7	10,4
86	92	2,2	2,6	305	313	5,5	6,6	655	673	8,8	10,6
92	98	2,3	2,8	313	321	5,6	6,7	673	691	8,9	10,7
98	104	2,4	2,9	321	329	5,7	6,8	691	712	9	10,8
104	110	2,5	3	329	337	5,8	7	712	736	9,1	10,9
110	116	2,6	3,1	337	345	5,9	7,1	736	760	9,2	11
116	122	2,7	3,2	345	354	6	7,2	760	790	9,3	11,2
122	128	2,8	3,4	354	362	6,1	7,3	790	820	9,4	11,3
128	134	2,9	3,5	362	370	6,2	7,4	820	850	9,5	11,4
134	140	3	3,6	370	379	6,3	7,6	850	880	9,6	11,5
140	146	3,1	3,7	379	388	6,4	7,7	880	910	9,7	11,6
146	152	3,2	3,8	388	397	6,5	7,8	910	940	9,8	11,8
152	158	3,3	4	397	406	6,6	7,9	940	970	9,9	11,9
158	164	3,4	4,1	406	415	6,7	8	970	1 050	10	12
164	171	3,5	4,2	415	425	6,8	8,2	—	—	—	—
171	178	3,6	4,3	425	435	6,9	8,3	—	—	—	—
178	185	3,7	4,4	435	—	—	—	—	—	—	—
185	191	3,8	4,5	444	—	—	—	—	—	—	—

^a Except special profiles.

The tolerance is expressed by the following formula (*C* = brimful capacity):

— For round bottles:

$$C \leq 1000 \text{ ml: } T_c = \frac{-C^2}{10^5} + \frac{1,9C}{100} + 0,6$$

$$C > 1000 \text{ ml} : T_c = \frac{C}{100}$$

— For non-round bottles:

$$C \leq 1000 \text{ ml} : T_c = 1,2 \left[\frac{-C^2}{10^5} + \frac{1,9C}{100} + 0,6 \right]$$

$$C > 1000 \text{ ml} : T_c = \frac{1,2C}{100}$$

4 Height tolerances

The dimensions of height and the tolerances are given in [Table 2](#).

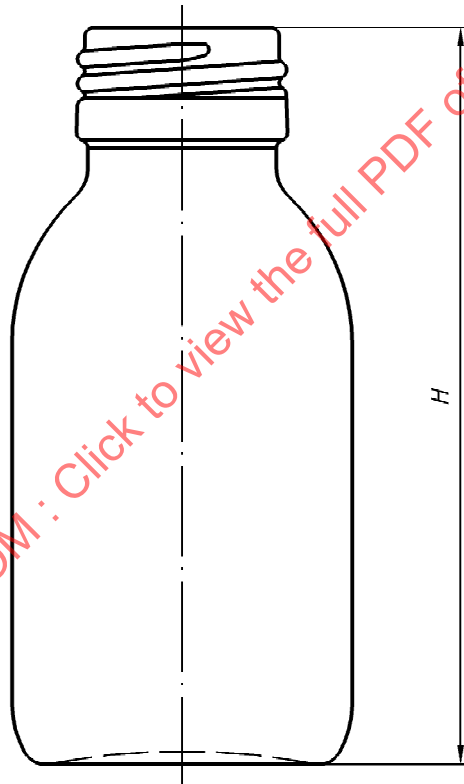


Figure 1 — Height

Table 2 — Height and height tolerances


Height <i>H</i> mm		Tolerance <i>Th</i>
Over	Up to and including	±
4	35	0,5
35	65	0,6
65	90	0,7
90	115	0,8
115	140	0,9
140	165	1,0
165	190	1,1
190	215	1,2
215	240	1,3
240	265	1,4
265	290	1,5
290	315	1,6
315	340	1,7
340	365	1,8

The tolerance is expressed by the following formula:

$$Th = 0,004 H + 0,4$$

5 Diameter and width tolerances

The dimensions of diameter and width and the tolerances are given in [Table 3](#).

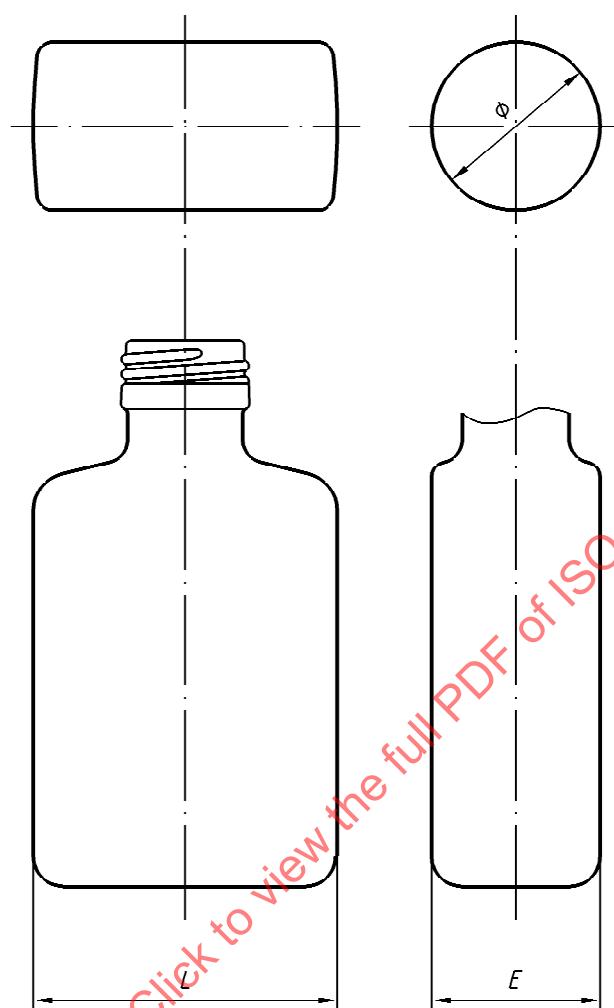

Non-round bottles: Tol. $L = \text{Tol. } \varnothing D + 0,1$

Tolerance $E = \text{Tolerance } L$

Figure 2 — Diameter and width

Table 3 — Diameter tolerances

Diameter mm		Tolerance $\varnothing D$ mm
Over	Up to and including	$\pm$
	18	0,5
18	30	0,6
30	44	0,7
44	54	0,8
54	60	0,9
60	70	1,0
70	75	1,1

Table 3 (continued)

Diameter mm		Tolerance øD mm
Over	Up to and including	±
75	82	1,2
82	90	1,3
90	97	1,4
97	105	1,5
105	110	1,6
110	118	1,7
118	125	1,8
125	132	1,9
132	140	2
140	148	2,1
148	155	2,2
155	162	2,3
162	169	2,4
169	175	2,5
175	182	2,6

The tolerance is expressed by the following formula:

— For round bottles:

$$E \leq 50 \quad T_e = 0,008E + 0,4$$

$$E > 50 \quad T_e = 0,014E + 0,1$$

— For non-round bottles:

$$L \leq 50 \quad T_l = 0,008L + 0,5$$

$$L > 50 \quad T_l = 0,014L + 0,2$$

6 Verticality tolerances

The dimensions of height and the tolerances are given in [Table 4](#).