
**Road vehicles — Anchorages in vehicles
and attachments to anchorages for child
restraint systems —**

**Part 1:
Seat bight anchorages and attachments**

**AMENDMENT 3: Specifications for the
detection of use of ISOFIX CRS**

*Véhicules routiers — Ancrages dans les véhicules et attaches aux
ancrages pour systèmes de retenue pour enfants —*

*Partie 1: Ancrages près de la jonction dossier-coussin d'assise et
attaches*

*AMENDEMENT 3: Spécifications pour la détection de l'utilisation de
systèmes de retenue pour enfants ISOFIX*



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

Amendment 3 to ISO 13216-1:1999 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 12, *Passive safety crash protection systems*.

ISO 13216-1 describes a universal system for anchoring child restraint systems to vehicles.

The purpose of this system is to improve the overall safety performance of child restraints, particularly by improving the convenience of installation and reducing the risk of misuse.

To further increase the child security, solutions to recognize the use of child seat complying with the ISOFIX system, when fitted in a vehicle seating position equipped with airbags and to allow the disconnection of the airbags in the event of impacts are studied by car manufacturers.

Annex C hereafter describes a basic solution allowing detection with a reliable manner the presence of an ISOFIX child seat, when fitted into a vehicle.

WARNING — The purpose of Annex C is not to provide a method of verification of correct CRS attachment in the vehicle.

STANDARDSISO.COM : Click to view the full PDF of ISO 13216-1:1999/Amd 3:2006

Road vehicles — Anchorages in vehicles and attachments to anchorages for child restraint systems —

Part 1: Seat bight anchorages and attachments

AMENDMENT 3: Specifications for the detection of use of ISOFIX CRS

Page 12, 5.2.2

Modify 5.2.2 as follows.

5.2.2 Dimensions

Dimensions for the portion of the CRS connector that engages the anchorage bar shall not exceed the maximum dimensions given by the envelope in Figure 8.1 and not be less than minimum dimensions given in Figure 8.2.

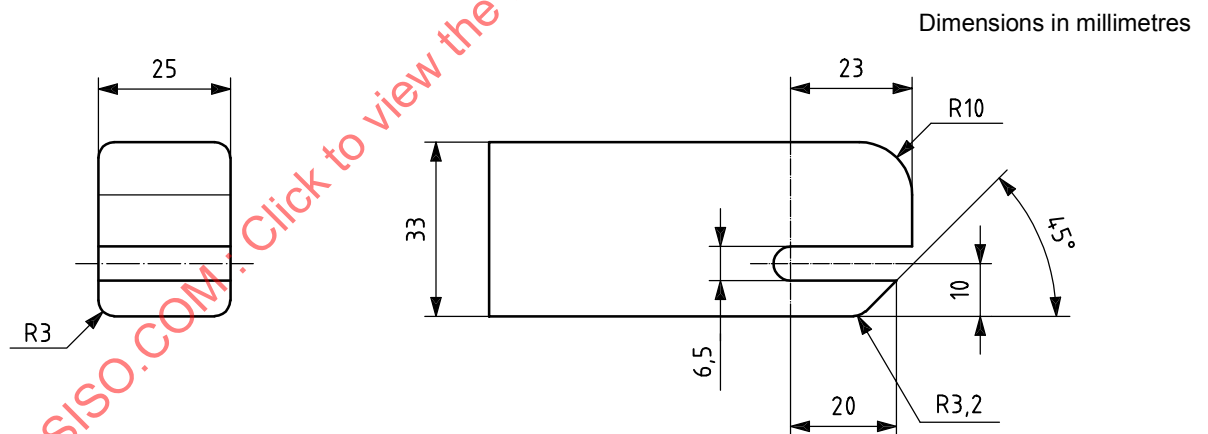


Figure 8.1 — Maximum dimensions of the connector


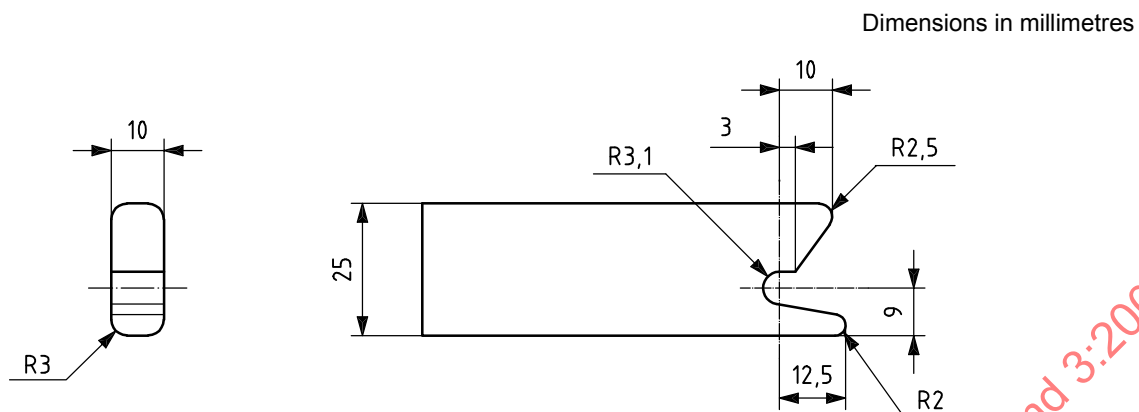


Figure 8.2 — Minimum dimensions of the connector

In the locked position around the ISOFIX bar, the maximum clearance between latch and bar shall not be greater than 1,5 mm (see Figure 8.3).

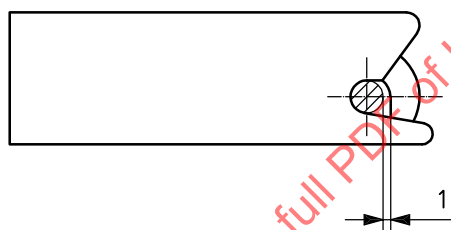

Key

- 1 maximum clearance = 1,5 mm

Figure 8.3 — Maximum clearance between latch and ISOFIX bar

After Annex B, page 18, add Annex C as follows.

Annex C (normative)

Method for the detection of use of ISOFIX CRS

C.1 Scope

The present annex is applicable to ISOFIX CRS and specifies a method to detect the use of such ISOFIX CRS into vehicles.


C.2 Principle

The principle of detection is based on the variation of a magnetic field when the ISOFIX connector of the child seat moves forward the ISOFIX anchorage bar of the vehicle.

C.3 Apparatus

See Figure C.1.

Dimensions in millimetres

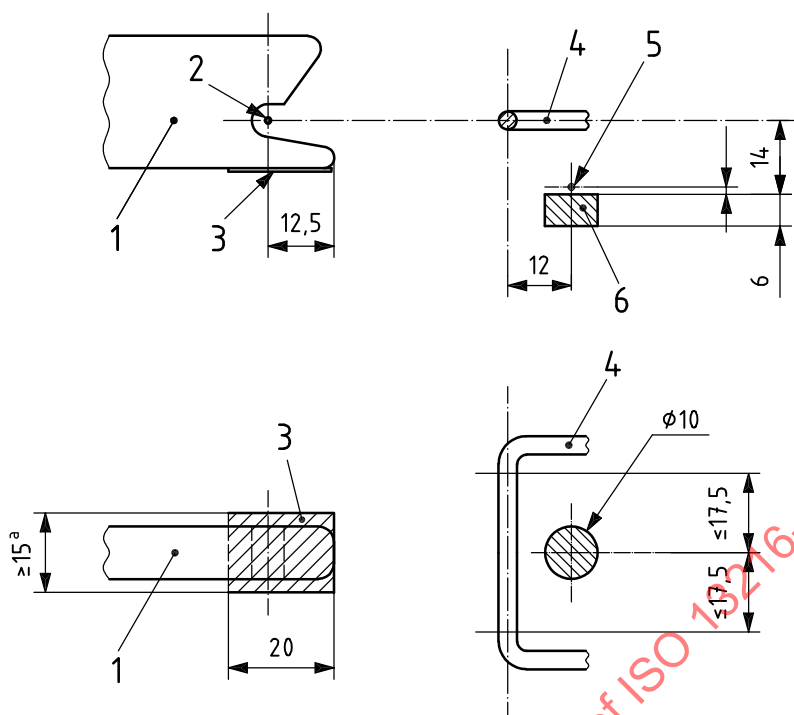


Key

- 1 CRS ISOFIX connectors
- 2 point B
- 3 ferromagnetic plate
- 4 ISOFIX anchorage bar
- 5 measurement point A
- 6 ferrite magnet – remanent field $F_r = 0,4 \text{ T}$

^a CRS equipped with connectors narrower than 15 mm shall provide guides to ensure the centering of connector above the magnet.

Figure C.1 — Detection test apparatus — side and plan views

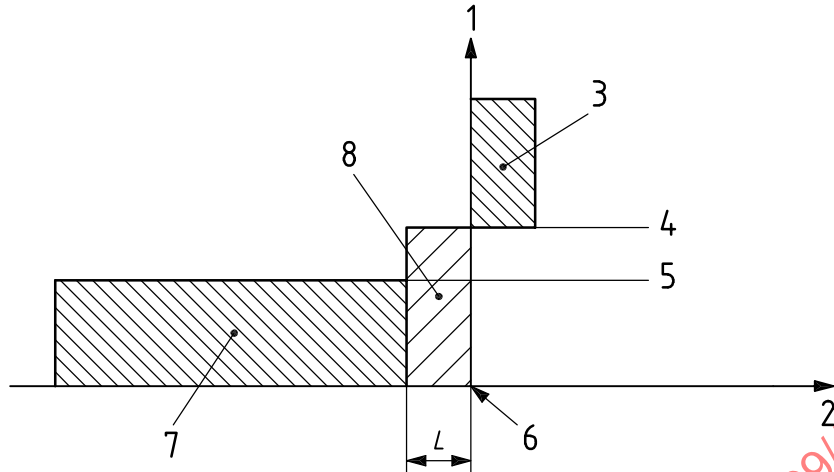

Key

- 1 induction at point A
- 2 point B position
- 3 ISOFIX connector detected
- 4 $F_2 \approx 0,115 T$
- 5 $F_1 \approx 0,110 T$
- 6 ISOFIX anchorage axis
- 7 ISOFIX connector non detected
- 8 area in which the ISOFIX connector presence cannot reliably be determined

Figure C.2 — Induction graph