
**Pyrotechnic articles — Pyrotechnic
articles for vehicles —**

**Part 2:
Test methods**

*Articles pyrotechniques — Articles pyrotechniques pour véhicules —
Partie 2: Méthodes d'essai*



STANDARDSISO.COM : Click to view the full PDF of ISO 14451-2:2013



COPYRIGHT PROTECTED DOCUMENT

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Test methods	1
4.1 Verification of design and documentation	1
4.2 Drop test	2
4.3 Vibration and temperature test	3
4.4 Thermal humidity cycling test	5
4.5 Electrostatic discharge (ESD) test	6
4.6 Fire test	10
4.7 Igniter test	12
4.8 Tank test	12
4.9 Functioning test	13
5 Recording	13
Annex A (normative) Definition of temperature build-up time, t_e	14
Annex B (normative) Probit test (PBBS test)	16
Annex C (normative) Bruceton method	22
Bibliography	25

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 14451-2 was prepared by the European Committee for Standardization (CEN) Technical Committee CEN/TC 212, *Pyrotechnic articles*, in collaboration with Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 12, *Passive safety crash protection systems*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

ISO 14451 consists of the following parts, under the general title *Pyrotechnic articles — Pyrotechnic articles for vehicles*:

- *Part 1: Terminology*
- *Part 2: Test methods*
- *Part 3: Labelling*
- *Part 4: Requirements and categorization for micro gas generators*
- *Part 5: Requirements and categorization for airbag gas generators*
- *Part 6: Requirements and categorization for airbag modules*
- *Part 7: Requirements and categorization for seatbelt pretensioners*
- *Part 8: Requirements and categorization for igniters*
- *Part 9: Requirements and categorization for actuators*
- *Part 10: Requirements and categorization for semi-finished products*

Pyrotechnic articles — Pyrotechnic articles for vehicles —

Part 2: Test methods

1 Scope

This part of ISO 14451 establishes uniform test methods for pyrotechnic articles for vehicles.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14451-1, *Pyrotechnic articles — Pyrotechnic articles for vehicles — Part 1: Terminology*

ISO 14451-3, *Pyrotechnic articles — Pyrotechnic articles for vehicles — Part 3: Labelling*

ISO 14451-5, *Pyrotechnic articles — Pyrotechnic articles for vehicles — Part 5: Requirements and categorization for airbag gas generators*

ISO 14451-6, *Pyrotechnic articles — Pyrotechnic articles for vehicles — Part 6: Requirements and categorization for airbag modules*

ISO 14451-7, *Pyrotechnic articles — Pyrotechnic articles for vehicles — Part 7: Requirements and categorization for seatbelt pretensioners*

ISO 14451-9, *Pyrotechnic articles — Pyrotechnic articles for vehicles — Part 9: Requirements and categorization for actuators*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 14451-1 apply.

NOTE Wherever reference is made to *pyrotechnic article(s)* only *pyrotechnic articles for vehicles* are meant.

4 Test methods

4.1 Verification of design and documentation

The manufacturer shall supply a document which describes the pyrotechnic article. The typical content of the document shall include the following information:

- description of the purpose of the pyrotechnic article;
- sketch with external dimensions;
- total mass of the pyrotechnic article;
- cross section and part list;
- mass and pyrotechnic composition(s) contained in the article;

- description of intended behaviour;
- description of foreseeable behaviour during fire test if applicable;
- proposed labelling in accordance with ISO 14451-3;
- safety data sheet/handling instructions, including electrical characteristics (e.g. all-fire current, no-fire current, resistance, etc.) which shall be provided with the pyrotechnic article.

This shall be verified by visual inspection by the naked eye.

4.2 Drop test

4.2.1 Purpose

The purpose of this test is to determine whether the pyrotechnic article experiences any detrimental effect when dropped from a specified height and at specified orientations.

4.2.2 Equipment

A steel impact plate of a minimum of 1 m x 1 m with at least 10 mm thickness, resting on a solid floor, with a fixture that supports the pyrotechnic article at the specified height, shall be used.

4.2.3 Test conditions

The drop height shall be $1^{+0,2}_0$ m.

The test shall be done with the pyrotechnic article at ambient temperature.

4.2.4 Test procedure

Mount one pyrotechnic article into the support fixture at the specified height above the impact plate and oriented such that it will fall in one of the six directions indicated in [Figure 1](#). Disarm the trigger device, if included in the pyrotechnic article.

Release the pyrotechnic article, allowing it to free fall onto the impact plate. Repeat the test using the same pyrotechnic article oriented to fall in the opposite direction.

Repeat the test twice more, once using a second pyrotechnic article and once using a third pyrotechnic article, each time along one of the remaining directions indicated in [Figure 1](#).

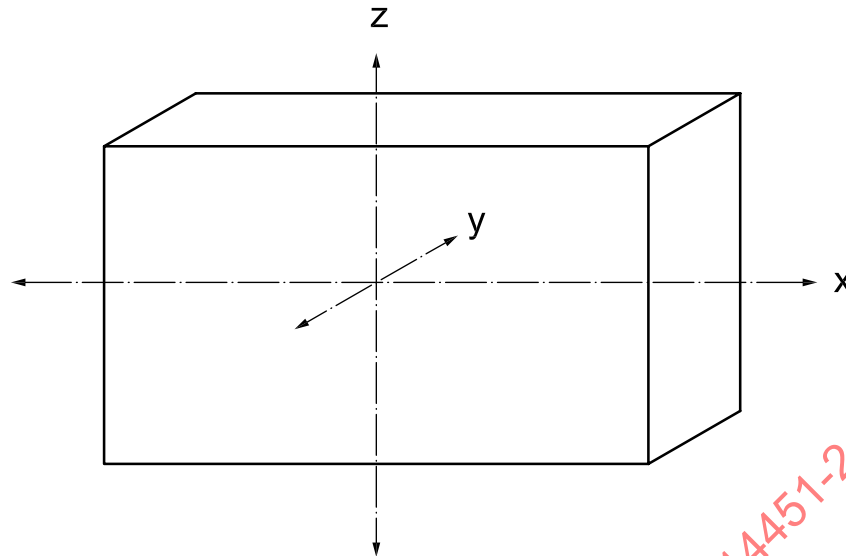


Figure 1 — Definition of main axes

4.3 Vibration and temperature test

4.3.1 Purpose

The purpose of this test is to determine the ability of the pyrotechnic article to withstand vibration and temperature conditions. The test may be performed simultaneously or sequentially.

4.3.2 Equipment

The equipment shall consist of a vibration table capable of producing the vibration loads as characterized in [Figure 2](#) and a climatic chamber capable of controlling the temperature during the test in accordance with [Figure 3](#). In case the test is being performed simultaneously the vibration table shall be mounted within the climatic chamber.

4.3.3 Test conditions

The temperature tolerance shall be $\pm 2,5$ °C.

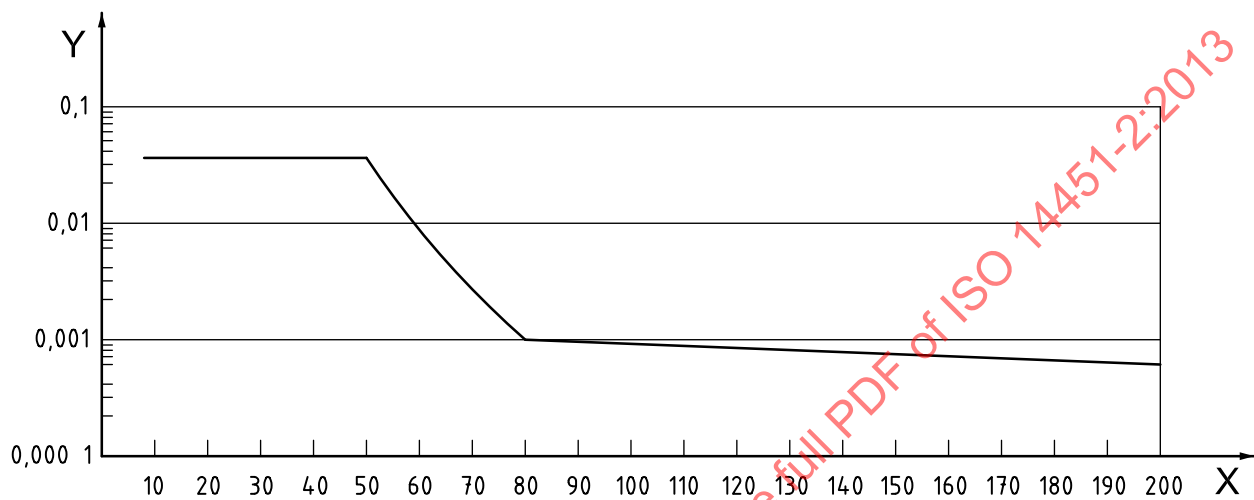
4.3.4 Test procedure

Fix the pyrotechnic article to the vibration table by an appropriate method insuring correct transmission of the vibration load. Apply random vibration in accordance with [Table 1](#) and [Figure 2](#) along each of the three main axes (see [Figure 1](#)) of each pyrotechnic article for 24 h.

Place the pyrotechnic article in the climatic chamber. The temperature shall be changed in accordance with [Figure 3](#). It may be changed simultaneously with application of the vibration load.

Table 1 — Frequency characteristics at RMS of 1,34 g

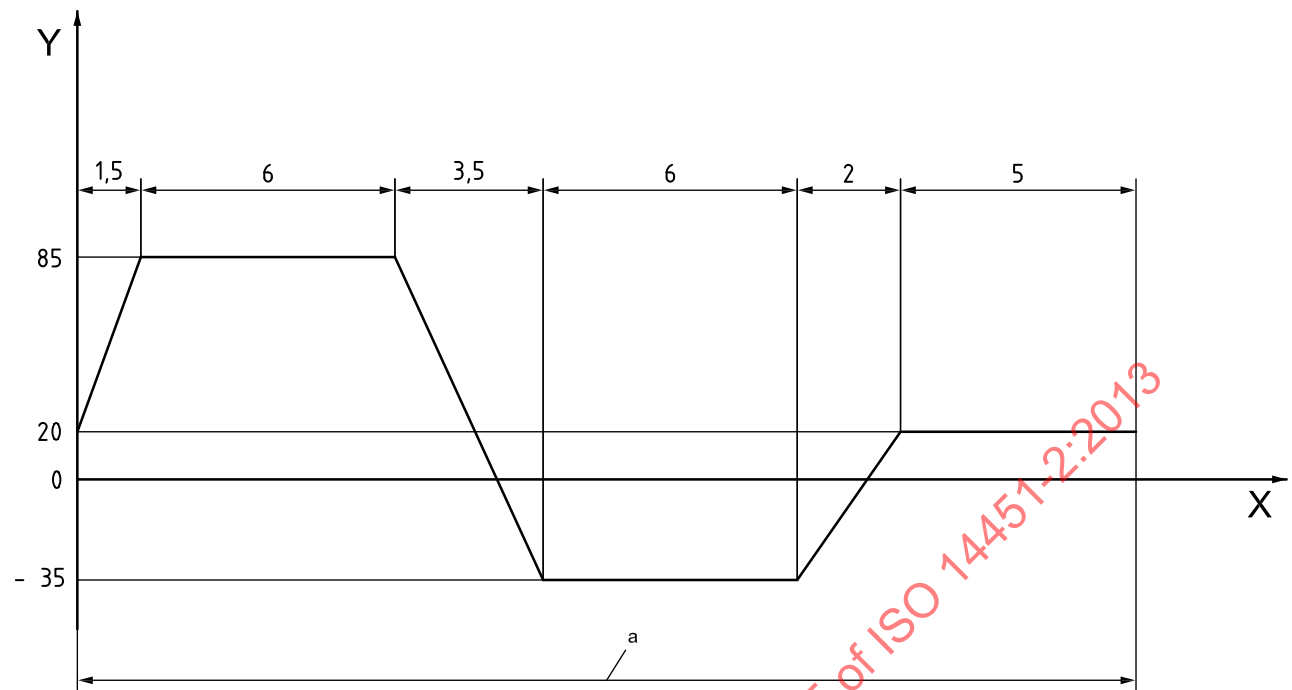
Frequency Hz	Power spectral density g^2/Hz
8	0,035
50	0,035
80	0,001
200	0,000 5

**Key**

X frequency, expressed in hertz

Y power spectral density, expressed in g^2 per hertz**Figure 2 — Vibration test**

Note to Figure 2: Number of lines: 400; Range of analysis (filter bandwidth 1,25 Hz): 500 Hz; Degree of freedom (DOF): 154; Abort limits lines: ± 5 dB; Abort limits g RMS: ± 5 dB.

**Key**

X time, expressed in hours

Y temperature, expressed in degrees Celsius

a Duration of one cycle: 24h

Figure 3 — Temperature cycle**4.4 Thermal humidity cycling test****4.4.1 Purpose**

The purpose of this test is to determine the ability of the pyrotechnic article to withstand high humidity and temperature variations.

4.4.2 Equipment

A climatic chamber with recirculating air shall be used.

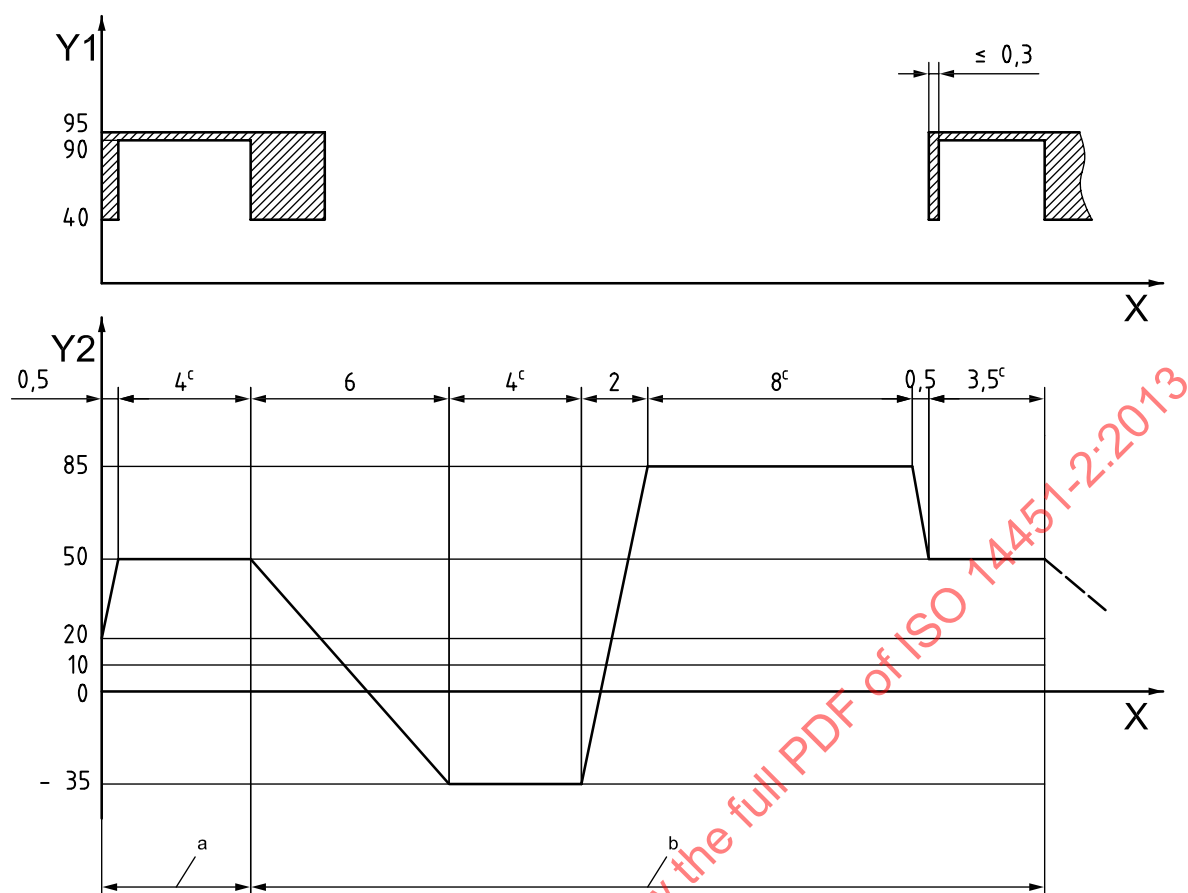
4.4.3 Test condition

The temperature tolerance shall be $\pm 2,5$ °C.

4.4.4 Test procedure

Place the pyrotechnic article in the climatic chamber and subject it to 30 thermal humidity cycles in accordance with [Figure 4](#).

NOTE 1 The temperature reference point is within the propelling media.



X time, expressed in hours

a Lead time

Y1 relative air humidity, expressed as a percentage

b Duration of one cycle: 24h, or less using t_e .

Y2 temperature, expressed in degrees Celsius

c Or: reference temperature build-up time, t_e .

NOTE 2 The relevant temperature build-up times, t_e , may be used instead of the given hours; if t_e is used, it shall be determined prior to the test according to the procedure in [Annex A](#).

Figure 4 — Thermal humidity cycle

4.5 Electrostatic discharge (ESD) test

4.5.1 Purpose

The purpose of this test is to prove the ability of the pyrotechnic article to withstand electrostatic discharges without unintended ignition.

4.5.2 Equipment

An ESD generator capable of producing the test pulse, adjustable within the limits given in [4.5.3](#), shall be used consisting in its main parts of the following and meeting the respective requirements:

- charging resistor: resistance, R_{ch} , between 50 M Ω and 100 M Ω ;
- energy-storage capacitor: capacitance, C_s ; ($C_s + C_d$) 150 pF $\pm$ 10 %;
- distributed capacitance, C_d ;

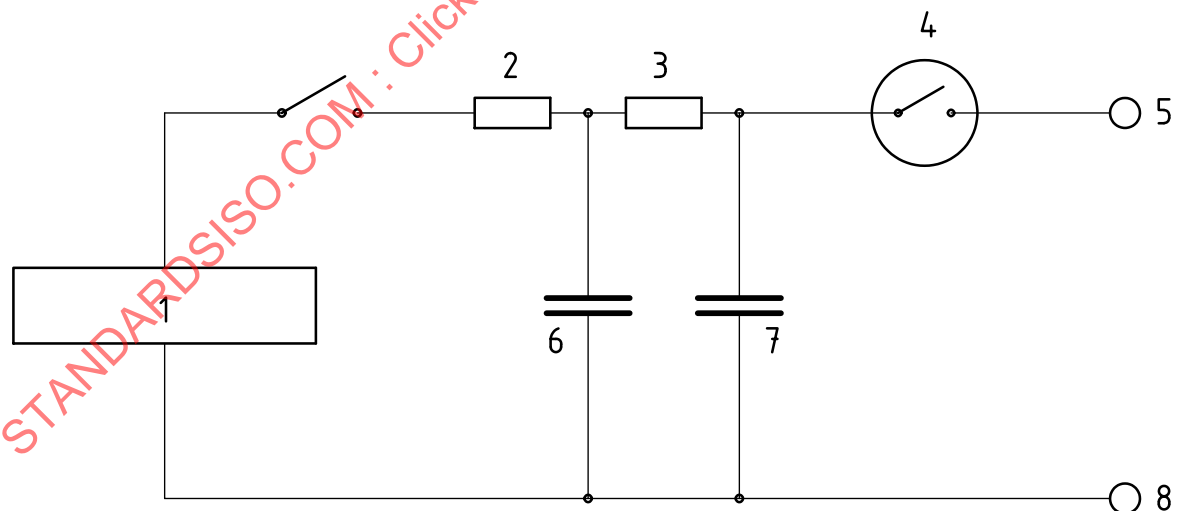
- hand capacitor: capacitance, C_h of $10 \text{ pF} \pm 10 \%$;
- discharge resistor: resistance, R_d , of $330 \Omega \pm 10 \%$;
- voltage indicator: tolerance of the output voltage indication, $\pm 5 \%$;
- output voltage (see Note 1 of [Figure 5](#)), up to 8 kV (nominal) for contact discharge;
- polarity of the output voltage: positive and negative;
- discharge switch;
- discharge return cable;
- holding time: at least 5 s;
- discharge, mode of operation: single discharge; the generator should be able to generate at a rate of at least 20 discharges per second for exploratory purposes only;
- time between successive discharges: at least 1 s;
- power supply unit.

NOTE Open circuit voltage is measured at the energy storage capacitor.

The generator shall be provided with a means of preventing unintended radiated or conducted emissions, of either pulse or continuous type, so that the pyrotechnic article and auxiliary test equipment are not disturbed by these effects.

The discharge return cable of the test generator shall be constructed to allow the generator to meet the waveform specification. It shall be sufficiently insulated to prevent the flow, during the ESD test, of the discharge current to personnel or conducting surfaces other than via its termination.

[Figure 5](#) presents a simplified diagram of the ESD generator. Construction details are not given.



Key

- | | |
|----------------------------------|--------------------------------------|
| 1 DC HV supply | 5 discharge contact |
| 2 charging resistor (R_{ch}) | 6 energy-storage capacitor (C_s) |
| 3 discharge resistor (R_d) | 7 hand capacitor (C_h) |
| 4 discharge switch | 8 discharge return connection |

NOTE 1 C_d , omitted from [Figure 5](#), is a distributed capacitance existing between generator and the pyrotechnic article, ground reference planes and coupling planes.

NOTE 2 Because the capacitance is distributed over the whole generator, it is not possible to show this in the circuit.

Figure 5 — Simplified diagram of the ESD generator

4.5.3 Test conditions

4.5.3.1 General

The pyrotechnic article shall be at ambient temperature.

4.5.3.2 Calibration of the test set-up for contact discharge

The calibration shall be done in such a way that the impulse shown in [Figure 6](#) and given in [Table 2](#) is measured by a suitable device connected to the ESD-simulator in accordance with the wiring diagram in [Figure 7](#).

The values of the parameters of the discharge current shall be verified with 1 000 MHz bandwidth-measuring instrumentation.

A lower bandwidth implies limitations in the measurement of rise time and amplitude of the first current peak.

4.5.4 Test procedure

Electrostatic discharge shall be applied in accordance with [Figure 6](#).

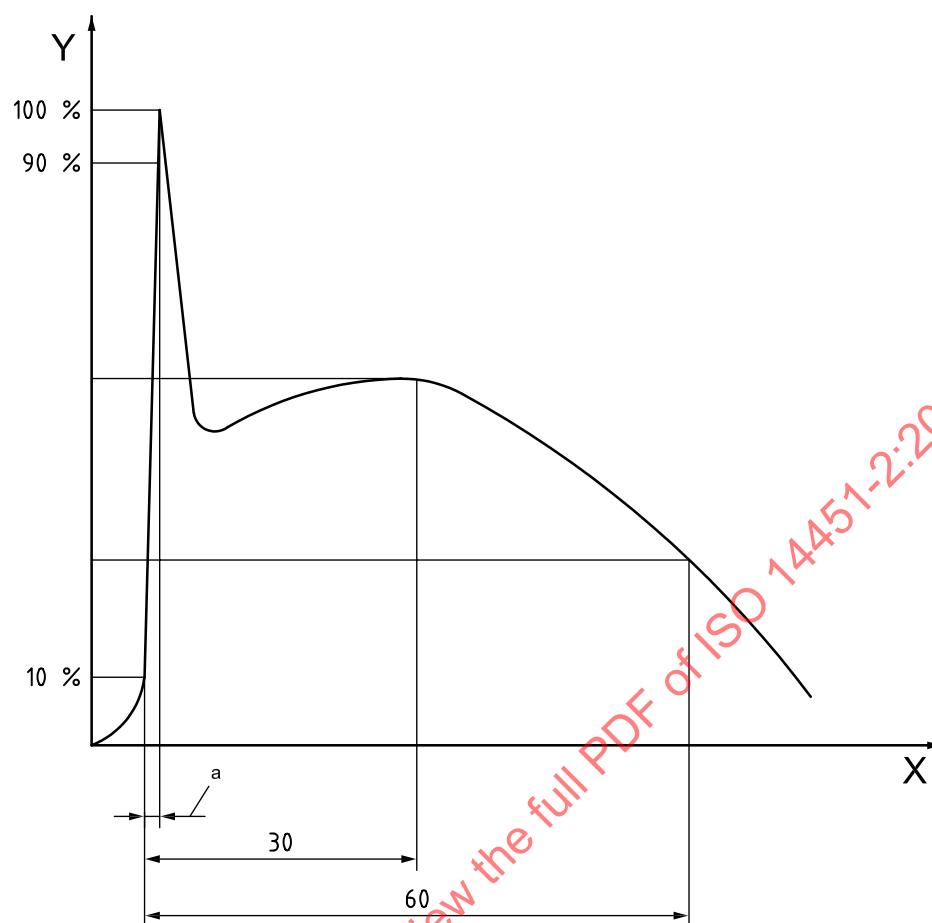
Place the pyrotechnic article under test on a conductive bench.

The bench ESD simulator and power source shall be grounded to earth.

Identify specific test points on the pyrotechnic article prior to conducting the test.

If an igniter is present, apply the discharge to the igniter from pin to pin and from each pin to all those other areas of the casing accessible to personnel in normal use.

Perform the test with contact discharges and with positive and negative voltages. Subject each discharge point to a minimum of three positive and three negative discharges at the voltage level as shown in [Figure 6](#). The time duration between discharges shall be at least 5 s.

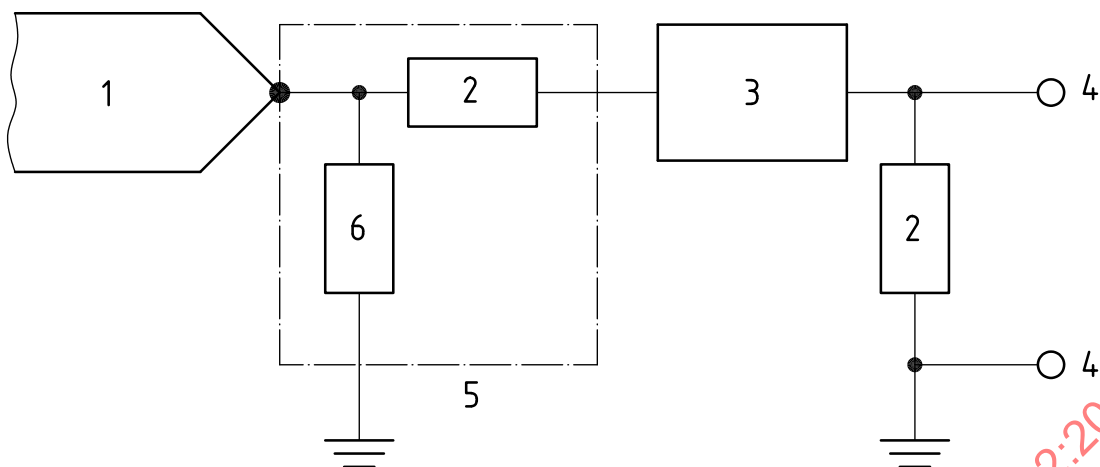
**Key**

X time, expressed in nanoseconds

Y current intensity, expressed in amperes

a Risetime, t_r , with discharge switch**Figure 6 — Typical waveform of the output current of the ESD generator****Table 2 — Characteristics of output current of ESD generator**

Indicated voltage	First peak current of discharge $\pm 10\%$	Rise time, t_r , with discharge switch	Current ($\pm 30\%$) at 30 ns	Current ($\pm 30\%$) at 60 ns
8 kV	30 A	0,7 to 1 ns	16 A	8 A



Key

1	ESD simulator (330 Ω)	4	purpose input
2	50 Ω	5	coaxial target
3	20 dB attenuator	6	2 Ω

Figure 7 — ESD simulator calibration set-up schematic

4.6 Fire test

4.6.1 Purpose

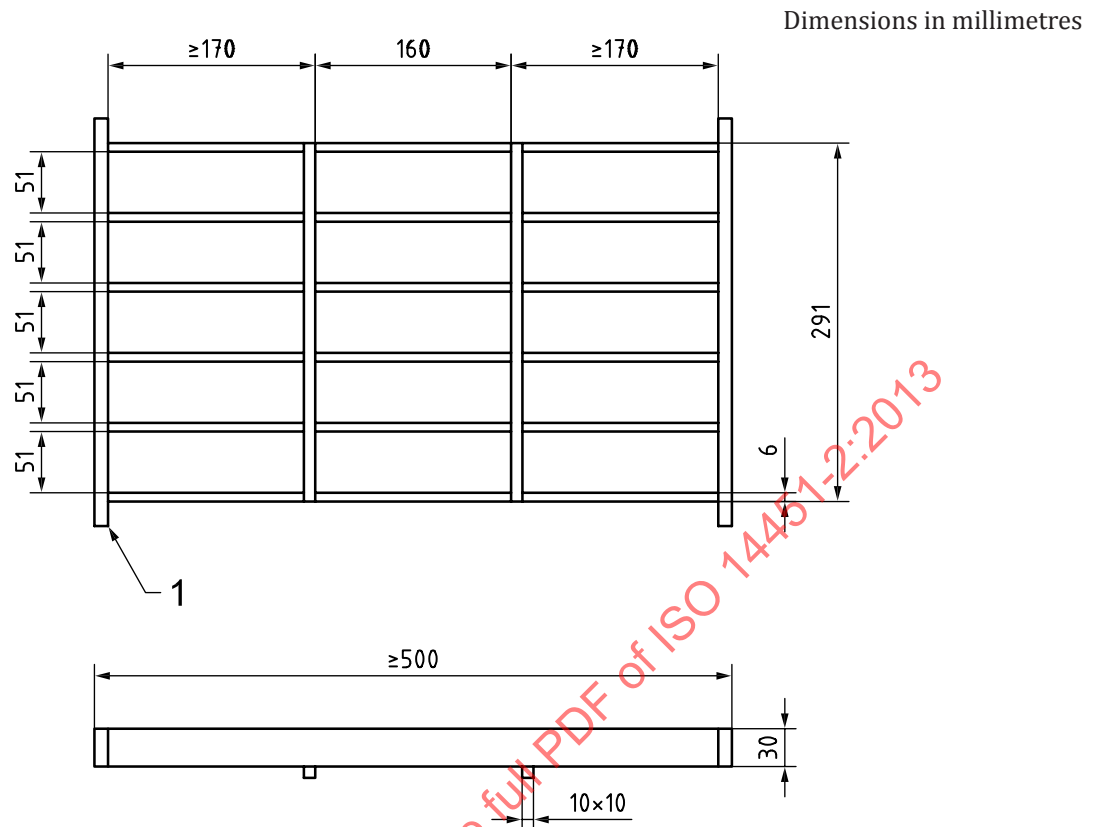
The purpose of this test is to determine the behaviour of the pyrotechnic article when exposed to fire.

4.6.2 Equipment


The following equipment shall be used when carrying out a fire test:

- gas cylinder, containing, for example, propane gas with gas-cylinder valve and hose assembly;
- gas burner(s), 60 mm in diameter;
- support made of mild steel according to [Figure 8](#);
- grid, an expanded metal made of mild steel as specified in [Figure 9](#) that shall cover the entire support surface;
- gas lighter;
- stop watch.

The vertical distance between mouth of the burner(s) and top of the grid shall be 400 ± 10 mm.

**Key**

- 1 fixture for user

Figure 8 — Support**Key**

- L_l long diagonal length, equal to 43 mm
 L_c short diagonal length, equal to 13 mm
 l strip width, equal to 2 mm
 e thickness, equal to 2 mm

Figure 9 — Grid**4.6.3 Test conditions****4.6.3.1 General**

The test shall be performed with the pyrotechnic article at ambient temperature. Standard positions and heating rate of the pyrotechnic article shall be considered according to the requirement specified in ISO 14451-5, ISO 14451-6, ISO 14451-7 or ISO 14451-9.

The number of burner(s) shall be chosen such that the whole cross-section of the pyrotechnic article (projection to the grid) shall be completely engulfed in the flames.

The pyrotechnic article shall be fixed to the grid during the test by an appropriate method (e.g. hose clamps, clamps, etc.) to ensure very low thermal loss through fixation contacts.

Each pyrotechnic article shall be filmed during the test with a minimum of 25 frames per second. Each test shall be recorded.

4.6.3.2 Calibration of the fire test set-up

Calibration as described below shall be ensured for each individual burner while all burners being used for the test are ignited.

For calibration of the test installation, the heating rate shall be measured with a steel cube of 50 mm side length made of mild steel and with a mass of $975 \text{ g} \pm 10 \text{ g}$. The cube shall be placed on the grid (as described in 4.6.2) so that heat losses through fixation contact are minimized. A hole with diameter of maximum 3 mm and 25 mm depth to accommodate the thermocouple shall be machined in the centre of one face. The diameter at the bottom of the hole shall be adjusted to fit the thermocouple as to allow good heat contact.

The calibration shall take place between 50 °C and 200 °C with the heating rate as defined for each individual article in ISO 14451-5, ISO 14451-6, ISO 14451-7 and ISO 14451-9. The tolerance for the heat rate is $\pm 5 \text{ K/min}$. Maintain the testing conditions constant (especially gas flow rate and possible air movement) in order to guarantee that the pyrotechnic article experiences the same heating rate as set during calibration.

This calibration shall be repeated prior to each test series in order to guarantee constant heating rate and the calibration shall be documented.

4.6.4 Test procedure

Position the pyrotechnic article in the intended path of the fire before lighting. Heat the pyrotechnic article until all pyrotechnic content is consumed or for a time period of 20 min when no further reaction has been observed.

4.7 Igniter test

4.7.1 Purpose

The purpose of this test is to establish the function and reliability of the igniter using appropriate statistical tests.

4.7.2 Test procedure

For an electrical igniter, the Probit Bayes test (see [Annex B](#))^[1] or the Bruceton test (see [Annex C](#))^[1] shall be used.

The test procedure proves the all-fire and no-fire values. These values, together with reliability and confidence levels, shall be specified.

4.8 Tank test

4.8.1 Purpose

The purpose of this test is to assess the performance of the pyrotechnic article by firing it into a closed volume container at a given temperature level.

4.8.2 Equipment

A tank suited to the performance of the pyrotechnic article shall be used.

4.8.3 Test conditions

Each pyrotechnic article shall be tested at ambient temperature.

4.8.4 Test procedure

4.8.4.1 General

The pyrotechnic article tightly fixed to the appropriate tank shall, if applicable, be ignited with a pulse not lower than the all-fire value.

4.8.4.2 Electrical connection

Measure the igniter resistance to ensure electrical connection before ignition of the pyrotechnic article.

4.8.4.3 Tank pressure

Measure the tank pressure versus time, using a pressure transducer with the following specifications:

- appropriate calibration range;
- linearity and hysteresis error $\leq 1\%$.

Do not place the pressure transducer in the direct gas flow from the exit ports of the pyrotechnic article.

4.9 Functioning test

4.9.1 Purpose

The purpose of this test is to assess the behaviour of the pyrotechnic article by firing it without fixation into an open air volume.

4.9.2 Test conditions

Each pyrotechnic article shall be tested at ambient temperature.

Each pyrotechnic article shall be filmed during the test by a camera with a minimum of 25 frames per second.

4.9.3 Test procedure

The pyrotechnic article shall be ignited with a pulse not lower than the all-fire value.

5 Recording

All measured parameters in tests under [Clause 4](#) shall be recorded.

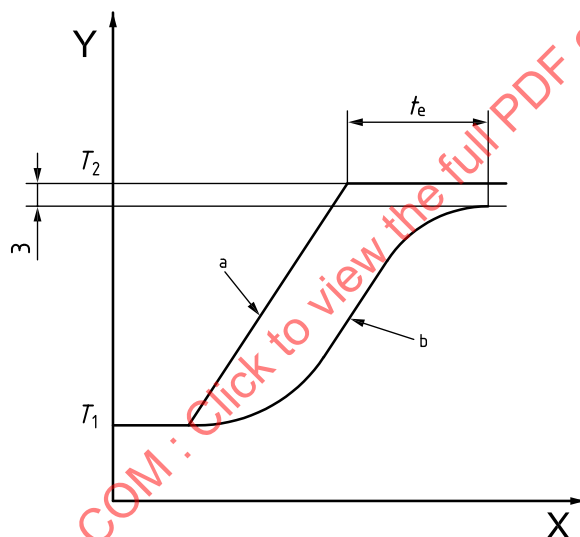
Annex A (normative)

Definition of temperature build-up time, t_e

The temperature build-up time t_e is the time required, after a change in the surrounding temperature from T_1 to T_2 , for a defined reference point of the test sample to reach the temperature T_2 , as follows:

- within 3°C, in the case of $|T_2 - T_1| \geq 60$ °C;
- within 5 % of the temperature difference $|T_2 - T_1|$, in the case of $|T_2 - T_1| < 60$ °C.

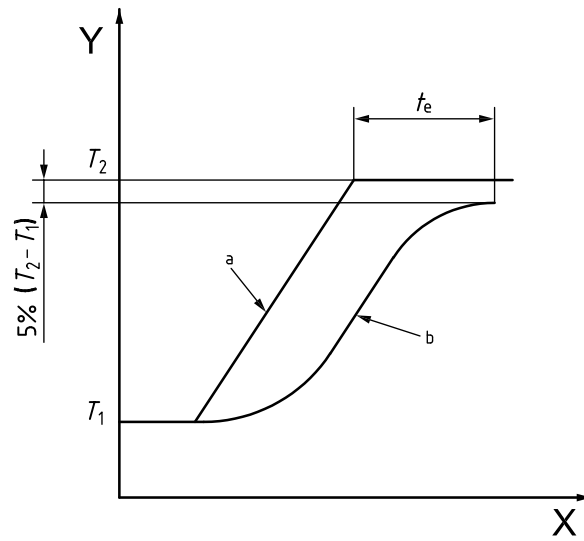
The temperature build-up time begins at the point where the desired target value curve reaches the surrounding temperature T_2 (see Figure A.1 and A.2). The temperature build-up times shall be determined in the apparatus for the relevant test. The test sample temperature shall be measured at the prescribed reference point.



Key

- X time, expressed in hours
 Y temperature, expressed in degrees Celsius
 a Target temperature, T_{targ}
 b Actual temperature, T_{act}

Figure A.1 — Temperature build-up time t_e for $|T_2 - T_1| \geq 60$ °C

**Key**

- X time, expressed in hours
- Y temperature, expressed in degrees Celsius
- a Target temperature, T_{targ}
- b Actual temperature, T_{act}

Figure A.2 — Temperature build-up time t_e for $|T_2 - T_1| < 60\text{ °C}$

Annex B (normative)

Probit test (PBBS test)

B.1 General

The aim of this annex is to describe the statistical model used to estimate the value of a specific quantity with a probability level of “no-fire” equal to 0,01 % and of “all-fire” equal to 99,99 %, within a confidence interval equal to 95 %. Typical estimated quantities are fire currents and fire impulses.

B.2 Symbols

F^{-1}	inverse F -distribution function
i_k	number of fires at test level y_k
K	number of test levels
k	index of test levels
N	number of tests per test level
p_k	relative frequency of fire at test level k
y	tested quantity
y_k	value of the tested quantity at test level k
$y_{0,000\ 1}$	estimated value of the no-fire quantity with a probability β_{NF} equal to 0,01 %
$y_{0,999\ 9}$	estimated value of the all-fire quantity with a probability β_{AF} equal to 99,99 %
y_{AF}	$y_{0,999\ 9}$ with a confidence interval α
y_{NF}	$y_{0,000\ 1}$ with a confidence interval α
α	required confidence interval for the all- or no-fire quantity (in this calculation, α is equal to 95 %)
β_{AF}	required probability of the all-fire quantity (in this calculation, β_{AF} is equal to 99,99 %)
β_{NF}	required probability of the no-fire quantity (in this calculation, β_{NF} is equal to 0,01 %)
Φ^{-1}	inverse standard normal distribution function
φ_k	values of the inverse standard normal distribution Φ^{-1} for the frequency p_k
φ_{AF}	value of the inverse standard normal distribution for the probability β_{AF} ($\varphi_{AF} = 3,719\ 1$)
φ_{NF}	value of the inverse standard normal distribution for the probability β_{NF} ($\varphi_{NF} = -3,719\ 1$)

B.3 Calculation of the frequencies

The relative frequency, p_k , is estimated by the general Formula (B.1):

$$p_k = \frac{i_k}{N} \quad (\text{B.1})$$

Difficulties arise when the value of the frequency is 0 or 1, i.e. when the number of occurrences at test level y_k is equal to 0 or N . In these cases, the corresponding values for φ_k are theoretically equal to $-\infty$ or to $+\infty$. Appropriate values of φ_k are in these cases estimate by using the Bayes estimator as follows.

Let the test level values, y_k , be ordered such that: $y_1 < y_2 < \dots < y_K$

Let u be the smallest index such that $i_u > 0$ and o be the largest index such that all $i_o < N$. Calculate the frequency p_k in the interval $u \leq k \leq o$ using the set of equations given in Formulae (B.2):

$$p_k = \frac{1}{N} \times i_k \quad \text{if } i_k \neq 0 \text{ and } N$$

$$p_k = \frac{1}{N+2} \quad \text{if } i_k = 0$$

$$p_k = \frac{N+1}{N+2} \quad \text{if } i_k = N$$
(B.2)

When $u > 1$, calculate p_{u-1} from Formula (B.3):

$$p_{u-1} = 1 - \frac{(N+1) \left[1 - (1-p_u)^{N+2} \right]}{(N+2) \left[1 - (1-p_u)^{N+1} \right]}$$
(B.3)

When $o < K$, calculate p_{o+1} from Formula (B.4):

$$p_{o+1} = \frac{(N+1) \left(1 - p_o^{N+2} \right)}{(N+2) \left(1 - p_o^{N+1} \right)}$$
(B.4)

If $u-1 > 1$ or $o+1 < K$ still holds, repeat the procedure, that is, according to Formulae (B.5) and (B.6):

$$p_{u-2} = 1 - \frac{(N+1) \left[1 - (1-p_{u-1})^{N+2} \right]}{(N+2) \left[1 - (1-p_{u-1})^{N+1} \right]}$$
(B.5)

or

$$p_{o+2} = \frac{(N+1) \left(1 - p_{o+1}^{N+2} \right)}{(N+2) \left(1 - p_{o+1}^{N+1} \right)}$$
(B.6)

and so forth.

B.4 Calculation of intermediate statistical parameters

The following equations apply:

$$\bar{\varphi} = \frac{\sum_{k=1}^K \varphi_k}{K}$$
(B.7)

$$\bar{y} = \frac{\sum_{k=1}^K y_k}{K} \quad (\text{B.8})$$

$$S_{yy} = \frac{\sum_{k=1}^K (y_k - \bar{y})^2}{K - 1} \quad (\text{B.9})$$

$$S_{\varphi\varphi} = \frac{\sum_{k=1}^K (\varphi_k - \bar{\varphi})^2}{K - 1} \quad (\text{B.10})$$

$$S_{\varphi y} = \frac{\sum_{k=1}^K (\varphi_k - \bar{\varphi}) \times (y_k - \bar{y})}{K - 1} \quad (\text{B.11})$$

$$D = (K - 1) \times \left(S_{\varphi\varphi} - \frac{S_{\varphi y}^2}{S_{yy}} \right) \quad (\text{B.12})$$

$$h(y) = \frac{1}{K} + \frac{(y - \bar{y})^2}{(K - 1) \times S_{yy}} \quad (\text{B.13})$$

$$\delta = \frac{2.D}{K - 2} \times F^{-1}(1 - \alpha, 2, K - 2) \quad (\text{B.14})$$

$$A = \frac{S_{\varphi y}^2}{S_{yy}^2} - \frac{\delta}{(K - 1) \times S_{yy}} \quad (\text{B.15})$$

$$B_{\text{AF}} = \frac{S_{\varphi y}}{S_{yy}} \times (\bar{\varphi} - \varphi_{\text{AF}}) \quad (\text{B.16})$$

$$B_{\text{NF}} = \frac{S_{\varphi y}}{S_{yy}} \times (\bar{\varphi} - \varphi_{\text{NF}}) \quad (\text{B.17})$$

$$C_{\text{AF}} = (\bar{\varphi} - \varphi_{\text{AF}})^2 - \frac{\delta}{K} \quad (\text{B.18})$$

$$C_{\text{NF}} = (\bar{\varphi} - \varphi_{\text{NF}})^2 - \frac{\delta}{K} \quad (\text{B.19})$$

B.5 Calculation of the no-fire and all-fire values

The theoretical model gives Formula (B.20):

$$\varphi = \Phi^{-1}(p) = ay + b \quad (\text{B.20})$$

where the parameters a and b are estimated by

$$a = \frac{S_{\varphi y}}{S_{yy}} \quad (\text{B.21})$$

$$b = \bar{\varphi} - a\bar{y} \quad (\text{B.22})$$

From these values, the mean and the standard deviation of the underlying normal distribution may be calculated:

$$m = -\frac{b}{a} = \bar{y} - \frac{S_{yy}}{S_{\varphi y}} \times \bar{\varphi} \quad (\text{B.23})$$

$$s = \frac{S_{yy}}{S_{\varphi y}} \quad (\text{B.24})$$

The following functions are obtained as limiting curves for the corresponding confidence interval:

$$ay + b \pm [h(y) \times \delta]^{1/2}$$

and using Formula (B.22):

$$a(y - \bar{y}) + \bar{\varphi} \pm [h(y) \times \delta]^{1/2} \quad (\text{B.25})$$

Estimate the no-fire and all-fire values by solving the following quadratic equation, respectively:

$$a(y - \bar{y}) + \bar{\varphi} \pm [h(y) \times \delta]^{1/2} = \varphi_{\text{NF}} = -3,719 \, 1 \quad (\text{B.26})$$

$$a(y - \bar{y}) + \bar{\varphi} \pm [h(y) \times \delta]^{1/2} = \varphi_{\text{AF}} = -3,719 \, 1 \quad (\text{B.27})$$

From Formulae (B.21) and (B.22), calculate the values $y_{0,000 \, 1}$ and $y_{0,999 \, 9}$ from Formulae (B.28) and (B.29):

$$y_{0,000 \, 1} = \frac{\varphi_{\text{NF}} - b}{a} \quad (\text{B.28})$$

$$y_{0,999 \, 9} = \frac{\varphi_{\text{AF}} - b}{a} \quad (\text{B.29})$$

From the resolution of Formulae (B.26) and (B.27), the estimated no-fire and all-fire values, with a confidence level of 95 %, are given in Formulae (B.30) and (B.31), respectively:

$$y_{\text{AF}} = \bar{y} - \frac{B_{\text{AF}}}{A} + \left(\frac{B_{\text{AF}}^2 - C_{\text{AF}} A}{A^2} \right)^{1/2} \quad (\text{B.30})$$

$$y_{\text{NF}} = \bar{y} - \frac{B_{\text{NF}}}{A} + \left(\frac{B_{\text{NF}}^2 - C_{\text{NF}} A}{A^2} \right)^{1/2} \quad (\text{B.31})$$

B.6 Example 1: Calculation of relative frequencies

An example of experimentally tested quantity y (for example, fire current), with its respective number of fires i_k at a given level y_k (current level in milliamperes) is given in [Table B.1](#). The y_k values are ordered by increasing values.

Table B.1 — Example of experimental results for the calculation of the frequencies

$N = 20 \ K = 7$							
K	1	2	3	4	5	6	7
i_k	0	0	10	14	16	19	29
y_k	540	560	580	600	620	640	660

From Table B.1, we have: $u = 3$ and $o = 6$.

Calculate the frequencies for $3 \leq k \leq 6$ [Formula ((B.1))]:

$$p_3 = 0,5 \ p_4 = 0,7 \ p_5 = 0,8 \ p_6 = 0,95$$

Using the Bayes estimator, calculate the other relative frequencies [Formulae (B.3), (B.4) and (B.5)]:

$$p_2 = 0,045 \ p_1 = 0,019 \ p_7 = 0,979$$

B.7 Example 2: Calculation of a no-fire current and an all-fire current

Typical results for determining the no-fire and all-fire currents are reported in Table B.2. The number of tests is equal to 20 for each level ($N = 20$). The relative frequencies are calculated according to the procedure described above and example 1. For each frequency, the φ_k value is calculated using the inverse of the standard normal distribution, Φ^{-1} .

The result of the calculation of the statistical parameters is collected in Table B.3.

Table B.2 — Example of values for calculation of the no-fire and all-fire currents

k (level)	y_k (current level) mA	l_k (number of occurrences)	p_k (frequency of fires)	φ_k
1	230	0	0,040 58	-1,744 0
$2 = u$	235	3	0,150 00	-1,036 4
3	240	5	0,250 00	-0,674 5
4	245	6	0,300 00	-0,524 4
5	250	11	0,550 00	0,125 7
$6 = o$	255	16	0,800 00	0,841 6
7	260	20	0,956 32	1,709 5

Table B.3 — Calculated statistical parameters

Quantity	Equation	Result
$\bar{\varphi}$	(B.7)	-0,186 1
$\bar{y}$	(B.8)	245
S_{yy}	(B.9)	116,667
$S_{\varphi\varphi}$	(B.10)	1,375
$S_{\varphi y}$	(B.11)	12,430 8
a	(B.21)	0,106 55