
**Snowboard plate-bindings without a
release mechanism — Requirements and
test methods**

*Fixations de surf des neiges de type à plaque sans mécanisme de
déclenchement — Exigences et méthodes d'essai*



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 14790:2005

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 14790 was prepared by Technical Committee ISO/TC 83, *Sports and recreational equipment*, Subcommittee SC 3, *Ski bindings*.

This second edition cancels and replaces the first edition (ISO 14790:1997), Clauses 5 and 6 of which have been technically revised.

Snowboard plate-bindings without a release mechanism — Requirements and test methods

1 Scope

This International Standard specifies the essential requirements (including certain quality aspects) of snowboard plate bindings without release mechanism.

This International Standard is applicable to non-releasable snowboard plate bindings for adults and children.

This International Standard does not apply to snowboard plate bindings with a release mechanism or to snowboard soft bindings.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6004:1991, *Alpine skis — Ski binding screws — Requirements*

ISO 9838:1991, *Alpine ski-bindings — Test soles for ski-binding tests*

ISO 11087:2004, *Alpine ski-bindings — Retention devices — Requirements and test methods*

ISO 11634:1996, *Snowboard-boots — Interface with ski-binding*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

snowboard plate binding

connecting element between a snowboard boot (boot with hard sole in accordance with ISO 11634) and a snowboard

NOTE An antiskid pad is not a component part of a plate binding.

3.2

snowboard binding type C

binding suitable exclusively for a body mass up to 45 kg (children)

3.3

snowboard binding type A

binding suitable for over 45 kg body mass (adults)

4 Parameters

All possible strains on the boot can be attributed to one torque, M , and one force, F , on each, x , y , z of a system of coordinates. The point of origin of the coordinates is fixed as in the centre of the ankle joint (defined by s_1 and s_2 in Figure 1).

The torques and forces illustrated in the drawing in Figure 1 are positive. The corresponding parameters acting in opposite directions are given negative signs. The arrowheads indicate the sense of rotation of the snowboard-boot movement.

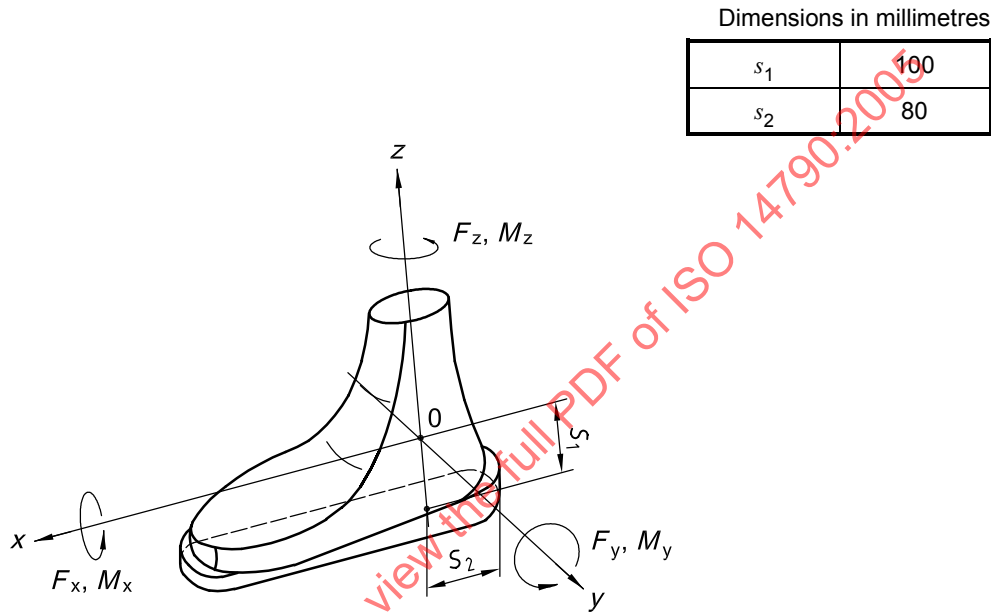


Figure 1 — Torques and forces

5 Requirements

5.1 Function

The snowboard binding shall be such that in practical use, the boot remains connected to the snowboard under all loads occurring in winter terrain. This requirement is met if, after all testing in accordance with 6.6, 6.7 and 6.8:

- a) there are no fractures, cracks or other indications of permanent deformation in the binding;
- b) the binding can attach the boot in the normal manner;
- c) the attached boot does not slip out of the binding;
- d) the boot can be moved from the binding in the original manner.

5.2 Retaining leash for mounting point for retaining leash

The mounting points for the retaining leash shall be indicated by the manufacturer.

The minimum breaking force of the mounting point and of the retaining leash shall be at least 500 N.

5.3 Snow pack

Each snowboard binding shall latch with a minimum of 2 mm snow pack between the boot sole and the binding.

5.4 Mounting screws

The snowboard binding shall be supplied with all parts necessary for mounting.

Metric screws shall be used, preferably M 6 class g, or ski binding screws in accordance with ISO 6004.

6 Test methods


6.1 Apparatus

6.1.1 **Artificial leg**, with fixed ankle joint of 80° , medium size (see Figure 2).

6.1.2 **Rigid plate**, e.g. steel plate of at least 10 mm thickness.

6.1.3 **Test sole**, in accordance with ISO 9838.

Dimensions in millimetres

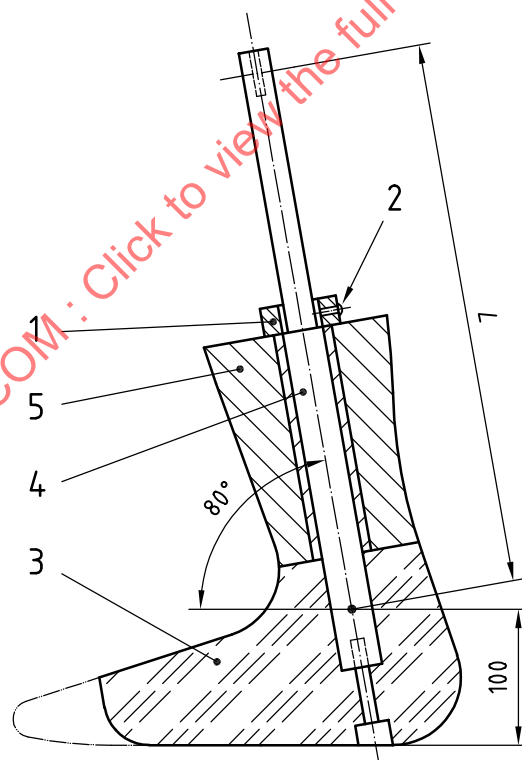

Key

- | | | | |
|---|----------------|---|------------|
| 1 | socket | 4 | steel axis |
| 2 | screw | 5 | resin calf |
| 3 | aluminium foot | L | 1 000 mm |

Figure 2 — Artificial leg

6.2 Sampling

Three pairs of snowboard bindings are needed.

All tests shall be passed.

6.3 Loading rate

Perform the test quasi-statically, ensuring that the following indicative values of the torque gradient are respected:

$$\text{a) torsion values: } \frac{dM_z}{dt} \leq 50 \text{ N} \cdot \text{m/s} \quad (1)$$

$$\text{b) forward bending value: } \frac{dM_y}{dt} \leq 220 \text{ N} \cdot \text{m/s} \quad (2)$$

$$\text{c) lateral bending: } \frac{dM_x}{dt} \leq 50 \text{ N} \cdot \text{m/s} \quad (3)$$

where

M is the torque in the x , y or z direction in newton metres;

t is the time of load application in seconds.

6.4 Accuracy of measurement

The measurement error of the value in torsion and in forward bending shall be no more than $\pm 2\%$.

The test equipment shall be designed to allow application of a torque (see Table 1) with a force applied at the upper part of the 1 m shaft connected to the artificial leg (see Figure 2).

Table 1 — Direction and torque

Direction	Type A	Type C
$\pm M_z$	150 N·m	100 N·m
$\pm M_y$	550 N·m	300 N·m
$\pm M_x$	300 N·m	150 N·m


6.5 Fatigue test

Test one snowboard binding with 50 000 sinusoidal load cycles at a frequency of 1 Hz (maximum) in the $\pm M_y$ direction, see Figure 3.

The test torque is $\pm 100 \text{ N} \cdot \text{m}$ for adults and $\pm (66 \pm 3,3 \text{ N} \cdot \text{m})$ for children.

Mount the binding on a steel plate of at least 10 mm thickness. Apply the torque through a test sole in accordance with ISO 9838.

Dimensions in millimetres

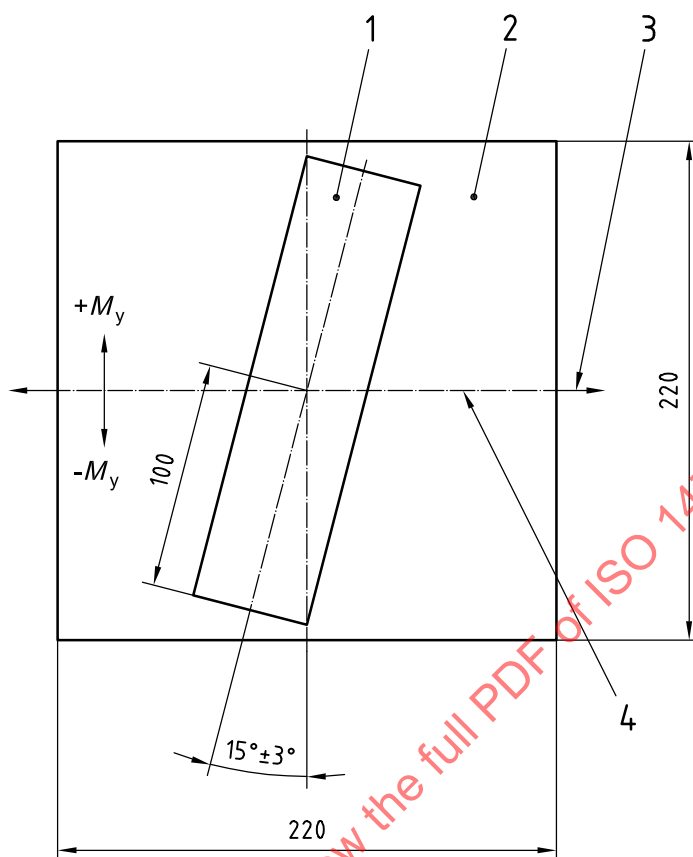**Key**

- 1 test sample
- 2 steel plate, thickness ≥ 10 mm
- 3 test torque $\pm M_y$
- 4 torque axis

Figure 3 — Fatigue test**6.6 Mechanical testing****6.6.1 Binding**

Carry out the test with the same snowboard binding that had been used for the fatigue test (6.5).

Mount the snowboard binding on a steel plate of 10 mm thickness.

After the binding and mounting plate have been preconditioned [0,5 h (1,5 h when using the artificial leg)] at $-20\text{ }^{\circ}\text{C}$, apply a torque in accordance with Table 1 in both directions, with a cold test sole at $-20\text{ }^{\circ}\text{C}$.

After the test the binding shall meet the requirements given in 5.1.

6.6.2 Retaining leash

Test the retaining leash (binding strap) in accordance with ISO 11087:2004 Annex A.