

---

---

**Road vehicles — Communication  
between vehicle and external equipment  
for emissions-related diagnostics —**

**Part 5:  
Emissions-related diagnostic services**

*Véhicules routiers — Communications entre un véhicule et un  
équipement externe pour le diagnostic relatif aux émissions —*

*Partie 5: Services de diagnostic relatif aux émissions*



STANDARDSISO.COM : Click to view the full PDF of ISO 15031-5:2011



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

|                                                                                                                                       |     |
|---------------------------------------------------------------------------------------------------------------------------------------|-----|
| Foreword .....                                                                                                                        | iv  |
| Introduction.....                                                                                                                     | v   |
| 1 Scope .....                                                                                                                         | 1   |
| 2 Normative references .....                                                                                                          | 2   |
| 3 Terms, definitions and abbreviated terms .....                                                                                      | 3   |
| 3.1 Terms and definitions .....                                                                                                       | 3   |
| 3.2 Abbreviated terms .....                                                                                                           | 5   |
| 4 Conventions .....                                                                                                                   | 6   |
| 5 Document overview .....                                                                                                             | 6   |
| 6 Technical requirements .....                                                                                                        | 6   |
| 6.1 General requirements .....                                                                                                        | 6   |
| 6.2 Diagnostic service requirements .....                                                                                             | 7   |
| 6.3 Diagnostic message format .....                                                                                                   | 34  |
| 6.4 Byte Order Convention .....                                                                                                       | 38  |
| 6.5 Allowance for expansion and enhanced diagnostic services .....                                                                    | 38  |
| 6.6 Definition of PIDs for services 0x01 and 0x02 .....                                                                               | 39  |
| 6.7 Format of data to be displayed .....                                                                                              | 39  |
| 7 Diagnostic service definition for ISO 9141-2, ISO 14230-4, and SAE J1850 .....                                                      | 39  |
| 7.1 Service 0x01 — Request current powertrain diagnostic data .....                                                                   | 39  |
| 7.2 Service 0x02 — Request powertrain freeze frame data .....                                                                         | 44  |
| 7.3 Service 0x03 — Request emission-related diagnostic trouble codes .....                                                            | 48  |
| 7.4 Service 0x04 — Clear/Reset emission-related diagnostic information .....                                                          | 53  |
| 7.5 Service 0x05 — Request oxygen sensor monitoring test results .....                                                                | 55  |
| 7.6 Service 0x06 — Request On-board monitoring test results for Specific monitored systems .....                                      | 60  |
| 7.7 Service 0x07 — Request emission-related diagnostic trouble codes detected during<br>current or last completed driving cycle ..... | 65  |
| 7.8 Service 0x08 — Request control of on-board system, test or component .....                                                        | 66  |
| 7.9 Service 0x09 — Request vehicle information .....                                                                                  | 69  |
| 8 Diagnostic service definition for ISO 15765-4 .....                                                                                 | 83  |
| 8.1 Service 0x01 — Request current powertrain diagnostic data .....                                                                   | 83  |
| 8.2 Service 0x02 — Request powertrain freeze frame data .....                                                                         | 89  |
| 8.3 Service 0x03 — Request emission-related diagnostic trouble codes .....                                                            | 95  |
| 8.4 Service 0x04 — Clear/Reset emission-related diagnostic information .....                                                          | 98  |
| 8.5 Service 0x05 — Request oxygen sensor monitoring test results .....                                                                | 100 |
| 8.6 Service 0x06 — Request on-board monitoring test results for specific monitored systems .....                                      | 100 |
| 8.7 Service 0x07 — Request emission-related diagnostic trouble codes detected during<br>current or last completed driving cycle ..... | 110 |
| 8.8 Service 0x08 — Request control of on-board system, test or component .....                                                        | 111 |
| 8.9 Service 0x09 — Request vehicle information .....                                                                                  | 115 |
| 8.10 Service 0x0A — Request emission-related diagnostic trouble codes with permanent<br>status .....                                  | 127 |
| Bibliography .....                                                                                                                    | 129 |

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 15031-5 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

This second edition cancels and replaces the first edition (ISO 15031-5:2006), which has been technically revised.

This part of ISO 15031 is technically equivalent to SAE J1979:2010, with the addition of new capabilities required by revised regulations from the California Air Resources Board and revised regulations from the European Commission.

ISO 15031 consists of the following parts, under the general title *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics*:

- *Part 1: General information and use case definition*
- *Part 2: Guidance on terms, definitions, abbreviations and acronyms*
- *Part 3: Diagnostic connector and related electrical circuits, specification and use*
- *Part 4: External test equipment*
- *Part 5: Emissions-related diagnostic services*
- *Part 6: Diagnostic trouble code definitions*
- *Part 7: Data link security*

## Introduction

### 0.1 Overview

ISO 15031 consists of a number of parts which, taken together, provide a coherent self-consistent set of specifications to facilitate emissions-related diagnostics. ISO 15031-1 provides an introduction to the series of International Standards. Parts 2 through 7 are based on SAE recommended practices. This part of ISO 15031 is based on SAE J1979.

This document set includes the communication between the vehicle's On-Board Diagnostic (OBD) systems and test equipment implemented across vehicles within the scope of the legislated emissions-related OBD.

To achieve this, it is based on the Open Systems Interconnection (OSI) Basic Reference Model in accordance with ISO/IEC 7498-1 and ISO/IEC 10731, which structures communication systems into seven layers. When mapped on this model, the services specified by ISO 15031 are broken into the following layers in accordance with Table 1:

- diagnostic services (layer 7), specified in
  - this part of ISO 15031,
  - ISO 27145-3 (WWH-OBD),
- presentation layer (layer 6), specified in
  - ISO 15031-2, SAE J1930-DA,
  - this part of ISO 15031, SAE J1979-DA,
  - ISO 15031-6, SAE J2012-DA,
  - ISO 27145-2, SAE J2012-DA,
- session layer services (layer 5), specified in
  - ISO 14229-2 support ISO 15765-4 DoCAN and ISO 14230-4 DoK-Line protocols,
  - ISO 14229-2 is not applicable to the SAE J1850 and ISO 9141-2 protocols,
- transport layer services (layer 4), specified in
  - ISO 15765-2,
  - SAE J1850 defined in this part of ISO 15031,
  - ISO 9141-2 defined in this part of ISO 15031,
  - ISO 14230-4, defined in this part of ISO 15031,

- network layer services (layer 3), specified in:
  - ISO 15765-2,
  - SAE J1850 defined in this part of ISO 15031,
  - ISO 9141-2 defined in this part of ISO 15031,
  - ISO 14230-4 defined in this part of ISO 15031,
- data link layer (layer 2), specified in:
  - ISO 15765-4, ISO 11898-1, and ISO 11898-2,
  - SAE J1850,
  - ISO 9141-2,
  - ISO 14230-2,
- physical layer (layer 1), specified in:
  - ISO 15765-4, ISO 11898-1, and ISO 11898-2,
  - SAE J1850,
  - ISO 9141-2,
  - ISO 14230-1.

**Table 1 — Legislated emissions-related OBD/WWH<sup>1)</sup>-OBD diagnostic specifications applicable to the OSI layers**

| Applicability                                             | OSI 7 layers           | Emissions-related OBD communication requirements |             |                | Emissions-related WWH-OBD communication requirements |             |             |
|-----------------------------------------------------------|------------------------|--------------------------------------------------|-------------|----------------|------------------------------------------------------|-------------|-------------|
| Seven layer according to ISO/IEC 7498-1 and ISO/IEC 10731 | Application (layer 7)  | ISO 15031-5                                      |             |                | ISO 27145-3                                          |             |             |
|                                                           | Presentation (layer 6) | ISO 15031-2, ISO 15031-5, ISO 15031-6            |             |                | ISO 27145-2                                          |             |             |
|                                                           |                        | SAE J1930-DA/SAE J1979-DA/SAE J2012-DA           |             |                | SAE J2012-DA                                         |             |             |
|                                                           | Session (layer 5)      | ISO 14229-2                                      |             | Not Applicable |                                                      | ISO 14229-2 |             |
|                                                           | Transport (layer 4)    | ISO 15765-2                                      | ISO 15765-4 | ISO 15031-5    |                                                      |             | ISO 14230-4 |
|                                                           | Network (layer 3)      |                                                  |             |                |                                                      |             |             |
|                                                           | Data link (layer 2)    | ISO 11898-1<br>ISO 11898-2                       |             | SAE J1850      | ISO 9141-2                                           | ISO 14230-2 |             |
|                                                           | Physical (layer 1)     |                                                  |             |                |                                                      | ISO 14230-1 |             |


1) World-Wide Harmonized.

## 0.2 SAE document reference concept

ISO 15031 references several SAE documents which contain all terms, data and DTC (diagnostic trouble code) definitions. This is illustrated in Figure 1.

Additional information on the content of the referenced documents is given below:

- SAE J1930: the document is concerned with a procedure for naming objects and systems and with the set of words from which names are built. It references SAE J1930-DA which contains all standardized naming objects, terms and abbreviations.
- SAE J1979: the document is concerned with the definition of emissions-related diagnostic services (diagnostic test modes). It references SAE J1979-DA which contains all standardized data items such as PIDs, Test IDs, Monitor IDs and INFOTYPE IDs.
- SAE J2012: the document is concerned with the procedure for defining emissions-related DTCs. It references SAE J2012-DA which contains all standardized data items such as DTCs and FTBs (failure type bytes).

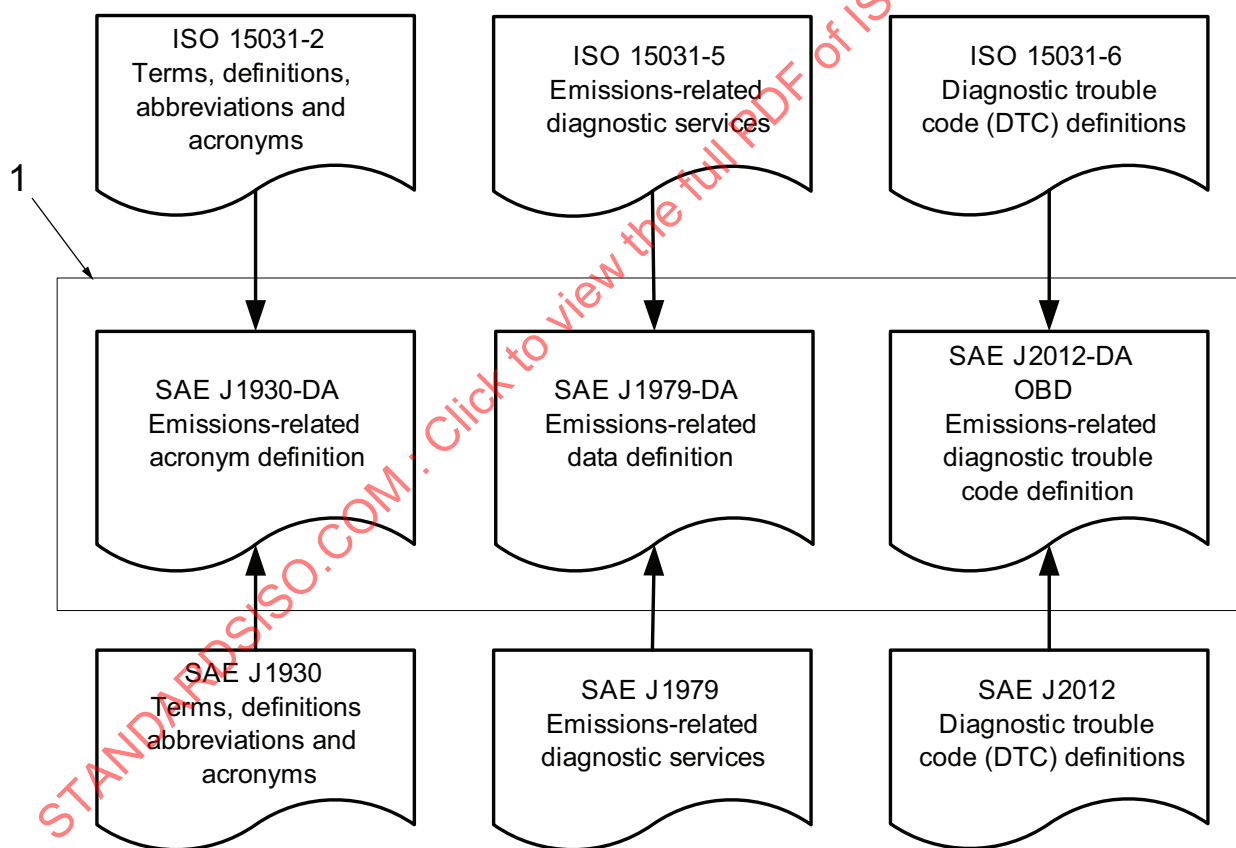

### Key

- 1 SAE Digital Annexes

**Figure 1 — SAE Digital Annex document reference**

OBD regulations require passenger cars, and light, medium and heavy duty trucks, to support a minimum set of diagnostic information to external (off-board) “generic” test equipment.

### 0.3 SAE J1979-DA (OBD) Digital Annex

This part of ISO 15031 references SAE J1979-DA. SAE J1979-DA is concerned with the definition of:

- Parameter Identifiers (PIDs),
- Test Identifiers (TIDs),
- OBD Monitor Identifiers (OBDMIDs),
- Unit and Scaling Identifiers (UASIDs), and
- INFOTYPEs (INFOTYPEs).

### 0.4 SAE Digital Annex revision procedure

New emissions-related regulatory requirements drive new in-vehicle technology to lower emissions. New technology related OBD monitor data and DTCs need to be standardized to support the external (off-board) “generic” test equipment. All relevant information is proposed by the automotive industry represented by members of the appropriate SAE task force.

The revision request form and instructions for updating the registers to this part of ISO 15031 can be obtained on the Registration Authority's website at:

<http://www.sae.org/servlets/works/committeeHome.do?comtID=TEVDS14>

The column titled “Resources” shows a document with the title: J1979-DA\_Revision\_Request\_Form.doc. Double click on the name and you will be asked to download the document with the file name:

SAE\_J1979-DA\_Revision\_Request\_Form.doc

Fill out the revision request form with your request.

Please send an e-mail with the completed revision request form as an attachment to:

SAE Headquarters  
755 West Big Beaver Road  
Suite 1600  
Troy, MI 48084-4093, USA  
Fax: +1 (248) 273-2494  
Email: [saej1979@sae.org](mailto:saej1979@sae.org)

# Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics —

## Part 5: Emissions-related diagnostic services

### 1 Scope

This part of ISO 15031 is intended to satisfy the data reporting requirements of On-Board Diagnostic (OBD) regulations in the United States and Europe, and any other region that may adopt similar requirements in the future. This part of ISO 15031 specifies:

- a) message formats for request and response messages,
- b) timing requirements between request messages from external test equipment and response messages from vehicles, and between those messages and subsequent request messages,
- c) behaviour of both the vehicle and external test equipment if data is not available,
- d) a set of diagnostic services, with corresponding content of request and response messages, to satisfy OBD regulations.

This part of ISO 15031 includes capabilities required to satisfy OBD requirements for multiple regions, model years, engine types, and vehicle types. Those regulations are not yet final for some regions, and are expected to change in the future. This part of ISO 15031 makes no attempt to interpret the regulations and does not include applicability of the included diagnostic services and data parameters for various vehicle applications. The user of this part of ISO 15031 is responsible for verifying the applicability of each clause of this part of ISO 15031 for a specific vehicle, engine, model year and region.

This part of ISO 15031 specifies diagnostic services and functionally addressed request/response messages required to be supported by motor vehicles and external test equipment for diagnostic purposes which pertain to motor vehicle emission-related data. Any external test equipment meeting the requirements of ISO 15031-4 use these messages to retrieve emissions-related information from the vehicle.

Each clause in this part of ISO 15031 which specifies additional details to existing sections of ISO 9141-2, ISO 14230-4, SAE J1850, and ISO 15765-4 supersede those specifications.

This part of ISO 15031 references SAE J1979-DA (Digital Annex), which includes all definitions of PIDs, OBDMIDs, TIDs and INFOTYPES.

This part of ISO 15031 provides the mechanism to satisfy the requirements included in the country-specific regulations and not all capabilities included in this part of ISO 15031 are required by the country-specific regulations. This part of ISO 15031 is not considered a final authority for interpretation of the regulations. Therefore readers should determine the applicability of capabilities defined in this part of ISO 15031 for their own specific needs.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 7498-1, *Information technology — Open Systems Interconnection — Basic Reference Model: The Basic Model*

ISO/IEC 10731, *Information technology — Open Systems Interconnection — Basic Reference Model — Conventions for the definition of OSI services*

ISO 9141-2:1994, *Road vehicles — Diagnostic systems — Part 2: CARB requirements for interchange of digital information*

ISO 14229-2<sup>2)</sup>, *Road vehicles — Unified diagnostic services (UDS) — Part 2: Session layer services*

ISO 14230-2, *Road vehicles — Diagnostic systems — Keyword Protocol 2000 — Part 2: Data link layer*

ISO 14230-4:2000, *Road vehicles — Diagnostic systems — Keyword Protocol 2000 — Part 4: Requirements for emission-related systems*

ISO 15765-2, *Road vehicles — Diagnostics on Controller Area Networks (CAN) — Part 2: Network layer services*

ISO 15765-4, *Road vehicles — Diagnostics on Controller Area Networks (CAN) — Part 4: Requirements for emissions-related systems*

ISO 15031-1, *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics — Part 1: General information and use case definition*

ISO 15031-2, *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics — Part 2: Guidance on terms, definitions, abbreviations, and acronyms*

ISO 15031-3, *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics — Part 3: Diagnostic connector and related electrical circuits, specification and use*

ISO 15031-4, *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics — Part 4: External test equipment*

ISO 15031-6, *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics — Part 6: Diagnostic trouble code definitions*

SAE J1930-DA, *Digital Annex of Electrical/Electronic Systems Diagnostic Terms, Definitions, Abbreviations, and Acronyms*

SAE J1979-DA, *Digital Annex of E/E Diagnostic Test Modes*

SAE J2012-DA, *Digital Annex of Diagnostic Trouble Code Definitions and Failure Type Byte Definitions*

---

2) To be published.

### 3 Terms, definitions and abbreviated terms

#### 3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 14229-2, ISO 14230-2, ISO 15031-2 and ISO 15765-2 and the following apply.

##### 3.1.1

##### **absolute throttle position sensor**

value intended to represent the throttle opening

NOTE For systems where the output is proportional to the input voltage, this value is the percent of maximum input signal. For systems where the output is inversely proportional to the input voltage, this value is 100 % minus the percent of maximum input signal. Throttle position at idle usually indicates greater than 0 %, and throttle position at wide open throttle usually indicates less than 100 %.

##### 3.1.2

##### **bank**

specific group of cylinders sharing a common control sensor

NOTE 1 Bank 1 always contains cylinder number 1 and bank 2 the opposite bank.

NOTE 2 If there is only one bank, the DTCs for bank #1 DTCs are used, and the word bank may be omitted. With a single "bank" system utilizing multiple sensors, bank #1 DTCs are used identifying the sensors as #1, #2, and #3 in order as they move further away from the cylinder.

##### 3.1.3

##### **base fuel schedule**

fuel calibration schedule programmed into the Powertrain Control Module or PROM when manufactured or when updated by an off-board source, prior to any learned on-board correction

##### 3.1.4

##### **calculated load value**

(spark ignition vehicles) typically an indication of the current airflow divided by peak airflow at wide open throttle as a function of rpm, where airflow is corrected for altitude and ambient temperature

NOTE 1 Both spark ignition and compression ignition vehicles can use an alternate definition that substitutes engine torque in place of airflow in the calculation.

NOTE 2 This definition provides a number (without unit) and provides the service technician with an indication of the percent engine capacity that is being used.

##### 3.1.5

##### **client**

function that is part of the tester and that makes use of the diagnostic services

NOTE A tester normally makes use of other functions such as database management, specific interpretation, and man-machine interface.

##### 3.1.6

##### **continuous monitoring**

sampling at a rate no fewer than two samples per second

NOTE If, for control purposes, a computer input is sampled less frequently, the signal of the component may instead be evaluated each time sampling occurs.

### 3.1.7

#### **convention**

##### **Cvt**

column integrated in each message table which marks each parameter included

NOTE The following conventions are used: C = Conditional: the parameter marked "C" in a request/response message is present only under a condition specified in the bottom row of the message table. M = Mandatory: the parameter marked "M" in a request/response message table is always present. U = User (optional): the parameter marked "U" in a request/response message table is supplied depending on dynamic usage by the manufacturer. The convention recommends a mnemonic, which might be used for implementation. In no case is the specified mnemonic ever a mandatory requirement for any implementation.

### 3.1.8

#### **electronic control unit**

##### **ECU**

generic term for any electronic control unit

### 3.1.9

#### **emissions-related DTC**

DTC which is set when a malfunction causes vehicle emissions to exceed legislated emission thresholds or is otherwise required to be set as specified by on-board diagnostics legislation (e.g. disables another part of the diagnostic system)

NOTE Normally, the malfunction indicator (MI) is illuminated at the same time as the emissions-related DTC is set. The determination of which DTCs are emissions-related is made by the vehicle manufacturer for each vehicle, as specified by on-board diagnostic legislation.

### 3.1.10

#### **fuel trim**

##### **FT**

feedback adjustments to the base fuel schedule

NOTE Short-term fuel trim refers to dynamic or instantaneous adjustments. Long-term fuel trim refers to much more gradual adjustments to the fuel calibration schedule than short-term trim adjustments. These long-term adjustments compensate for vehicle differences and gradual changes that occur over time.

### 3.1.11

#### **negative numbers**

signed binary, the most significant bit (MSB) of the binary number used to indicate positive (0) / negative (1)

NOTE 1 2s complement: negative numbers are represented by complementing the binary number and then adding 1.

EXAMPLE      $-0,99 = 8001 \text{ hex} = 1000\ 0000\ 0000\ 0001 \text{ binary}$   
                  $0 = 0x0000 = 0000\ 0000\ 0000\ 0000 \text{ binary}$   
                  $+0,99 = 0x7FFF = 0111\ 1111\ 1111\ 1111 \text{ binary}$

NOTE 2  $(-0,99) + (+0,99) = 0$ .

### 3.1.12

#### **number**

expressed by this symbol "#"

### 3.1.13

#### **P2, P3 timing parameter**

application timing parameters for the ECU(s) and the external test equipment

**3.1.14****P2<sub>CAN\_min</sub> timing parameter**

CAN application timing parameter with the minimum value for the ECU(s) and the external test equipment to start the response message

**3.1.15****P2<sub>CAN\_max</sub> timing parameter**

CAN application timing parameter with the maximum value for the ECU(s) and the external test equipment to indicate a response message

**3.1.16****P2<sub>reload</sub> timing parameter**

CAN application timing parameter with the maximum value (P2<sub>CAN\_max</sub>) for external test equipment only

**3.1.17****server**

function that is part of an ECU that provides the diagnostic services

NOTE This part of ISO 15031 differentiates between the server, i.e. the function, and the electronic control unit so that it remains independent from the implementation.

**3.1.18****service**

information exchange initiated by a client (external test equipment) in order to require diagnostic information from a server (ECU) and/or to modify its behavior for diagnostic purposes

NOTE This is also the equivalent of test mode or mode.

**3.2 Abbreviated terms**

|            |                                     |
|------------|-------------------------------------|
| .con       | confirmation                        |
| .ind       | indication                          |
| .req       | request                             |
| CRC        | cyclic redundancy check             |
| CVN        | calibration verification number     |
| DTC        | diagnostic trouble code             |
| ECM        | engine control module               |
| ERR        | error detection byte                |
| EWMA       | exponential weighted moving average |
| FF         | first frame                         |
| ISR        | interrupt service routine           |
| LSB        | least significant bit               |
| MI         | malfunction indicator               |
| MIL        | malfunction indicator light         |
| MSB        | most significant bit                |
| N_PDU      | network protocol data unit          |
| N/A        | not applicable                      |
| NRC        | negative response code              |
| NVRAM      | non-volatile memory                 |
| OBDMID OBD | monitor identifier                  |

|            |                                                 |
|------------|-------------------------------------------------|
| PID        | parameter identifier                            |
| PCI        | protocol control information                    |
| RSP        | in-frame response                               |
| SF         | single frame                                    |
| SOM        | start of message                                |
| T_AE       | virtual transport interface address extension   |
| T_Data [ ] | virtual transport interface data field          |
| T_Mtype    | virtual transport interface message type        |
| T_Length   | virtual transport interface length information  |
| T_PDU      | virtual transport interface protocol data unit  |
| T_Result   | virtual transport interface result              |
| T_SA       | virtual transport interface source address      |
| T_TA       | virtual transport interface target address      |
| T_Tatype   | virtual transport interface target address type |
| TCM        | transmission control module                     |
| TID        | test identifier                                 |
| UASID      | unit and scaling identifier                     |
| VIN        | vehicle identification number                   |

## 4 Conventions

ISO 15031 is based on the conventions specified in the OSI Service Conventions (ISO/IEC 10731) as they apply for diagnostic services.

## 5 Document overview

Figure 2 illustrates the emissions-related OBD in ISO 15765-4, SAE J1850, ISO 9141-2, and ISO 14230-4. The protocol initialization identifies whether ISO 15765-4 DoCAN or SAE J1850 or ISO 14230-4 DoK-Line or ISO 9141-2 is the data link layer supported by the vehicle. ISO 15031 references the standards as an applicable data link for emissions-related OBD.

This part of ISO 15031 specifies the applicable emissions-related diagnostic services. It specifies the data record structures and references SAE J1930-DA, SAE J1979-DA and SAE J2012-DA which include all emissions-related OBD data definitions.

## 6 Technical requirements

### 6.1 General requirements

The requirements specified in this clause are necessary to ensure proper operation of both the external test equipment and the vehicle during diagnostic procedures. External test equipment, when using the messages specified, shall not affect normal operation of the emission control system.

**IMPORTANT — New emissions-related vehicle technology required the definition of new PIDs and INFOTYPES. The data parameter set for several new definitions exceed the specified limit of message length for ISO 9141-2, ISO 14230-4 and SAE J1850 protocols. It is the vehicle manufacturer's**

responsibility to implement the ISO 15765-4 DoCAN protocol in order to achieve legislative compliance of the emissions-related OBD systems in the vehicle.

## 6.2 Diagnostic service requirements

### 6.2.1 Multiple responses to a single data request

The request messages are functional messages, which means that the external test equipment will request data without knowledge of which ECU(s) on the vehicle will respond. In some vehicles, multiple ECUs may respond with the information requested. Any external test equipment requesting information shall therefore have provisions for receiving multiple responses.

**IMPORTANT — All emissions-related OBD ECUs, which at least support one of the services defined in this part of ISO 15031, shall support service 0x01 and PID 0x00. Service 0x01 with PID 0x00 is defined as the universal “initialization/keep alive/ping” message for all emissions-related OBD ECUs.**

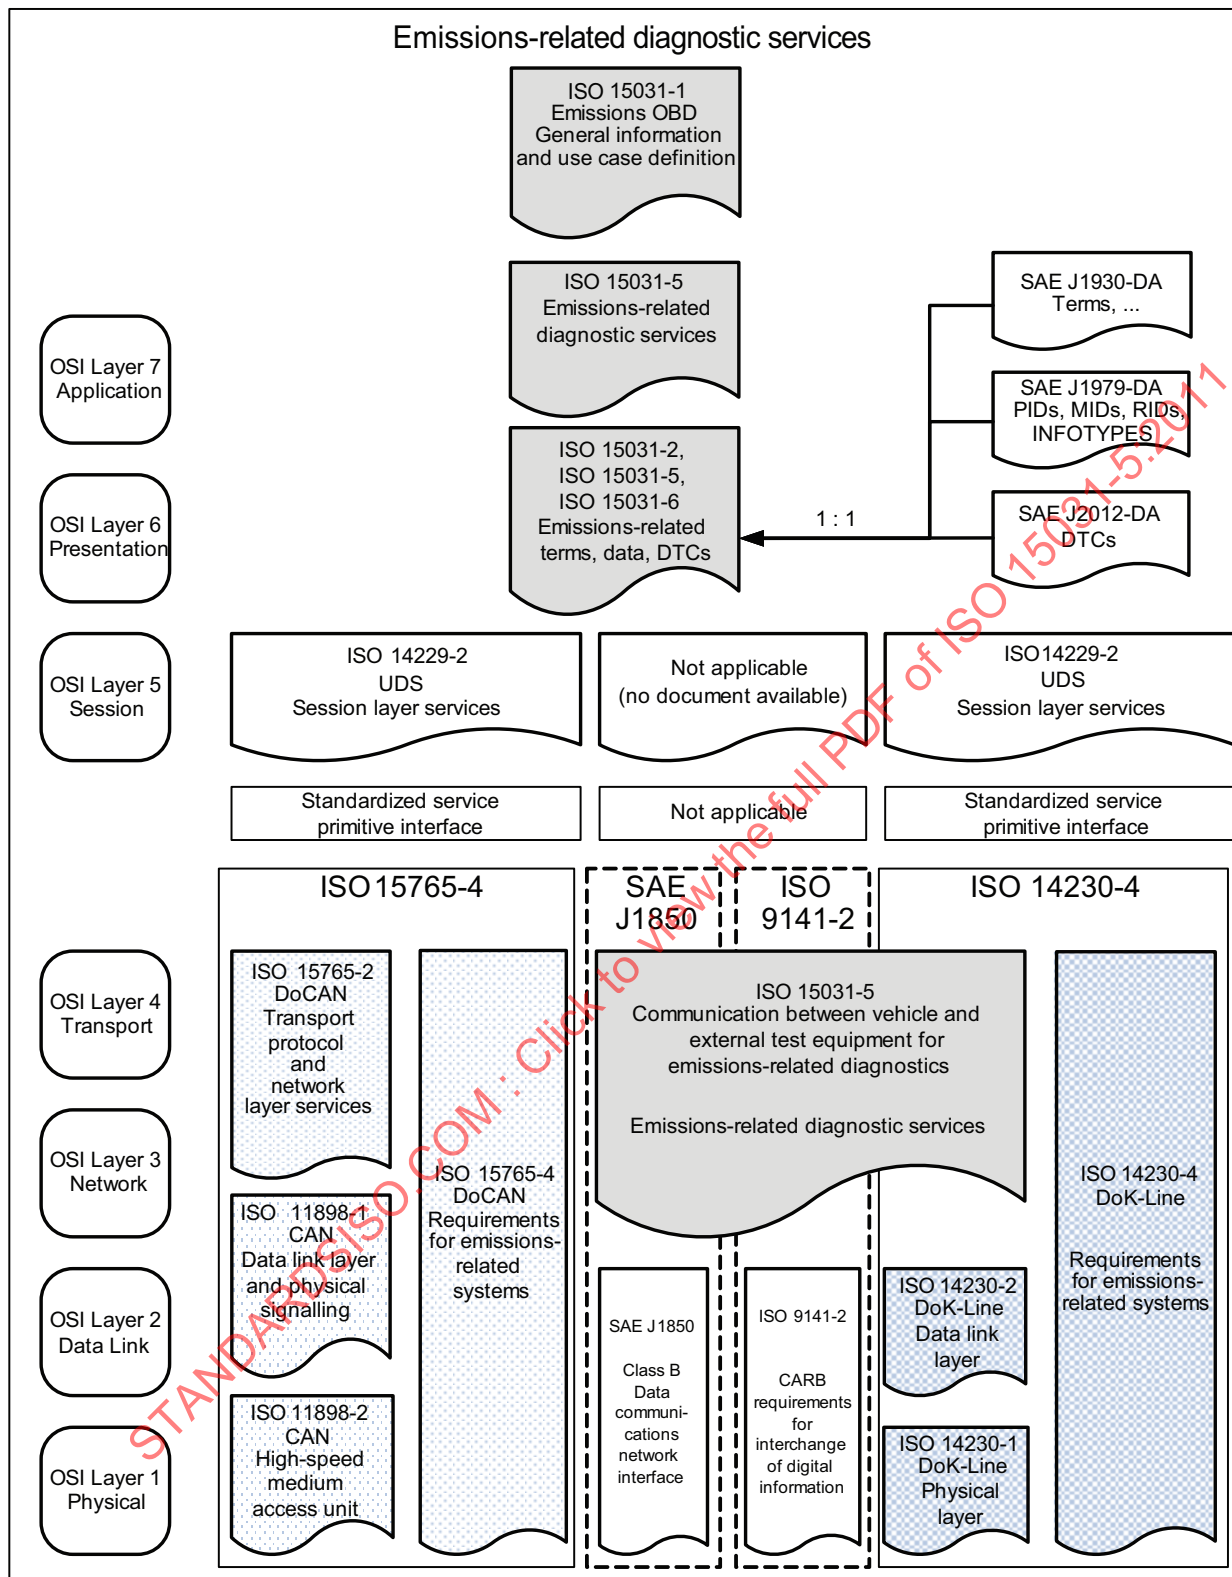


**Figure 2 — Emissions-related OBD in ISO 15765-4, SAE J1850, ISO 9141-2, and ISO 14230-4 according to OSI model**

## 6.2.2 Application timing parameter definition

### 6.2.2.1 Overview

The definition of P2 and P3 is included in this clause. A subscript is added to each timing parameter to identify the protocol:

- P2<sub>K-line</sub>, P3<sub>K-line</sub>: P2, P3 for ISO 9141-2 and ISO 14230-4 protocols
- P2<sub>J1850</sub>: P2 for SAE J1850 protocol
- P2<sub>CAN</sub>: P2 for ISO 15765-4 protocol

**IMPORTANT — The vehicle manufacturer is responsible for specifying a shorter P2 timing window than specified in this part of ISO 15031 for each emission-related server/ECU in the vehicle in order to make sure that network topology delays of the vehicle architecture are considered.**

### 6.2.2.2 Definition for ISO 9141-2

For ISO 9141-2 interfaces, data link layer response time requirements (P1, P4) are specified in ISO 9141-2.

Table 2 specifies the application timing parameter values for P2 and P3.

**Table 2 — Definition of ISO 9141-2 application timing parameter values**

| Parameter                                       | Minimum value<br>ms | Maximum value<br>ms | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------|---------------------|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| P2 <sub>K-line</sub><br>Key Bytes:<br>0x08 0x08 | 25                  | 50                  | Time between external test equipment request message and the transmission of the ECU(s) response message(s). Each OBD ECU shall start sending its response message within P2 <sub>K-line</sub> after the request message has been correctly received. Subsequent response messages shall also be transmitted within P2 <sub>K-line</sub> of the previous response message for multiple message responses.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| P2 <sub>K-line</sub><br>Key Bytes:<br>0x94 0x94 | 0                   | 50                  | Time between external test equipment request message and the transmission of the ECU response message(s). The OBD ECU shall start sending its response message within P2 <sub>K-line</sub> after the request message has been correctly received. Subsequent response messages shall also be transmitted within P2 <sub>K-line</sub> of the previous response message for multiple message responses.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| P3 <sub>K-line</sub>                            | 55                  | 5000                | Time between the end of an ECU(s) successful transmission of response message(s) and start of new external test equipment request message. The external test equipment may send a new request message if all response messages related to the previously sent request message have been received and if P3 <sub>K-line</sub> minimum time has expired.<br><br>ECU implementation guideline: TX (transmit) and RX (receive) lines are connected. Each transmitted byte is read back by the receiver in the ECU. Upon the reception of a received byte, e.g. last byte of a request message (checksum) from the tester, the ECU shall reset the P3 timer value to zero. If the ECU supports the request message, it will start transmitting the response message within the P2 timing window. Each transmitted byte will cause the P3 timer value to be reset. If the ECU does not support the request and does not send a response message, then in a single OBD ECU system the P3 is started after the last byte received of the request message. In a multiple OBD ECU system a response message by one or more ECUs shall cause the P3 timer value to be reset in all ECUs including any ECU not supporting the request message. |

### 6.2.2.3 Definition for ISO 14230-4

For ISO 14230-4 interfaces, data link layer response time requirements are specified in ISO 14230-4.

Table 3 specifies the application timing parameter values for P2 and P3.

**Table 3 — Definitions of ISO 14230-4 application timing parameter values**

| Parameter            | Minimum value<br>ms | Maximum value<br>ms | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------|---------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| P2 <sub>K-line</sub> | 25                  | 50                  | Time between external test equipment request message and the transmission of the ECU(s) response message(s). Each OBD ECU shall start sending its response message within P2 <sub>K-line</sub> after the request message has been correctly received. Subsequent response messages shall also be transmitted within P2 <sub>K-line</sub> of the previous response message for multiple message responses.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| P3 <sub>K-line</sub> | 55                  | 5000                | Time between the end of an ECU(s) successful transmission of response message(s) and start of new external test equipment request message. The external test equipment may send a new request message if all response messages related to the previously sent request message have been received and if P3 <sub>K-line</sub> minimum time has expired.<br><br>ECU implementation guideline: TX (transmit) and RX (receive) line are connected. Each transmitted byte is read back by the receiver in the ECU. Upon the reception of a received byte, e.g. last byte of a request message (checksum) from the tester, the ECU shall reset the P3 timer value to zero. If the ECU supports the request message, it will start transmitting the response message within the P2 timing window. Each transmitted byte will cause the P3 timer value to be reset. If the ECU does not support the request and does not send a response message, then in a single OBD ECU system, the P3 is started with the last byte received of the request message. In a multiple OBD ECU system, a response message by any one or more ECUs shall cause the P3 timer value to be reset in all ECUs including any ECU not supporting the request message. |

### 6.2.2.4 Data link layer interface adaptation

#### 6.2.2.4.1 General information

This part of ISO 15031 makes use of the data link layer services defined in ISO 14230-2 for the transmission and reception of diagnostic messages. This section defines the mapping of the virtual data link PDU (T\_PDU) in ISO 14229-2 onto the K-Line data link layer PDU (DL\_PDU) in ISO 14230-2.

**NOTE** The data link layer services are used to perform the application layer and diagnostic session management timing.

#### 6.2.2.4.2 Mapping of data link independent service primitives onto K-Line data link dependent service primitives

Table 4 specifies the mapping interface between the ISO 14230-2 DoK-Line Part 2: Data link layer services and the ISO 14229-2 UDS Part 2.

**Table 4 — Mapping of T\_PDU service primitives onto DL\_PDU service primitives**

| transport/network layer service primitives<br>(data link independent according to ISO 14229-2) | DoK-Line data link layer service primitives<br>(data link dependent according to ISO 14230-2) |
|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| T_Data.indication                                                                              | DL_Data.indication                                                                            |
| T_DataSOM.indication                                                                           | DL_DataFB.indication                                                                          |
| T_Data.confirm                                                                                 | DL_Data.confirm                                                                               |
| T_Data.request                                                                                 | DL_Data.request                                                                               |

#### 6.2.2.4.3 Mapping of T\_PDU onto DL\_PDU for message transmission

The parameters of the application layer protocol data unit defined to request the transmission of a diagnostic service request/response are mapped in accordance with Table 5 onto the parameters of the data link layer protocol data unit for the transmission of a message in the client/server.

**Table 5 — Mapping of T\_PDU parameter onto DL\_PDU parameter**


| <b>T_PDU parameter</b><br>(data link independent according to ISO 14229-2) | <b>DL_PDU parameter</b><br>(DoK-Line data link dependent according to ISO 14230-2) |
|----------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| T_Mtype                                                                    | N/A (always set to "diagnostics")                                                  |
| T_SA                                                                       | DL_SA                                                                              |
| T_TA                                                                       | DL_TA                                                                              |
| T_TAtype                                                                   | DL_TAtype                                                                          |
| T_AE                                                                       | N/A                                                                                |
| T_Data [ ]                                                                 | <MessageData>                                                                      |
| T_Length                                                                   | <Length>                                                                           |
| T_Result                                                                   | <DL_Result>                                                                        |

#### 6.2.2.5 Implementation guidance example for ISO 9141-2 and ISO 14230-4 protocols

This subclause provides an implementation example for client/external test equipment and server/ECU. It is assumed that the client (external test equipment) communicates to a vehicle with two (2) emission-related OBD servers (ECUs). The client requests a CVN, which is only supported by server #1 (ECU#1) with two (2) response messages. Server #2 (ECU#2) is not flash programmable. Figure 3 graphically depicts the timing handling in the client and two (2) servers for a functionally addressed request message. A description following Figure 3 references the points marked in the figure.

From a server point of view, there is no difference in the timing handling compared to a physically addressed request message. The server shall reset the  $P3_{K-line}$  timer value on each received byte regardless of whether the byte is part of a request message or a response message from any other server or an echo from its transmit line. There are several methods in which a server can implement the timing handling. The implementation of timing parameters is not part of this part of ISO 15031 but has an important system supplier responsibility. Some general server timing parameter implementation guidelines are described in this subclause. The server time stamps each receiver interrupt event and restarts/resets the  $P3_{K-line\_server}$  timer or timing value, e.g. ISR time stamps received byte, and processing of the received information is performed outside the ISR. For simplification of the diagram, Figure 3 only shows a  $P3_{K-line\_server}$  restart after the reception of the first byte and last byte (checksum) of a received message. The  $P3_{K-line\_server}$  restart is required on each received byte. The received message can be either a request message from the client or a response message from any other server connected and initialized by the 0x33 address. If the server has received a complete message, it compares the target address with the 0x33 address.

Figure 3 shows the client and two (2) initialized servers connected via K-line (either ISO 9141-2 or ISO 14230-4 protocol). The relevant events for the client and both servers are marked and described.

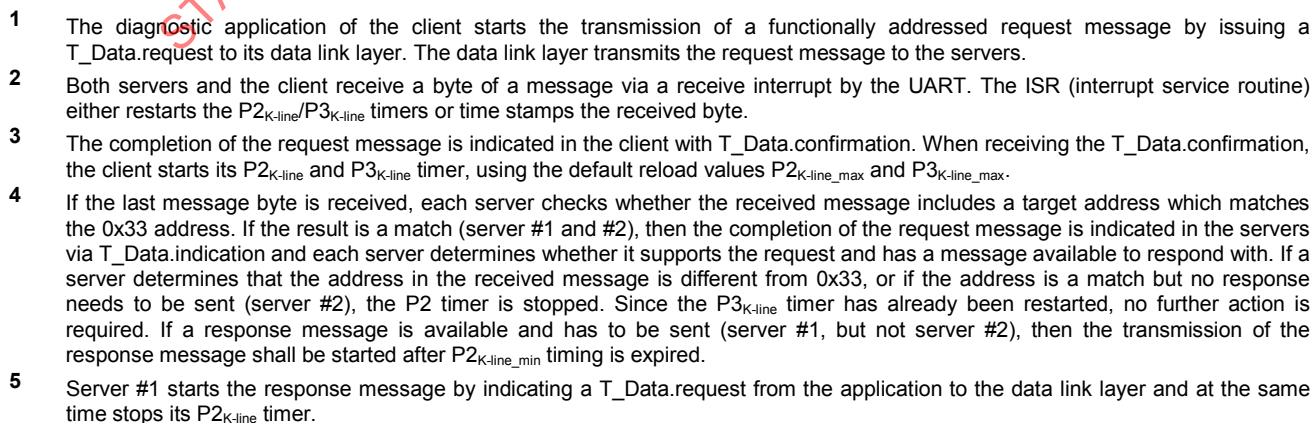

- 6 Both servers and the client receive a byte of a message via a receive interrupt by the UART. The ISR (interrupt service routine) restarts the  $P2_{K-line}/P3_{K-line}$  timers or time stamps the received byte and the client issues a  $T\_Data\_FB.indication$  to the application layer.
- 7 The completion of the response message is indicated in the client with  $T\_Data.indication$ . When receiving the  $T\_Data.indication$ , the client starts its  $P2_{K-line}$  and  $P3_{K-line}$  timer, using the default reload values  $P2_{K-line\_max}$  and  $P3_{K-line\_max}$ .
- 8 Both servers have received the last byte of a message via a receive interrupt by the UART. The ISR (interrupt service routine) either resets the  $P2_{K-line}/P3_{K-line}$  timers or time stamps the received byte. The completion of the response message (e.g. length and checksum check) is indicated in server #1 via  $T\_Data.confirmation$ . If server #1 does not want to send further response messages, it stops its  $P2$  timer. In server #2 the message is received and the  $P3_{K-line}$  timer is restarted, but no  $T\_Data.indication$  is forwarded to the application because the target address does not match the 0x33 (target address of this message is the tester address 0xF1).
- 9 The client application detects a  $P2_{K-line\_max}$  timeout, which indicates that all response messages from all servers are received.
- 10 The client application indicates that  $P3_{K-line\_min}$  is reached and that the  $P3_{K-line}$  timing window is now open to send a new request message (see 1).
- 11  $P3_{K-line\_max}$  timeout indicates that the client is required to start a new initialization prior to sending a new request message.

**Figure 3 — ISO 9141-2 and ISO 14230-4 protocol client and server timing behaviour**

#### 6.2.2.6 Definition for SAE J1850

For SAE J1850 network interfaces, the on-board systems shall respond to a request within  $P2_{J1850}$  of a request or a previous response message. With multiple response messages possible from a single request message, this allows as much time as is necessary for all ECUs to access the data link and transmit their response message(s). If there is no response message within this time period, the external test equipment can either assume no response message will be received, or if a response message has already been received, that no more response messages will be received. The application timing parameter value  $P2_{J1850}$  is specified in Table 6.

**Table 6 — Definition of SAE J1850 application timing parameter values**

| Parameter    | Minimum value<br>ms | Maximum value<br>ms | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------|---------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $P2_{J1850}$ | 0                   | 100                 | Time between external test equipment request message and the successful transmission of the ECU(s) response message(s). Each OBD ECU shall attempt to send its response message (or at least the first of multiple response messages) within $P2_{J1850}$ after the request message has been correctly received. Subsequent response messages shall also be transmitted within $P2_{J1850}$ of the previous response message for multiple message responses. |

### 6.2.2.7 Definition for ISO 15765-4

For CAN bus systems based on ISO 15765-4, the (all) responding ECU(s) of the on-board system shall start the response message to a request message within  $P2_{CAN}$ . Table 7 specifies the application timing parameter values for  $P2$ .

**Table 7 — Definition of ISO 15765-4 application timing parameter values**

| Parameter    | Minimum value<br>$P2_{CAN\_min}$<br>ms | Maximum value<br>$P2_{CAN\_max}$<br>ms | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------|----------------------------------------|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $P2_{CAN}$   | 0                                      | 50                                     | <p>This is a system-wide parameter related to diagnostic response times. Each server (ECU) is required to respond to a request between <math>P2_{CAN\_min}</math> and <math>P2_{CAN\_max}</math>.</p> <p>A client (tester) shall wait for at least <math>P2_{CAN\_max}</math> for the single-frame (SF) or first-frame (FF) of a response.</p> <p><math>P2_{CAN}</math> is the time until the first indication of a multiple-frame response message (FirstFrame). The client shall not process the response until the complete message (last ConsecutiveFrame) has been received.</p> <p>For clients (testers) which also support UDSonCAN for enhanced diagnostics, a <math>P2_{reload}</math> mechanism is required. Upon receiving the SF or FF, the client (tester) shall reload its <math>P2_{CAN}</math> timer with a value of at least <math>P2_{CAN\_max}</math> and restart the timer. Once the client's (tester's) <math>P2_{CAN}</math> timer expires without receiving a SF or FF, the client (tester) may assume no more responses are forthcoming.</p> |
| $P2^*_{CAN}$ | 0                                      | 5000                                   | <p>Time between the successful reception of a negative response message with NRC 0x78 and the next response message (positive or negative message).</p> <p>See Table 11 for which service a negative response message with NRC 0x78 shall not be used as a response message.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

NOTE The network layer timing parameters for the multiple-frame response are not shown. Network layer timing requirements for legislated diagnostic messages are specified in ISO 15765-4.

### 6.2.2.8 Transport/Network layer interface adaptation

#### 6.2.2.8.1 General information

This part of ISO 15031 makes use of the network layer services defined in ISO 15765-2 for the transmission and reception of diagnostic messages. This section defines the mapping of the virtual data link PDU ( $T\_PDU$ ) onto the independent transport/network layer protocol data units of the CAN data link specific network layer ( $N\_PDU$ ).

NOTE The transport/network layer services are used to perform the application layer and diagnostic session management timing.

### 6.2.2.8.2 Mapping of data link independent service primitives onto CAN data link dependent service primitives

Table 8 specifies the mapping interface between the ISO 15765-2 DoCAN Part 2 and the ISO 14229-2 UDS Part 2.

**Table 8 — Mapping of T\_PDU service primitives onto N\_PDU service primitives**

| <b>transport/network layer service primitives</b><br>(data link independent according to ISO 14229-2) | <b>DoCAN network layer service primitives</b><br>(data link dependent according to ISO 15765-2) |
|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| T_Data.indication                                                                                     | N_USData.indication                                                                             |
| T_DataSOM.indication                                                                                  | N_USDataFF.indication                                                                           |
| T_Data.confirm                                                                                        | N_USData.confirm                                                                                |
| T_Data.request                                                                                        | N_USData.request                                                                                |

### 6.2.2.8.3 Mapping of T\_PDU onto N\_PDU for message transmission

The parameters of the application layer protocol data unit defined to request the transmission of a diagnostic service request/response are mapped in accordance with Table 9 onto the parameters of the network layer protocol data unit for the transmission of a message in the client/server.

The network layer confirmation of the successful transmission of the message (N\_USData.con) is forwarded to the application, because it is needed in the application for starting those actions, which shall be executed immediately after the transmission of the request/response message (ECUReset, BaudrateChange, etc.).


**Table 9 — Mapping of T\_PDU parameter onto N\_PDU parameter**

| <b>T_PDU parameter</b><br>(data link independent according to ISO 14229-2) | <b>N_PDU parameter</b><br>(CAN data link dependent according to ISO 15765-2) |
|----------------------------------------------------------------------------|------------------------------------------------------------------------------|
| T_Mtype                                                                    | N_Mtype                                                                      |
| T_SA                                                                       | N_SA                                                                         |
| T_TA                                                                       | N_TA                                                                         |
| T_TAtype                                                                   | N_TAtype                                                                     |
| T_AE                                                                       | N_AE                                                                         |
| T_Data [ ]                                                                 | <MessageData>                                                                |
| T_Length                                                                   | <Length>                                                                     |
| T_Result                                                                   | <N_Result>                                                                   |

## 6.2.2.9 Implementation guidance example for ISO 15765-4 protocol

## 6.2.2.9.1 Functional OBD communication during default session

Figure 4 graphically depicts the timing handling in the client and three servers for a functionally addressed request message during the default session. A description following Figure 4 references the points marked in the figure.

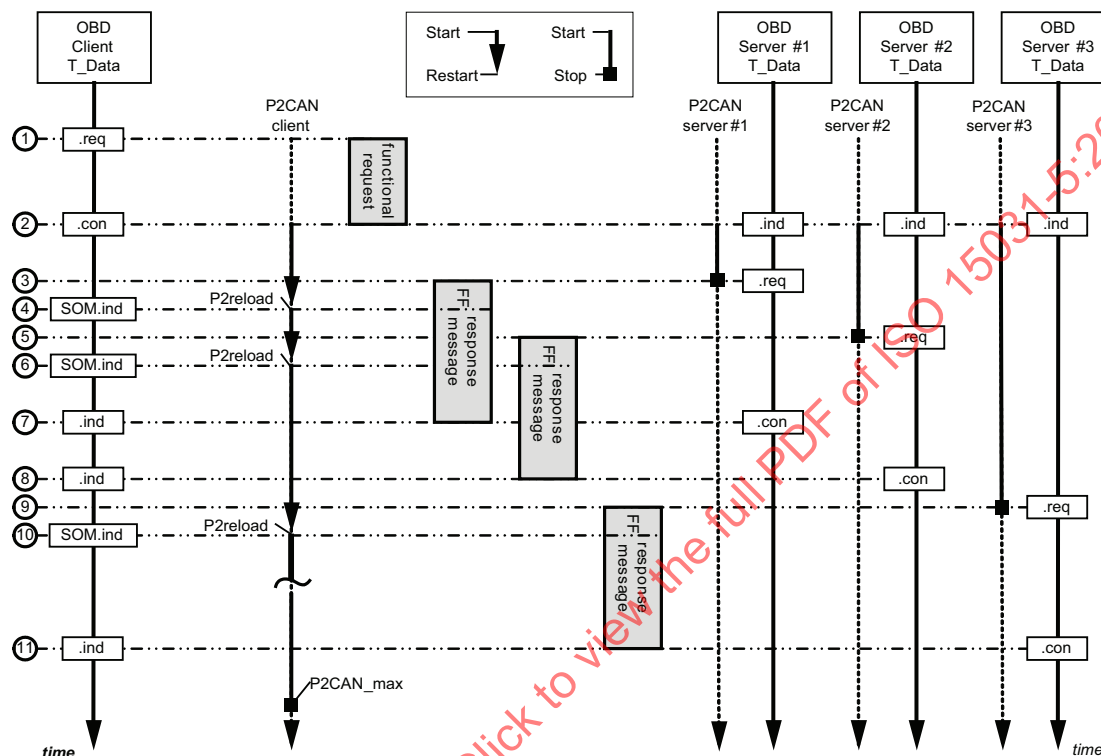


- 1 **Client T\_Data.req:** diagnostic application issues functionally addressed request message to network layer.
- 2 **All server T\_Data.ind:** network layer issues to diagnostic application the reception of a request message. All servers start the  $P2_{CAN}$  timer using the value of  $P2_{CAN} = P2_{CAN\_max}$ .  
**Client T\_Data.con:** network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its  $P2_{CAN\_Client}$  timer using the default reload value  $P2_{CAN} = P2_{CAN\_max}$ .
- 3 **Server #1 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ . The response message can be a multi-frame or single-frame response message.
- 4 **Client T\_Data.SOM.ind:** network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Reload  $P2_{CAN}$  with  $P2_{CAN\_max}$  value.
- 5 **Server #2 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ . The response message can be a multi-frame or single-frame response message.
- 6 **Client T\_Data.SOM.ind:** network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Reload  $P2_{CAN}$  with  $P2_{CAN\_max}$  value.
- 7 **Server #1 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message.
- 8 **Server #2 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message.
- 9 **Server #3 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ . The response message can be a multi-frame or single-frame response message.
- 10 **Client T\_Data.SOM.ind:** network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Reload  $P2_{CAN}$  with  $P2_{CAN\_max}$  value.
- 11 **Server #2 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message.

Figure 4 — Functional OBD communication — Default response timing

### 6.2.2.9.2 Functional OBD communication with enhanced response timing

Figure 5 illustrates the timing handling in the client and three (3) servers for a functionally addressed request message during the default session, where one server requests an enhanced response timing via a negative response message including a negative response code (NRC) 0x78. A description following Figure 5 references the points marked in the figure.

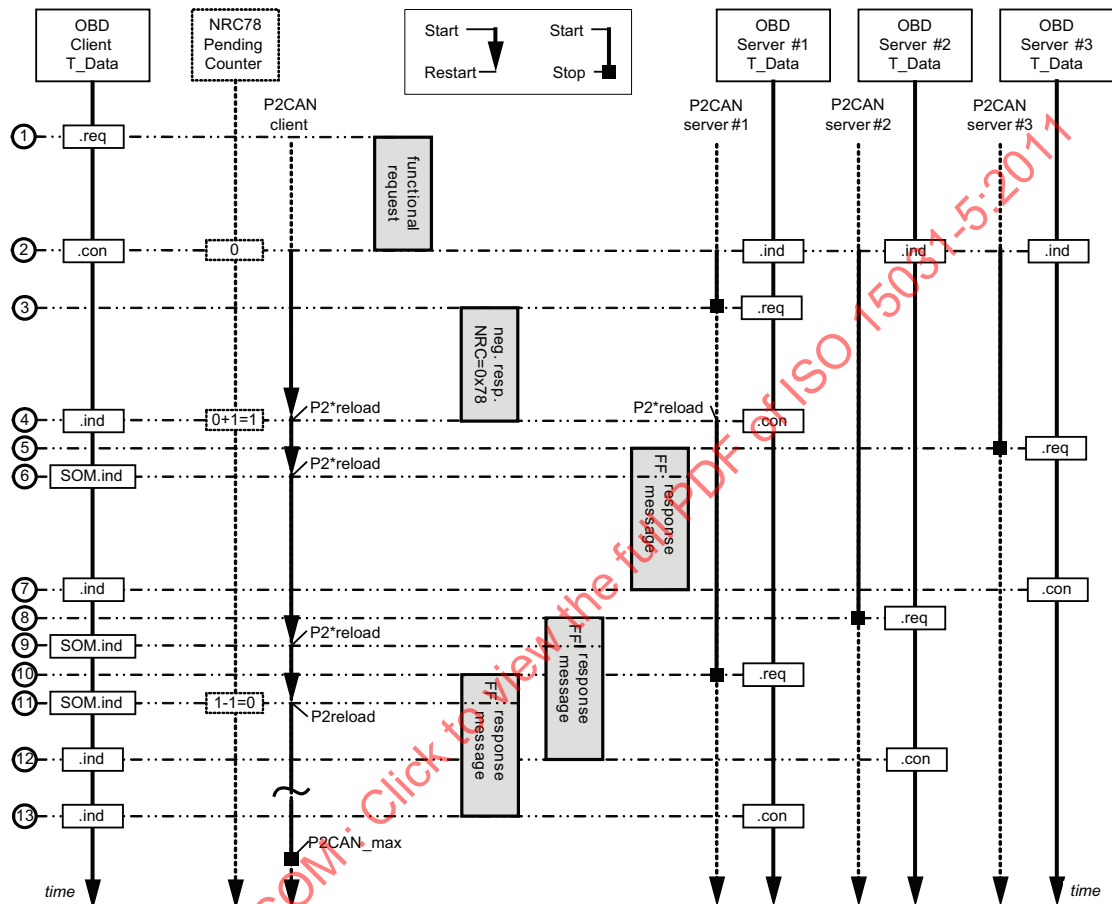

- 1 **Client T\_Data.req:** diagnostic application issues functionally addressed request message to network layer.
- 2 **All server T\_Data.ind:** network layer issues to diagnostic application the reception of a request message. All servers start the  $P2_{CAN}$  timer using the value of  $P2_{CAN} = P2_{CAN\_max}$ .  
**Client T\_Data.con:** network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its  $P2_{CAN}$  timer using the default reload value  $P2_{CAN} = P2_{CAN\_max}$ . **NRCPendingCounter** = 0.
- 3 **Server #1 T\_Data.req:** diagnostic application does not have the positive response message ready and issues negative response message with NRC = 0x78 by a T\_Data.req to the network layer within  $P2_{CAN}$ .
- 4 **Server #1 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the reception of a message. Since the received response message is a negative response message with NRC = 0x78 the **NRCPendingCounter** is incremented by 1 ( $0+1=1$ ). Reload  $P2_{CAN}$  with  $P2^*_{CAN\_max}$  value. Server#1 reloads  $P2_{CAN}$  with  $P2^*_{CAN\_max}$  value.
- 5 **Server #3 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ .
- 6 **Client T\_Data.SOM.ind:** network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Reload  $P2_{CAN}$  with  $P2^*_{CAN\_max}$  value.
- 7 **Server #3 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message.
- 8 **Server #2 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ .
- 9 **Client T\_Data.SOM.ind:** network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Client reloads  $P2_{CAN}$  with  $P2^*_{CAN\_max}$  value.

- 10 **Server #1 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ .
- 11 **Client T\_DataSOM.ind:** network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Since the received response message is a positive response message the **NRCPendingCounter** is decremented by 1 (1-1=0). Client reloads  $P2_{CAN}$  with  $P2_{CAN\_max}$  value.
- 12 **Server #2 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message.
- 13 **Server #1 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message.

Figure 5 — Functional OBD communication — Enhanced response timing

### 6.2.3 Minimum time between requests from external test equipment

#### 6.2.3.1 ISO 9141-2, ISO 14230-4 — Minimum time between requests from external test equipment

For ISO 9141-2 (K-line) interfaces, the required times between request messages are specified in ISO 9141-2.

For ISO 14230-4 (K-line) interfaces, the required times between request messages are specified in ISO 14230-4. Figure 6 shows an example of a request message followed by four (4) response messages and another request message.

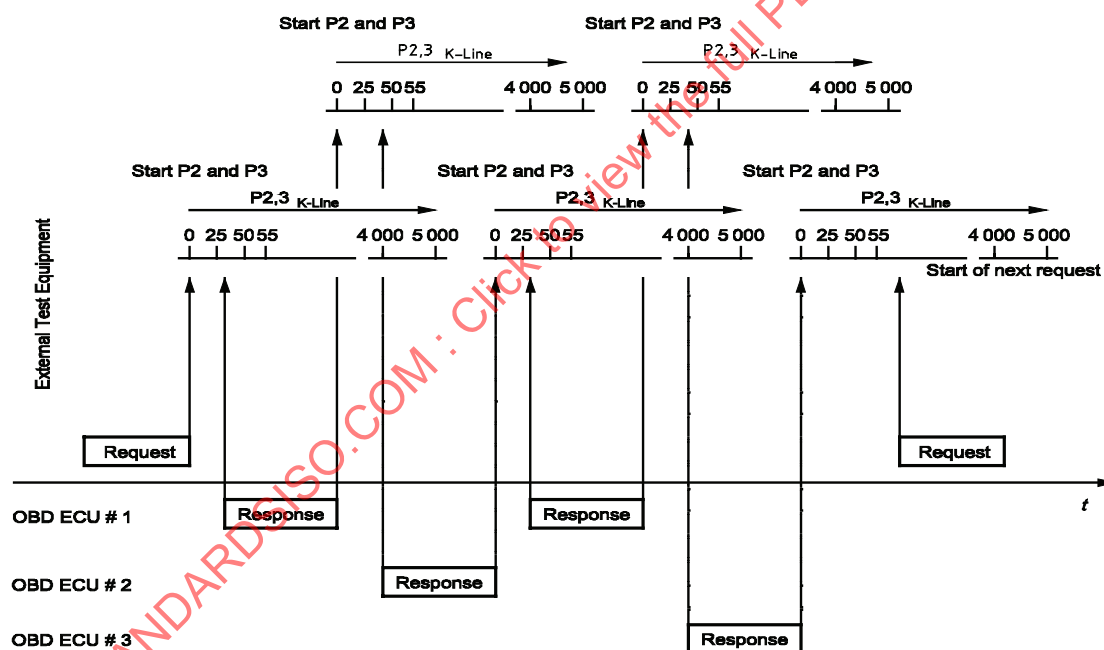


Figure 6 — ISO 9141-2 (Key bytes: 0x08 0x08) and ISO 14230-4 application timing parameter overview

#### 6.2.3.2 SAE J1850 — Minimum time between requests from external test equipment

For SAE J1850 network interfaces, an external test equipment shall always wait for a response message from the previous request, or “no response” time-out before sending another request message. If the number of response messages is known and all response messages have been received, then the external test equipment is permitted to send the next request message immediately. If the number of response messages is not known, then the external test equipment shall wait at least  $P2_{J1850}$  maximum time.

Figure 7 illustrates an example of a request message followed by four (4) response messages and another request message.

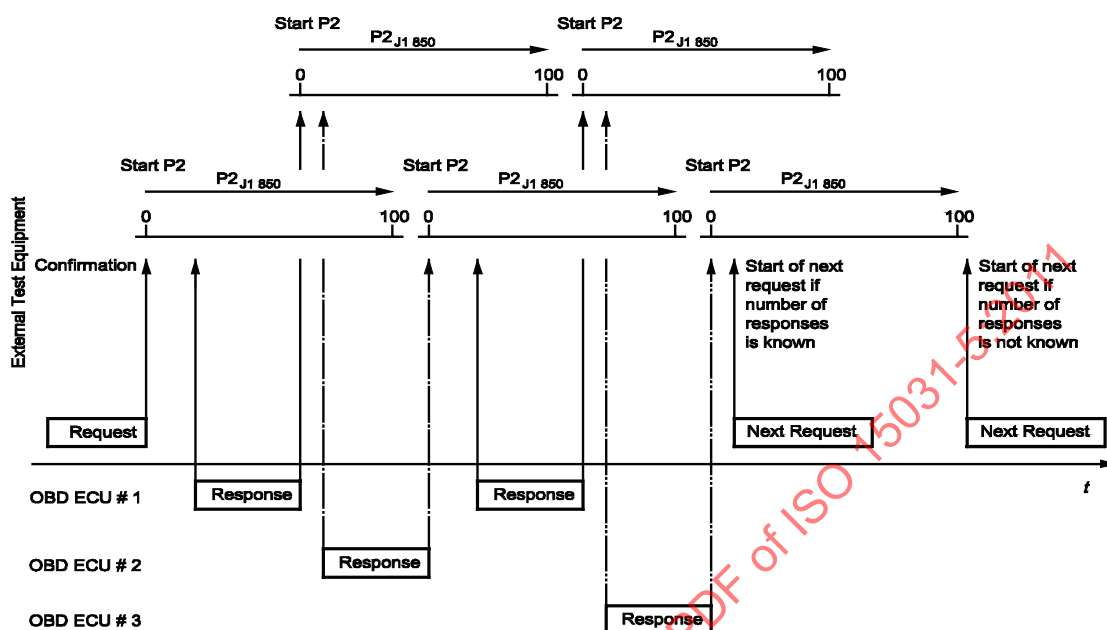



Figure 7 — SAE J1850 application timing parameter overview

### 6.2.3.3 ISO 15765-4 — Minimum time between requests from external test equipment

For ISO 15765-4 network interfaces, the external test equipment may send a new request message immediately after it has determined that all responses related to the previously sent request message have been received. If the external test equipment does not know whether it has received all response messages, (e.g. after sending the initial OBD request message: Service 0x01, PID 0x00), it shall wait ( $P2_{CAN\_max}$ ) after the last request. The timer  $P2_{CAN}$  of the external test equipment starts with the confirmation of a successful transmission of the request message.

Figure 8 illustrates an example of a request message followed by three (3) single-frame response messages and another request message.

**IMPORTANT** — The  $P2_{CAN\_reload}$  is performed by the client to identify whether more emissions-related OBD ECUs will send a response message. The  $P2_{CAN\_reload}$  is not defined to check whether the entire response message is sent within  $P2_{CAN\_max}$  timing.

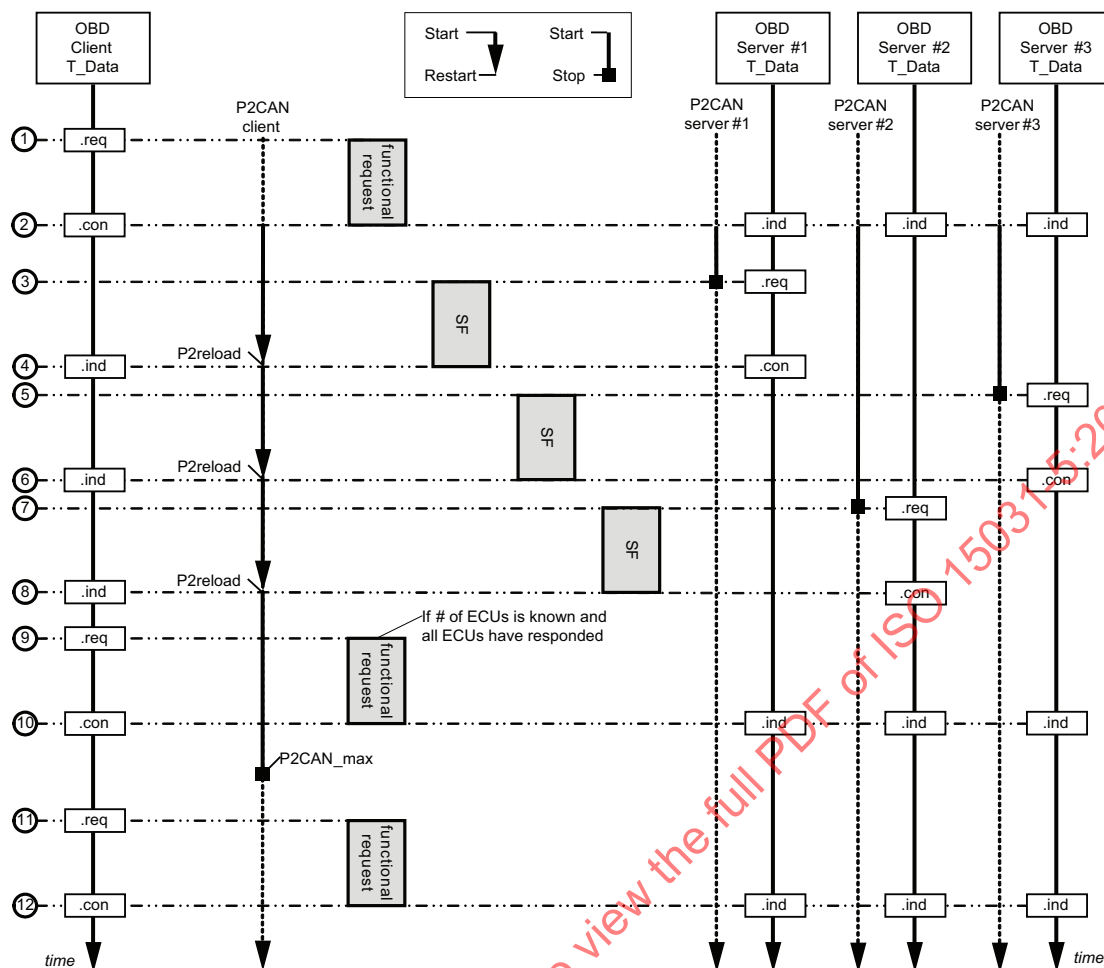


- 1 **Client T\_Data.req:** diagnostic application issues functionally addressed request message to network layer.
- 2 **All server T\_Data.ind:** network layer issues to diagnostic application the reception of a request message. All servers start the  $P2_{CAN}$  timer using the value of  $P2_{CAN} = P2_{CAN\_max}$ .  
**Client T\_Data.con:** network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its  $P2_{CAN}$  timer using the default reload value  $P2_{CAN} = P2_{CAN\_max}$ .
- 3 **Server #1 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ . The response message is a single-frame message.
- 4 **Server #1 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message. Client reloads  $P2_{CAN}$  with  $P2_{CAN\_max}$  value.
- 5 **Server #3 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ . The response message is a single-frame message.
- 6 **Server #3 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message. Client reloads  $P2_{CAN}$  with  $P2_{CAN\_max}$  value.
- 7 **Server #2 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ . The response message is a single-frame message.
- 8 **Server #2 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message. Client reloads  $P2_{CAN}$  with  $P2_{CAN\_max}$  value.
- 9 **Client T\_Data.req:** diagnostic application issues functionally addressed request message to network layer. The client knows the number of ECUs which shall have responded to the previous request. Since all response messages have been received, the client is already allowed to issue a new functional request message.
- 10 **All server T\_Data.ind:** network layer issues to diagnostic application the reception of a request message. All servers start the  $P2_{CAN}$  timer using the value of  $P2_{CAN} = P2_{CAN\_max}$ .  
**Client T\_Data.con:** network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its  $P2_{CAN}$  timer using the default reload value  $P2_{CAN} = P2_{CAN\_max}$  (not shown in figure).

- 11 **Client T\_Data.req**: diagnostic application issues functionally addressed request message to network layer. The client does not know the number of ECUs which shall have responded to the previous request. Therefore the client shall wait until  $P2_{CAN} = P2_{CAN\_max}$  before it issues a new functional request message.
- 12 **All server T\_Data.ind**: network layer issues to diagnostic application the reception of a request message. All servers start the  $P2_{CAN}$  timer using the value of  $P2_{CAN} = P2_{CAN\_max}$  (not shown in figure).  
**Client T\_Data.con**: network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its  $P2_{CAN}$  timer using the default reload value  $P2_{CAN} = P2_{CAN\_max}$  (not shown in figure).

Figure 8 — ISO 15765-4 application timing parameter (single-frame response messages) overview

Figure 9 illustrates an example of a request message followed by one (1) multiple-frame response message and two (2) single frames and another request message. The next request message can be sent immediately by the external test equipment after completion of all response messages in case the transmission of the response messages takes longer than  $P2_{CAN\_max}$ , even if the external test equipment does not know the number of responding ECUs.

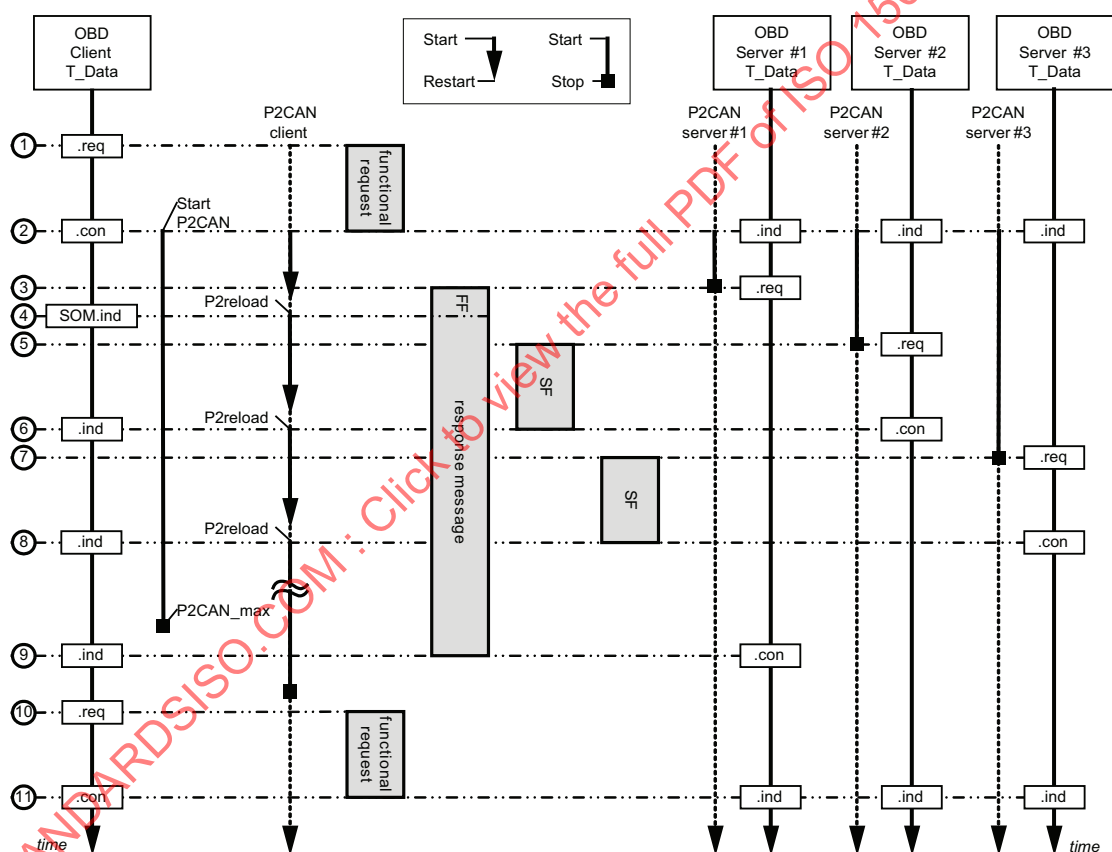


- 1 **Client T\_Data.req**: diagnostic application issues functionally addressed request message to network layer.
- 2 **All server T\_Data.ind**: network layer issues to diagnostic application the reception of a request message. All servers start the  $P2_{CAN}$  timer using the value of  $P2_{CAN} = P2_{CAN\_max}$ .  
**Client T\_Data.con**: network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its  $P2_{CAN}$  timer using the default reload value  $P2_{CAN} = P2_{CAN\_max}$ .
- 3 **Server #1 T\_Data.req**: diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ .
- 4 **Client T\_Data.SOM.ind**: network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Client reloads  $P2_{CAN}$  with  $P2_{CAN\_max}$  value.
- 5 **Server #2 T\_Data.req**: diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ . The response message is a single-frame message.
- 6 **Server #2 T\_Data.con**: network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind**: network layer issues to diagnostic application the completion of the response message. Client reloads  $P2_{CAN}$  with  $P2_{CAN\_max}$  value.

- 7 **Server #3 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ . The response message is a single-frame message.
- 8 **Server #3 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message. Client reloads  $P2_{CAN}$  with  $P2_{CAN\_max}$  value.
- 9 **Server #1 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message.
- 10 **Client T\_Data.req:** diagnostic application issues functionally addressed request message to network layer. The client does not know the number of ECUs which shall have responded to the previous request. Therefore the client shall wait until  $P2_{CAN} = P2_{CAN\_max}$  before it issues a new functional request message.
- 11 **All server T\_Data.ind:** network layer issues to diagnostic application the reception of a request message. All servers start the  $P2_{CAN}$  timer using the value of  $P2_{CAN} = P2_{CAN\_max}$ .  
**Client T\_Data.con:** network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its  $P2_{CAN}$  timer using the default reload value  $P2_{CAN} = P2_{CAN\_max}$ .

**Figure 9 — ISO 15765-4 functional OBDonCAN communication — Multiple-frame response not finished within  $P2_{CAN}$**

Figure 10 illustrates an example of a request message followed by one (1) multiple-frame response message and two (2) single frames, (completion within  $P2_{CAN\_max}$ ) and another request message. The next request message can be sent immediately by the external test equipment after completion of all response messages if the external test equipment knows the number of responding ECUs. If not, it needs to wait with the next request message to send until  $P2_{CAN\_max}$  is expired.

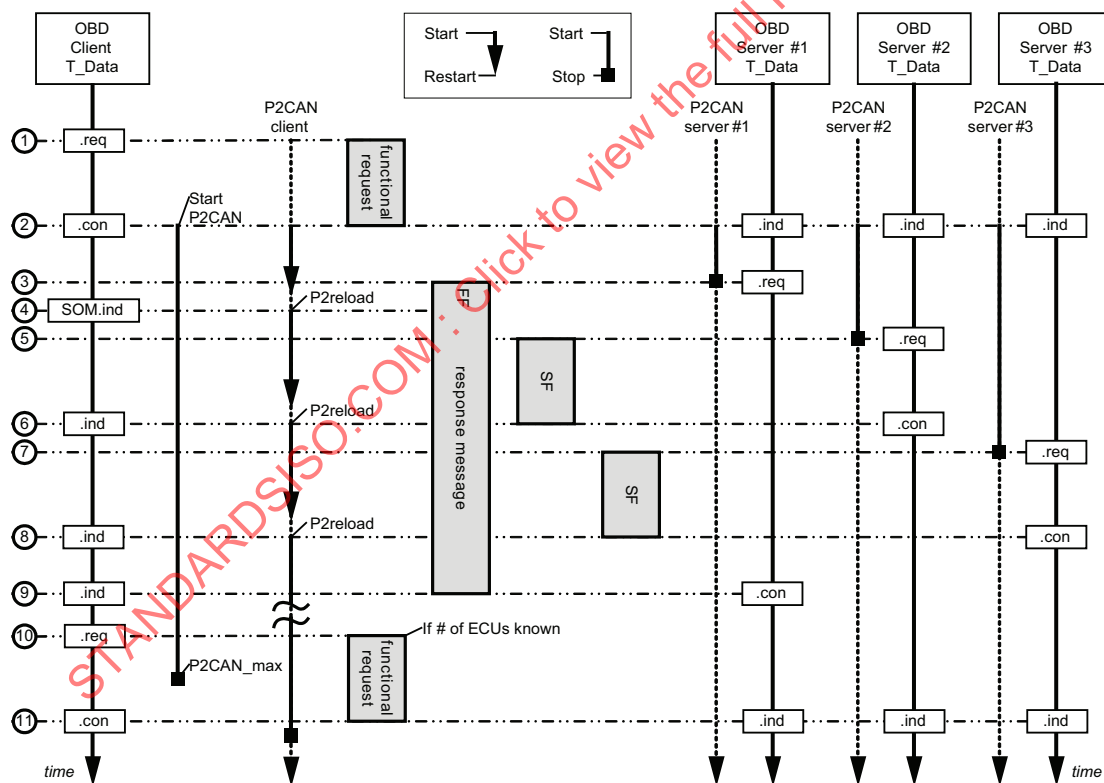

- 1 **Client T\_Data.req:** diagnostic application issues functionally addressed request message to network layer.
- 2 **All server T\_Data.ind:** network layer issues to diagnostic application the reception of a request message. All servers start the  $P2_{CAN}$  timer using the value of  $P2_{CAN} = P2_{CAN\_max}$ .  
**Client T\_Data.con:** network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its  $P2_{CAN}$  timer using the default reload value  $P2_{CAN} = P2_{CAN\_max}$ .
- 3 **Server #1 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ .
- 4 **Client T\_DataSOM.ind:** network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Client reloads  $P2_{CAN}$  with  $P2_{CAN\_max}$  value.

- 5 **Server #2 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ . The response message is a single-frame message.
- 6 **Server #2 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message. Client reloads  $P2_{CAN\_max}$  value.
- 7 **Server #3 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within  $P2_{CAN}$ . The response message is a single-frame message.
- 8 **Server #3 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message. Client reloads  $P2_{CAN}$  with  $P2_{CAN\_max}$  value.
- 9 **Server #1 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message.
- 10 **Client T\_Data.req:** diagnostic application issues functionally addressed request message to network layer. The client knows the number of ECUs which shall have responded to the previous request. Therefore the client is not required to wait until the time window has reached  $P2_{CAN\_max}$  before it issues a new functional request message.
- 11 **All server T\_Data.ind:** network layer issues to diagnostic application the reception of a request message. All servers start the  $P2_{CAN}$  timer using the value of  $P2_{CAN} = P2_{CAN\_max}$ .  
**Client T\_Data.con:** network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its  $P2_{CAN}$  timer using the default reload value  $P2_{CAN} = P2_{CAN\_max}$ .

**Figure 10 — ISO 15765-4 functional OBDOnCAN communication — Multiple-frame response finished within  $P2_{CAN}$**

NOTE The network layer timing parameters for the multiple-frame response are not shown. Network layer timing requirements for legislated diagnostic messages are specified in ISO 15765-4.

#### 6.2.3.4 ECU behaviour to a request for supported/non-supported OBD information

Figure 11 illustrates an example of a typical vehicle OBD configuration.

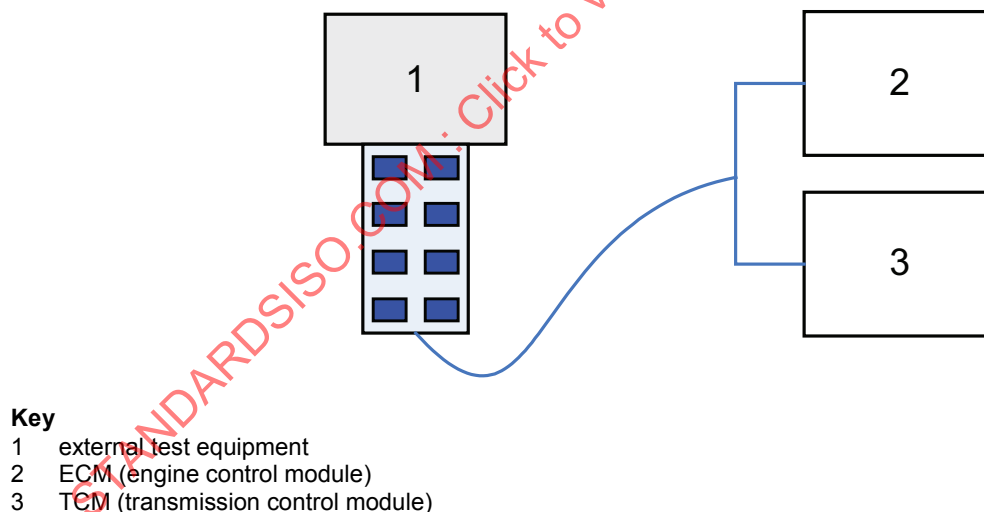


**Figure 11 — Example of external test equipment connected to two (2) OBD ECUs**

A service shall only be implemented by an ECU if supported with data (e.g. PID/OBD Monitor ID/Test ID/INFOTYPE supported), except for Service 0x01 and PID 0x00 which shall be supported by all emissions-related ECUs.

Typically, the ECM supports OBD Monitor IDs, which the TCM does not support. In case the external test equipment requests the status of such OBD Monitor ID supported by the ECM, the ECM sends a positive response message and the TCM does not send a response message (no negative response message).

allowed). The external test equipment knows that the TCM will not send a positive response message based on the OBD Monitor ID supported information retrieved prior to the latter request.

This shall be implemented to enhance the overall diagnostic communication performance between the external test equipment and the vehicle ECUs (see 6.2.3.3).

#### 6.2.4 Data not available

##### 6.2.4.1 ISO 9141-2, ISO 14230-4, and SAE J1850 — Data not available

There are two conditions for which data is considered not available. One condition is that the service is not supported, and the other is that the service is supported but data is currently not available.

For SAE J1850 and ISO 9141-2 interfaces, there will be no reject message to a functional request message if the request is not supported by the ECU. This prevents response messages from all ECUs that do not support a service or a specific data value.

For ISO 14230-4 interfaces, there will be a response message to every request message either positive (with data) or negative. In order to avoid unnecessary communication, the ECU(s) which does (do) not support a functionally requested PID, TID, or INFOTYPE is permitted not to send a negative response message because another ECU will send a positive response message. Format and possible codes of negative responses are specified in 6.3.4.

Some services are supported by a vehicle, but data may not always be available when requested. For Services 0x05 and 0x06, if the test has not been run since test results were cleared, or for Service 0x02 if freeze frame data has not been stored, or for Service 0x09 if the engine is running, valid data will not be available. For these conditions, the manufacturer has the option either to not respond or to respond with data that is invalid (ISO 9141-2 and SAE J1850 only). The functional description for these services discusses the method to determine if the data is valid.

##### 6.2.4.2 ISO 15765-4 — Data not available

There are four (4) conditions for which data is considered not available:

- a) **Request message is not supported:** The ECU(s) which does (do) not support the functional request message shall not send any response message.
- b) **Request message is supported but data is not supported:** The ECU(s) which does (do) support the functional request message but does (do) not support the requested data (e.g. PID, OBD Monitor ID, TID, or INFOTYPE) is (are) not allowed to send a negative response message because another ECU will send a positive response message. If the external test equipment sends a message including multiple PIDs and each emission-related ECU does not support all requested PIDs, then each ECU shall send a positive response message including the supported PID(s) and data values and shall not send a negative response message. If an ECU does not support any of the PIDs requested, it is not allowed to send a negative response message.
- c) **Request message is supported but data is currently not available:** The ECU(s) which does (do) support the functional request message but does (do) not currently have the requested data available shall respond with a negative response message with response code 0x22 - ConditionsNotCorrect (negative response message format is specified in 6.3.3). For Services 0x01, 0x02, 0x03, 0x06, 0x07 and 0x0A the use of a negative response message including response code 0x22 is not permitted. For Services 0x04, 0x08 and 0x09 the use of a negative response message including negative response code (NRC) 0x22/0x78 is allowed only during conditions specified by OBD regulations.
- d) **Request message is supported but data is not available within P2 timing:** The behaviour of the ECU(s) and the external test equipment is specified in 6.2.4.3.

### 6.2.4.3 Data not available within P2 timing

#### 6.2.4.3.1 Overview

The following subclauses specify the request/response message handling for each protocol if the data is not available within the P2 timing in the ECU(s). The description in the sub-section only applies to Service 0x09, INFOTYPE 0x06 Calibration Verification Numbers.

#### 6.2.4.3.2 ISO 9141-2 — Data not available within P2 timing

If an ECU(s) supports the functional request message but does not have the requested data available within P2 timing, then a retry message handling routine shall be performed as follows:

- If the response message is not received within  $P2_{K-Line}$ , the external test equipment shall stop retrying the request message after one (1) minute from the original request.
- The retry message shall be sent at least every four (4) seconds (between 55 ms and 4 000 ms). The retry message keeps the bus alive and prevents the external test equipment from having to re-initialize the bus ( $P3_{K-Line}$  time out).
- The ECUs, which either have already sent a positive response message or have not sent a positive response message, shall not restart the requested internal routine again.
- The external test equipment shall record if all ECUs have sent the expected number of response messages.
- After successful completion of all response messages, the external test equipment shall send a request message which is “not equal” to the “Repeated Request” message.

Additional description is included in the functional description of the corresponding service.

Figure 12 illustrates the ISO 9141-2 (Key Bytes: 0x08 0x08) data not available within P2 timing handling overview.

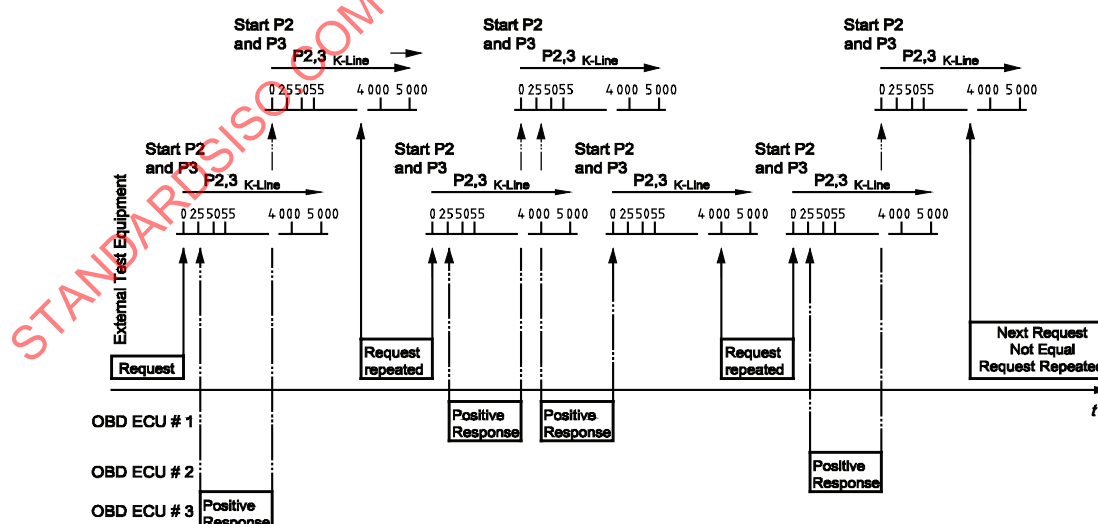


Figure 12 — ISO 9141-2 (Key bytes: 0x08 0x08) data not available within P2 timing handling overview

For the ISO 9141-2 protocol, the response message timing  $P2_{K-Line}$  shall be in accordance with Table 2. The  $P2_{K-line\_min}$  application timing parameter value depends on the Key bytes as listed:

- Key bytes:0x08 0x08:  $P2_{K-line\_min} = 25\text{ ms}$
- Key bytes:0x94 0x94:  $P2_{K-line\_min} = 0\text{ ms}$

6.2.4.3.3 ISO 14230-4 — Data not available within P2 timing

If an ECU(s) supports the functional request message but does not have the requested data available within P2 timing, handling shall be performed as follows:

- a) The ECU(s) shall respond with a negative response message with response code 0x78 - RequestCorrectlyReceived-ResponsePending within P2 timing.
- b) ECUs which require more time than  $P2_{K-Line}$  to perform the requested action shall repeat the negative response message with response code 0x78 prior to expiration of  $P2_{K-Line}$  until the positive response message is available.
- c) After all positive response messages have been received or a time out  $P2_{K-Line\_max}$  has occurred, the external test equipment shall wait until  $P3_{K-Line\_min}$  is reached to send a new request message.

Figure 13 illustrates the ISO 14230-4 negative response code RC=0x78 handling overview.

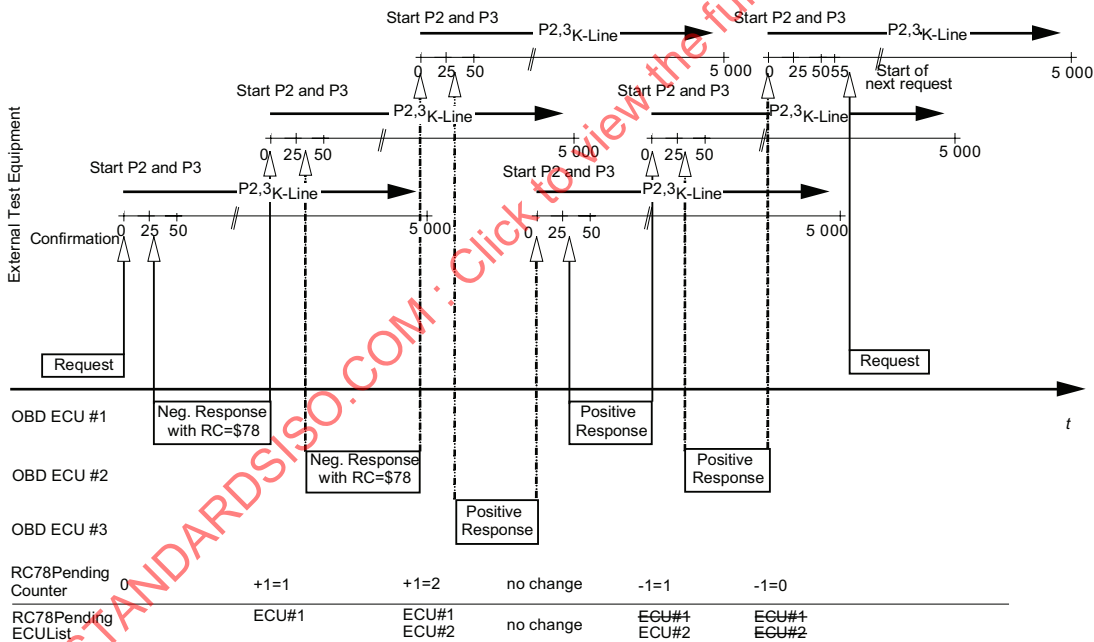


Figure 13 — ISO 14230-4 — Negative response code RC=0x78 handling overview

#### 6.2.4.3.4 SAE J1850 — Data not available within P2 timing

If an ECU(s) supports the functional request message but does not have the requested data available within P2 timing, then a retry message handling routine shall be performed as follows:

- If the response message is not received within  $P2_{J1850}$ , the external test equipment shall wait thirty  $(30 \pm 1)$  seconds and then retry the request message.
- The retry message shall be stopped after one (1) minute from the original request.
- The external test equipment shall record if all ECUs have sent the expected number of response messages.

An additional description is included in the functional description of the corresponding service.

Figure 14 illustrates the SAE J1850 data not available within P2 timing handling overview.

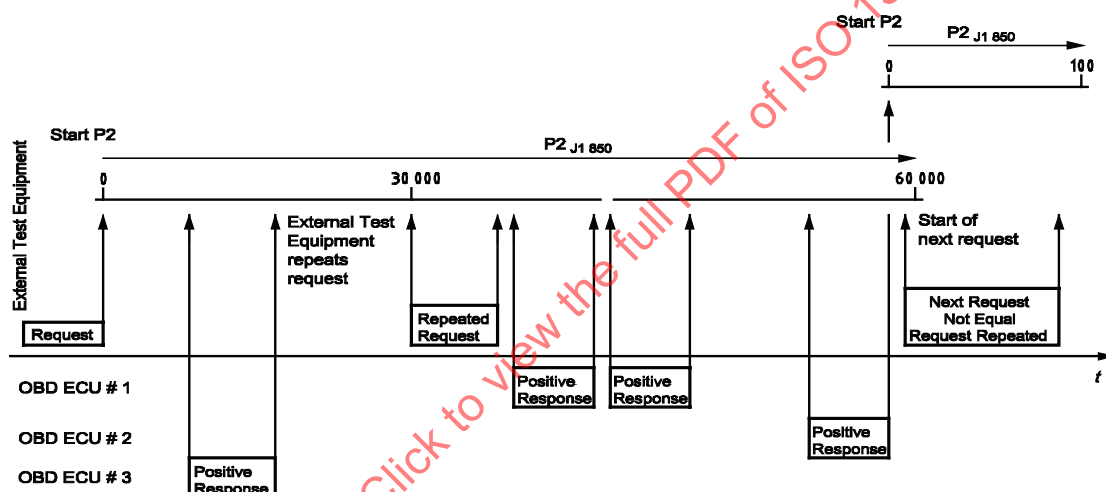


Figure 14 — SAE J1850 — Data not available within P2 timing handling overview

#### 6.2.4.3.5 Data not available test conditions for protocols: ISO 9141-2, ISO 14230-4 and SAE J1850

There are two conditions for which data is considered not available:

- Service is not supported.
- Service is supported but data is not available at the time that the request is made.

Table 10 indicates the proper server/ECU response for each protocol as detailed in 6.2.4.1.

**Table 10 — Proper response from server/ECU with ISO 9141-2, ISO 14230-4 and SAE J1850 protocol**

| #  | Condition                                                      | ISO 9141-2                                                                                                                                                                                                                                      | SAE J1850                                                                                                                                                                                                                                       | ISO 14230-4                                                                                                                                                                                                                                                               |
|----|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| a) | Service 0x01 not supported                                     | All ECUs must respond to Service 0x01 PID 0x00 if Service 0x01 is supported. If Service 0x01 is not supported, no response is allowed                                                                                                           | All ECUs must respond to Service 0x01 PID 0x00 if Service 0x01 is supported. If Service 0x01 is not supported, no response is allowed                                                                                                           | All ECUs must respond to Service 0x01 PID 0x00 if Service 0x01 is supported. If Service 0x01 is not supported, ECU can either not respond or send a negative response (0x7F, 0x01, 0x11)                                                                                  |
| b) | Service 0x01 unsupported PID requested                         | No response preferred, positive response is allowed                                                                                                                                                                                             | No response preferred, positive response is allowed                                                                                                                                                                                             | ECU can either not respond or send a negative response (0x7F, 0x01, 0x12)                                                                                                                                                                                                 |
| c) | Service 0x01 supported PID requested                           | Respond within P2 timing                                                                                                                                                                                                                        | Respond within P2 timing                                                                                                                                                                                                                        | Respond within P2 timing                                                                                                                                                                                                                                                  |
| d) | Service 0x02 not supported                                     | The ECU shall not respond                                                                                                                                                                                                                       | The ECU shall not respond                                                                                                                                                                                                                       | ECU can either not respond or send a negative response (0x7F, 0x02, 0x11)                                                                                                                                                                                                 |
| e) | Service 0x02 supported PID requested, no Freeze Frame stored   | PID 0x02 indicates 0x0000, but if PIDs are requested, ECU can either not respond or send invalid data, except if supported PIDs (0x00, 0x20, ...) have been requested. Then the ECU shall send a response with the supported PID and data bytes | PID 0x02 indicates 0x0000, but if PIDs are requested, ECU can either not respond or send invalid data, except if supported PIDs (0x00, 0x20, ...) have been requested. Then the ECU shall send a response with the supported PID and data bytes | PID 0x02 indicates 0x0000, but if PIDs are requested, ECU can either not respond or send a negative response (0x7F, 0x02, 0x12), except if supported PIDs (0x00, 0x20, ...) have been requested. Then the ECU shall send a response with the supported PID and data bytes |
| f) | Service 0x02 unsupported PID requested, no Freeze Frame stored | No response preferred, positive response is allowed                                                                                                                                                                                             | No response preferred, positive response is allowed                                                                                                                                                                                             | ECU can either not respond or send a negative response (0x7F, 0x02, 0x12)                                                                                                                                                                                                 |
| g) | Service 0x02 supported PID requested, Freeze Frame stored      | Respond within P2 timing                                                                                                                                                                                                                        | Respond within P2 timing                                                                                                                                                                                                                        | Respond within P2 timing                                                                                                                                                                                                                                                  |
| h) | Service 0x02 unsupported PID requested, Freeze Frame stored    | No response preferred, positive response is allowed                                                                                                                                                                                             | No response preferred, positive response is allowed                                                                                                                                                                                             | ECU can either not respond or send a negative response (0x7F, 0x02, 0x12)                                                                                                                                                                                                 |
| i) | Service 0x03/0x07 not supported                                | The ECU shall not respond                                                                                                                                                                                                                       | The ECU shall not respond                                                                                                                                                                                                                       | ECU can either not respond or send a negative response (0x7F, 0x03/0x07, 0x11)                                                                                                                                                                                            |
| j) | Service 0x03/0x07 supported, no DTCs stored                    | No response preferred, positive response indicating no DTCs is allowed                                                                                                                                                                          | No response preferred, positive response indicating no DTCs is allowed                                                                                                                                                                          | Positive response indicating no DTCs is required                                                                                                                                                                                                                          |
| k) | Service 0x03/0x07 supported, DTCs stored                       | Positive response is required                                                                                                                                                                                                                   | Positive response is required                                                                                                                                                                                                                   | Positive response is required                                                                                                                                                                                                                                             |
| l) | Service 0x04 not supported                                     | The ECU shall not respond                                                                                                                                                                                                                       | The ECU shall not respond                                                                                                                                                                                                                       | ECU can either not respond or send a negative response (0x7F, 0x04, 0x11)                                                                                                                                                                                                 |
| m) | Service 0x04 supported, conditions not correct                 | The ECU shall not respond                                                                                                                                                                                                                       | The ECU shall not respond                                                                                                                                                                                                                       | Negative response is required (0x7F, 0x04, 0x22)                                                                                                                                                                                                                          |
| n) | Service 0x04 supported, conditions correct                     | Positive response is required                                                                                                                                                                                                                   | Positive response is required                                                                                                                                                                                                                   | Positive response is required                                                                                                                                                                                                                                             |
| o) | Service 0x05/0x06 not supported                                | The ECU shall not respond                                                                                                                                                                                                                       | The ECU shall not respond                                                                                                                                                                                                                       | ECU can either not respond or send a negative response (0x7F, 0x05/0x06, 0x11)                                                                                                                                                                                            |

Table 10 (continued)

| #   | Condition                                                                                                          | ISO 9141-2                                                                                                                                     | SAE J1850                                                                                                                                      | ISO 14230-4                                                                                                                                                          |
|-----|--------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| p)  | Service 0x05/0x06 supported TID requested, no stored data available                                                | If TIDs are requested, ECU can either not respond or send invalid data                                                                         | If TIDs are requested, ECU can either not respond or send invalid data                                                                         | If TIDs are requested, ECU can either not respond or send invalid data or send negative response (0x7F, 0x05/0x06, 0x12)                                             |
| q)  | Service 0x05/0x06 unsupported TID requested, no stored data available                                              | No response preferred, positive response is allowed                                                                                            | No response preferred, positive response is allowed                                                                                            | ECU can either not respond or send a negative response (0x7F, 0x05/0x06, 0x12)                                                                                       |
| r)  | Service 0x05/0x06 supported TID requested, stored data available                                                   | Respond within P2 timing                                                                                                                       | Respond within P2 timing                                                                                                                       | Respond within P2 timing                                                                                                                                             |
| s)  | Service 0x05/0x06 unsupported TID requested, stored data available                                                 | No response preferred, positive response is allowed                                                                                            | No response preferred, positive response is allowed                                                                                            | ECU can either not respond or send a negative response (0x7F, 0x05/0x06, 0x12)                                                                                       |
| t)  | Service 0x08 not supported                                                                                         | The ECU shall not respond                                                                                                                      | The ECU shall not respond                                                                                                                      | ECU can either not respond or send a negative response (0x7F, 0x08, 0x11)                                                                                            |
| u)  | Service 0x08 supported TID requested, conditions correct                                                           | Respond within P2 timing                                                                                                                       | Respond within P2 timing                                                                                                                       | Respond within P2 timing                                                                                                                                             |
| v)  | Service 0x08 supported TID requested, conditions not correct                                                       | The ECU shall not respond or may respond with a manufacturer-specified value as DATA A, which corresponds to the reason the test cannot be run | The ECU shall not respond or may respond with a manufacturer-specified value as DATA A, which corresponds to the reason the test cannot be run | Negative response is required (0x7F, 0x08, 0x22) or may respond with a manufacturer-specified value as DATA A which corresponds to the reason the test cannot be run |
| w)  | Service 0x08 unsupported TID requested                                                                             | No response preferred, positive response is allowed                                                                                            | No response preferred, positive response is allowed                                                                                            | ECU can either not respond or send a negative response (0x7F, 0x08, 0x12)                                                                                            |
| x)  | Service 0x09 not supported                                                                                         | The ECU shall not respond                                                                                                                      | The ECU shall not respond                                                                                                                      | ECU can either not respond or send a negative response (0x7F, 0x09, 0x11)                                                                                            |
| y)  | Service 0x09 supported INFOTYPE requested, data available (VIN, CVN, CALID)                                        | Respond within P2 timing                                                                                                                       | Respond within P2 timing                                                                                                                       | Respond within P2 timing                                                                                                                                             |
| z)  | Service 0x09 supported INFOTYPE requested, data not available, conditions correct (CVN)                            | Respond within 1 minute; do not restart CVN calculation. Test tool sends retry message every 0,055 to 4,0 seconds                              | Respond within 1 minute; do not restart CVN calculation. Test tool sends retry message after 30 seconds                                        | One or multiple negative response message(s) (0x7F, 0x09, 0x78) required within $P2_{max}$ (25 – 50 ms) until positive response is sent                              |
| aa) | Service 0x09 supported INFOTYPE requested, data not available, conditions not correct (CVN), prior to 2005 MY only | The ECU shall not respond                                                                                                                      | The ECU shall not respond                                                                                                                      | Negative response is required (0x7F, 0x09, 0x22)                                                                                                                     |
| bb) | Service 0x09 unsupported INFOTYPE requested                                                                        | No response preferred, positive response is allowed                                                                                            | No response preferred, positive response is allowed                                                                                            | ECU can either not respond or send a negative response (0x7F, 0x09, 0x12)                                                                                            |
| cc) | Service 0x00 or 0x0A through 0x0F                                                                                  | The ECU shall not respond                                                                                                                      | The ECU shall not respond                                                                                                                      | ECU can either not respond or send a negative response (0x7F, 0x0X, 0x11)                                                                                            |


#### 6.2.4.3.6 ISO 15765-4 — Data not available within P2 timing

The ECU(s) which does (do) support the functional request message but does (do) not have the requested data available within P2 timing shall perform the following handling:

- a) The ECU(s) shall respond with a negative response message with negative response code (NRC) 0x78 - RequestCorrectlyReceived-ResponsePending within P2 timing (not allowed for Service 0x01, 0x02, 0x03, 0x06, 0x07 and 0x0A requests).
- b) After correct reception of the negative response message with negative response code (NRC) 0x78, the  $P2_{CAN\_max}$  parameter timing value shall be set to  $P2^*_{CAN\_max}$  (5 000 ms) by the external test equipment and the ECU which has sent the negative response message.
- c) If another ECU also sends a negative response message with response code 0x78, the  $P2_{CAN\_max}$  timing parameter value shall be reloaded to  $P2^*_{CAN\_max}$ .
- d) ECUs which require more than  $P2^*_{CAN\_max}$  to perform the requested action shall repeat the negative response message with negative response code (NRC) 0x78 prior to expiration of  $P2^*_{CAN\_max}$  until correct reception of the positive response message.
- e) After all positive response messages have been received or time out,  $P2^*_{CAN\_max}$  has occurred, the  $P2_{CAN\_max}$  timing parameter shall be reset to the values specified in Table 7.

The vehicle manufacturer is responsible to ensure that the network architecture of the vehicle does not cause timing delays that exceed  $P2_{CAN\_max}$  timing when responding to Services 0x01, 0x02, 0x03, 0x06, 0x07 and 0x0A requests because a negative response message with response code 0x78 shall not be allowed.

Figure 15 illustrates the negative response message handling with response code 0x78 for the ISO 15765-4 interface.

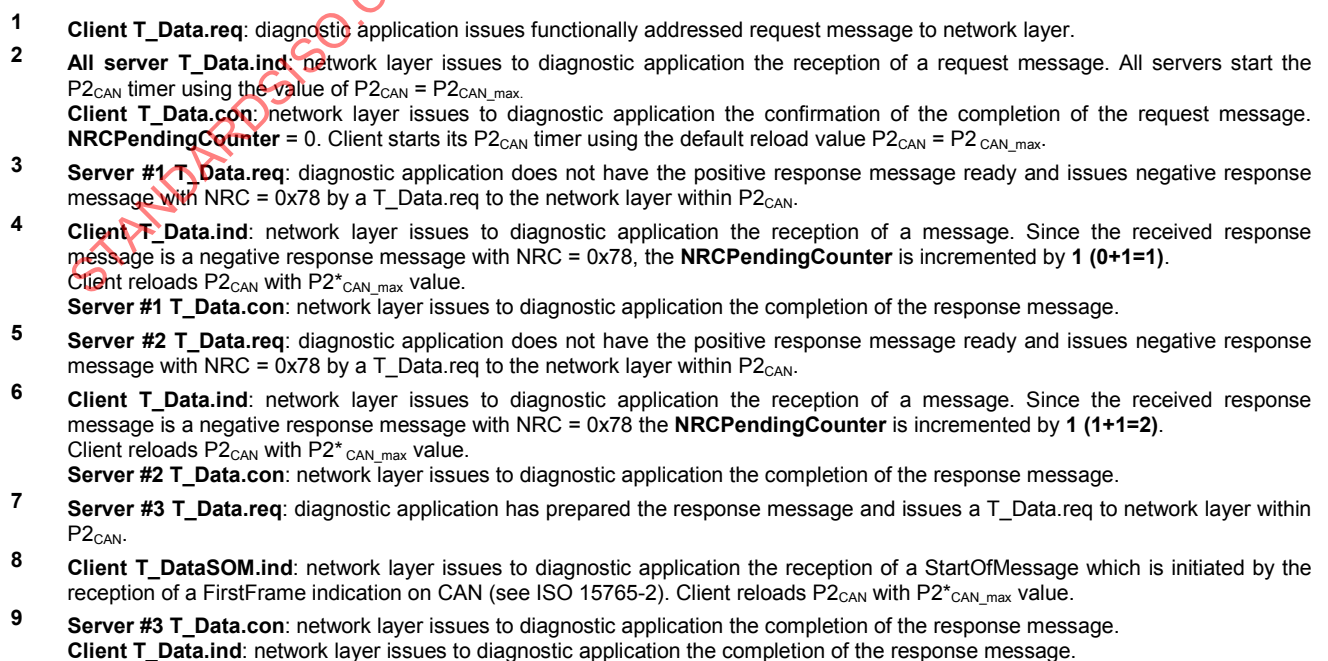

- 10 **Server #2 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within P2<sub>CAN</sub>. The response message is a single-frame message.
- 11 **Server #2 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message. Since the received response message is a positive response message the **NRCPendingCounter** is decremented by 1 (2-1=1). Client reloads P2<sub>CAN</sub> with P2\*<sub>CAN\_max</sub> value.
- 12 **Server #1 T\_Data.req:** diagnostic application has prepared the response message and issues a T\_Data.req to network layer within P2<sub>CAN</sub>. The response message is a single-frame message.
- 13 **Server #1 T\_Data.con:** network layer issues to diagnostic application the completion of the response message.  
**Client T\_Data.ind:** network layer issues to diagnostic application the completion of the response message. Since the received response message is a positive response message the **NRCPendingCounter** is decremented by 1 (1-1=0). Client reloads P2<sub>CAN</sub> with P2<sub>CAN\_max</sub> value.

Figure 15 — ISO 15765-4 — Negative response code RC=0x78 handling overview

#### 6.2.4.3.7 Data not available — Test conditions for protocol: ISO 15765-4 Diagnostic communication over CAN

There are four conditions for which data is considered not available:

- Service is not supported.
- Service is supported but data is not supported.
- Service is supported but data is not available at the time that the request is made.
- Service is supported but data is not available within P2 timing.

Table 11 indicates the proper server/ECU response as detailed in 6.2.4.2.

Table 11 — Proper response from server/ECU for ISO 15765-4 protocol

| #  | Condition                                                                | ISO 15765-4                                                                                                                                                                                                                                                                                           |
|----|--------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| a) | Service 0x01 not supported                                               | All emissions-related ECUs shall respond to Service 0x01 PID 0x00 if Service 0x01 is supported. If Service 0x01 is not supported, no response is allowed.                                                                                                                                             |
| b) | Service 0x01 unsupported PID requested                                   | The emissions-related ECU shall not respond.                                                                                                                                                                                                                                                          |
| c) | Service 0x01 supported PID requested                                     | Respond within P2 timing (no negative response message with response code 0x78 allowed).                                                                                                                                                                                                              |
| d) | Service 0x02 not supported                                               | The ECU shall not respond.                                                                                                                                                                                                                                                                            |
| e) | Service 0x02 supported PID, frame xx requested, no Freeze Frame stored   | 1) The ECU shall respond to PID 0x02 frame xx within P2 timing; PID 0x02 frame xx shall indicate 0x0000.<br>2) The ECU shall respond with supported PIDs for frame xx (0x00, 0x20, ...) within P2 timing.<br>3) If PIDs other than support PIDs or PID 0x02 are requested, the ECU shall not respond. |
| f) | Service 0x02 unsupported PID, frame xx requested, no Freeze Frame stored | PID 0x02 frame xx indicates 0x0000, but if any other PIDs are requested, ECU shall not respond.                                                                                                                                                                                                       |
| g) | Service 0x02 supported PID, frame xx requested, Freeze Frame stored      | 1) The ECU shall respond to PID 0x02 frame xx within P2 timing.<br>2) The ECU shall respond with supported PIDs for frame xx (0x00, 0x20 ...) within P2 timing and shall respond to PIDs frame xx indicated as supported within P2 timing.                                                            |

Table 11 (continued)

| #   | Condition                                                                                                          | ISO 15765-4                                                                                                                                                                                                                                             |
|-----|--------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| h)  | Service 0x02 unsupported PID, frame xx requested, Freeze Frame stored                                              | The ECU shall not respond.                                                                                                                                                                                                                              |
| i)  | Service 0x03/0x07/0x0A not supported                                                                               | The ECU shall not respond.                                                                                                                                                                                                                              |
| j)  | Service 0x03/0x07/0x0A supported, no DTCs stored                                                                   | Positive response indicating no DTCs is required.                                                                                                                                                                                                       |
| k)  | Service 0x03/0x07/0x0A supported, DTCs stored                                                                      | Positive response including the stored DTCs is required.                                                                                                                                                                                                |
| l)  | Service 0x04 not supported                                                                                         | The ECU shall not respond.                                                                                                                                                                                                                              |
| m)  | Service 0x04 supported, conditions not correct                                                                     | Negative response is required (0x7F, 0x04, 0x22).                                                                                                                                                                                                       |
| n)  | Service 0x04 supported, conditions correct                                                                         | Positive response message required. Negative response messages(s) (0x7F, 0x04, 0x78) allowed until positive response message available.                                                                                                                 |
| o)  | Service 0x06 not supported                                                                                         | The ECU shall not respond.                                                                                                                                                                                                                              |
| p)  | Service 0x06 supported OBDMID requested, no stored data available                                                  | Positive response required, test values, min and max limits must be set to 0x00.                                                                                                                                                                        |
| q)  | Service 0x06 unsupported OBDMID requested, no stored data available                                                | The ECU shall not respond.                                                                                                                                                                                                                              |
| r)  | Service 0x06 supported OBDMID requested, stored data available                                                     | Respond within P2 timing.                                                                                                                                                                                                                               |
| s)  | Service 0x06 unsupported OBDMID requested, stored data available                                                   | The ECU shall not respond.                                                                                                                                                                                                                              |
| t)  | Service 0x08 not supported                                                                                         | The ECU shall not respond.                                                                                                                                                                                                                              |
| u)  | Service 0x08 supported TID requested, conditions correct                                                           | Respond within P2 timing.                                                                                                                                                                                                                               |
| v)  | Service 0x08 supported TID requested, conditions not correct                                                       | Negative response required (0x7F, 0x08, 0x22).                                                                                                                                                                                                          |
| w)  | Service 0x08 unsupported TID requested                                                                             | The ECU shall not respond.                                                                                                                                                                                                                              |
| x)  | Service 0x09 not supported                                                                                         | The ECU shall not respond.                                                                                                                                                                                                                              |
| y)  | Service 0x09 supported INFOTYPE requested, data available (VIN, CVN, CALID)                                        | Respond within P2 timing.                                                                                                                                                                                                                               |
| z)  | Service 0x09 supported INFOTYPE requested, data not available, conditions correct (CVN)                            | Initial negative response message (0x7F 0x09, 0x78) required within P2 <sub>max</sub> (50 ms) and consecutive negative response message(s) (0x7F, 0x09, 0x78) is (are) required within P2 <sub>max</sub> (5.0 seconds) until positive response is sent. |
| aa) | Service 0x09 supported INFOTYPE requested, data not available, conditions not correct (CVN), prior to 2005 MY only | Negative response required (0x7F, 0x09, 0x22).                                                                                                                                                                                                          |
| bb) | Service 0x09 unsupported INFOTYPE requested                                                                        | The ECU shall not respond.                                                                                                                                                                                                                              |
| cc) | Service 0x00 or 0x0B through 0x0F                                                                                  | The ECU shall not respond.                                                                                                                                                                                                                              |

### 6.2.5 Maximum values

If the data value exceeds the maximum value possible to be sent, the on-board system shall send the maximum value possible (0xFF or 0xFFFF). The external test equipment shall display the maximum value or an indication of data too high. This is not normally critical for real-time diagnostics, but, for example, in the case of a misfire at high vehicle speed with resulting freeze frame data stored, this will be very valuable diagnostic information.

### 6.2.6 Invalid signals

In distributed network architectures, certain OBD devices may be hardwired to other ECUs or may be independent OBD mechatronic devices, e.g. smart sensor/actuator connected through a network from another ECU (both referred to as remote OBD devices). When remote OBD devices are not hardwired to the OBD ECU and the data is not received over the data bus from the specific remote OBD device, this may occur for two reasons; either the remote ECU is not functioning and sending any data, or the OBD device that is hardwired to the remote ECU has failed and the remote ECU is sending a message with invalid data for the OBD remote device. In either one of these cases, the primary OBD ECU shall report Service 0x01 and Service 0x02 data parameters as the minimum or maximum value to indicate that the signal has not been received. A PID which includes this invalid data (no signal) shall either be reported with a minimum value (0x00 or 0x0000) or maximum value (0xFF or 0xFFFF), e.g. PID 0x0D "Vehicle Speed Sensor" = 0xFF = 255 km/h, PID 0x2F "Fuel Level Input" = 0x00 = 0,0 %. The reported value shall be determined by the manufacturer based on system design and network architecture to represent the least likely value to be expected under normal conditions.

## 6.3 Diagnostic message format

### 6.3.1 Addressing method

Functional addressing shall be used for all request messages because the external test equipment does not know which system on the vehicle has the information that is needed.

### 6.3.2 Maximum message length

#### 6.3.2.1 ISO 9141-2, ISO 14230-4, SAE J1850 — Maximum message length

The maximum message length for request and response messages is limited to seven (7) data bytes.

For SAE J1850 and ISO 9141-2 interfaces, each unique diagnostic message specified in this part of ISO 15031 is a fixed length, although not all messages are the same length. For Services 0x01 and 0x02, message length is determined by parameter identification (PID). Several PIDs, e.g. 0x06 - 0x09, require reading of PIDs 0x13 and/or 0x1D to determine whether a data byte B is included in the response message. For Service 0x05, message length is determined by Test ID. For other services, the message length is determined by the service. This enables the external test equipment to check for proper message length, and to recognize the end of the message without waiting for possible additional data bytes. For ISO 14230-4 interfaces, the message length is always determined by the length information included in the first byte of the header.

#### 6.3.2.2 ISO 15765-4 — Maximum message length

The maximum message length is specified in ISO 15765-2. For request messages, the message length is limited to seven (7) data bytes.

### 6.3.3 Request/Response message format

#### 6.3.3.1 ISO 9141-2, ISO 14230-4, SAE 1850, ISO 15765-4 — Request message format

Table 12 specifies the request message format.

**Table 12 — Request message format for ISO 9141-2, ISO 14230-4, SAE J1850, ISO 15765-4**

| Data Byte | Parameter Name               | Cvt | Hex Value | Mnemonic |
|-----------|------------------------------|-----|-----------|----------|
| #1        | Request Service Identifier   | M   | xx        | SIDRQ    |
| #2        | service-specific data byte#1 | U   | xx        | —        |
| #3        | service-specific data byte#2 | U   | xx        | —        |
| #4        | service-specific data byte#3 | U   | xx        | —        |
| #5        | service-specific data byte#4 | U   | xx        | —        |
| #6        | service-specific data byte#5 | U   | xx        | —        |
| #7        | service-specific data byte#6 | U   | xx        | —        |

The message format defined for some services for the ISO 15765-4 protocol allows for an optional number of data bytes in the request message sent by the external test equipment. If these are included in the request message, support of those optional data bytes becomes mandatory for the server/ECU.

### 6.3.3.2 ISO 9141-2, ISO 14230-4, SAE J1850 — Positive response message format

Table 13 specifies the positive response message format.

**Table 13 — Positive response message format for ISO 9141-2, ISO 14230-4, SAE J1850**

| Data Byte | Parameter Name                       | Cvt | Hex Value | Mnemonic |
|-----------|--------------------------------------|-----|-----------|----------|
| #1        | Positive Response Service Identifier | M   | xx        | SIDPR    |
| #2        | service-specific data byte#1         | U   | xx        | —        |
| #3        | service-specific data byte#2         | U   | xx        | —        |
| #4        | service-specific data byte#3         | U   | xx        | —        |
| #5        | service-specific data byte#4         | U   | xx        | —        |
| #6        | service-specific data byte#5         | U   | xx        | —        |
| #7        | service-specific data byte#6         | U   | xx        | —        |

### 6.3.3.3 ISO 15765-4 — Positive response message format

Table 14 specifies the positive response message format.

**Table 14 — Positive response message format for ISO 15765-4**

| Data Byte                                                                                                        | Parameter Name                       | Cvt | Hex Value | Mnemonic |
|------------------------------------------------------------------------------------------------------------------|--------------------------------------|-----|-----------|----------|
| #1                                                                                                               | Positive Response Service Identifier | M   | xx        | SIDPR    |
| #2                                                                                                               | service-specific data byte#1         | U   | xx        | —        |
| #3                                                                                                               | service-specific data byte#2         | U   | xx        | —        |
| #4                                                                                                               | service-specific data byte#3         | U   | xx        | —        |
| ⋮                                                                                                                | ⋮                                    | ⋮   | ⋮         | ⋮        |
| #n-2                                                                                                             | service-specific data byte#m-2       | U   | xx        | —        |
| #n-1                                                                                                             | service-specific data byte#m-1       | U   | xx        | —        |
| #n                                                                                                               | service-specific data byte#m         | U   | xx        | —        |
| n: this value depends on the response message length<br>m: this value depends on the response message length - 1 |                                      |     |           |          |

### 6.3.3.4 ISO 14230-4, ISO 15765-4 — Negative response message format

This subclause includes additions, exceptions, and/or restrictions for ISO 14230-4 and ISO 15765-4.

Table 15 specifies the negative response message format.

Table 15 — Negative response message format for ISO 14230-4, ISO 15765-4

| Data Byte | Parameter Name                       | Cvt | Hex Value | Mnemonic |
|-----------|--------------------------------------|-----|-----------|----------|
| #1        | Negative Response Service Identifier | M   | 0x7F      | SIDNR    |
| #2        | Request Service Identifier           | M   | xx        | SIDRQ    |
| #3        | Response Code                        | M   | xx        | RC_      |

#### 6.3.4 Response code parameter definition

Response codes shall be implemented in an ECU that supports a service(s) not having valid data available at the time of a request or which cannot respond with valid data available within  $P2_{K-Line}$  and  $P2_{CAN}$  timing.

Table 16 defines negative response codes.

Table 16 — Negative response code (NRC) definition

| Supported by ISO Protocol | Hex Value | Definition of Response Code                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Mnemonic |
|---------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 14230-4                   | 0x10      | generalReject<br>This response code indicates that the service is rejected but the server (ECU) does not specify the reason of the rejection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | GR       |
| 14230-4                   | 0x11      | serviceNotSupported<br>This response code indicates that the requested action will not be taken because the server (ECU) does not support the requested service.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | SNS      |
| 14230-4                   | 0x12      | subFunctionNotSupported-InvalidFormat<br>This response code indicates that the requested action will not be taken because the server (ECU) does not support the arguments of the request message or the format of the argument bytes do not match the prescribed format for the specified service.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | SFNSIF   |
| 14230-4<br>15765-4        | 0x21      | busy-RepeatRequest<br>This response code indicates that the server (ECU) is temporarily too busy to perform the requested operation. For ISO 15765-4 protocol, the client (external test equipment) shall behave as defined in ISO 15765-4. In a multi-client (more than one external test equipment, e.g. telematic client) environment the diagnostic request message of one client might be blocked temporarily by a negative response message with response code 0x21 while another client finishes a diagnostic task. Therefore this negative response code (NRC) is only allowed to be used during the initialization sequence of the protocol.<br><br>NOTE If the server (ECU) is able to perform the diagnostic task but needs additional time to finish the task and prepares the response message, the negative response message with response code 0x78 are used instead of 0x21. | BRR      |
| 14230-4<br>15765-4        | 0x22      | conditionsNotCorrectOrRequestSequenceError<br>This response code indicates that the requested action will not be taken because the server (ECU) prerequisite conditions are not met. This request may also occur when sequence-sensitive requests are issued in the wrong order.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | CNCORSE  |
| 14230-4<br>15765-4        | 0x78      | requestCorrectlyReceived-ResponsePending<br>This response code indicates that the request message was received correctly, and that any parameters in the request message were valid, but the action to be performed may not be completed yet. This response code can be used to indicate that the request message was properly received and does not need to be re-transmitted, but the server (ECU) is not yet ready to receive another request. The negative response message with this response code may be repeated by the ECU(s) within $P2_{K-Line} = P2_{CAN} = P2_{max}^*$ until the positive response message with the requested data is available.                                                                                                                                                                                                                                 | RCR-RP   |

### 6.3.5 Header byte definition of ISO 9141-2, ISO 14230-4, and SAE J1850

The first three (3) bytes of all diagnostic messages are the header bytes.

For SAE J1850 and ISO 9141-2 interfaces, the value of the first header byte is dependant on the bit rate of the data link and the type of message (see SAE J1850 and ISO 9141-2). The second header byte has a value that depends on the type of message, either a request or a response.

For ISO 14230-4 interfaces, the value of the first header byte indicates the addressing mode (physical/functional) and the length of the data field. The second header byte is the address of the receiver of the message. The third header byte for all interfaces is the physical address of the sender of the message. The external test equipment has the address 0xF1. Other service tools shall use addresses in the range from 0xF0 to 0xFD. The response to all request messages will be independent of the address of the external test equipment requesting the information. Vehicle manufacturers shall not use the header bytes defined in this part of ISO 15031 for any purpose other than emissions-related diagnostic messages. When they are used, they shall conform to this specification.

Table 17 defines the diagnostic message format for ISO 9141-2, ISO 14230-4, and SAE J1850 protocols.

**Table 17 — Diagnostic message format for ISO 9141-2, ISO 14230-4, SAE J1850**

| Header Bytes (Hex)                                           |                      |                      | Data Bytes           |    |    |    |    |    |    |     |      |
|--------------------------------------------------------------|----------------------|----------------------|----------------------|----|----|----|----|----|----|-----|------|
| Priority/Type                                                | Target Address (hex) | Source Address (hex) | #1                   | #2 | #3 | #4 | #5 | #6 | #7 | ERR | RESP |
| Diagnostic Request at 10,4 kbit/s: SAE J1850 and ISO 9141-2  |                      |                      |                      |    |    |    |    |    |    |     |      |
| 0x68                                                         | 0x6A                 | 0xF1                 | Maximum 7 data bytes |    |    |    |    |    |    | Yes | No   |
| Diagnostic Response at 10,4 kbit/s: SAE J1850 and ISO 9141-2 |                      |                      |                      |    |    |    |    |    |    |     |      |
| 0x48                                                         | 0x6B                 | ECU addr             | Maximum 7 data bytes |    |    |    |    |    |    | Yes | No   |
| Diagnostic Request at 10,4 kbit/s (ISO 14230-4)              |                      |                      |                      |    |    |    |    |    |    |     |      |
| 11LL LLLLb                                                   | 0x33                 | 0xF1                 | Maximum 7 data bytes |    |    |    |    |    |    | Yes | No   |
| Diagnostic Response at 10,4 kbit/s (ISO 14230-4)             |                      |                      |                      |    |    |    |    |    |    |     |      |
| 10LL LLLLb                                                   | 0xF1                 | ECU addr             | Maximum 7 data bytes |    |    |    |    |    |    | Yes | No   |
| Diagnostic Request at 41,6 kbit/s (SAE J1850)                |                      |                      |                      |    |    |    |    |    |    |     |      |
| 0x61                                                         | 0x6A                 | 0xF1                 | Maximum 7 data bytes |    |    |    |    |    |    | Yes | Yes  |
| Diagnostic Response at 41,6 kbit/s (SAE J1850)               |                      |                      |                      |    |    |    |    |    |    |     |      |
| 0x41                                                         | 0x6B                 | ECU addr             | Maximum 7 data bytes |    |    |    |    |    |    | Yes | Yes  |

NOTE LL LLLL = Length of data bytes; RESP = In-frame response; ERR = Error Detection.

### 6.3.6 Header byte definition of ISO 15765-4

Each CAN frame is identified by a CAN Identifier. The size of the identifier is either 11 bit or 29 bit. The CAN identifier shall always be followed by an eight (8) byte CAN frame data field [see ISO 15765-4; section "Data length code (DLC)"]. Depending on the message type, up to three (3) bytes (FlowControl) are used for the PCI (Protocol Control Information) prior to the Service Identifier (only included in single frame or first frame) and data bytes of the message.

Table 18 defines the diagnostic message format for ISO 15765-4 protocol.

Table 18 — Diagnostic message format for ISO 15765-4

| Header Bytes                  | CAN frame data field |    |    |    |    |    |    |    |
|-------------------------------|----------------------|----|----|----|----|----|----|----|
| CAN Identifier (11 or 29 bit) | #1                   | #2 | #3 | #4 | #5 | #6 | #7 | #8 |

### 6.3.7 Data bytes definition of ISO 9141-2, ISO 14230-4, SAE J1850, and ISO 15765-4

For the ISO 9141-2, ISO 14230-4, and the SAE J1850 protocol, the first data byte following the header is the diagnostic service identifier, and the remaining data bytes vary depending on the specific diagnostic service. For the ISO 15765-4 protocol, the first data byte following the CAN Identifier in a single frame and first frame is the PCI (Protocol Control Information, number of bytes varies, depending on frame type), then diagnostic service identifier, and the remaining data bytes vary depending on the specific diagnostic service.

### 6.3.8 Non-data bytes included in diagnostic messages with SAE J1850

All diagnostic messages use a cyclic redundancy check (CRC) as in SAE J1850 as the error detection byte (ERR). In-frame response (RSP) is specified as optional in SAE J1850. For messages specified in this part of ISO 15031, the RSP byte is required in all request and response messages at 41,6 kbit/s, and is not allowed for messages at 10,4 kbit/s. The in-frame response byte shall be the node address of the device transmitting the RSP. SAE J1850 specifies additional message elements that may be included in diagnostic messages. Use of these message elements is beyond the scope of this part of ISO 15031, but needs to be considered when specifying total diagnostic messages.

### 6.3.9 Non-data bytes included in diagnostic messages with ISO 9141-2 and ISO 14230-4

Messages will include a checksum, specified in ISO 9141-2 and ISO 14230-4, after the data bytes as the error detection byte (ERR). There is no provision for an in-frame response.

In the bit position convention, some data byte values include descriptions that are based on bit positions within the byte. The convention used is that the most significant bit (MSB) is referred to as “bit 7”, and the least significant bit (LSB) is referred to as “bit 0,” as shown in Figure 16.

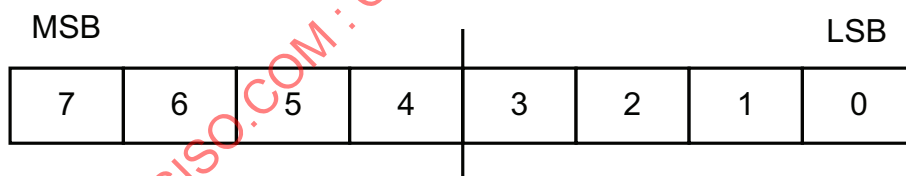


Figure 16 — Bit position within a data byte

## 6.4 Byte order convention

When reporting data larger than one byte, the Most Significant Byte (or high byte) is reported as first data byte followed by the next most significant bytes. The Least Significant Byte (or low byte) is reported as the last data byte. This convention is shown in numerous examples throughout this part of ISO 15031.

## 6.5 Allowance for expansion and enhanced diagnostic services

This part of ISO 15031 allows for the addition of diagnostic services both as industry standards and manufacturer-specific services. The diagnostic services 0x00 through 0x0F are ISO/SAE reserved.

## 6.6 Definition of PIDs for services 0x01 and 0x02

All PIDs are defined in SAE J1979-DA.

**IMPORTANT** — Several new PIDs have been defined in SAE J1979-DA based on new emissions-related vehicle technology. The data size of those PIDs exceeds the maximum message length of the non-CAN protocols (SAE J1850, ISO 9141-2, ISO 14230-4). Those PIDs are not supported by the non-CAN protocols.

## 6.7 Format of data to be displayed

Table 19 indicates the type of data and minimum requirements for the display format.

**Table 19 — Format of data to be displayed**

| Data                                   | Services           | Display Format                                                                                                                                                                           |
|----------------------------------------|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Device ID – source address of response | All                | ISO 9141-2: Hexadecimal (0x00 to 0xFF)<br>ISO 14230-4: Hexadecimal (0x00 to 0xFF)<br>SAE J1850: Hexadecimal (0x00 to 0xFF)<br>ISO 15765-4: Hexadecimal (11 bit or 29 bit CAN Identifier) |
| Parameter ID (PID)                     | 0x01 & 0x02        | Hexadecimal (0x00 to 0xFF) description (see SAE J1979-DA)                                                                                                                                |
| Frame number                           | 0x02               | Decimal (0 to 255)                                                                                                                                                                       |
| Data values                            | 0x01 & 0x02        | See SAE J1979-DA                                                                                                                                                                         |
| Diagnostic trouble codes               | 0x03, 0x07, & 0x0A | “P”, “B”, “C” or “U”, plus 4 hexadecimal characters and/or DTC definition (see SAE J2012-DA)                                                                                             |
| Test ID                                | 0x05, 0x06, & 0x08 | Hexadecimal (0x00 to 0xFF)                                                                                                                                                               |
| Test value and test limits             | 0x05               | Engineering units for Test IDs less than 0x80 (see SAE J1979-DA) – Decimal (0 to 255) for Test IDs greater than 0x80                                                                     |
| Test value and test limits             | 0x06               | Decimal (0 to 65535)                                                                                                                                                                     |
| Component ID                           | 0x06               | Hexadecimal (0x00 to 0x7F)                                                                                                                                                               |
| Optional data bytes                    | 0x08               | 4 bytes, each decimal (0 to 255) (see SAE J1979-DA)                                                                                                                                      |
| Vehicle information type               | 0x09               | Hexadecimal (0x00 to 0x7F) (see SAE J1979-DA)                                                                                                                                            |
| Vehicle information data               | 0x09               | ASCII for information types 0x02, 0x04, and 0x0A;<br>Hexadecimal for information type 0x06;<br>Decimal for information type 0x08 and 0x0B (see SAE J1979-DA)                             |

NOTE ISO 15031-4/SAE J1978 specifies further guidelines and examples on displaying Service 0x01 through 0x09 data.

## 7 Diagnostic service definition for ISO 9141-2, ISO 14230-4, and SAE J1850

### 7.1 Service 0x01 — Request current powertrain diagnostic data

#### 7.1.1 Functional description

The purpose of this service is to allow access to current emission-related data values, including analogue inputs and outputs, digital inputs and outputs, and system status information. The request for information includes a parameter identification (PID) value that indicates to the on-board system the specific information requested. PID specifications, scaling information, and display formats are included in SAE J1979-DA.

The ECU(s) shall respond to this message by transmitting the requested data value last determined by the system. All data values returned for sensor readings will be actual readings, not default or substitute values used by the system because of a fault with that sensor.

Not all PIDs are applicable or supported by all systems. PID 0x00 is a bit-encoded PID that indicates, for each ECU, which PIDs that ECU supports. PID 0x00 shall be supported by all ECUs that respond to a Service 0x01 request, because the external test equipment that conforms to SAE J1978 uses the presence of a response message by the vehicle to this request message to determine which protocol is supported for diagnostic communications. SAE J1979-DA defines how to encode supported PIDs.

**IMPORTANT — All emissions-related OBD ECUs which at least support one of the services defined in this part of ISO 15031 shall support Service 0x01 and PID 0x00. Service 0x01 with PID 0x00 is defined as the universal “initialization/keep alive/ping” message for all emissions-related OBD ECUs.**

## 7.1.2 Message data bytes

### 7.1.2.1 Request current powertrain diagnostic data request message definition (read-supported PIDs)

**Table 20 — Request current powertrain diagnostic data request message (read-supported PIDs)**

| Data Byte | Parameter Name                                         | Cvt | Hex Value | Mnemonic |
|-----------|--------------------------------------------------------|-----|-----------|----------|
| #1        | Request current powertrain diagnostic data request SID | M   | 0x01      | SIDRQ    |
| #2        | PID (see SAE J1979-DA)                                 | M   | xx        | PID      |

### 7.1.2.2 Request current powertrain diagnostic data response message definition (report supported PIDs)

**Table 21 — Request current powertrain diagnostic data response message (report supported PIDs)**

| Data Byte | Parameter Name                                                                                 | Cvt | Hex Value | Mnemonic       |
|-----------|------------------------------------------------------------------------------------------------|-----|-----------|----------------|
| #1        | Request current powertrain diagnostic data response SID                                        | M   | 0x41      | SIDPR          |
| #2        | data record of supported PID = [<br>supported PID<br>data A,<br>data B,<br>data C,<br>data D ] | M   | xx        | PIDREC_<br>PID |
| #3        |                                                                                                | M   | xx        | DATA_A         |
| #4        |                                                                                                | M   | xx        | DATA_B         |
| #5        |                                                                                                | M   | xx        | DATA_C         |
| #6        |                                                                                                | M   | xx        | DATA_D         |

### 7.1.2.3 Request current powertrain diagnostic data request message definition (read PID value)

**Table 22 — Request current powertrain diagnostic data request message (read PID value)**

| Data Byte | Parameter Name                                         | Cvt              | Hex Value | Mnemonic |
|-----------|--------------------------------------------------------|------------------|-----------|----------|
| #1        | Request current powertrain diagnostic data request SID | M                | 01        | SIDRQ    |
| #2        | PID (see SAE J1979-DA)                                 | M/C <sup>a</sup> | xx        | PID      |

<sup>a</sup> C = Conditional — PID value is one of the supported PIDs of previous response message.

#### 7.1.2.4 Request current powertrain diagnostic data response message definition (report PID value)

**Table 23 — Request current powertrain diagnostic data response message (report PID value)**

| Data Byte | Parameter Name                                                                                       | Cvt            | Hex Value | Mnemonic       |
|-----------|------------------------------------------------------------------------------------------------------|----------------|-----------|----------------|
| #1        | Request current powertrain diagnostic data response SID                                              | M              | 0x41      | SIDPR          |
| #2        | data record of 1 <sup>st</sup> supported PID = [<br>PID<br>data A,<br>data B,<br>data C,<br>data D ] | M              | xx        | PIDREC_<br>PID |
| #3        |                                                                                                      | M              | xx        | DATA_A         |
| #4        |                                                                                                      | C <sup>a</sup> | xx        | DATA_B         |
| #5        |                                                                                                      | C              | xx        | DATA_C         |
| #6        |                                                                                                      | C              | xx        | DATA_D         |

<sup>a</sup> C = Conditional — data B - D depend on selected PID value.

The PID, which is included in the request message, may be supported by all emission-related ECUs, which shall comply with this specification. Therefore, multiple response messages are sent by the vehicle ECUs.

#### 7.1.3 Parameter definition

##### 7.1.3.1 PIDs supported

SAE J1979-DA specifies the interpretation of the data record of supported PIDs.

##### 7.1.3.2 PID and data byte descriptions

SAE J1979-DA specifies standardized emission-related parameters.

#### 7.1.4 Message example

The example below shows how the “Request current powertrain diagnostic data” service shall be implemented.

##### 7.1.4.1 Step #1: Request supported PIDs from vehicle

The external test equipment requests supported PIDs (PID = 0x00, 0x20) from the vehicle. Refer to SAE J1979-DA to interpret the data bytes in the response messages.

**Table 24 — Request current powertrain diagnostic data request message**

| <b>Message Direction:</b> |                                                        | External test equipment → All ECUs |          |
|---------------------------|--------------------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                                        | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal)            | Byte Value                         | Mnemonic |
| #1                        | Request current powertrain diagnostic data request SID | 0x01                               | SIDRQ    |
| #2                        | PID used to determine PID support for PIDs 0x01 - 0x20 | 0x00                               | PID      |

**Table 25 — Request current powertrain diagnostic data response message**

| <b>Message Direction:</b> |                                                              | ECU#1 → External test equipment |          |
|---------------------------|--------------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                              | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)                  | Byte Value                      | Mnemonic |
| #1                        | Request current powertrain diagnostic data response SID      | 0x41                            | SIDPR    |
| #2                        | PID requested                                                | 0x00                            | PID      |
| #3                        | Data byte A, representing support for PIDs 0x01, 0x03 – 0x08 | 10111111b = 0xBF                | DATA_A   |
| #4                        | Data byte B, representing support for PIDs 0x09, 0x0B – 0x10 | 10111111b = 0xBF                | DATA_B   |
| #5                        | Data byte C, representing support for PIDs 0x11, 0x13, 0x15  | 10101000b = 0xA8                | DATA_C   |
| #6                        | Data byte D, representing support for PIDs 0x19, 0x1C, 0x20  | 10010001b = 0x91                | DATA_D   |

**Table 26 — Request current powertrain diagnostic data response message**

| <b>Message Direction:</b> |                                                           | ECU#2 → External test equipment |          |
|---------------------------|-----------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                           | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)               | Byte Value                      | Mnemonic |
| #1                        | Request current powertrain diagnostic data response SID   | 0x41                            | SIDPR    |
| #2                        | PID requested                                             | 0x00                            | PID      |
| #3                        | Data byte A, representing support for PID 0x01            | 10000000b = 0x80                | DATA_A   |
| #4                        | Data byte B, representing support for PID 0x0D            | 00001000b = 0x08                | DATA_B   |
| #5                        | Data byte C, representing no support for PIDs 0x11 – 0x18 | 00000000b = 0x00                | DATA_C   |
| #6                        | Data byte D, representing no support for PIDs 0x19 – 0x20 | 00000000b = 0x00                | DATA_D   |

**Table 27 — Request current powertrain diagnostic data request message**

| <b>Message Direction:</b> |                                                        | External test equipment → All ECUs |          |
|---------------------------|--------------------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                                        | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal)            | Byte Value                         | Mnemonic |
| #1                        | Request current powertrain diagnostic data request SID | 0x01                               | SIDRQ    |
| #2                        | PID requested                                          | 0x20                               | PID      |

**Table 28 — Request current powertrain diagnostic data response message**

| <b>Message Direction:</b> |                                                           | ECU#1 → External test equipment |          |
|---------------------------|-----------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                           | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)               | Byte Value                      | Mnemonic |
| #1                        | Request current powertrain diagnostic data response SID   | 0x41                            | SIDPR    |
| #2                        | PID requested                                             | 0x20                            | PID      |
| #3                        | Data byte A, representing support for PID 0x21            | 10000000b = 0x80                | DATA_A   |
| #4                        | Data byte B, representing no support for PIDs 0x29 – 0x30 | 00000000b = 0x00                | DATA_B   |
| #5                        | Data byte C, representing no support for PIDs 0x31 – 0x38 | 00000000b = 0x00                | DATA_C   |
| #6                        | Data byte D, representing no support for PIDs 0x39 – 0x40 | 00000000b = 0x00                | DATA_D   |

NOTE ECU#2 does not send a response message because it indicated with the previous response message that it does not support PID 0x20.

Now the external test equipment creates an internal list of supported PIDs for each ECU. The ECU#1 (ECM) supports the following PIDs: 0x01, 0x03 – 0x09, 0x0B – 0x11, 0x13, 0x15, 0x19, 0x1C, 0x20, 0x21. The ECU#2 (TCM) supports the PIDs 0x01 and 0x0D.

#### 7.1.4.2 Step #2: Request PID from vehicle

The external test equipment requests the following PID from the vehicle:

- PID 0x01: Number of emission-related powertrain DTCs and MIL status, PID is supported by ECU#1 (ECM) and ECU#2 (TCM)

**Table 29 — Request current powertrain diagnostic data request message**

| <b>Message Direction:</b> |                                                                | External test equipment → All ECUs |          |
|---------------------------|----------------------------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                                                | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal)                    | Byte Value                         | Mnemonic |
| #1                        | Request current powertrain diagnostic data request SID         | 0x01                               | SIDRQ    |
| #2                        | PID: Number of emission-related powertrain DTCs and MIL status | 0x01                               | PID      |

**Table 30 — Request current powertrain diagnostic data response message**

| <b>Message Direction:</b> |                                                                           | ECU#1 → External test equipment |          |
|---------------------------|---------------------------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                                           | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)                               | Byte Value                      | Mnemonic |
| #1                        | Request current powertrain diagnostic data response SID                   | 0x41                            | SIDPR    |
| #2                        | PID: Number of emission-related powertrain DTCs and MIL status            | 0x01                            | PID      |
| #3                        | MIL: ON; Number of emission-related powertrain DTCs: 0x01                 | 0x81                            | DATA_A   |
| #4                        | Misfire -, Fuel system -, Comprehensive monitoring                        | 0x07                            | DATA_B   |
| #5                        | Catalyst -, Heated catalyst -, ..., monitoring supported                  | 0xEF                            | DATA_C   |
| #6                        | Catalyst -, Heated catalyst -, ..., monitoring test complete/not complete | 0x63                            | DATA_D   |

**Table 31 — Request current powertrain diagnostic data response message**

| <b>Message Direction:</b> |                                                                           | ECU#2 → External test equipment |          |
|---------------------------|---------------------------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                                           | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)                               | Byte Value                      | Mnemonic |
| #1                        | Request current powertrain diagnostic data response SID                   | 0x41                            | SIDPR    |
| #2                        | PID: Number of emission-related powertrain DTCs and MIL status            | 0x01                            | PID      |
| #3                        | MIL: OFF; Number of emission-related powertrain DTCs: 0x01                | 0x01                            | DATA_A   |
| #4                        | Comprehensive monitoring: supported, test complete                        | 0x04                            | DATA_B   |
| #5                        | Catalyst -, Heated catalyst -, ..., monitoring supported                  | 0x00                            | DATA_C   |
| #6                        | Catalyst -, Heated catalyst -, ..., monitoring test complete/not complete | 0x00                            | DATA_D   |

The ECU#1 (ECM) reports MIL commanded on, one stored DTC, all monitors as supported, catalyst, heated catalyst, oxygen sensor and oxygen sensor heater as not completed, and all other monitors as completed.

The ECU#2 (TCM) reports MIL commanded off, one stored DTC, comprehensive components monitor as supported and complete, and all other monitors as not supported.

The external test equipment requests the following PID from the vehicle:

— PID 0x19: Bank 2 - Sensor 2, PID is supported by ECU#1 (ECM).

**Table 32 — Request current powertrain diagnostic data request message**

| <b>Message Direction:</b> | External test equipment → All ECUs                                            |            |          |
|---------------------------|-------------------------------------------------------------------------------|------------|----------|
| <b>Message Type:</b>      | Request                                                                       |            |          |
| Data Byte                 | Description (all values are in hexadecimal)                                   | Byte Value | Mnemonic |
| #1                        | Request current powertrain diagnostic data request SID                        | 0x01       | SIDRQ    |
| #2                        | PID: Oxygen Sensor Output Voltage (B2 - S2)<br>Short Term Fuel Trim (B2 - S2) | 0x19       | PID      |

**Table 33 — Request current powertrain diagnostic data response message**

| <b>Message Direction:</b> | ECU#1 → External test equipment                                               |            |          |
|---------------------------|-------------------------------------------------------------------------------|------------|----------|
| <b>Message Type:</b>      | Response                                                                      |            |          |
| Data Byte                 | Description (all values are in hexadecimal)                                   | Byte Value | Mnemonic |
| #1                        | Request current powertrain diagnostic data response SID                       | 0x41       | SIDPR    |
| #2                        | PID: Oxygen Sensor Output Voltage (B2 - S2)<br>Short Term Fuel Trim (B2 - S2) | 0x19       | PID      |
| #3                        | Oxygen Sensor Output Voltage (B2 - S2): 0,8 Volt                              | 0xA0       | DATA_A   |
| #4                        | Short Term Fuel Trim (B2 - S2): 93,7 %                                        | 0x78       | DATA_B   |

NOTE ECU#2 does not support PID 0x19 and therefore does not send a response message.

## 7.2 Service 0x02 — Request powertrain freeze frame data

### 7.2.1 Functional description

The purpose of this service is to allow access to emission-related data values in a freeze frame. This allows expansion to meet manufacturer-specific requirements not necessarily related to the required freeze frame, and not necessarily containing the same data values as the required freeze frame. The request message includes a parameter identification (PID) value that indicates to the on-board system the specific information requested. PID specifications, scaling information and display formats for the freeze frame are included in SAE J1979-DA.

The ECU(s) shall respond to this message by transmitting the requested data value stored by the system. All data values returned for sensor readings will be actual stored readings, not default or substitute values used by the system because of a fault with that sensor.

Not all PIDs are applicable or supported by all systems. PID 0x00 is a bit-encoded PID that indicates, for each ECU, which PIDs that ECU supports. Therefore, PID 0x00 shall be supported by all ECUs that respond to a

Service 0x02 request as specified, even if the ECU does not have a freeze frame stored at the time of the request.

SAE J1979-DA defines how to encode supported PIDs.

PID 0x02 indicates the DTC that caused the freeze frame data to be stored. If freeze frame data is not stored in the ECU, the system shall report 0x00 0x00 as the DTC. Any data reported when the stored DTC is 0x00 0x00 may not be valid.

The frame number byte shall indicate 0x00 for the mandated freeze frame data. Manufacturers may optionally save additional freeze frames and use this service to obtain that data by specifying the freeze frame number in the request message. If a manufacturer uses these additional freeze frames, they will be stored under conditions specified by the manufacturer, and contain data specified by the manufacturer.

## 7.2.2 Message data bytes

### 7.2.2.1 Request powertrain freeze frame data request message definition (read-supported PIDs)

**Table 34 — Request powertrain freeze frame data request message (read-supported PIDs)**

| Data Byte | Parameter Name                                   | Cvt | Hex Value | Mnemonic |
|-----------|--------------------------------------------------|-----|-----------|----------|
| #1        | Request powertrain freeze frame data request SID | M   | 0x02      | SIDRQ    |
| #2        | PID (see SAE J1979-DA)                           | M   | xx        | PID      |
| #3        | frame #                                          | M   | xx        | FRNO     |

### 7.2.2.2 Request powertrain freeze frame data response message definition (report supported PIDs)

**Table 35 — Request powertrain freeze frame data response message (report supported PIDs)**

| Data Byte | Parameter Name                                                                                                                                 | Cvt | Hex Value | Mnemonic |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----------|----------|
| #1        | Request powertrain freeze frame data response SID                                                                                              | M   | 0x42      | SIDPR    |
| #2        | PID                                                                                                                                            | M   | xx        | PID      |
| #3        | frame #                                                                                                                                        | M   | xx        | FRNO     |
| #4        | data record of supported PIDs = [<br>Data A: supported PIDs,<br>Data B: supported PIDs,<br>Data C: supported PIDs,<br>Data D: supported PIDs ] | M   | xx        | DATAREC_ |
| #5        |                                                                                                                                                | M   | xx        | DATA_A   |
| #6        |                                                                                                                                                | M   | xx        | DATA_B   |
| #7        |                                                                                                                                                | M   | xx        | DATA_C   |

### 7.2.2.3 Request powertrain freeze frame data request message definition (read freeze frame PID value)

**Table 36 — Request powertrain freeze frame data request message (read freeze frame PID value)**

| Data Byte | Parameter Name                                         | Cvt              | Hex Value | Mnemonic |
|-----------|--------------------------------------------------------|------------------|-----------|----------|
| #1        | Request current powertrain diagnostic data request SID | M                | 0x02      | SIDRQ    |
| #2        | PID (see SAE J1979-DA)                                 | M/C <sup>a</sup> | xx        | PID      |
| #3        | frame #                                                | M                | xx        | FRNO     |

<sup>a</sup> C = Conditional. PID value shall be one of the supported PIDs of previous response message.

#### 7.2.2.4 Request powertrain freeze frame data response message definition (report freeze frame PID value)

**Table 37 — Request powertrain freeze frame data response message (report freeze frame PID value)**

| Data Byte | Parameter Name                                               | Cvt            | Hex Value | Mnemonic  |
|-----------|--------------------------------------------------------------|----------------|-----------|-----------|
| #1        | Request powertrain freeze frame data response SID            | M              | 0x42      | SIDPR     |
| #2        | PID                                                          | M              | xx        | PID       |
| #3        | frame #                                                      | M              | xx        | FRNO      |
| #4        | data record = [<br>Data A,<br>Data B,<br>Data C,<br>Data D ] | M              | xx        | DATA_REC_ |
| #5        |                                                              | C <sup>a</sup> | xx        | DATA_A    |
| #6        |                                                              | C              | xx        | DATA_B    |
| #7        |                                                              | C              | xx        | DATA_C    |
|           |                                                              |                |           | DATA_D    |

<sup>a</sup> C = Conditional. Data B - D depend on selected PID value.

### 7.2.3 Parameter definition

#### 7.2.3.1 PIDs supported

SAE J1979-DA specifies the interpretation of the data record of supported PIDs.

#### 7.2.3.2 PID and data byte descriptions

SAE J1979-DA specifies standardized emission-related parameters.

#### 7.2.3.3 Frame # description

The frame number identifies the freeze frame, which includes emission-related data values in case an emission-related DTC is detected by the ECU.

### 7.2.4 Message example

#### 7.2.4.1 General

The example below shows how the "Request powertrain freeze frame data" service shall be implemented.

#### 7.2.4.2 Step #1: Request Supported Powertrain Freeze Frame PIDs from Vehicle

The external test equipment requests all supported powertrain freeze frame PIDs of freeze frame 0x00 from the vehicle. Refer to the example of Service 0x01 on how to request supported PIDs.

As a result of the supported PID request, the external test equipment creates an internal list of supported PIDs for each ECU. ECU#1 (ECM) supports the following PIDs: 0x02 – 0x09, 0x0B – 0x0E. ECU#2 (TCM) does not support any PIDs for this service.

#### 7.2.4.3 Step #2: Request PID 0x02 "DTC which Caused Freeze Frame to be Stored" from Vehicle

##### 7.2.4.3.1 Case #1: Freeze Frame data are stored in ECU#1

Now the external test equipment requests PID 0x02 of freeze frame 0x00 from the vehicle. Since the ECU#2 (TCM) does not store a freeze frame data record, only the ECU#1 (ECM) will send a response message.

In this example, the freeze frame data are stored based on a DTC P0130 occurrence. The parameter value of PID 0x02 "DTC that caused required freeze frame data storage" is set to the DTC P0130.

**Table 38 — Request powertrain freeze frame data request message**

| <b>Message Direction:</b> |                                                         | External test equipment → All ECUs |          |
|---------------------------|---------------------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                                         | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal)             | Byte Value                         | Mnemonic |
| #1                        | Request powertrain freeze frame data request SID        | 0x02                               | SIDRQ    |
| #2                        | PID: DTC that caused required freeze frame data storage | 0x02                               | PID      |
| #3                        | Frame #                                                 | 0x00                               | FRNO     |

**Table 39 — Request powertrain freeze frame data response message**

| <b>Message Direction:</b> |                                                         | ECU#1 → External test equipment |          |
|---------------------------|---------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                         | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)             | Byte Value                      | Mnemonic |
| #1                        | Request powertrain freeze frame data response SID       | 0x42                            | SIDPR    |
| #2                        | PID: DTC that caused required freeze frame data storage | 0x02                            | PID      |
| #3                        | Frame #: 00                                             | 0x00                            | FRNO     |
| #4                        | DTC High Byte of P0130                                  | 0x01                            | DATA_A   |
| #5                        | DTC Low Byte of P0130                                   | 0x30                            | DATA_B   |

**7.2.4.3.2 Case #2: No freeze frame data are stored in any ECU**

If no freeze frame data are stored, then the ECU(s) which support this service but do not have any freeze frame stored shall send a response message with the parameter values of DATA\_A and DATA\_B of PID 0x02 “DTC that caused required freeze frame data storage” set to 0x0000.

**Table 40 — Request powertrain freeze frame data request message**

| <b>Message Direction:</b> |                                                         | External test equipment → All ECUs |          |
|---------------------------|---------------------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                                         | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal)             | Byte Value                         | Mnemonic |
| #1                        | Request powertrain freeze frame data request SID        | 0x02                               | SIDRQ    |
| #2                        | PID: DTC that caused required freeze frame data storage | 0x02                               | PID      |
| #3                        | Frame #: 00                                             | 0x00                               | FRNO     |

**Table 41 — Request powertrain freeze frame data response message  
(Service 0x02, PID 0x02, Frame # 0x00)**

| <b>Message Direction:</b> |                                                                    | ECU#1 → External test equipment |          |
|---------------------------|--------------------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                                    | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)                        | Byte Value                      | Mnemonic |
| #1                        | Request powertrain freeze frame data response SID                  | 0x42                            | SIDPR    |
| #2                        | PID: DTC that caused required freeze frame data storage            | 0x02                            | PID      |
| #3                        | Frame #: 00                                                        | 0x00                            | FRNO     |
| #4                        | DTC High Byte: zero value indicates that no freeze frame is stored | 0x00                            | DATA_A   |
| #5                        | DTC Low Byte: zero value indicates that no freeze frame is stored  | 0x00                            | DATA_B   |

NOTE The DTC value reported is 0x00 0x00, therefore no valid freeze frame data are stored for supported PIDs.

### 7.3 Service 0x03 — Request emission-related diagnostic trouble codes

#### 7.3.1 Functional description

The purpose of this service is to enable the external test equipment to obtain “confirmed” emission-related DTCs. This shall be a two-step process for the external test equipment:

- Step 1: Send a Service 0x01, PID 0x01 request to get the number of emission-related DTCs from all ECUs that have this available. Each ECU that has a DTC(s) stored will respond with a message that includes the number of stored codes to be reported. If an ECU that is capable of storing emission-related DTCs does not have stored DTCs, then that ECU shall respond with a message indicating zero (0) DTCs are stored.
- Step 2: Send a Service 0x03 request for all emission-related DTCs. Each ECU that has DTCs will respond with one or more messages, each containing up to three (3) DTCs. If no emission-related DTCs are stored in the ECU, then the ECU may not respond to this request.

If additional DTCs are set between the time that the number of DTCs is reported by an ECU, and the DTCs are reported by an ECU, then the number of DTCs reported could exceed the number expected by the external test equipment. In this case, the external test equipment shall repeat this cycle until the number of DTCs reported equals the number expected based on the Service 0x01, PID 0x01 response.

DTCs are transmitted in two (2) bytes of information for each DTC. The first two (2) bits (high order) of the first (1) byte for each DTC indicate whether the DTC is a Powertrain, Chassis, Body, or Network DTC (refer to SAE J2012 for additional interpretation of this structure). The second two (2) bits shall indicate the first (1) digit of the DTC (0 through 3). The second (2) nibble of the first (1) byte and the entire second (2) byte are the next three (3) hexadecimal characters of the actual DTC reported hexadecimal. A powertrain DTC transmitted as 0x0143 shall be displayed as P0143 (see Figure 17).

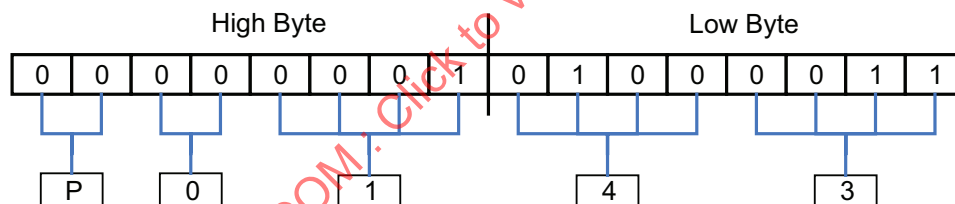


Figure 17 — Diagnostic trouble code encoding example DTC P0143

If fewer than three (3) DTCs are reported, the response message used to report DTCs shall have their unused bytes set to zero (0) to maintain the required fixed message length for all messages. If there are no DTCs to report, a response message is allowed, but not required for SAE J1850 and ISO 9141-2 interfaces. For ISO 14230-4 interfaces, the ECU will respond with a report containing no DTCs (DTC#1, DTC#2, and DTC#3 shall be all set to 0x00).

#### 7.3.2 Message data bytes

##### 7.3.2.1 Request current powertrain diagnostic data request message definition (PID 0x01)

Table 42 — Request current powertrain diagnostic data request message (PID 0x01)

| Data Byte | Parameter Name                                         | Cvt | Hex Value | Mnemonic |
|-----------|--------------------------------------------------------|-----|-----------|----------|
| #1        | Request current powertrain diagnostic data request SID | M   | 0x01      | SIDRQ    |
| #2        | PID {Number of emission-related DTCs and MIL status}   | M   | 0x01      | PID      |

### 7.3.2.2 Request current powertrain diagnostic data response message definition (PID 0x01)

**Table 43 — Request current powertrain diagnostic data response message (PID 0x01)**

| Data Byte | Parameter Name                                               | Cvt | Hex Value | Mnemonic           |
|-----------|--------------------------------------------------------------|-----|-----------|--------------------|
| #1        | Request current powertrain diagnostic data response SID      | M   | 0x41      | SIDPR              |
| #2        | PID {Number of emission-related DTCs and MIL status}         | M   | 0x01      | PID                |
| #3        | data record = [<br>Data A,<br>Data B,<br>Data C,<br>Data D ] | M   | xx        | DATAREC_<br>DATA_A |
| #4        |                                                              | M   | xx        | DATA_B             |
| #5        |                                                              | M   | xx        | DATA_C             |
| #6        |                                                              | M   | xx        | DATA_D             |

### 7.3.2.3 Request emission-related DTC request message definition

**Table 44 — Request emission-related DTC request message**

| Data Byte | Parameter Name                           | Cvt | Hex Value | Mnemonic |
|-----------|------------------------------------------|-----|-----------|----------|
| #1        | Request emission-related DTC request SID | M   | 0x03      | SIDRQ    |

### 7.3.2.4 Request emission-related DTC response message definition

**Table 45 — Request emission-related DTC response message**

| Data Byte | Parameter Name                            | Cvt              | Hex Value | Mnemonic |
|-----------|-------------------------------------------|------------------|-----------|----------|
| #1        | Request emission-related DTC response SID | M                | 0x43      | SIDPR    |
| #2        | DTC#1 (High Byte)                         | M/C <sup>a</sup> | xx        | DTC1HI   |
| #3        | DTC#1 (Low Byte)                          | M/C              | xx        | DTC1LO   |
| #4        | DTC#2 (High Byte)                         | M/C              | xx        | DTC2HI   |
| #5        | DTC#2 (Low Byte)                          | M/C              | xx        | DTC2LO   |
| #6        | DTC#3 (High Byte)                         | M/C              | xx        | DTC3HI   |
| #7        | DTC#3 (Low Byte)                          | M/C              | xx        | DTC3LO   |

<sup>a</sup> C = Conditional. DTC#1, DTC#2, and DTC#3 are always present. If no valid DTC number is included the DTC values shall contain 0x00.

### 7.3.3 Parameter definition

This service does not support any parameters.

### 7.3.4 Message example

The example below shows how the “Request emission-related DTCs” service shall be implemented. The external test equipment requests emission-related DTCs from the vehicle. The vehicle supports the ISO 14230-4 protocol. The ECU#1 (ECM) has six (6) DTCs stored, the ECU#2 (TCM) has one (1) DTC stored, and the ECU#3 (ABS/Traction Control) has no DTC stored.

- ECU#1 (ECM): P0143, P0196, P0234, P02CD, P0357, P0A24
- ECU#2 (TCM): P0443
- ECU#3 (ABS/Traction Control): no DTC stored (response message is optional for ISO 9141-2 and SAE J1850)

The external test equipment requests the following PID from the vehicle:

- PID 0x01: Number of emission-related DTCs and MIL status, PID is supported by ECU#1 (ECM), ECU#2 (TCM), and ECU#3 (ABS/Traction Control)

**Table 46 — Request current powertrain diagnostic data request message**

| <b>Message Direction:</b> |                                                        | External test equipment → All ECUs |          |
|---------------------------|--------------------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                                        | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal)            | Byte Value                         | Mnemonic |
| #1                        | Request current powertrain diagnostic data request SID | 0x01                               | SIDRQ    |
| #2                        | PID: Number of emission-related DTCs and MIL status    | 0x01                               | PID      |

**Table 47 — Request current powertrain diagnostic data response message**

| <b>Message Direction:</b> |                                                                           | ECU#1 → External test equipment |          |
|---------------------------|---------------------------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                                           | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)                               | Byte Value                      | Mnemonic |
| #1                        | Request current powertrain diagnostic data response SID                   | 0x41                            | SIDPR    |
| #2                        | PID: Number of emission-related DTCs and MIL status                       | 0x01                            | PID      |
| #3                        | MIL: ON; Number of emission-related DTCs: 0x06                            | 0x86                            | DATA_A   |
| #4                        | Misfire -, Fuel system -, Comprehensive monitoring                        | 0x33                            | DATA_B   |
| #5                        | Catalyst -, Heated catalyst -, ..., monitoring supported                  | 0xFF                            | DATA_C   |
| #6                        | Catalyst -, Heated catalyst -, ..., monitoring test complete/not complete | 0x63                            | DATA_D   |

**Table 48 — Request current powertrain diagnostic data response message**

| <b>Message Direction:</b> |                                                                           | ECU#2 → External test equipment |          |
|---------------------------|---------------------------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                                           | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)                               | Byte Value                      | Mnemonic |
| #1                        | Request current powertrain diagnostic data response SID                   | 0x41                            | SIDPR    |
| #2                        | PID: Number of emission-related DTCs and MIL status                       | 0x01                            | PID      |
| #3                        | MIL: OFF; Number of emission-related DTCs: 0x01                           | 0x01                            | DATA_A   |
| #4                        | Comprehensive monitoring: supported, test complete                        | 0x44                            | DATA_B   |
| #5                        | Catalyst -, Heated catalyst -, ..., monitoring supported                  | 0x00                            | DATA_C   |
| #6                        | Catalyst -, Heated catalyst -, ..., monitoring test complete/not complete | 0x00                            | DATA_D   |

**Table 49 — Request current powertrain diagnostic data response message**

| <b>Message Direction:</b> |                                                                           | ECU#3 → External test equipment |                 |
|---------------------------|---------------------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                                           | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>                        | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request current powertrain diagnostic data response SID                   | 0x41                            | SIDPR           |
| #2                        | PID: Number of emission-related DTCs and MIL status                       | 0x01                            | PID             |
| #3                        | MIL: OFF; Number of emission-related DTCs: 0x00                           | 0x00                            | DATA_A          |
| #4                        | Comprehensive monitoring: supported, test complete                        | 0x00                            | DATA_B          |
| #5                        | Catalyst -, Heated catalyst -, ..., monitoring supported                  | 0x00                            | DATA_C          |
| #6                        | Catalyst -, Heated catalyst -, ..., monitoring test complete/not complete | 0x00                            | DATA_D          |

The external test equipment requests emission-related DTCs because ECU#1 has six (6) DTCs stored, ECU#2 has one (1) DTC stored, and ECU#3 has no (0) DTC stored.

**Table 50 — Request emission-related diagnostic trouble codes request message**

| <b>Message Direction:</b> |                                                    | External test equipment → All ECUs |                 |
|---------------------------|----------------------------------------------------|------------------------------------|-----------------|
| <b>Message Type:</b>      |                                                    | Request                            |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b> | <b>Byte Value</b>                  | <b>Mnemonic</b> |
| #1                        | Request emission-related DTC request SID           | 0x03                               | SIDRQ           |

**Table 51 — Request emission-related diagnostic trouble codes response message**

| <b>Message Direction:</b> |                                                    | ECU#1 → External test equipment |                 |
|---------------------------|----------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                    | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b> | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request emission-related DTC response SID          | 0x43                            | SIDPR           |
| #2                        | DTC#1 High Byte of P0143                           | 0x01                            | DTC1HI          |
| #3                        | DTC#1 Low Byte of P0143                            | 0x43                            | DTC1LO          |
| #4                        | DTC#2 High Byte of P0196                           | 0x01                            | DTC2HI          |
| #5                        | DTC#2 Low Byte of P0196                            | 0x96                            | DTC2LO          |
| #6                        | DTC#3 High Byte of P0234                           | 0x02                            | DTC3HI          |
| #7                        | DTC#3 Low Byte of P0234                            | 0x34                            | DTC3LO          |

**Table 52 — Request emission-related diagnostic trouble codes response message**

| <b>Message Direction:</b> |                                                    | ECU#2 → External test equipment |                 |
|---------------------------|----------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                    | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b> | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request emission-related DTC response SID          | 0x43                            | SIDPR           |
| #2                        | DTC#1 High Byte of P0443                           | 0x04                            | DTC1HI          |
| #3                        | DTC#1 Low Byte of P0443                            | 0x43                            | DTC1LO          |
| #4                        | DTC#2 High Byte: 0x00                              | 0x00                            | DTC2HI          |
| #5                        | DTC#2 Low Byte: 0x00                               | 0x00                            | DTC2LO          |
| #6                        | DTC#3 High Byte: 0x00                              | 0x00                            | DTC3HI          |
| #7                        | DTC#3 Low Byte: 0x00                               | 0x00                            | DTC3LO          |

**Table 53 — Request emission-related diagnostic trouble codes response message**

| <b>Message Direction:</b> |                                                    | ECU#1 → External test equipment |                 |
|---------------------------|----------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                    | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b> | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request emission-related DTC response SID          | 0x43                            | SIDPR           |
| #2                        | DTC#1 High Byte of P02CD                           | 0x02                            | DTC1HI          |
| #3                        | DTC#1 Low Byte of P02CD                            | 0xCD                            | DTC1LO          |
| #4                        | DTC#2 High Byte of P0357                           | 0x03                            | DTC2HI          |
| #5                        | DTC#2 Low Byte of P0357                            | 0x57                            | DTC2LO          |
| #6                        | DTC#3 High Byte of P0A24                           | 0x0A                            | DTC3HI          |
| #7                        | DTC#3 Low Byte of P0A24                            | 0x24                            | DTC3LO          |

**Table 54 — Request emission-related diagnostic trouble codes response message**

| <b>Message Direction:</b> |                                                    | ECU#3 → External test equipment |                 |
|---------------------------|----------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                    | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b> | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request emission-related DTC response SID          | 0x43                            | SIDPR           |
| #2                        | DTC#1 High Byte: 00                                | 0x00                            | DTC1HI          |
| #3                        | DTC#1 Low Byte: 00                                 | 0x00                            | DTC1LO          |
| #4                        | DTC#2 High Byte: 00                                | 0x00                            | DTC2HI          |
| #5                        | DTC#2 Low Byte: 00                                 | 0x00                            | DTC2LO          |
| #6                        | DTC#3 High Byte: 00                                | 0x00                            | DTC3HI          |
| #7                        | DTC#3 Low Byte: 00                                 | 0x00                            | DTC3LO          |

NOTE For ISO 9141-2 and SAE J1850 protocols, the ECU#3 response message is optional because there is no DTC stored. If ISO 14230-4 protocol is supported by the vehicle, ECU#3 shall send a positive response message with no DTCs.

## 7.4 Service 0x04 — Clear/Reset emission-related diagnostic information

### 7.4.1 Functional description

The purpose of this service is to provide a means for the external test equipment to command ECUs to clear all emission-related diagnostic information. This includes:

- MIL and number of diagnostic trouble codes (can be read with Service 0x01, PID 0x01)
- clear the I/M (Inspection/Maintenance) readiness bits (can be read with Service 0x01, PID 0x01)
- confirmed diagnostic trouble codes (can be read with Service 0x03)
- pending diagnostic trouble codes (can be read with Service 0x07)
- diagnostic trouble code for freeze frame data (can be read with Service 0x02, PID 0x02)
- freeze frame data (can be read with Service 0x02)
- oxygen sensor test data (can be read with Service 0x05)
- status of system monitoring tests (can be read with Service 0x01, PID 0x41)
- on-board monitoring test results (can be read with Service 0x06)
- distance traveled while MIL is activated (can be read with Service 0x01, PID 0x21)
- number of warm-ups since DTCs cleared (can be read with Service 0x01, PID 0x30)
- distance traveled since DTCs cleared (can be read with Service 0x01, PID 0x31)
- engine run time while MIL is activated (can be read with Service 0x01, PID 0x4D)
- engine run time since DTCs cleared (can be read with Service 0x01, PID 0x4E)

Other manufacturer-specific “clearing/resetting” actions may also occur in response to this request message. For safety and/or technical design reasons, some ECUs may not respond to this service under all conditions. All ECUs shall respond to this service request with the ignition ON and with the engine not running. ECUs that cannot perform this operation under other conditions, such as with the engine running, will ignore the request with SAE J1850 and ISO 9141-2 interfaces, or will send a negative response message with ISO 14230-4 interfaces, as described in ISO 14230-4.

### 7.4.2 Message data bytes

#### 7.4.2.1 Clear/Reset emission-related diagnostic information request message definition

**Table 55 — Clear/Reset emission-related diagnostic information request message**

| Data Byte | Parameter Name                                                  | Cvt | Hex Value | Mnemonic |
|-----------|-----------------------------------------------------------------|-----|-----------|----------|
| #1        | Clear/reset emission-related diagnostic information request SID | M   | 04        | SIDRQ    |

## 7.4.2.2 Clear/Reset emission-related diagnostic information response message definition

Table 56 — Clear/Reset emission-related diagnostic information response message

| Data Byte | Parameter Name                                                   | Cvt | Hex Value | Mnemonic |
|-----------|------------------------------------------------------------------|-----|-----------|----------|
| #1        | Clear/reset emission-related diagnostic information response SID | M   | 44        | SIDPR    |

## 7.4.3 Parameter definition

This service does not support any parameters.

## 7.4.4 Message example

This example is based on the example of Service 0x03 as described in 7.3.4. The external test equipment commands the vehicle to clear/reset emission-related diagnostic information with the engine running. The ECU#1 (ECM) and ECU#2 (TCM) will send a response message to confirm that all emission-related diagnostic information is cleared. For ISO 9141-2 and SAE J1850 protocols, ECU#3 (ABS/Traction Control) will not send a response message because the conditions to perform the requested action are not met. For ISO 14230-4 protocol, ECU#3 will send a negative response message with response code 0x22 - conditionsNotCorrect. In such case the external test equipment shall post a message with "Stop engine and turn ON ignition" and then repeat the Service 0x04 command and check for response messages from all emission-related ECUs installed in the vehicle.

Table 57 — Clear/Reset emission-related diagnostic information request message

| <b>Message Direction:</b> |                                                                 | External test equipment → All ECUs |          |  |
|---------------------------|-----------------------------------------------------------------|------------------------------------|----------|--|
| <b>Message Type:</b>      |                                                                 | Request                            |          |  |
| Data Byte                 | Description (all values are in hexadecimal)                     | Byte Value                         | Mnemonic |  |
| #1                        | Clear/reset emission-related diagnostic information request SID | 0x04                               | SIDRQ    |  |

Table 58 — Clear/Reset emission-related diagnostic information response message

| <b>Message Direction:</b> |                                                                  | ECU#1 → External test equipment |          |  |
|---------------------------|------------------------------------------------------------------|---------------------------------|----------|--|
| <b>Message Type:</b>      |                                                                  | Response                        |          |  |
| Data Byte                 | Description (all values are in hexadecimal)                      | Byte Value                      | Mnemonic |  |
| #1                        | Clear/reset emission-related diagnostic information response SID | 0x44                            | SIDPR    |  |

Table 59 — Clear/Reset emission-related diagnostic information response message

| <b>Message Direction:</b> |                                                                  | ECU#2 → External test equipment |          |  |
|---------------------------|------------------------------------------------------------------|---------------------------------|----------|--|
| <b>Message Type:</b>      |                                                                  | Response                        |          |  |
| Data Byte                 | Description (all values are in hexadecimal)                      | Byte Value                      | Mnemonic |  |
| #1                        | Clear/reset emission-related diagnostic information response SID | 0x44                            | SIDPR    |  |

**Table 60 — Negative response message**

| <b>Message Direction:</b> |                                                                 | ECU#3 → External test equipment |          |
|---------------------------|-----------------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                                 | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)                     | Byte Value                      | Mnemonic |
| #1                        | Negative Response Service Identifier                            | 0x7F                            | SIDNR    |
| #2                        | Clear/reset emission-related diagnostic information request SID | 0x04                            | SIDRQ    |
| #3                        | Negative Response Code: conditionsNotCorrect                    | 0x22                            | NR_CNC   |

For ISO 14230-4 protocol, the conditions of ECU#3 to Clear/reset emissions-related diagnostic information is not met. Therefore, ECU#3 sends a negative response message with response code “conditionsNotCorrect”. The external test equipment shall repeat the request after the conditions of the vehicle have changed by the user. Now, all ECUs shall send a positive response message to the external test equipment to confirm successful operation of the Clear/reset emission-related diagnostic information service.

## 7.5 Service 0x05 — Request oxygen sensor monitoring test results

### 7.5.1 Functional description

The purpose of this service is to allow access to the on-board oxygen sensor monitoring test results. The same information may be obtained by the use of Service 0x06.

The request message for test results includes a Test ID value that indicates the information requested. Test value definitions, scaling information, and display formats are included in SAE J1979-DA.

Many methods may be used to calculate test results for this service by different manufacturers. If data values are to be reported using these messages that are different from those specified, ranges of test values have been assigned that can be used which have standard units of measure. The external test equipment can convert these values and display them in the standard units.

The ECU shall respond to this message by transmitting the requested test data last determined by the system. The latest test results are to be retained, even over multiple ignition OFF cycles, until replaced by more recent test results. Test results are requested by Test ID.

Not all test values are applicable or supported by all vehicles. An optional feature of this service is for the ECU to indicate which Test IDs are supported. Test ID 0x00 is a bit-encoded value that indicates support for Test IDs from 0x01 to 0x20. Test ID 0x20 indicates support for Test IDs 0x21 through 0x40, etc. This is the same concept as used for PID support in Services 0x01 and 0x02 as specified in SAE J1979-DA. If Test ID 0x00 is not supported, then the ECU does not use this feature to indicate Test ID support.

### 7.5.2 Message data bytes

#### 7.5.2.1 Request oxygen sensor monitoring test results request message definition (read-supported TIDs)

**Table 61 — Request oxygen sensor monitoring test results request message (read-supported TIDs)**

| Data Byte | Parameter Name                                            | Cvt | Hex Value | Mnemonic |
|-----------|-----------------------------------------------------------|-----|-----------|----------|
| #1        | Request oxygen sensor monitoring test results request SID | M   | 0x05      | SIDRQ    |
| #2        | Test ID (see SAE J1979-DA)                                | M   | xx        | TID      |
| #3        | O2 Sensor #                                               | M   | xx        | O2SNO    |

**Table 62 — Request oxygen sensor monitoring test results response message (report supported TIDs)**

| Data Byte | Parameter Name                                                                                                                                                       | Cvt | Hex Value | Mnemonic |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----------|----------|
| #1        | Request oxygen sensor monitoring test results response SID                                                                                                           | M   | 0x45      | SIDPR    |
| #2        | Test ID                                                                                                                                                              | M   | xx        | TID      |
| #3        | O2 Sensor #                                                                                                                                                          | M   | xx        | O2SNO    |
| #4        | data record of supported Test IDs = [      Data A: supported Test IDs,<br>Data B: supported Test IDs,<br>Data C: supported Test IDs,<br>Data D: supported Test IDs ] | M   | xx        | DATA_A   |
| #5        |                                                                                                                                                                      | M   | xx        | DATA_B   |
| #6        |                                                                                                                                                                      | M   | xx        | DATA_C   |
| #7        |                                                                                                                                                                      | M   | xx        | DATA_D   |

**7.5.2.2 Request oxygen sensor monitoring test results request message definition (read TID values)****Table 63 — Request oxygen sensor monitoring test results request message (read TID values)**

| Data Byte | Parameter Name                                            | Cvt | Hex Value | Mnemonic |
|-----------|-----------------------------------------------------------|-----|-----------|----------|
| #1        | Request oxygen sensor monitoring test results request SID | M   | 0x05      | SIDRQ    |
| #2        | Test ID                                                   | M   | xx        | TID      |
| #3        | O2 Sensor #                                               | M   | xx        | O2SNO    |

**7.5.2.3 Request oxygen sensor monitoring test results response message definition (report TID values)****Table 64 — Request oxygen sensor monitoring test results response message (report TID values)**

| Data Byte | Parameter Name                                                                 | Cvt            | Hex Value | Mnemonic |
|-----------|--------------------------------------------------------------------------------|----------------|-----------|----------|
| #1        | Request oxygen sensor monitoring test results response SID                     | M              | 0x45      | SIDPR    |
| #2        | TEST ID                                                                        | M              | xx        | TID      |
| #3        | O2 Sensor #                                                                    | M              | xx        | O2SNO    |
| #4        | data record of Test ID = [      Test Value<br>Minimum Limit<br>Maximum Limit ] | M              | xx        | TESTVAL  |
| #5        |                                                                                | C <sup>a</sup> | xx        | MINLIMIT |
| #6        |                                                                                | C              | xx        | MAXLIMIT |

<sup>a</sup> C = Conditional. If the supported Test ID is a constant (0x01 – 0x04), the parameters Minimum and Maximum Limit shall not be included.

**7.5.3 Parameter definition****7.5.3.1 Test IDs supported**

The Test IDs supported is the same concept as used for PID support in Services 0x01 and 0x02 as specified in SAE J1979-DA.

**7.5.3.2 Test ID and data byte descriptions**

SAE J1979-DA specifies standardized and vehicle manufacturer specific Test ID ranges.

### 7.5.3.3 Oxygen sensor location definition

The oxygen sensor location value used in the request message shall indicate the oxygen sensor location as defined by PID 0x13 or 0x1D as specified in SAE J1979-DA.

**Table 65 — Oxygen sensor location description**

| Oxygen sensor location (one, and only one bit can be set to a 1) |                              |                                          |
|------------------------------------------------------------------|------------------------------|------------------------------------------|
| Bit                                                              | Sensor location <sup>a</sup> | Alternative sensor location <sup>b</sup> |
| 0                                                                | Bank 1 - Sensor 1            | Bank 1 - Sensor 1                        |
| 1                                                                | Bank 1 - Sensor 2            | Bank 1 - Sensor 2                        |
| 2                                                                | Bank 1 - Sensor 3            | Bank 2 - Sensor 1                        |
| 3                                                                | Bank 1 - Sensor 4            | Bank 2 - Sensor 2                        |
| 4                                                                | Bank 2 - Sensor 1            | Bank 3 - Sensor 1                        |
| 5                                                                | Bank 2 - Sensor 2            | Bank 3 - Sensor 2                        |
| 6                                                                | Bank 2 - Sensor 3            | Bank 4 - Sensor 1                        |
| 7                                                                | Bank 2 - Sensor 4            | Bank 4 - Sensor 2                        |
| <sup>a</sup> If Service 0x01 PID 0x13 supported.                 |                              |                                          |
| <sup>b</sup> If Service 0x01 PID 0x1D supported.                 |                              |                                          |

### 7.5.3.4 Test result description

**Table 66 — Test result description**

| Hex         | # of bytes | Description                                                                                          |
|-------------|------------|------------------------------------------------------------------------------------------------------|
| 0x00 – 0xFF | 1          | The Test result parameter includes either a constant or a calculated value depending on the Test ID. |


### 7.5.3.5 Minimum and maximum test limit description

The minimum and maximum test limit description shown in Table 67 defines the test limit value which is either a minimum or a maximum value to which the test results are compared. The test limit is a one-byte unsigned numeric value (0 - 255).

**Table 67 — Minimum and maximum test limit description**

| Test Limit | # of bytes | Description                                                                                                         |
|------------|------------|---------------------------------------------------------------------------------------------------------------------|
| Minimum    | 1          | The minimum test limit (only for calculated test result) is the minimum value to which the test result is compared. |
| Maximum    | 1          | The maximum test limit (only for calculated test result) is the maximum value to which the test result is compared. |

For results of latest mandated on-board oxygen sensor monitoring test, see Figure 18.

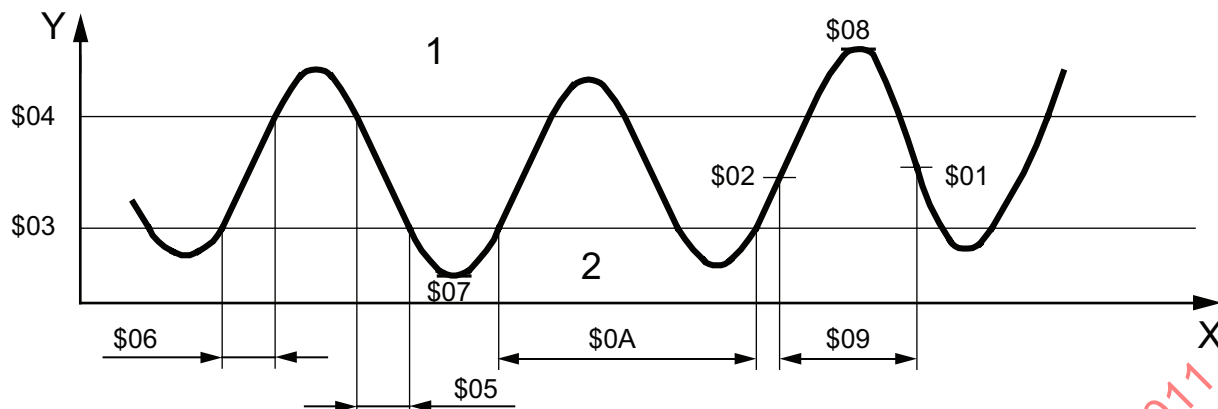**Key**

- 1 rich
- 2 lean

Figure 18 — Test ID value example

**7.5.4 Message example**

The example below shows how the “Request oxygen sensor monitoring test results” service shall be implemented.

**7.5.4.1 Step #1: Request oxygen sensor monitoring test results (request for supported Test IDs) from vehicle**

The external test equipment requests all supported Test IDs from the vehicle. Refer to the example of Service 0x01 for how to request supported PIDs (same concept is used for supported TIDs). PID 0x13 is supported by ECU#1. This is important information for the external test equipment in order to identify the correct O2 Sensor location.

As a result of the supported TID request, the external test equipment creates an internal list of supported TIDs for each ECU: The ECU#1 (ECM) supports Test IDs 0x01 - 0x06, 0x70, 0x71 and 0x81. The ECU#2 (TCM) does not support any Test IDs.

**7.5.4.2 Step #2: Request oxygen sensor monitoring test results from vehicle**

The external test equipment sends two (2) “Request oxygen sensor monitoring test results” request messages to the vehicle. The two (2) request messages include the following Test IDs:

- 1st request message: Test IDs 0x01
- 2nd request message: Test IDs 0x05

**NOTE** In general, the external test equipment should read the test status of Service 0x01 PID 0x01 prior to execution Service 0x05 with Test ID 0x01 and 0x05 to verify whether the tests are supported and completed. The test values reported may be invalid if the test is not completed.

**Table 68 — Request oxygen sensor monitoring test results request message**

| <b>Message Direction:</b> |                                                           | External test equipment → All ECUs |                 |
|---------------------------|-----------------------------------------------------------|------------------------------------|-----------------|
| <b>Message Type:</b>      |                                                           | Request                            |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>        | <b>Byte Value</b>                  | <b>Mnemonic</b> |
| #1                        | Request oxygen sensor monitoring test results request SID | 0x05                               | SIDRQ           |
| #2                        | TID: Rich to lean sensor threshold voltage (constant)     | 0x01                               | TID             |
| #3                        | O2 Sensor #: Bank 1 - Sensor 1                            | 0x01                               | O2SNO           |

**Table 69 — Request oxygen sensor monitoring test results response message**

| <b>Message Direction:</b> |                                                            | ECU#1 → External test equipment |                 |
|---------------------------|------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                            | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>         | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request oxygen sensor monitoring test results response SID | 0x45                            | SIDPR           |
| #2                        | TID: Rich to lean sensor threshold voltage (constant)      | 0x01                            | TID             |
| #3                        | O2 Sensor #: Bank 1 - Sensor 1                             | 0x01                            | O2SNO           |
| #4                        | Test Limit: 450 mV                                         | 0x5A                            | TESTVAL         |

NOTE ECU#2 does not support any Test IDs and therefore does not send a response message.

**Table 70 — Request oxygen sensor monitoring test results request message**

| <b>Message Direction:</b> |                                                           | External test equipment → All ECUs |                 |
|---------------------------|-----------------------------------------------------------|------------------------------------|-----------------|
| <b>Message Type:</b>      |                                                           | Request                            |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>        | <b>Byte Value</b>                  | <b>Mnemonic</b> |
| #1                        | Request oxygen sensor monitoring test results request SID | 0x05                               | SIDRQ           |
| #2                        | TID: Rich to lean sensor switch time (calculated)         | 0x05                               | TID             |
| #3                        | O2 Sensor #: Bank 1 - Sensor 1                            | 0x01                               | O2SNO           |

**Table 71 — Request oxygen sensor monitoring test results response message**

| <b>Message Direction:</b> |                                                            | ECU#1 → External test equipment |                 |
|---------------------------|------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                            | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>         | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request oxygen sensor monitoring test results response SID | 0x45                            | SIDPR           |
| #2                        | TID: Rich to lean sensor switch time (calculated)          | 0x05                            | TID             |
| #3                        | O2 Sensor #: Bank 1 - Sensor 1                             | 0x01                            | O2SNO           |
| #4                        | Test Limit: 72 ms (milliseconds)                           | 0x12                            | TESTVAL         |
| #5                        | Minimum Limit: 0 ms                                        | 0x00                            | MINLIMIT        |
| #6                        | Maximum Limit: 100 ms                                      | 0x19                            | MAXLIMIT        |

## 7.6 Service 0x06 — Request On-board monitoring test results for Specific monitored systems

### 7.6.1 Functional description

The purpose of this service is to allow access to the results of On-Board Diagnostic monitoring tests for specific components/systems. Examples are catalyst monitoring and the evaporative system monitoring.

The vehicle manufacturer is responsible for assigning Test IDs and Component IDs for tests of different systems and components. The latest valid test results are to be retained, even over multiple ignition OFF cycles, until replaced by more recent test results. Test results are requested by Test ID. Test results are reported only for supported combinations of test limit type and component ID, and are reported as positive (unsigned) values. Only one test limit is included in a response message, but that limit could be either a minimum or a maximum limit. If both a minimum and maximum test limit are to be reported, then two (2) response messages will be transmitted, in any order. The most significant bit (MSB) of the “test limit type/component ID” byte will be used to indicate the test limit type.

A feature of this service is for the ECU to indicate which Test IDs are supported. Test ID 0x00 is a bit-encoded value that indicates support for Test IDs from 0x01 to 0x20. Test ID 0x20 indicates support for Test IDs 0x21 through 0x40, etc. This is the same concept as used for PID support in Services 0x01 and 0x02 as specified in SAE J1979-DA.

This service can be used as an alternative to Service 0x05 to report oxygen sensor test results.

A unique method must be utilized for displaying data for monitors that have multiple tests. Many OBD monitors have multiple tests that are done in either a serial or parallel manner. If a monitor uses multiple Test ID/Component ID combinations that may not all complete at the same time, the following method shall be used to update the stored test results at the time of monitor completion.

After the monitor completes, update all Test ID/Component ID combinations (or “test results”) that were utilized by the monitor with appropriate passing or failing results. If a test result (or “Test ID/Component ID”) was not utilized during this monitoring event, set the Test Values and Minimum and Maximum Test Limits to their initial values (test not completed). Test results from the previously completed monitoring events shall not be mixed with test results from the current completed monitoring event.

In some cases, test results (or “Test ID/Component ID combinations”) will be displayed as being incomplete even though the monitor (as indicated by PID 0x41) was successfully completed and either passed or failed. In other cases, some Test IDs will show passing results while others will show failing results after the monitor (as indicated by PID 0x41) was successfully completed and failed. Note that OBD-II regulations prohibit a passing monitor from showing any failing test results. If an initial serial test indicates a failure and a subsequent re-test of the system indicates a passing result, the test that was utilized to make the passing determination should be displayed, while the failing test that was utilized to make the initial determination should be reset to its initial values (test not completed).

As an example of a serial monitor, an evaporative system monitor can fail for a large evaporative system leak and never continue to test for small leaks or very small leaks. In this case, the Component ID for the large leak would show a failing result, while the small leak test and the very small leak test would show incomplete. As an example of the parallel monitor, a purge valve flow monitor can pass by having a large rich lambda shift, a large lean lambda shift or a large engine rpm increase. If the purge valve is activated and a large rich lambda shift occurs, the Component ID for the rich lambda shift would show a passing result while the other two Component IDs would show incomplete. Since some Component IDs for a completed monitor will show incomplete, PID 0x41 must be used to determine monitor completion status.

## 7.6.2 Message data bytes

### 7.6.2.1 Request On-board monitoring test results for specific monitored systems request message definition (read-supported TIDs)

**Table 72 — Request on-board monitoring test results for specific monitored systems request message (read-supported TIDs)**

| Data Byte | Parameter Name                                                                      | Cvt | Hex Value | Mnemonic |
|-----------|-------------------------------------------------------------------------------------|-----|-----------|----------|
| #1        | Request on-board monitoring test results for specific monitored systems request SID | M   | 0x06      | SIDRQ    |
| #2        | Test ID (see SAE J1979-DA)                                                          | M   | xx        | TID      |

### 7.6.2.2 Request On-board monitoring test results for specific monitored systems response message definition (report supported TIDs)

**Table 73 — Request on-board monitoring test results for specific monitored systems response message (report supported TIDs)**

| Data Byte | Parameter Name                                                                                                                                                  | Cvt | Hex Value | Mnemonic |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----------|----------|
| #1        | Request on-board monitoring test results for specific monitored systems response SID                                                                            | M   | 0x46      | SIDPR    |
| #2        | Test ID                                                                                                                                                         | M   | xx        | TID      |
| #3        | Filler Byte                                                                                                                                                     | M   | 0xFF      | FB       |
| #4        | data record of supported Test IDs = [ Data A: supported Test IDs,<br>Data B: supported Test IDs,<br>Data C: supported Test IDs,<br>Data D: supported Test IDs ] | M   | xx        | DATAREC_ |
| #5        |                                                                                                                                                                 | M   | xx        | DATA_A   |
| #6        |                                                                                                                                                                 | M   | xx        | DATA_B   |
| #7        |                                                                                                                                                                 | M   | xx        | DATA_C   |

### 7.6.2.3 Request On-board monitoring test results for Specific monitored systems request message definition (read test results)

**Table 74 — Request on-board monitoring test results for specific monitored systems request message (read test results)**

| Data Byte | Parameter Name                                                                      | Cvt | Hex Value | Mnemonic |
|-----------|-------------------------------------------------------------------------------------|-----|-----------|----------|
| #1        | Request on-board monitoring test results for specific monitored systems request SID | M   | 0x06      | SIDRQ    |
| #2        | Test ID (request test results)                                                      | M   | xx        | TID      |

#### 7.6.2.4 Request on-board monitoring test results for Specific monitored systems response message definition (report test results)

**Table 75 — Request on-board monitoring test results for specific monitored systems response message (report test results)**

| Data Byte | Parameter Name                                                                                                                     | Cvt            | Hex Value | Mnemonic |
|-----------|------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------|----------|
| #1        | Request on-board monitoring test results for specific monitored systems response SID                                               | M              | 0x46      | SIDPR    |
| #2        | Test ID (report test results)                                                                                                      | M              | xx        | TID      |
| #3        | Test Limit Type & Component ID                                                                                                     | M              | xx        | TLTCID   |
| #4        | data record of Test ID = [<br>Test Value (High Byte)<br>Test Value (Low Byte)<br>Test Limit (High Byte)<br>Test Limit (Low Byte) ] | M              | xx        | TIDREC_  |
| #5        |                                                                                                                                    | M              | xx        | TVHI     |
| #6        |                                                                                                                                    | C <sup>a</sup> | xx        | TVLO     |
| #7        |                                                                                                                                    | C              | xx        | TLHI     |
|           |                                                                                                                                    |                |           | TLLO     |

<sup>a</sup> C = Conditional. If Test Limit is either a Minimum or a Maximum Limit depends on the parameter Test Limit Type & Component ID value (bit 7).

### 7.6.3 Parameter definition

#### 7.6.3.1 Test IDs supported

The Test IDs supported is the same concept as used for PID support in Services 0x01 and 0x02 as specified in SAE J1979-DA.

#### 7.6.3.2 Test ID and data byte descriptions

SAE J1979-DA specifies standardized and vehicle manufacturer-specific Test ID ranges, which are permitted to be supported in this service.

**NOTE** For ISO 9141-2, SAE J1850 and ISO 14230-4 protocols that SAE J1979-DA is recommended but not required. This is for backward compatibility and only applies to Test ID range 0x01 – 0x1F.

#### 7.6.3.3 Test Limit Type and Component ID description

The Test Limit Type and Component ID is a one (1) byte parameter and are defined in Table 76.

**Table 76 — Test Limit Type and Component ID description**

| Parameter Name  | Bit   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Component ID    | 0 - 6 | Component ID - manufacturer specified - necessary when multiple components or systems are present on the vehicle and have the same definition of Test ID.<br><br>If the same test is performed on more than one component, multiple test results shall be reported for that Test ID. For example, a test for bank 1 catalyst can be the same as a test for a bank 2 catalyst, or a test for a pre-catalyst oxygen sensor can be the same as a test for a post-catalyst oxygen sensor. In either case, a request for a single Test ID would result in two test results being reported with different Component IDs. |
| Test Limit Type | 7     | Most Significant Bit (MSB) indicates type of test limit, where:<br>0 - test limit is maximum value - test fails if test value is greater than this value; and<br>1 - test limit is minimum value - test fails if test value is less than this value.                                                                                                                                                                                                                                                                                                                                                               |

#### 7.6.3.4 Test Result description

The Test Result represents the test result and is defined in Table 77.

**Table 77 — Test Result description**

| Parameter Name | # of Bytes               | Description                                                                                                                                                                                                                                                                                                  |
|----------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Result    | 2<br>(High and Low Byte) | Test Result - this value shall be less than or equal to the test limit if MSB of Test Limit Type and Component ID byte is "0", and shall be greater than or equal to the test limit if MSB of Test Limit Type and Component ID byte is "1". The Test Value is a two-byte unsigned numeric value (0 - 65535). |

#### 7.6.3.5 Test Limit description

The Test Limit is defined in Table 78.

**Table 78 — Test Limit description**

| Parameter Name | # of Bytes               | Description                                                                                                                                                          |
|----------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Limit     | 2<br>(High and Low Byte) | The Test Limit value is either a minimum or a maximum value to which the test results are compared. The Test Limit is a two-byte unsigned numeric value (0 - 65535). |

#### 7.6.4 Message example

Tables 79 to 81 below show how the "request on-board monitoring test results for specific monitored systems" service shall be implemented.

##### 7.6.4.1 Step #1: Request on-board monitoring test results for specific monitored systems (request for supported Test IDs)

The external test equipment requests all supported Test IDs from the vehicle. Refer to the example of Service 0x01 for guidance on requesting supported PIDs (the same concept is used for supported TIDs).

As a result of the supported TID request, the external test equipment creates an internal list of supported TIDs for each ECU. ECU#1 (ECM) supports Test ID 0x02. ECU#2 (TCM) does not support any Test IDs.

##### 7.6.4.2 Step #2: Request on-board monitoring test results for specific monitored systems

The external test equipment sends a "request on-board monitoring test results for specific monitored systems" request message with one (1) supported Test ID to the vehicle. The response messages indicate which Component IDs are supported. The request message includes the following Test ID:

Test ID 0x02 - Lean to rich sensor threshold voltage (constant), (supported Component IDs: 0x04, 0x16).

In general, the external test equipment should read the test status of Service 0x01 PID 0x01 prior to executing Service 0x06 with Test ID 0x01 and 0x06 to verify whether the tests are supported and completed. The test values reported may be invalid if the test is not completed.

**Table 79 — Request on-board monitoring test results for specific monitored systems request message**

|                           |                                                                                     |                                    |                 |
|---------------------------|-------------------------------------------------------------------------------------|------------------------------------|-----------------|
| <b>Message Direction:</b> |                                                                                     | External test equipment → All ECUs |                 |
| <b>Message Type:</b>      |                                                                                     | Request                            |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>                                  | <b>Byte Value</b>                  | <b>Mnemonic</b> |
| #1                        | Request on-board monitoring test results for specific monitored systems request SID | 0x06                               | SIDRQ           |
| #2                        | TID Lean to rich sensor threshold voltage (constant)                                | 0x02                               | TID             |

**Table 80 — Request on-board monitoring test results for specific monitored systems response message**

|                           |                                                                                      |                                 |                 |
|---------------------------|--------------------------------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Direction:</b> |                                                                                      | ECU#1 → External test equipment |                 |
| <b>Message Type:</b>      |                                                                                      | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>                                   | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request on-board monitoring test results for specific monitored systems response SID | 0x46                            | SIDPR           |
| #2                        | TID Lean to rich sensor threshold voltage (constant)                                 | 0x02                            | TID             |
| #3                        | Test Limit Type: test limit is minimum value; Component ID: 04                       | 0x84                            | TLTCID          |
| #4                        | Test Value High Byte: test fails if test value is less than test limit               | 0x00                            | TVHI            |
| #5                        | Test Value Low Byte: test fails if test value is less than test limit                | 0x10                            | TVLO            |
| #6                        | Minimum Test Limit High Byte                                                         | 0x00                            | TLHI            |
| #7                        | Minimum Test Limit Low Byte                                                          | 0x00                            | TLLO            |

NOTE ECU#2 does not support any Test IDs and therefore does not send a response message.

**Table 81 — Request on-board monitoring test results for specific monitored systems response message**

|                           |                                                                                      |                                 |                 |
|---------------------------|--------------------------------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Direction:</b> |                                                                                      | ECU#1 → External test equipment |                 |
| <b>Message Type:</b>      |                                                                                      | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>                                   | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request on-board monitoring test results for specific monitored systems response SID | 0x46                            | SIDPR           |
| #2                        | TID Lean to rich sensor threshold voltage (constant)                                 | 0x02                            | TID             |
| #3                        | Test Limit Type: test limit is maximum value; Component ID: 0x16                     | 0x16                            | TLTCID          |
| #4                        | Test Value High Byte: test fails if test value is greater than test limit            | 0x00                            | TVHI            |
| #5                        | Test Value Low Byte: test fails if test value is greater than test limit             | 0x32                            | TVLO            |
| #6                        | Maximum Test Limit High Byte                                                         | 0x00                            | TLHI            |
| #7                        | Maximum Test Limit Low Byte                                                          | 0x20                            | TLLO            |

NOTE The above example shows that the test in ECU#1 for Test ID 0x02 and Component ID 0x04 passed and that the test in ECU#1 for Test ID 0x02 and Component ID 0x16 failed.

## 7.7 Service 0x07 — Request emission-related diagnostic trouble codes detected during current or last completed driving cycle

### 7.7.1 Functional description

The purpose of this service is to enable the external test equipment to obtain “pending” diagnostic trouble codes detected during current or last completed driving cycle for emission-related components/systems. Service 0x07 is required for all DTCs and is independent of Service 0x03. The intended use of this data is to assist the service technician after a vehicle repair, and after clearing diagnostic information, by reporting test results after a single driving cycle. If the test failed during the driving cycle, the DTC associated with that test will be reported. Test results reported by this service do not necessarily indicate a faulty component/system. If test results indicate a failure after additional driving, then the MIL will be illuminated and a DTC will be set and reported with Service 0x03, indicating a faulty component/system. This service can always be used to request the results of the latest test, independent of the setting of a DTC.

Test results for these components/systems are reported in the same format as the DTCs in Service 0x03 (see the functional description for Service 0x03).

If fewer than three (3) DTC values are reported for failed tests, the response messages used to report the test results shall be filled with 0x00 to fill seven (7) data bytes. This maintains the required fixed message length for all messages.

If there is no test failure to report, responses are permitted but not required for SAE J1850 and ISO 9141-2 interfaces. For ISO 14230-4 interfaces, the ECU will respond with a report containing no codes (all DTC values shall contain 0x00).

### 7.7.2 Message data bytes

#### 7.7.2.1 Request emission-related diagnostic trouble codes detected during current or last completed driving cycle request message definition

**Table 82 — Request emission-related diagnostic trouble codes detected during current or last completed driving cycle request message**

| Data Byte | Parameter Name                                                                                                        | Cvt | Hex Value | Mnemonic |
|-----------|-----------------------------------------------------------------------------------------------------------------------|-----|-----------|----------|
| #1        | Request emission-related diagnostic trouble codes detected during current or last completed driving cycle request SID | M   | 0x07      | SIDRQ    |

#### 7.7.2.2 Request emission-related diagnostic trouble codes detected during current or last completed driving cycle response message definition

**Table 83 — Request emission-related diagnostic trouble codes detected during current or last completed driving cycle response message**

| Data Byte | Parameter Name                                                                                                         | Cvt              | Hex Value | Mnemonic |
|-----------|------------------------------------------------------------------------------------------------------------------------|------------------|-----------|----------|
| #1        | Request emission-related diagnostic trouble codes detected during current or last completed driving cycle response SID | M                | 0x47      | SIDPR    |
| #2        | DTC#1 (High Byte)                                                                                                      | M/C <sup>a</sup> | xx        | DTC1HI   |
| #3        | DTC#1 (Low Byte)                                                                                                       | M/C              | xx        | DTC1LO   |
| #4        | DTC#2 (High Byte)                                                                                                      | M/C              | xx        | DTC2HI   |
| #5        | DTC#2 (Low Byte)                                                                                                       | M/C              | xx        | DTC2LO   |
| #6        | DTC#3 (High Byte)                                                                                                      | M/C              | xx        | DTC3HI   |
| #7        | DTC#3 (Low Byte)                                                                                                       | M/C              | xx        | DTC3LO   |

<sup>a</sup> C = Conditional. DTC#1, DTC#2, and DTC#3 are always present. If no valid DTC number is included, the DTC values shall contain 0x00.

### 7.7.3 Parameter definition

This service does not support any parameters.

### 7.7.4 Message example

Refer to message example of Service 0x03.

## 7.8 Service 0x08 — Request control of on-board system, test or component

### 7.8.1 Functional description

The purpose of this service is to enable the external test equipment to control the operation of an on-board system, test or component.

The data bytes will be specified, if necessary, for each Test ID in SAE J1979-DA, and will be unique for each Test ID. If any data bytes are unused for any test, they shall be filled with 0x00 to maintain a fixed message length.

Possible uses for these data bytes in the request message are to:

- turn on-board system/test/component ON;
- turn on-board system/test/component OFF; and
- cycle on-board system/test/component for 'n' seconds.

Possible uses for these data bytes in the response message are to:

- report system status; and
- report test results.

A feature of this service is for the ECU to indicate which Test IDs are supported. Test ID 0x00 is a bit-encoded value that indicates support for Test IDs from 0x01 to 0x20. Test ID 0x20 indicates support for Test IDs 0x21 through 0x40, etc. This is the same concept as used for PID support in Services 0x01 and 0x02 as specified in SAE J1979-DA.

### 7.8.2 Message data bytes

#### 7.8.2.1 Request control of on-board device request message definition (read-supported TIDs)

**Table 84 — Request control of on-board device request message (read-supported TIDs)**

| Data Byte | Parameter Name                                                                     | Cvt | Hex Value | Mnemonic          |
|-----------|------------------------------------------------------------------------------------|-----|-----------|-------------------|
| #1        | Request control of on-board device request SID                                     | M   | 0x08      | SIDRQ             |
| #2        | Test ID (see SAE J1979-DA)                                                         | M   | xx        | TID               |
| #3        | data record of Test ID = [<br>Data A,<br>Data B,<br>Data C,<br>Data D,<br>Data E ] | M   | 0x00      | TIDREC_<br>DATA_A |
| #4        |                                                                                    | M   | 0x00      | DATA_B            |
| #5        |                                                                                    | M   | 0x00      | DATA_C            |
| #6        |                                                                                    | M   | 0x00      | DATA_D            |
| #7        |                                                                                    | M   | 0x00      | DATA_E            |

## 7.8.2.2 Request control of on-board device response message definition (report supported TIDs)

Table 85 — Request control of on-board device response message (report supported TIDs)

| Data Byte | Parameter Name                                                                                                                                                     | Cvt | Hex Value | Mnemonic          |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----------|-------------------|
| #1        | Request control of on-board device response SID                                                                                                                    | M   | 0x48      | SIDPR             |
| #2        | Test ID                                                                                                                                                            | M   | xx        | TID               |
| #3        | Filler Byte                                                                                                                                                        | M   | 0x00      | FB                |
| #4        | data record of supported Test IDs = [<br>Data A: supported Test IDs,<br>Data B: supported Test IDs,<br>Data C: supported Test IDs,<br>Data D: supported Test IDs ] | M   | xx        | TIDREC_<br>DATA_A |
| #5        |                                                                                                                                                                    | M   | xx        | DATA_B            |
| #6        |                                                                                                                                                                    | M   | xx        | DATA_C            |
| #7        |                                                                                                                                                                    | M   | xx        | DATA_D            |

## 7.8.2.3 Request control of on-board device request message definition (read TID values)

Table 86 — Request control of on-board device request message (read TID values)

| Data Byte | Parameter Name                                                                     | Cvt              | Hex Value | Mnemonic          |
|-----------|------------------------------------------------------------------------------------|------------------|-----------|-------------------|
| #1        | Request control of on-board device request SID                                     | M                | 0x08      | SIDRQ             |
| #2        | Test ID (request Test ID values)                                                   | M                | xx        | TID               |
| #3        | data record of Test ID = [<br>Data A,<br>Data B,<br>Data C,<br>Data D,<br>Data E ] | M/C <sup>a</sup> | xx        | TIDREC_<br>DATA_A |
| #4        |                                                                                    | M/C              | xx        | DATA_B            |
| #5        |                                                                                    | M/C              | xx        | DATA_C            |
| #6        |                                                                                    | M/C              | xx        | DATA_D            |
| #7        |                                                                                    | M/C              | xx        | DATA_E            |

<sup>a</sup> C = Conditional. Data A to E shall be filled with 0x00 if unused.

## 7.8.2.4 Request control of on-board device response message definition (report TID values)

Table 87 — Request control of on-board device response message (report TID values)

| Data Byte | Parameter Name                                                                     | Cvt              | Hex Value | Mnemonic          |
|-----------|------------------------------------------------------------------------------------|------------------|-----------|-------------------|
| #1        | Request control of on-board device response SID                                    | M                | 48        | SIDPR             |
| #2        | Test ID (report Test ID values)                                                    | M                | xx        | TID               |
| #3        | data record of Test ID = [<br>Data A,<br>Data B,<br>Data C,<br>Data D,<br>Data E ] | M/C <sup>a</sup> | xx        | TIDREC_<br>DATA_A |
| #4        |                                                                                    | M/C              | xx        | DATA_B            |
| #5        |                                                                                    | M/C              | xx        | DATA_C            |
| #6        |                                                                                    | M/C              | xx        | DATA_D            |
| #7        |                                                                                    | M/C              | xx        | DATA_E            |

<sup>a</sup> C = Conditional. Data A to E shall be filled with 0x00 if unused.

### 7.8.3 Parameter definition

#### 7.8.3.1 Test IDs supported

Refer to SAE J1979-DA.

#### 7.8.3.2 Test ID and data byte descriptions

Refer to SAE J1979-DA.

### 7.8.4 Message example

Tables 88 and 89 show how “request control of on-board system, test or component” service shall be implemented.

#### 7.8.4.1 Step #1: Request control of on-board system, test or component (request for supported Test IDs)

The external test equipment requests all supported Test IDs from the vehicle. Refer to the example of Service 0x01 for guidance on requesting supported Test IDs (the same concept is used for supported TIDs).

As a result of the supported TID request, the external test equipment creates an internal list of supported PIDs for each ECU. ECU#1 (ECM) supports Test ID 0x01. ECU#2 (TCM) does not support any Test IDs and therefore does not send a response message.

#### 7.8.4.2 Step #2: Request control of on-board device (Service 0x08, Test ID 0x01)

The external test equipment sends a “request control of on-board device” message with one (1) supported Test ID 0x01 to the vehicle.

**Table 88 — Request control of on-board device request message**

| <b>Message Direction:</b> |                                                | External test equipment → All ECUs |          |
|---------------------------|------------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                                | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal)    | Byte Value                         | Mnemonic |
| #1                        | Request control of on-board device request SID | 0x08                               | SIDRQ    |
| #2                        | TID: Evaporative system leak test              | 0x01                               | TID      |
| #3                        | Data A: 0x00                                   | 0x00                               | DATA_A   |
| #4                        | Data B: 0x00                                   | 0x00                               | DATA_B   |
| #5                        | Data C: 0x00                                   | 0x00                               | DATA_C   |
| #6                        | Data D: 0x00                                   | 0x00                               | DATA_D   |
| #7                        | Data E: 0x00                                   | 0x00                               | DATA_E   |

Table 89 — Request control of on-board device response message

| <b>Message Direction:</b> |                                                 | ECU#1 → External test equipment |          |
|---------------------------|-------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                 | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)     | Byte Value                      | Mnemonic |
| #1                        | Request control of on-board device response SID | 0x48                            | SIDPR    |
| #2                        | TID: Evaporative system leak test               | 0x01                            | TID      |
| #3                        | Data A: 0x00                                    | 0x00                            | DATA_A   |
| #4                        | Data B: 0x00                                    | 0x00                            | DATA_B   |
| #5                        | Data C: 0x00                                    | 0x00                            | DATA_C   |
| #6                        | Data D: 0x00                                    | 0x00                            | DATA_D   |
| #7                        | Data E: 0x00                                    | 0x00                            | DATA_E   |

NOTE ECU#2 does not support the Test ID and therefore does not send a response message.

## 7.9 Service 0x09 — Request vehicle information

### 7.9.1 Functional description

The purpose of this service is to enable the external test equipment to request vehicle-specific vehicle information such as Vehicle Identification Number (VIN) and Calibration IDs. Some of this information may be required by regulations and some should be reported in a standard format if supported by the vehicle manufacturer. INFOTYPES are defined in SAE J1979-DA.

A feature of this service is for the ECU to indicate which INFOTYPES are supported (support of INFOTYPE 0x00 is required for ISO 9141-2). INFOTYPE 0x00 is a bit-encoded value that indicates support for INFOTYPES from 0x01 to 0x20. INFOTYPE 0x20 indicates support for INFOTYPES 0x21 through 0x40, etc. This is the same concept as used for PID support in Services 0x01 and 0x02 as specified in SAE J1979-DA.

The external test equipment shall maintain a list of ECUs which support the INFOTYPES not equal to 0x00 in order to justify whether it expects a response message from this ECU or not. For request messages with INFOTYPES not equal to 0x00, the positive response messages may not be sent by the ECU(s) within the  $P2_{max}$  timing window as specified in 6.2.2.

If INFOTYPE 0x02 (VIN) is indicated as supported, the ECU shall respond within  $P2_{max}$  timing even if the VIN is missing or incomplete. For example, a development ECU may respond with 0xFF characters for VIN because the VIN has not been programmed.

### 7.9.2 Message data bytes

#### 7.9.2.1 Request vehicle information request message definition (read-supported INFOTYPE)

Table 90 — Request vehicle information request message (read-supported INFOTYPE)

| Data Byte | Parameter Name                          | Cvt | Hex Value | Mnemonic |
|-----------|-----------------------------------------|-----|-----------|----------|
| #1        | Request vehicle information request SID | M   | 0x09      | SIDRQ    |
| #2        | INFOTYPE (see SAE J1979-DA)             | M   | xx        | INFOTYP  |

## 7.9.2.2 Request vehicle information response message definition (report supported INFOTYPE)

Table 91 — Request vehicle information response message (report supported INFOTYPE)

| Data Byte | Parameter Name                                                                                                                                               | Cvt | Hex Value | Mnemonic  |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----------|-----------|
| #1        | Request vehicle information response SID                                                                                                                     | M   | 0x49      | SIDPR     |
| #2        | INFOTYPE                                                                                                                                                     | M   | xx        | INFTYP_   |
| #3        | MessageCount                                                                                                                                                 | M   | xx        | MC_       |
| #4        | data record of INFOTYPE = [<br>Data A: supported INFOTYPEs,<br>Data B: supported INFOTYPEs,<br>Data C: supported INFOTYPEs,<br>Data D: supported INFOTYPEs ] | M   | xx        | DATA_REC_ |
| #5        |                                                                                                                                                              | M   | xx        | DATA_A    |
| #6        |                                                                                                                                                              | M   | xx        | DATA_B    |
| #7        |                                                                                                                                                              | M   | xx        | DATA_C    |

## 7.9.2.3 Request vehicle information request message definition (read INFOTYPE values)

Table 92 — Request vehicle information request message (read INFOTYPE values)

| Data Byte | Parameter Name                          | Cvt | Hex Value | Mnemonic |
|-----------|-----------------------------------------|-----|-----------|----------|
| #1        | Request vehicle information request SID | M   | 0x09      | SIDRQ    |
| #2        | INFOTYPE                                | M   | xx        | INFTYP_  |

## 7.9.2.4 Request vehicle information response message definition (report INFOTYPE values)

Table 93 — Request vehicle information response message (report INFOTYPE values)

| Data Byte | Parameter Name                                                        | Cvt              | Hex Value | Mnemonic |
|-----------|-----------------------------------------------------------------------|------------------|-----------|----------|
| #1        | Request vehicle information response SID                              | M                | 0x49      | SIDPR    |
| #2        | INFOTYPE                                                              | M                | xx        | INFTYP_  |
| #3        | MessageCount                                                          | M                | xx        | MC_      |
| #4        | data record of INFOTYPE = [ Data A,<br>Data B,<br>Data C,<br>Data D ] | M/C <sup>a</sup> | xx        | DATA_A   |
| #5        |                                                                       | M/C              | xx        | DATA_B   |
| #6        |                                                                       | M/C              | xx        | DATA_C   |
| #7        |                                                                       | M/C              | xx        | DATA_D   |

<sup>a</sup> C = Conditional. Data A to D is only present if the requested INFOTYPE equals an even number.

## 7.9.3 Parameter definition

## 7.9.3.1 Vehicle information types supported

Refer to SAE J1979-DA.

## 7.9.3.2 Vehicle information types and data byte descriptions

Refer to SAE J1979-DA.

### 7.9.3.3 MessageCount description

The MessageCount parameter has two (2) definitions depending on the INFOTYPE parameter value:

- INFOTYPE parameter values 0x01, 0x03, 0x05, 0x07, 0x09, 0x0C: In this case, the MessageCount parameter includes a value which represents the number of response messages to be sent by the server (ECU) to report the Data A to D referenced by the corresponding INFOTYPE parameter value. The MessageCount parameter value is a “static value”.
- INFOTYPE parameter values 0x02, 0x04, 0x06, 0x08, 0x0A, 0x0B, 0x0D: In this case, the MessageCount parameter includes a value which represents a dynamic counter starting with the value of 1 and incremented by 1 in the following response messages (assuming error-free transmission of the response message). The MessageCount parameter value is a “dynamic incremented value” (increments of 1). The last response message shall include an incremented MessageCount value which matches the reported MessageCount parameter value previously reported by the server (ECU) with the odd INFOTYPE (even INFOTYPE – 1).

Refer to SAE J1979-DA.

### 7.9.4 Message example

The tables below show how the “request vehicle information” service shall be implemented.

#### 7.9.4.1 Step #1: Request vehicle information (request supported INFOTYPE) from vehicle

The external test equipment requests all supported INFOTYPES from the vehicle. Refer to the example of Service 0x01 for guidance on requesting supported PIDs (the same concept is used for supported INFOTYPES). As a result of the supported INFOTYPE request, the external test equipment creates an internal list of supported INFOTYPES for each ECU: ECU#1 (ECM) supports the following INFOTYPES: 0x01, 0x02, 0x03, 0x04, 0x05, 0x06, 0x07, and 0x08. Since there is only one ECU which meets emission-related legislative requirements, no response messages from another ECU will occur.

#### 7.9.4.2 Step #2: Request INFOTYPES from vehicle

Now the external test equipment requests the following INFOTYPE:

- INFOTYPE 0x01: MC\_VIN = 5 response messages; supported by ECU#1.

**Table 94 — Request vehicle information request message**

|                           |                                                    |                   |                 |
|---------------------------|----------------------------------------------------|-------------------|-----------------|
| <b>Message Direction:</b> | External test equipment → All ECUs                 |                   |                 |
| <b>Message Type:</b>      | Request                                            |                   |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b> | <b>Byte Value</b> | <b>Mnemonic</b> |
| #1                        | Request vehicle information request SID            | 0x09              | SIDRQ           |
| #2                        | INFOTYPE: MessageCount VIN                         | 0x01              | INFOTYP         |

**Table 95 — Request vehicle information response message**

| <b>Message Direction:</b> |                                                    | ECU#1 → External test equipment |                 |
|---------------------------|----------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                    | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b> | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request vehicle information response SID           | 0x49                            | SIDPR           |
| #2                        | INFOTYPE: MessageCount VIN                         | 0x01                            | INFTYP          |
| #3                        | MessageCount VIN = 5 response messages             | 0x05                            | MC_VIN          |

Now the external test equipment requests the following INFOTYPE:

— INFOTYPE 0x02: VIN = [1G1JC5444R7252367] supported by ECU#1.

**Table 96 — Request vehicle information request message**

| <b>Message Direction:</b> |                                                    | External test equipment → All ECUs |                 |
|---------------------------|----------------------------------------------------|------------------------------------|-----------------|
| <b>Message Type:</b>      |                                                    | Request                            |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b> | <b>Byte Value</b>                  | <b>Mnemonic</b> |
| #1                        | Request vehicle information request SID            | 0x09                               | SIDRQ           |
| #2                        | INFOTYPE: VIN                                      | 0x02                               | INFTYP          |

**Table 97 — Request vehicle information response message (1)**

| <b>Message Direction:</b> |                                                     | ECU#1 → External test equipment |                 |
|---------------------------|-----------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                     | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>  | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request vehicle information response SID            | 0x49                            | SIDPR           |
| #2                        | INFOTYPE: VIN                                       | 0x02                            | INFTYP          |
| #3                        | MessageCount VIN = 1 <sup>st</sup> response message | 0x01                            | MC_VIN          |
| #4                        | Data A: Fill byte                                   | 0x00                            | DATA_A          |
| #5                        | Data B: Fill byte                                   | 0x00                            | DATA_B          |
| #6                        | Data C: Fill byte                                   | 0x00                            | DATA_C          |
| #7                        | Data D: '1'                                         | 0x31                            | DATA_D          |

**Table 98 — Request vehicle information response message (2)**

| <b>Message Direction:</b> |                                                     | ECU#1 → External test equipment |          |
|---------------------------|-----------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                     | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)         | Byte Value                      | Mnemonic |
| #1                        | Request vehicle information response SID            | 0x49                            | SIDPR    |
| #2                        | INFOTYPE: VIN                                       | 0x02                            | INFTYP   |
| #3                        | MessageCount VIN = 2 <sup>nd</sup> response message | 0x02                            | MC_VIN   |
| #4                        | Data A: 'G'                                         | 0x47                            | DATA_A   |
| #5                        | Data B: '1'                                         | 0x31                            | DATA_B   |
| #6                        | Data C: 'J'                                         | 0x4A                            | DATA_C   |
| #7                        | Data D: 'C'                                         | 0x43                            | DATA_D   |

**Table 99 — Request vehicle information response message (3)**

| <b>Message Direction:</b> |                                                     | ECU#1 → External test equipment |          |
|---------------------------|-----------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                     | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)         | Byte Value                      | Mnemonic |
| #1                        | Request vehicle information response SID            | 0x49                            | SIDPR    |
| #2                        | INFOTYPE: VIN                                       | 0x02                            | INFTYP   |
| #3                        | MessageCount VIN = 3 <sup>rd</sup> response message | 0x03                            | MC_VIN   |
| #4                        | Data A: '5'                                         | 0x35                            | DATA_A   |
| #5                        | Data B: '4'                                         | 0x34                            | DATA_B   |
| #6                        | Data C: '4'                                         | 0x34                            | DATA_C   |
| #7                        | Data D: '4'                                         | 0x34                            | DATA_D   |

**Table 100 — Request vehicle information response message (4)**

| <b>Message Direction:</b> |                                                     | ECU#1 → External test equipment |          |
|---------------------------|-----------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                     | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)         | Byte Value                      | Mnemonic |
| #1                        | Request vehicle information response SID            | 0x49                            | SIDPR    |
| #2                        | INFOTYPE: VIN                                       | 0x02                            | INFTYP   |
| #3                        | MessageCount VIN = 4 <sup>th</sup> response message | 0x04                            | MC_VIN   |
| #4                        | Data A: 'R'                                         | 0x52                            | DATA_A   |
| #5                        | Data B: '7'                                         | 0x37                            | DATA_B   |
| #6                        | Data C: '2'                                         | 0x32                            | DATA_C   |
| #7                        | Data D: '5'                                         | 0x35                            | DATA_D   |

**Table 101 — Request vehicle information response message (5)**

| <b>Message Direction:</b> |                                                     | ECU#1 → External test equipment |          |
|---------------------------|-----------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                     | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)         | Byte Value                      | Mnemonic |
| #1                        | Request vehicle information response SID            | 0x49                            | SIDPR    |
| #2                        | INFOTYPE: VIN                                       | 0x02                            | INFTYP   |
| #3                        | MessageCount VIN = 5 <sup>th</sup> response message | 0x05                            | MC_VIN   |
| #4                        | Data A: '2'                                         | 0x32                            | DATA_A   |
| #5                        | Data B: '3'                                         | 0x33                            | DATA_B   |
| #6                        | Data C: '6'                                         | 0x36                            | DATA_C   |
| #7                        | Data D: '7'                                         | 0x37                            | DATA_D   |

Now the external test equipment requests the following INFOTYPE:

— INFOTYPE 0x03: MessageCount Calibration ID = 0x08; supported by ECU#1.

**Table 102 — Request vehicle information request message**

| <b>Message Direction:</b> |                                             | External test equipment → All ECUs |          |
|---------------------------|---------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                             | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal) | Byte Value                         | Mnemonic |
| #1                        | Request vehicle information request SID     | 0x09                               | SIDRQ    |
| #2                        | INFOTYPE: MessageCount Calibration ID       | 0x03                               | INFTYP   |

**Table 103 — Request vehicle information response message**

| <b>Message Direction:</b> |                                                   | ECU#1 → External test equipment |          |
|---------------------------|---------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                   | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)       | Byte Value                      | Mnemonic |
| #1                        | Request vehicle information response SID          | 0x49                            | SIDPR    |
| #2                        | INFOTYPE: MessageCount Calibration ID             | 0x03                            | INFTYP   |
| #3                        | MessageCount Calibration ID = 8 response messages | 0x08                            | MC_CALID |

Now the external test equipment requests the following INFOTYPE:

— INFOTYPE 0x04: CALID#1 = [JMB\*36761500]; supported by ECU#1;

— INFOTYPE 0x04: CALID#2 = [JMB\*47872611]; supported by ECU#1.

**Table 104 — Request vehicle information request message**

| <b>Message Direction:</b> |                                             | External test equipment → All ECUs |          |
|---------------------------|---------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                             | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal) | Byte Value                         | Mnemonic |
| #1                        | Request vehicle information request SID     | 0x09                               | SIDRQ    |
| #2                        | INFOTYPE: Calibration ID                    | 0x04                               | INFOTYP  |

**Table 105 — Request vehicle information response message (1)**

| <b>Message Direction:</b> |                                                                  | ECU#1 → External test equipment |          |
|---------------------------|------------------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                                  | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)                      | Byte Value                      | Mnemonic |
| #1                        | Request vehicle information response SID                         | 0x49                            | SIDPR    |
| #2                        | INFOTYPE: Calibration ID                                         | 0x04                            | INFOTYP  |
| #3                        | MessageCount Calibration ID#1 = 1 <sup>st</sup> response message | 0x01                            | MC_CALID |
| #4                        | Data A: 'J'                                                      | 0x4A                            | DATA_A   |
| #5                        | Data B: 'M'                                                      | 0x4D                            | DATA_B   |
| #6                        | Data C: 'B'                                                      | 0x42                            | DATA_C   |
| #7                        | Data D: '*'                                                      | 0x2A                            | DATA_D   |

**Table 106 — Request vehicle information response message (2)**

| <b>Message Direction:</b> |                                                                  | ECU#1 → External test equipment |          |
|---------------------------|------------------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                                  | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)                      | Byte Value                      | Mnemonic |
| #1                        | Request vehicle information response SID                         | 0x49                            | SIDPR    |
| #2                        | INFOTYPE: Calibration ID                                         | 0x04                            | INFOTYP  |
| #3                        | MessageCount Calibration ID#1 = 2 <sup>nd</sup> response message | 0x02                            | MC_CALID |
| #4                        | Data A: '3'                                                      | 0x33                            | DATA_A   |
| #5                        | Data B: '6'                                                      | 0x36                            | DATA_B   |
| #6                        | Data C: '7'                                                      | 0x37                            | DATA_C   |
| #7                        | Data D: '6'                                                      | 0x36                            | DATA_D   |

**Table 107 — Request vehicle information response message (3)**

| <b>Message Direction:</b> |                                                                  | ECU#1 → External test equipment |                 |
|---------------------------|------------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                                  | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>               | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request vehicle information response SID                         | 0x49                            | SIDPR           |
| #2                        | INFOTYPE: Calibration ID                                         | 0x04                            | INFOTYP         |
| #3                        | MessageCount Calibration ID#1 = 3 <sup>rd</sup> response message | 0x03                            | MC_CALID        |
| #4                        | Data A: '1'                                                      | 0x31                            | DATA_A          |
| #5                        | Data B: '5'                                                      | 0x35                            | DATA_B          |
| #6                        | Data C: '0'                                                      | 0x30                            | DATA_C          |
| #7                        | Data D: '0'                                                      | 0x30                            | DATA_D          |

**Table 108 — Request vehicle information response message (4)**

| <b>Message Direction:</b> |                                                                  | ECU#1 → External test equipment |                 |
|---------------------------|------------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                                  | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>               | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request vehicle information response SID                         | 0x49                            | SIDPR           |
| #2                        | INFOTYPE: Calibration ID                                         | 0x04                            | INFOTYP         |
| #3                        | MessageCount Calibration ID#1 = 4 <sup>th</sup> response message | 0x04                            | MC_CALID        |
| #4                        | Data A: Fill byte                                                | 0x00                            | DATA_A          |
| #5                        | Data B: Fill byte                                                | 0x00                            | DATA_B          |
| #6                        | Data C: Fill byte                                                | 0x00                            | DATA_C          |
| #7                        | Data D: Fill byte                                                | 0x00                            | DATA_D          |

**Table 109 — Request vehicle information response message (5)**

| <b>Message Direction:</b> |                                                                  | ECU#1 → External test equipment |                 |
|---------------------------|------------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                                  | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>               | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request vehicle information response SID                         | 0x49                            | SIDPR           |
| #2                        | INFOTYPE: Calibration ID                                         | 0x04                            | INFOTYP         |
| #3                        | MessageCount Calibration ID#2 = 5 <sup>th</sup> response message | 0x05                            | MC_CALID        |
| #4                        | Data A: 'J'                                                      | 0x4A                            | DATA_A          |
| #5                        | Data B: 'M'                                                      | 0x4D                            | DATA_B          |
| #6                        | Data C: 'B'                                                      | 0x42                            | DATA_C          |
| #7                        | Data D: '*'                                                      | 0x2A                            | DATA_D          |

**Table 110 — Request vehicle information response message (6)**

| <b>Message Direction:</b> |                                                                  | ECU#1 → External test equipment |                 |
|---------------------------|------------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                                  | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>               | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request vehicle information response SID                         | 0x49                            | SIDPR           |
| #2                        | INFOTYPE: Calibration ID                                         | 0x04                            | INFOTYP         |
| #3                        | MessageCount Calibration ID#2 = 6 <sup>th</sup> response message | 0x06                            | MC_CALID        |
| #4                        | Data A: '4'                                                      | 0x34                            | DATA_A          |
| #5                        | Data B: '7'                                                      | 0x37                            | DATA_B          |
| #6                        | Data C: '8'                                                      | 0x38                            | DATA_C          |
| #7                        | Data D: '7'                                                      | 0x37                            | DATA_D          |

**Table 111 — Request vehicle information response message (7)**

| <b>Message Direction:</b> |                                                                  | ECU#1 → External test equipment |                 |
|---------------------------|------------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                                  | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>               | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request vehicle information response SID                         | 0x49                            | SIDPR           |
| #2                        | INFOTYPE: Calibration ID                                         | 0x04                            | INFOTYP         |
| #3                        | MessageCount Calibration ID#2 = 7 <sup>th</sup> response message | 0x07                            | MC_CALID        |
| #4                        | Data A: '2'                                                      | 0x32                            | DATA_A          |
| #5                        | Data B: '6'                                                      | 0x36                            | DATA_B          |
| #6                        | Data C: '1'                                                      | 0x31                            | DATA_C          |
| #7                        | Data D: '1'                                                      | 0x31                            | DATA_D          |

**Table 112 — Request vehicle information response message (8)**

| <b>Message Direction:</b> |                                                                  | ECU#1 → External test equipment |                 |
|---------------------------|------------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                                  | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>               | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request vehicle information response SID                         | 0x49                            | SIDPR           |
| #2                        | INFOTYPE: Calibration ID                                         | 0x04                            | INFOTYP         |
| #3                        | MessageCount Calibration ID#2 = 8 <sup>th</sup> response message | 0x08                            | MC_CALID        |
| #4                        | Data A: Fill byte                                                | 0x00                            | DATA_A          |
| #5                        | Data B: Fill byte                                                | 0x00                            | DATA_B          |
| #6                        | Data C: Fill byte                                                | 0x00                            | DATA_C          |
| #7                        | Data D: Fill byte                                                | 0x00                            | DATA_D          |

Now the external test equipment requests the following INFOTYPE:

- INFOTYPE 0x05: MessageCount Calibration Verification Number = 0x02; supported by ECU#1.

**Table 113 — Request vehicle information request message**

| <b>Message Direction:</b> |                                                        | External test equipment → All ECUs |          |
|---------------------------|--------------------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                                        | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal)            | Byte Value                         | Mnemonic |
| #1                        | Request vehicle information request SID                | 0x09                               | SIDRQ    |
| #2                        | INFOTYPE: MessageCount Calibration Verification Number | 0x05                               | INFTYP   |

**Table 114 — Request vehicle information response message**

| <b>Message Direction:</b> |                                                                    | ECU#1 → External test equipment |          |
|---------------------------|--------------------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                                    | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)                        | Byte Value                      | Mnemonic |
| #1                        | Request vehicle information response SID                           | 0x49                            | SIDPR    |
| #2                        | INFOTYPE: MessageCount Calibration Verification Number             | 0x05                            | INFTYP   |
| #3                        | MessageCount Calibration Verification Number = 2 response messages | 0x02                            | MC_CVN   |

Now the external test equipment requests the following INFOTYPE:

- INFOTYPE 0x06: CVN#1 = [17 91 BC 82]; supported by ECU#1;
- INFOTYPE 0x06: CVN#2 = [16 E0 62 BE]; supported by ECU#1.

**Table 115 — Request vehicle information request message**

| <b>Message Direction:</b> |                                             | External test equipment → All ECUs |          |
|---------------------------|---------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                             | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal) | Byte Value                         | Mnemonic |
| #1                        | Request vehicle information request SID     | 0x09                               | SIDRQ    |
| #2                        | INFOTYPE: Calibration Verification Number   | 0x06                               | INFTYP   |

**Table 116 — Request vehicle information response message (1)**

| <b>Message Direction:</b> |                                                                                 | ECU#1 → External test equipment |          |
|---------------------------|---------------------------------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                                                 | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)                                     | Byte Value                      | Mnemonic |
| #1                        | Request vehicle information response SID                                        | 0x49                            | SIDPR    |
| #2                        | INFOTYPE: Calibration Verification Number                                       | 0x06                            | INFOTYP  |
| #3                        | MessageCount Calibration Verification Number = 1 <sup>st</sup> response message | 0x01                            | MC_CVN   |
| #4                        | Data A: 17                                                                      | 0x17                            | DATA_A   |
| #5                        | Data B: 91                                                                      | 0x91                            | DATA_B   |
| #6                        | Data C: BC                                                                      | 0xBC                            | DATA_C   |
| #7                        | Data D: 82                                                                      | 0x82                            | DATA_D   |

Depending on which protocol the vehicle supports, the following situations may occur:

If the vehicle supports ISO 9141-2, the external test equipment may need to repeat the request message multiple times before the ECU(s) send a response message.

If the vehicle supports SAE J1850, the external test equipment may need to repeat the request message before the ECU(s) send a response message.

If the vehicle supports ISO 14230-4, the ECU(s) may send a negative response message with response code 0x22 - conditionsNotCorrect if, for example, the engine is running. After the vehicle conditions have been adjusted to meet this service request, the external test equipment shall repeat the request message and the ECU(s) shall send a positive response message.

**Table 117 — Request vehicle information response message (2)**

| <b>Message Direction:</b> |                                                                                 | ECU#1 → External test equipment |          |
|---------------------------|---------------------------------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                                                 | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)                                     | Byte Value                      | Mnemonic |
| #1                        | Request vehicle information response SID                                        | 0x49                            | SIDPR    |
| #2                        | INFOTYPE: Calibration Verification Number                                       | 0x06                            | INFOTYP  |
| #3                        | MessageCount Calibration Verification Number = 2 <sup>nd</sup> response message | 0x02                            | MC_CVN   |
| #4                        | Data A: 0x16                                                                    | 0x16                            | DATA_A   |
| #5                        | Data B: 0xE0                                                                    | 0xE0                            | DATA_B   |
| #6                        | Data C: 0x62                                                                    | 0x62                            | DATA_C   |
| #7                        | Data D: 0xBE                                                                    | 0xBE                            | DATA_D   |

Now the external test equipment requests the following INFOTYPE:

— INFOTYPE 0x07: MessageCount In-use Performance Tracking = 0x08; supported by ECU#1.

**Table 118 — Request vehicle information request message**

| <b>Message Direction:</b> |                                                    | External test equipment → All ECUs |          |
|---------------------------|----------------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                                    | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal)        | Byte Value                         | Mnemonic |
| #1                        | Request vehicle information request SID            | 0x09                               | SIDRQ    |
| #2                        | INFOTYPE: MessageCount In-use Performance Tracking | 0x07                               | INFTYP   |

**Table 119 — Request vehicle information response message**

| <b>Message Direction:</b> |                                                                | ECU#1 → External test equipment |          |
|---------------------------|----------------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                                | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)                    | Byte Value                      | Mnemonic |
| #1                        | Request vehicle information response SID                       | 0x49                            | SIDPR    |
| #2                        | INFOTYPE: MessageCount In-use Performance Tracking             | 0x07                            | INFTYP   |
| #3                        | MessageCount In-use Performance Tracking = 8 response messages | 0x08                            | MC_IPT   |

Now the external test equipment requests the following INFOTYPE:

— INFOTYPE 0x08: MC\_IPT = 8 response messages; supported by ECU#1.

**Table 120 — Request vehicle information request message**

| <b>Message Direction:</b> |                                             | External test equipment → All ECUs |          |
|---------------------------|---------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                             | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal) | Byte Value                         | Mnemonic |
| #1                        | Request vehicle information request SID     | 0x09                               | SIDRQ    |
| #2                        | INFOTYPE: In-use Performance Tracking       | 0x08                               | INFTYP   |

**Table 121 — Request vehicle information response message (1)**

| <b>Message Direction:</b> |                                                                             | ECU#1 → External test equipment |           |
|---------------------------|-----------------------------------------------------------------------------|---------------------------------|-----------|
| <b>Message Type:</b>      |                                                                             | Response                        |           |
| Data Byte                 | Description (all values are in hexadecimal)                                 | Byte Value                      | Mnemonic  |
| #1                        | Request vehicle information response SID                                    | 0x49                            | SIDPR     |
| #2                        | INFOTYPE: In-use Performance Tracking                                       | 0x08                            | INFTYP    |
| #3                        | MessageCount In-use Performance Tracking = 1 <sup>st</sup> response message | 0x01                            | MC_IPT    |
| #4                        | OBDCOND_A: 1024 counts                                                      | 0x04                            | OBDCOND_A |
| #5                        | OBDCOND_B: 1024 counts                                                      | 0x00                            | OBDCOND_B |
| #6                        | IGNCNTR_A: 3337 counts                                                      | 0x0D                            | IGNCNTR_A |
| #7                        | IGNCNTR_B: 3337 counts                                                      | 0x09                            | IGNCNTR_B |

Table 122 — Request vehicle information response message (2)

| <b>Message Direction:</b> |                                                                             | ECU#1 → External test equipment |            |
|---------------------------|-----------------------------------------------------------------------------|---------------------------------|------------|
| <b>Message Type:</b>      |                                                                             | Response                        |            |
| Data Byte                 | Description (all values are in hexadecimal)                                 | Byte Value                      | Mnemonic   |
| #1                        | Request vehicle information response SID                                    | 0x49                            | SIDPR      |
| #2                        | INFOTYPE: In-use Performance Tracking                                       | 0x08                            | INFTYP     |
| #3                        | MessageCount In-use Performance Tracking = 2 <sup>nd</sup> response message | 0x02                            | MC_IPT     |
| #4                        | CATCOMP1_A: 824 counts                                                      | 0x03                            | CATCOMP1_A |
| #5                        | CATCOMP1_B: 824 counts                                                      | 0x38                            | CATCOMP1_B |
| #6                        | CATCOND1_A: 945 counts                                                      | 0x03                            | CATCOND1_A |
| #7                        | CATCOND1_B: 945 counts                                                      | 0xB1                            | CATCOND1_B |

Table 123 — Request vehicle information response message (3)

| <b>Message Direction:</b> |                                                                             | ECU#1 → External test equipment |            |
|---------------------------|-----------------------------------------------------------------------------|---------------------------------|------------|
| <b>Message Type:</b>      |                                                                             | Response                        |            |
| Data Byte                 | Description (all values are in hexadecimal)                                 | Byte Value                      | Mnemonic   |
| #1                        | Request vehicle information response SID                                    | 0x49                            | SIDPR      |
| #2                        | INFOTYPE: In-use Performance Tracking                                       | 0x08                            | INFTYP     |
| #3                        | MessageCount In-use Performance Tracking = 3 <sup>rd</sup> response message | 0x03                            | MC_IPT     |
| #4                        | CATCOMP2_A: 711 counts                                                      | 0x02                            | CATCOMP2_A |
| #5                        | CATCOMP2_B: 711 counts                                                      | 0xC7                            | CATCOMP2_B |
| #6                        | CATCOND2_A: 945 counts                                                      | 0x03                            | CATCOND2_A |
| #7                        | CATCOND2_B: 945 counts                                                      | 0xB1                            | CATCOND2_B |

Table 124 — Request vehicle information response message (4)

| <b>Message Direction:</b> |                                                                             | ECU#1 → External test equipment |            |
|---------------------------|-----------------------------------------------------------------------------|---------------------------------|------------|
| <b>Message Type:</b>      |                                                                             | Response                        |            |
| Data Byte                 | Description (all values are in hexadecimal)                                 | Byte Value                      | Mnemonic   |
| #1                        | Request vehicle information response SID                                    | 0x49                            | SIDPR      |
| #2                        | INFOTYPE: In-use Performance Tracking                                       | 0x08                            | INFTYP     |
| #3                        | MessageCount In-use Performance Tracking = 4 <sup>th</sup> response message | 0x04                            | MC_IPT     |
| #4                        | O2SCOMP1_A: 737 counts                                                      | 0x02                            | O2SCOMP1_A |
| #5                        | O2SCOMP1_B: 737 counts                                                      | 0xE1                            | O2SCOMP1_B |
| #6                        | O2SCOND1_A: 924 counts                                                      | 0x03                            | O2SCOND1_A |
| #7                        | O2SCOND1_B: 924 counts                                                      | 0x9C                            | O2SCOND1_B |

**Table 125 — Request vehicle information response message (5)**

| <b>Message Direction:</b> |                                                                             | ECU#1 → External test equipment |            |
|---------------------------|-----------------------------------------------------------------------------|---------------------------------|------------|
| <b>Message Type:</b>      |                                                                             | Response                        |            |
| Data Byte                 | Description (all values are in hexadecimal)                                 | Byte Value                      | Mnemonic   |
| #1                        | Request vehicle information response SID                                    | 0x49                            | SIDPR      |
| #2                        | INFOTYPE: In-use Performance Tracking                                       | 0x08                            | INFOTYP    |
| #3                        | MessageCount In-use Performance Tracking = 5 <sup>th</sup> response message | 0x05                            | MC_IPT     |
| #4                        | O2SCOMP2_A: 724 counts                                                      | 0x02                            | O2SCOMP2_A |
| #5                        | O2SCOMP2_B: 724 counts                                                      | 0xD4                            | O2SCOMP2_B |
| #6                        | O2SCOND2_A: 833 counts                                                      | 0x03                            | O2SCOND2_A |
| #7                        | O2SCOND2_B: 833 counts                                                      | 0x41                            | O2SCOND2_B |

**Table 126 — Request vehicle information response message (6)**

| <b>Message Direction:</b> |                                                                             | ECU#1 → External test equipment |           |
|---------------------------|-----------------------------------------------------------------------------|---------------------------------|-----------|
| <b>Message Type:</b>      |                                                                             | Response                        |           |
| Data Byte                 | Description (all values are in hexadecimal)                                 | Byte Value                      | Mnemonic  |
| #1                        | Request vehicle information response SID                                    | 0x49                            | SIDPR     |
| #2                        | INFOTYPE: In-use Performance Tracking                                       | 0x08                            | INFOTYP   |
| #3                        | MessageCount In-use Performance Tracking = 6 <sup>th</sup> response message | 0x06                            | MC_IPT    |
| #4                        | EGRCOMP_A: 997 counts                                                       | 0x03                            | EGRCOMP_A |
| #5                        | EGRCOMP_B: 997 counts                                                       | 0xE5                            | EGRCOMP_B |
| #6                        | EGRCOND_A: 1010 counts                                                      | 0x03                            | EGRCOND_A |
| #7                        | EGRCOND_B: 1010 counts                                                      | 0xF2                            | EGRCOND_B |

**Table 127 — Request vehicle information response message (7)**

| <b>Message Direction:</b> |                                                                             | ECU#1 → External test equipment |           |
|---------------------------|-----------------------------------------------------------------------------|---------------------------------|-----------|
| <b>Message Type:</b>      |                                                                             | Response                        |           |
| Data Byte                 | Description (all values are in hexadecimal)                                 | Byte Value                      | Mnemonic  |
| #1                        | Request vehicle information response SID                                    | 0x49                            | SIDPR     |
| #2                        | INFOTYPE: In-use Performance Tracking                                       | 0x08                            | INFOTYP   |
| #3                        | MessageCount In-use Performance Tracking = 7 <sup>th</sup> response message | 0x07                            | MC_IPT    |
| #4                        | AIRCOMP_A: 937 counts                                                       | 0x03                            | AIRCOMP_A |
| #5                        | AIRCOMP_B: 937 counts                                                       | 0xA9                            | AIRCOMP_B |
| #6                        | AIRCOND_A: 973 counts                                                       | 0x03                            | AIRCOND_A |
| #7                        | AIRCOND_B: 973 counts                                                       | 0xCD                            | AIRCOND_B |

Table 128 — Request vehicle information response message (8)

| <b>Message Direction:</b> |                                                                             | ECU#1 → External test equipment |            |
|---------------------------|-----------------------------------------------------------------------------|---------------------------------|------------|
| <b>Message Type:</b>      |                                                                             | Response                        |            |
| Data Byte                 | Description (all values are in hexadecimal)                                 | Byte Value                      | Mnemonic   |
| #1                        | Request vehicle information response SID                                    | 0x49                            | SIDPR      |
| #2                        | INFOTYPE: In-use Performance Tracking                                       | 0x08                            | INFOTYP    |
| #3                        | MessageCount In-use Performance Tracking = 8 <sup>th</sup> response message | 0x08                            | MC_IPT     |
| #4                        | EVAPCOMP_A: 68 counts                                                       | 0x00                            | EVAPCOMP_A |
| #5                        | EVAPCOMP_B: 68 counts                                                       | 0x44                            | EVAPCOMP_B |
| #6                        | EVAPCOND_A: 97 counts                                                       | 0x00                            | EVAPCOND_A |
| #7                        | EVAPCOND_B: 97 counts                                                       | 0x61                            | EVAPCOND_B |

## 8 Diagnostic service definition for ISO 15765-4

### 8.1 Service 0x01 — Request current powertrain diagnostic data

#### 8.1.1 Functional description

The purpose of this service is to allow access to current emission-related data values, including analogue inputs and outputs, digital inputs and outputs, and system status information. The request for information includes a parameter identification (PID) value that indicates to the on-board system the specific information requested. PID specifications, scaling information and display formats are included in SAE J1979-DA.

The ECU(s) shall respond to this message by transmitting the requested data value last determined by the system. All data values returned for sensor readings shall be actual readings, not default or substitute values used by the system because of a fault with that sensor.

Not all PIDs are applicable or supported by all systems. PID 0x00 is a bit-encoded value that indicates which PIDs are supported for each ECU. PID 0x00 indicates support for PIDs from 0x01 to 0x20. PID 0x20 indicates support for PIDs 0x21 through 0x40, etc. This is the same concept for PIDs/OBD Monitor IDs/TIDs/INFOTYPES support in Services 0x01, 0x02, 0x06, 0x08, 0x09. PID 0x00 is required for those ECUs that respond to a corresponding Service 0x01 request message as specified in SAE J1979-DA.

**IMPORTANT — All emissions-related OBD ECUs which at least support one of the services defined in this part of ISO 15031, shall support Service 0x01 and PID 0x00. Service 0x01 with PID 0x00 is defined as the universal “initialization/keep alive/ping” message for all emissions-related OBD ECUs.**

The request message may contain up to six (6) PIDs. External test equipment is not allowed to request a combination of PIDs supported and PIDs which report data values. The ECU shall support requests for up to six (6) PIDs. The request message may contain the same PID multiple times. The ECU shall treat each PID as a separate parameter and respond with data for each PID (data returned may be different for the same PID) as often as requested.

The order of the PIDs in the response message is not required to match the order in the request message.

## 8.1.2 Message data bytes

## 8.1.2.1 Request current powertrain diagnostic data request message definition (read-supported PIDs)

Table 129 — Request current powertrain diagnostic data request message (read-supported PIDs)

| Data Byte | Parameter Name                                         | Cvt            | Hex Value | Mnemonic |
|-----------|--------------------------------------------------------|----------------|-----------|----------|
| #1        | Request current powertrain diagnostic data request SID | M              | 0x01      | SIDRQ    |
| #2        | PID#1 (PIDs supported: see SAE J1979-DA)               | M              | xx        | PID      |
| #3        | PID#2 (PIDs supported: see SAE J1979-DA)               | U <sup>a</sup> | xx        | PID      |
| #4        | PID#3 (PIDs supported: see SAE J1979-DA)               | U              | xx        | PID      |
| #5        | PID#4 (PIDs supported: see SAE J1979-DA)               | U              | xx        | PID      |
| #6        | PID#5 (PIDs supported: see SAE J1979-DA)               | U              | xx        | PID      |
| #7        | PID#6 (PIDs supported: see SAE J1979-DA)               | U              | xx        | PID      |

<sup>a</sup> U = User Optional. PID may be included to avoid multiple PID supported request messages.

To request PIDs supported range from 0xC1 to 0xFF, another request message with PID#1 = 0xC0 and PID#2 = 0xE0 shall be sent to the vehicle.

## 8.1.2.2 Request current powertrain diagnostic data response message definition (report supported PIDs)

ECU(s) shall respond to all supported ranges if requested. A range is defined as a block of 32 PIDs (e.g. range #1: PID 0x01 - 0x20). The ECU shall not respond to unsupported PID ranges unless subsequent ranges have a supported PID(s).

Table 130 — Request current powertrain diagnostic data response message (report supported PIDs)

| Data Byte                          | Parameter Name                                                                                                                                                                  | Cvt             | Hex Value | Mnemonic       |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------|----------------|
| #1                                 | Request current powertrain diagnostic data response SID                                                                                                                         | M               | 0x41      | SIDPR          |
| #2                                 | data record of supported PIDs = [<br>1 <sup>st</sup> supported PID<br>Data A: supported PIDs,<br>Data B: supported PIDs,<br>Data C: supported PIDs,<br>Data D: supported PIDs ] | M               | xx        | PIDREC_<br>PID |
| #3                                 |                                                                                                                                                                                 | M               | xx        | DATA_A         |
| #4                                 |                                                                                                                                                                                 | M               | xx        | DATA_B         |
| #5                                 |                                                                                                                                                                                 | M               | xx        | DATA_C         |
| #6                                 |                                                                                                                                                                                 | M               | xx        | DATA_D         |
| :                                  | :                                                                                                                                                                               | :               | :         | :              |
| #n-4<br>#n-3<br>#n-2<br>#n-1<br>#n | data record of supported PIDs = [<br>m <sup>th</sup> supported PID<br>Data A: supported PIDs,<br>Data B: supported PIDs,<br>Data C: supported PIDs,<br>Data D: supported PIDs ] | C1 <sup>a</sup> | xx        | PIDREC_<br>PID |
|                                    |                                                                                                                                                                                 | C2 <sup>b</sup> | xx        | DATA_A         |
|                                    |                                                                                                                                                                                 | C2              | xx        | DATA_B         |
|                                    |                                                                                                                                                                                 | C2              | xx        | DATA_C         |
|                                    |                                                                                                                                                                                 | C2              | xx        | DATA_D         |

<sup>a</sup> C1 = Conditional. PID value shall be the same value as included in the request message if supported by the ECU.

<sup>b</sup> C2 = Conditional. Value indicates PIDs supported; range of supported PIDs depends on selected PID value (see C1).

The response message shall only include the PID(s) and Data A to D which are supported by the ECU. If the request message includes a PID value(s) which are not supported by the ECU, those shall not be included in the response message.

### 8.1.2.3 Request current powertrain diagnostic data request message definition (read PID values)

**Table 131 — Request current powertrain diagnostic data request message**

| Data Byte | Parameter Name                                         | Cvt            | Hex Value | Mnemonic |
|-----------|--------------------------------------------------------|----------------|-----------|----------|
| #1        | Request current powertrain diagnostic data request SID | M              | 0x01      | SIDRQ    |
| #2        | PID#1 (see SAE J1979-DA)                               | M              | xx        | PID      |
| #3        | PID#2 (see SAE J1979-DA)                               | U <sup>a</sup> | xx        | PID      |
| #4        | PID#3 (see SAE J1979-DA)                               | U              | xx        | PID      |
| #5        | PID#4 (see SAE J1979-DA)                               | U              | xx        | PID      |
| #6        | PID#5 (see SAE J1979-DAB)                              | U              | xx        | PID      |
| #7        | PID#6 (see SAE J1979-DAB)                              | U              | xx        | PID      |

<sup>a</sup> U = User Optional. The parameter may be either present or not.

### 8.1.2.4 Request current powertrain diagnostic data response message definition (report PID values)

**Table 132 — Request current powertrain diagnostic data response message**

| Data Byte              | Parameter Name                                                                              | Cvt                                           | Hex Value            | Mnemonic                                    |
|------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------|----------------------|---------------------------------------------|
| #1                     | Request current powertrain diagnostic data response SID                                     | M                                             | 0x41                 | SIDPR                                       |
| #2<br>#3<br>:<br>#j+1  | data record of 1 <sup>st</sup> supported PID = [<br>PID#1<br>data #1.1,<br>:<br>data #1.j ] | M<br>M<br>:<br>C1 <sup>a</sup>                | xx<br>xx<br>xx<br>xx | PIDREC_<br>PID<br>DATA_1.1<br>:<br>DATA_1.j |
| :                      | :                                                                                           | :                                             | :                    | :                                           |
| :<br>:<br>:<br>:<br>#n | data record of m <sup>th</sup> supported PID = [<br>PID#m<br>data #m.1,<br>:<br>data #m.k ] | C2 <sup>b</sup><br>C2<br>:<br>C3 <sup>c</sup> | xx<br>xx<br>:<br>xx  | PIDREC_<br>PID<br>DATA_m.1<br>:<br>DATA_1.k |

<sup>a</sup> C1 = Conditional. Data depends on selected PID value.

<sup>b</sup> C2 = Conditional. Parameter is only present if supported by the ECU.

<sup>c</sup> C3 = Conditional. Parameters and values for data depend on selected PID number and are only included if PID is supported by the ECU.

Not all PIDs which are included in the request message may be supported by all emission-related ECUs, which shall comply with this part of ISO 15031. Therefore, each vehicle ECU, which supports at least one (1) PID, shall send a response message including the PID(s) with data.

### 8.1.3 Parameter definition

#### 8.1.3.1 PIDs supported

SAE J1979-DA specifies the interpretation of the data record of supported PIDs.

#### 8.1.3.2 PID and data byte descriptions

SAE J1979-DA specifies standardized emission-related parameters.

### 8.1.4 Message example

Tables 133 to 135 show how the “request current powertrain diagnostic data” service shall be implemented.

#### 8.1.4.1 Step #1: Request supported PIDs from vehicle

The external test equipment requests supported PIDs (0x00, 0x20, 0x40, 0x60, 0x80, 0xA0) from the vehicle. Refer to SAE J1979-DA to interpret the data bytes in the response messages.

ECU(s) shall respond to all supported ranges if requested. A range is defined as a block of 32 PIDs (e.g. range #1: PID 0x01 - 0x20). The ECU shall not respond to unsupported PID ranges unless subsequent ranges have a supported PID(s).

**Table 133 — Request current powertrain diagnostic data request message**

| <b>Message Direction:</b> |                                                        | External test equipment → All ECUs |          |
|---------------------------|--------------------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                                        | Request                            |          |
| Data Byte                 | Description (All PID values are in hexadecimal)        | Byte Value                         | Mnemonic |
| #1                        | Request current powertrain diagnostic data request SID | 0x01                               | SIDRQ    |
| #2                        | PID used to determine PID support for PIDs 0x01 - 0x20 | 0x00                               | PID      |
| #3                        | PID used to determine PID support for PIDs 0x21 – 0x40 | 0x20                               | PID      |
| #4                        | PID used to determine PID support for PIDs 0x41 – 0x60 | 0x40                               | PID      |
| #5                        | PID used to determine PID support for PIDs 0x61 – 0x80 | 0x60                               | PID      |
| #6                        | PID used to determine PID support for PIDs 0x81 – 0xA0 | 0x80                               | PID      |
| #7                        | PID used to determine PID support for PIDs 0xA1 – 0xC0 | 0xA0                               | PID      |

Table 134 — ECU#1 response: Request current powertrain diagnostic data response message

| <b>Message Direction:</b> |                                                              | ECU#1 → External test equipment |          |
|---------------------------|--------------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                              | Response                        |          |
| Data Byte                 | Description (All PID values are in hexadecimal)              | Byte Value                      | Mnemonic |
| #1                        | Request current powertrain diagnostic data response SID      | 0x41                            | SIDPR    |
| #2                        | PID requested                                                | 0x00                            | PID      |
| #3                        | Data byte A, representing support for PIDs 0x01, 0x03 - 0x08 | 10111111b = 0xBF                | DATA_A   |
| #4                        | Data byte B, representing support for PIDs 0x09, 0x0B - 0x10 | 10111111b = 0xBF                | DATA_B   |
| #5                        | Data byte C, representing support for PIDs 0x11, 0x13, 0x15  | 10101000b = 0xA8                | DATA_C   |
| #6                        | Data byte D, representing support for PIDs 0x19, 0x1C, 0x20  | 10010001b = 0x91                | DATA_D   |
| #7                        | PID requested                                                | 0x20                            | PID      |
| #8                        | Data byte A, representing support for PID 0x21               | 10000000b = 0x80                | DATA_A   |
| #9                        | Data byte B, representing no support for PIDs 0x29 - 0x30    | 00000000b = 0x00                | DATA_B   |
| #10                       | Data byte C, representing no support for PIDs 0x31 - 0x38    | 00000000b = 0x00                | DATA_C   |
| #11                       | Data byte D, representing no support for PIDs 0x39 - 0x40    | 00000000b = 0x00                | DATA_D   |

Table 135 — ECU#2 response: Request current powertrain diagnostic data response message

| <b>Message Direction:</b> |                                                           | ECU#2 → External test equipment |          |
|---------------------------|-----------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                           | Response                        |          |
| Data Byte                 | Description (All PID values are in hexadecimal)           | Byte Value                      | Mnemonic |
| #1                        | Request current powertrain diagnostic data response SID   | 0x41                            | SIDPR    |
| #2                        | PID requested                                             | 0x00                            | PID      |
| #3                        | Data byte A, representing support for PID 0x01            | 10000000b = 0x80                | DATA_A   |
| #4                        | Data byte B, representing support for PID 0x0D            | 00001000b = 0x08                | DATA_B   |
| #5                        | Data byte C, representing no support for PIDs 0x11 - 0x18 | 00000000b = 0x00                | DATA_C   |
| #6                        | Data byte D, representing no support for PIDs 0x19 - 0x20 | 00000000b = 0x00                | DATA_D   |

Now the external test equipment creates an internal list of supported PIDs for each ECU. ECU#1 (ECM) supports the following PIDs: 0x01, 0x03 - 0x09, 0x0B - 0x11, 0x13, 0x15, 0x19, 0x1C, 0x20, 0x21.

ECU#2 (TCM) supports the following PIDs: 0x01 and 0x0D.

#### 8.1.4.2 Step #2: Request multiple PIDs from vehicle

Now the external test equipment requests a combination of a maximum of six (6) PIDs in one request message to gain best performance of displaying current data.

- PID 0x15: Bank 1 - Sensor 2, PID is supported by ECU#1;
- PID 0x01: Number of emission-related DTCs and MIL status, PID is supported by ECU#1 and #2;
- PID 0x05: Engine coolant temperature, PID is supported by ECU#1;
- PID 0x03: Fuel system 1 status, PID is supported by ECU#1;
- PID 0x0C: Engine speed, PID is supported by ECU#1;
- PID 0x0D: Vehicle speed, PID is supported by ECU#2.

**Table 136 — Request current powertrain diagnostic data request message**

| <b>Message Direction:</b> |                                                        | External test equipment → All ECUs |                 |
|---------------------------|--------------------------------------------------------|------------------------------------|-----------------|
| <b>Message Type:</b>      |                                                        | Request                            |                 |
| <b>Data Byte</b>          | <b>Description (All PID values are in hexadecimal)</b> | <b>Byte Value</b>                  | <b>Mnemonic</b> |
| #1                        | Request current powertrain diagnostic data request SID | 0x01                               | SIDRQ           |
| #2                        | PID: Bank 1 - Sensor 2                                 | 0x15                               | PID(15)         |
| #3                        | PID: Number of emission-related DTCs and MIL status    | 0x01                               | PID(01)         |
| #4                        | PID: Engine coolant temperature                        | 0x05                               | PID(05)         |
| #5                        | PID: Fuel system 1 status                              | 0x03                               | PID(03)         |
| #6                        | PID: Engine speed                                      | 0x0C                               | PID(0C)         |
| #7                        | PID: Vehicle speed                                     | 0x0D                               | PID(0D)         |

**Table 137 — ECU#1 response: Request current powertrain diagnostic data response message**

| <b>Message Direction:</b> |                                                                                      | ECU#1 → External test equipment |                 |
|---------------------------|--------------------------------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                                                      | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (All PID values are in hexadecimal)</b>                               | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request current powertrain diagnostic data response SID                              | 0x41                            | SIDPR           |
| #2                        | PID #1: Engine coolant temperature                                                   | 0x05                            | PID(05)         |
| #3                        | Data #1.1                                                                            | 0x6E                            | DATA(A)         |
| #4                        | PID #2: Number of emission-related DTCs and MIL status                               | 0x01                            | PID(01)         |
| #5                        | Data #2.1: MIL: ON; Number of emission-related DTCs: 03                              | 0x83                            | DATA(A)         |
| #6                        | Data #2.2: Misfire -, Fuel system -, Comprehensive monitoring                        | 0x07                            | DATA(B)         |
| #7                        | Data #2.3: Catalyst -, Heated catalyst -, ..., monitoring supported                  | 0xEF                            | DATA(C)         |
| #8                        | Data #2.4: Catalyst -, Heated catalyst -, ..., monitoring test complete/not complete | 0x63                            | DATA(D)         |
| #9                        | PID #3: Bank 1 - Sensor 2                                                            | 0x15                            | PID(15)         |
| #10                       | Data #3.1: Bank 2 - Sensor 2: 0.8 Volt                                               | 0xA0                            | DATA(A)         |
| #11                       | Data #3.2: Bank 2 - Sensor 2: 93.7 %                                                 | 0x78                            | DATA(B)         |
| #12                       | PID #4: Engine speed                                                                 | 0x0C                            | PID(0C)         |
| #13                       | Data #4.1: 667 rpm                                                                   | 0x0A                            | DATA(A)         |
| #14                       | Data #4.2: 667 rpm                                                                   | 0x6B                            | DATA(B)         |
| #15                       | PID #5: Fuel system 1 status                                                         | 0x03                            | PID(03)         |
| #16                       | Data #5.1: Closed loop - using oxygen sensor(s) as feedback for fuel control         | 0x02                            | DATA(A)         |
| #17                       | Data #5.2:                                                                           | 0x00                            | DATA(B)         |

Table 138 — ECU#2 response: Request current powertrain diagnostic data response message

| <b>Message Direction:</b> |                                                                                      | ECU#2 → External test equipment |                 |
|---------------------------|--------------------------------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                                                      | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (All PID values are in hexadecimal)</b>                               | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request current powertrain diagnostic data response SID                              | 0x41                            | SIDPR           |
| #2                        | PID #1: Vehicle speed                                                                | 0x0D                            | PID(0D)         |
| #3                        | Data #1.1:                                                                           | 0x23                            | DATA(A)         |
| #4                        | PID #2: Number of emission-related DTCs and MIL status                               | 0x01                            | PID(01)         |
| #5                        | Data #2.1: MIL: OFF; Number of emission-related DTCs: 01                             | 0x01                            | DATA(A)         |
| #6                        | Data #2.2: Comprehensive monitoring: supported, test complete                        | 0x04                            | DATA(B)         |
| #7                        | Data #2.3: Catalyst -, Heated catalyst -, ..., monitoring supported                  | 0x00                            | DATA(C)         |
| #8                        | Data #2.4: Catalyst -, Heated catalyst -, ..., monitoring test complete/not complete | 0x00                            | DATA(D)         |

ECU #1 (ECM) reports MIL commanded on, three stored DTCs, all monitors as supported, catalyst, heated catalyst, oxygen sensor and oxygen sensor heater as not completed, and all other monitors as completed.

ECU #2 (TCM) reports MIL commanded off, one stored DTC, comprehensive components monitor as supported and complete, and all other monitors as not supported.

## 8.2 Service 0x02 — Request powertrain freeze frame data

### 8.2.1 Functional description

The purpose of this service is to allow access to emission-related data values in a freeze frame. This allows expansion to meet manufacturer-specific requirements not necessarily related to the required freeze frame, and not necessarily containing the same data values as the required freeze frame. The request message includes a parameter identification (PID) value that indicates to the on-board system the specific information requested. PID specifications, scaling information and display formats for the freeze frame are included in SAE J1979-DA.

The ECU(s) shall respond to this message by transmitting the requested data value stored by the system. All data values returned for sensor readings shall be actual stored readings, not default or substitute values used by the system because of a fault with that sensor.

Service 0x02 PID 0x02 indicates the DTC that caused the freeze frame data to be stored. If freeze frame data is not stored in the ECU, the system shall report 0x00 0x00 as the DTC.

The frame number byte shall indicate 0x00 for the freeze frame data. Manufacturers may optionally save additional freeze frames and use this service to obtain that data by specifying the freeze frame number in the request message. If a manufacturer uses these additional freeze frames, they shall be stored under conditions specified by the manufacturer, and contain data specified by the manufacturer.

Not all PIDs are applicable or supported by all systems. PID 0x00 is a bit-encoded value that indicates for each ECU, for each frame, which PIDs are supported. Different freeze frames can support a different set of PIDs depending on the DTC that caused the frame to be stored. PID 0x00 indicates support for PIDs from 0x01 to 0x20. PID 0x20 indicates support for PIDs 0x21 through 0x40, etc. This is the same concept for PIDs/TIDs/INFOTYPEs support in Services 0x01, 0x02, 0x06, 0x08, 0x09. PID 0x00 is required for those ECUs that respond to a corresponding Service 0x02 request message as specified in SAE J1979-DA.

The order of the PIDs in the response message is not required to match the order in the request message.

External test equipment shall not request a combination of PIDs supported and PIDs which report data values. The ECU shall support requests for up to three (3) PIDs. The request message may contain the same PID multiple times. The ECU shall treat each PID as a separate parameter and respond with data for each PID as often as requested.

## 8.2.2 Message data bytes

## 8.2.2.1 Request powertrain freeze frame data request message definition (read-supported PIDs)

Table 139 — Request powertrain freeze frame data request message (read-supported PIDs)

| Data Byte                                                                                              | Parameter Name                                   | Cvt              | Hex Value | Mnemonic |
|--------------------------------------------------------------------------------------------------------|--------------------------------------------------|------------------|-----------|----------|
| #1                                                                                                     | Request powertrain freeze frame data request SID | M                | 0x02      | SIDRQ    |
| #2                                                                                                     | PID#1 (PIDs supported: SAE J1979-DA)             | M                | xx        | PID      |
| #3                                                                                                     | frame #                                          | M                | xx        | FRNO_    |
| #4                                                                                                     | PID#2 (PIDs supported: SAE J1979-DA)             | U <sup>a</sup>   | xx        | PID      |
| #5                                                                                                     | frame #                                          | U/C <sup>b</sup> | xx        | FRNO_    |
| #6                                                                                                     | PID#3 (PIDs supported: SAE J1979-DA)             | U                | xx        | PID      |
| #7                                                                                                     | frame #                                          | U/C              | xx        | FRNO_    |
| <sup>a</sup> U = User Optional. PID may be included to reduce multiple PID supported request messages. |                                                  |                  |           |          |
| <sup>b</sup> C = Conditional. Parameter is only included if the preceding PID# is included.            |                                                  |                  |           |          |

To request PIDs supported range from 0x61 - 0xFF, multiple request messages with PIDs = 0x60, 0x80, 0xA0, 0xC0 and 0xE0 shall be sent to the vehicle.

## 8.2.2.2 Request powertrain freeze frame data response message definition (report supported PIDs)

The ECU(s) must respond to all supported ranges if requested. A range is defined as a block of 32 PIDs (e.g. range #1: PID 0x01 - 0x20). The ECU shall not respond to unsupported PID ranges unless subsequent ranges have a supported PID(s).

Table 140 — Request powertrain freeze frame data response message (report supported PIDs)

| Data Byte | Parameter Name                                                                                                                                 | Cvt             | Hex Value | Mnemonic |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------|----------|
| #1        | Request powertrain freeze frame data response SID                                                                                              | M               | 0x42      | SIDPR    |
| #2        | 1 <sup>st</sup> supported PID                                                                                                                  | M               | 0x00      | PID      |
| #3        | frame #                                                                                                                                        | M               | xx        | FRNO_    |
| #4        | data record of supported PIDs = [<br>Data A: supported PIDs,<br>Data B: supported PIDs,<br>Data C: supported PIDs,<br>Data D: supported PIDs ] | M               | xx        | DATA_REC |
| #5        |                                                                                                                                                | M               | xx        | DATA_A   |
| #6        |                                                                                                                                                | M               | xx        | DATA_C   |
| #7        |                                                                                                                                                | M               | xx        | DATA_D   |
| :         | :                                                                                                                                              | :               | :         | :        |
| #n-5      | m <sup>th</sup> supported PID                                                                                                                  | C1 <sup>a</sup> | xx        | PID      |
| #n-4      | frame #                                                                                                                                        | C1              | xx        | FRNO_    |
| #n-3      | data record of supported PIDs = [<br>Data A: supported PIDs,<br>Data B: supported PIDs,<br>Data C: supported PIDs,<br>Data D: supported PIDs ] | C2 <sup>b</sup> | xx        | DATA_REC |
| #n-2      |                                                                                                                                                | C2              | xx        | DATA_B   |
| #n-1      |                                                                                                                                                | C2              | xx        | DATA_C   |
| #n        |                                                                                                                                                | C2              | xx        | DATA_D   |

<sup>a</sup> C1 = Conditional. PID value shall be the same value as included in the request message if supported by the ECU.

<sup>b</sup> C2 = Conditional. Value indicates PIDs supported; range of supported PIDs depends on selected PID value (see C1).

The response message shall only include the PID(s) and Data A to D which are supported by the ECU. If the request message includes a PID value(s) which are not supported by the ECU, those shall not be included in the response message.

### 8.2.2.3 Request powertrain freeze frame data request message definition (read freeze frame PID values)

**Table 141 — Request powertrain freeze frame data request message (read freeze frame PID values)**

| Data Byte | Parameter Name                                   | Cvt             | Hex Value | Mnemonic |
|-----------|--------------------------------------------------|-----------------|-----------|----------|
| #1        | Request powertrain freeze frame data request SID | M               | 0x02      | SIDRQ    |
| #2        | PID#1 (see SAE J1979-DA)                         | M               | xx        | PID      |
| #3        | frame #                                          | M               | xx        | FRNO     |
| #4        | PID#2 (see SAE J1979-DA)                         | U <sup>a</sup>  | xx        | PID      |
| #5        | frame #                                          | C1 <sup>b</sup> | xx        | FRNO     |
| #6        | PID#3 (see SAE J1979-DA)                         | U               | xx        | PID      |
| #7        | frame #                                          | C1              | xx        | FRNO     |

<sup>a</sup> U = User Optional. The parameter may be either present or not.

<sup>b</sup> C1 = Conditional. Parameter is only present if the preceding PID# is present.

### 8.2.2.4 Request powertrain freeze frame data response message definition (report freeze frame PID values)

**Table 142 — Request powertrain freeze frame data response message (report freeze frame PID values)**

| Data Byte                   | Parameter Name                                                                                   | Cvt                                           | Hex Value            | Mnemonic                                         |
|-----------------------------|--------------------------------------------------------------------------------------------------|-----------------------------------------------|----------------------|--------------------------------------------------|
| #1                          | Request powertrain freeze frame data response SID                                                | M                                             | 0x42                 | SIDPR                                            |
| #2                          | 1 <sup>st</sup> supported PID                                                                    | M                                             | xx                   | PID_                                             |
| #3                          | frame #                                                                                          | M                                             | xx                   | FRNO_                                            |
| #4<br>#5<br>:<br>#j+3       | data record of 1 <sup>st</sup> supported PID = [<br>data #1.1,<br>data #1.2,<br>:<br>data #1.j ] | M<br>C1 <sup>a</sup><br>:<br>C1               | xx<br>xx<br>xx<br>xx | PIDREC_<br>DATA_1.1<br>DATA_1.2<br>:<br>DATA_1.j |
| :                           | :                                                                                                | :                                             | :                    | :                                                |
| #n                          | m <sup>th</sup> supported PID                                                                    | C2 <sup>b</sup>                               | xx                   | PID_                                             |
| #n+1                        | frame #                                                                                          | C2                                            | xx                   | FRNO_                                            |
| #n+2<br>#n+3<br>:<br>#n+k+1 | data record of m <sup>th</sup> supported PID = [<br>data #m.1,<br>data #m.2,<br>:<br>data #m.k ] | C4 <sup>c</sup><br>C4 <sup>d</sup><br>:<br>C4 | xx<br>xx<br>:<br>xx  | PIDREC_<br>DATA_m.1<br>DATA_m.2<br>:<br>DATA_m.k |

<sup>a</sup> C1 = Conditional. Data depends on selected PID.

<sup>b</sup> C2 = Conditional. Parameter shall be the same value as included in the request message and only present if supported.

<sup>c</sup> C3 = Conditional. Data #m.1 shall be included if preceding PID is supported.

<sup>d</sup> C4 = Conditional. Parameters and values for data depends on selected PID number.

### 8.2.3 Parameter definition

#### 8.2.3.1 PIDs supported

SAE J1979-DA specifies the interpretation of the data record of supported PIDs.

#### 8.2.3.2 PID and data byte descriptions

SAE J1979-DA specifies standardized emission-related parameters.

#### 8.2.3.3 Frame number description

The frame number identifies the freeze frame, which includes emission-related data values in case an emission-related DTC is detected by the ECU.

### 8.2.4 Message example

The tables below show how the “request powertrain freeze frame data” service shall be implemented.

#### 8.2.4.1 Step #1: Request supported powertrain freeze frame PIDs from vehicle

The external test equipment requests all supported powertrain freeze frame PIDs of freeze frame 0x00 from the vehicle. Refer to the example of Service 0x01 for guidance on requesting supported PIDs.

As a result of the supported PID request, the external test equipment creates an internal list of supported PIDs for each ECU: ECU#1 (ECM) supports the following PIDs: 0x02 – 0x09, 0x0B – 0x0E. ECU#2 (TCM) does not support any PIDs for this service.

#### 8.2.4.2 Step #2: Request PID 0x02 “DTC which caused freeze frame to be stored” from vehicle

##### Case #1: Freeze frame data are stored in ECU#1:

Now the external test equipment requests PID 0x02 of freeze frame 0x00 from the vehicle. Since ECU#2 (TCM) doesn't store a freeze frame data record, only ECU#1 (ECM) will send a response message. In this example, the freeze frame data are stored based on a DTC P0130 occurrence. The parameter value of PID 0x02 “DTC that caused required freeze frame data storage” is set to the DTC P0130.

**Table 143 — Request powertrain freeze frame data request message**

| <b>Message Direction:</b> |                                                         | External test equipment → All ECUs |          |
|---------------------------|---------------------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                                         | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal)             | Byte Value                         | Mnemonic |
| #1                        | Request powertrain freeze frame data request SID        | 0x02                               | SIDRQ    |
| #2                        | PID: DTC that caused required freeze frame data storage | 0x02                               | PID      |
| #3                        | Frame #                                                 | 0x00                               | FRNO     |

**Table 144 — Request powertrain freeze frame data response message**

| <b>Message Direction:</b> |                                                         | ECU#1 → External test equipment |                 |
|---------------------------|---------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                         | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>      | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request powertrain freeze frame data response SID       | 0x42                            | SIDRQ           |
| #2                        | PID: DTC that caused required freeze frame data storage | 0x02                            | PID             |
| #3                        | Frame #                                                 | 0x00                            | FRNO            |
| #4                        | DTC High Byte of P0130                                  | 0x01                            | DATA_A          |
| #5                        | DTC Low Byte of P0130                                   | 0x30                            | DATA_B          |

NOTE ECU#2 does not store freeze frame data and therefore does not send a response message.

Now the external test equipment requests the parameter value of PID 0x0C “Engine Speed”, PID 0x05 “Engine coolant temperature”, and PID 0x04 “Load”, stored in the freeze frame.

**Table 145 — Request powertrain freeze frame data request message**

| <b>Message Direction:</b> |                                                    | External test equipment → All ECUs |                 |
|---------------------------|----------------------------------------------------|------------------------------------|-----------------|
| <b>Message Type:</b>      |                                                    | Request                            |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b> | <b>Byte Value</b>                  | <b>Mnemonic</b> |
| #1                        | Request powertrain freeze frame data request SID   | 0x02                               | SIDRQ           |
| #2                        | PID: Engine Speed                                  | 0x0C                               | PID             |
| #3                        | Frame #                                            | 0x00                               | FRNO            |
| #4                        | PID: Engine coolant temperature                    | 0x05                               | PID             |
| #5                        | Frame #                                            | 0x00                               | FRNO            |
| #4                        | PID: Load                                          | 0x04                               | PID             |
| #5                        | Frame #                                            | 0x00                               | FRNO            |

**Table 146 — Request powertrain freeze frame data response message**

| <b>Message Direction:</b> |                                                    | ECU#1 → External test equipment |                 |
|---------------------------|----------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                    | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b> | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request powertrain freeze frame data response SID  | 0x42                            | SIDRQ           |
| #2                        | PID: Engine Speed                                  | 0x0C                            | PID             |
| #3                        | Frame #                                            | 0x00                            | FRNO            |
| #4                        | High Byte: Engine Speed: 2080 rpm                  | 0x20                            | DATA_A          |
| #5                        | Low Byte: Engine Speed: 2080 rpm                   | 0x80                            | DATA_B          |
| #6                        | PID: Load                                          | 0x04                            | PID             |
| #7                        | Frame #                                            | 0x00                            | FRNO            |
| #8                        | Load: 50,2 %                                       | 0x80                            | DATA_A          |
| #9                        | PID: Engine coolant temperature                    | 0x05                            | PID             |
| #10                       | Frame #                                            | 0x00                            | FRNO            |
| #11                       | Engine coolant temperature: 0 °C                   | 0x28                            | DATA_A          |

**Case #2: No freeze frame data is stored in any ECU:**

If no freeze frame data is stored, then the parameter value of PID 0x02 “DTC that caused required freeze frame data storage” is set to 0x00 00. If the external test equipment requests a PID excluding 0x00, 0x02, 0x20, 0x40, etc., the ECU shall not send a response message.

**Table 147 — Request powertrain freeze frame data request message**

| <b>Message Direction:</b> |                                                         | External test equipment → All ECUs |          |
|---------------------------|---------------------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                                         | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal)             | Byte Value                         | Mnemonic |
| #1                        | Request powertrain freeze frame data request SID        | 0x02                               | SIDRQ    |
| #2                        | PID: DTC that caused required freeze frame data storage | 0x02                               | PID      |
| #3                        | Frame #                                                 | 0x00                               | FRNO     |

**Table 148 — Request powertrain freeze frame data response message**

| <b>Message Direction:</b> |                                                         | ECU#1 → External test equipment |          |
|---------------------------|---------------------------------------------------------|---------------------------------|----------|
| <b>Message Type:</b>      |                                                         | Response                        |          |
| Data Byte                 | Description (all values are in hexadecimal)             | Byte Value                      | Mnemonic |
| #1                        | Request powertrain freeze frame data response SID       | 0x42                            | SIDRQ    |
| #2                        | PID: DTC that caused required freeze frame data storage | 0x02                            | PID      |
| #3                        | Frame #                                                 | 0x00                            | FRNO     |
| #4                        | DTC High Byte of P0000 {no freeze frame data stored}    | 0x00                            | DATA_A   |
| #5                        | DTC Low Byte of P0000 {no freeze frame data stored}     | 0x00                            | DATA_B   |

**Case #3: Multiple freeze frames**

Cases #1 and #2 imply a scenario where only the required freeze frame (frame 0x00) is stored. This scenario implies the use of static PID support data where PID support data for a given ECU does not change for different frames or different DTCs. Since the PID support data is static, it can be obtained even before a freeze frame is stored.

Manufacturers who wish to store multiple freeze frames or, where allowed by OBD regulations, who wish to store different PID data in freeze frame based on the DTC, would be required to use dynamic PID support data. Dynamic PID support data allows for different PID support data for different freeze frames and for different DTCs. Because of this, dynamic PID support data is not valid until a freeze frame for a particular frame has been stored. Requesting PID support data before a freeze frame is stored would indicate that only PID 0x02 is supported.

External test equipment that supports dynamic PID support data for freeze frame retrieval will be compatible with ECUs that support static PID support data as well as dynamic PID support data, and is therefore the recommended approach.

In this example, every freeze frame supports a different set of PIDs. PID support cannot be determined until after a freeze frame is stored. In order to determine if there are any frames stored, the external test equipment shall request PID 0x02 of freeze frame 0x00 from the vehicle, then request PID 0x02 frame 0x01, then request PID 0x02 frame 0x02, etc. Any frames that report a DTC will have freeze frame data stored. When a frame reports 0x0000, indicating no DTC stored and no freeze frame data, subsequent frames shall also report 0x0000. Note that this requires the ECU to store freeze frames in ascending order starting with frame 0x00, then 0x01, etc. There can be no gaps in the frame numbers, e.g. 0x00, then 0x02, then 0x05. If there are gaps, the tool would have to ask for every possible frame from 0x00 to 0xFF to make sure that all frames are available to the technician. Therefore, gaps are not allowed.

Next, the external test equipment presents a list of available DTCs to the technician. After the technician selects a DTC, the external test equipment requests the supported PIDs for the DTC the technician selected. Once the PIDs supported by that freeze frame have been determined, the external test equipment requests the supported PIDs for the frame associated with the DTC.

### 8.3 Service 0x03 — Request emission-related diagnostic trouble codes

#### 8.3.1 Functional description

The purpose of this service is to enable the external test equipment to obtain “confirmed” emission-related DTCs.

Send a Service 0x03 request for all emission-related DTCs. Each ECU that has DTCs shall respond with one (1) message containing all emission-related DTCs. If an ECU does not have emission-related DTCs, then it shall respond with a message indicating no DTCs are stored by setting the parameter # of DTC to 0x00.

DTCs are transmitted in two (2) bytes of information for each DTC. The first two (2) bits (high order) of the first (1) byte for each DTC indicate whether the DTC is a powertrain, chassis, body, or network DTC (refer to SAE J2012 for additional interpretation of this structure). The second two (2) bits shall indicate the first digit of the DTC (0 through 3). The second (2) nibble of the first (1) byte and the entire second (2) byte are the next three (3) hexadecimal characters of the actual DTC reported as hexadecimal. A powertrain DTC transmitted as 0x0143 shall be displayed as P0143.

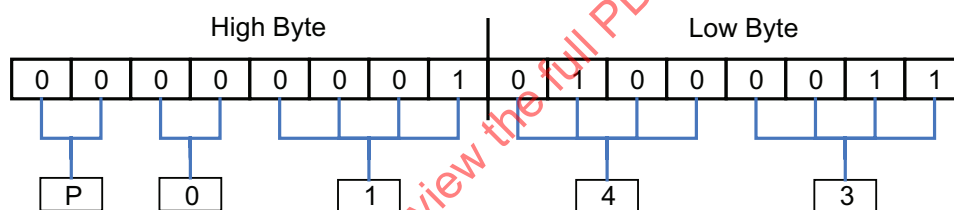


Figure 19 — Diagnostic trouble code encoding example DTC P0143

#### 8.3.2 Message data bytes

##### 8.3.2.1 Request emission-related DTC request message definition

Table 149 — Request emission-related DTC request message

| Data Byte | Parameter Name                           | Cvt | Hex Value | Mnemonic |
|-----------|------------------------------------------|-----|-----------|----------|
| #1        | Request emission-related DTC request SID | M   | 0x03      | SIDRQ    |

## 8.3.2.2 Request emission-related DTC response message definition

Table 150 — Request emission-related DTC response message

| Data Byte  | Parameter Name                                                                    | Cvt                 | Hex Value                      | Mnemonic         |
|------------|-----------------------------------------------------------------------------------|---------------------|--------------------------------|------------------|
| #1         | Request emission-related DTC response SID                                         | M                   | 0x43                           | SIDPR            |
| #2         | # of DTC = [<br>no emission-related DTCs stored<br>emission-related DTCs stored ] | M                   | xx = [<br>0x00,<br>0x01 – 0xFF | #OFDTC           |
| #3<br>#4   | DTC#1 (High Byte)<br>DTC#1 (Low Byte)                                             | C <sup>a</sup><br>C | xx<br>xx                       | DTC1HI<br>DTC1LO |
| :          | :                                                                                 | :                   | xx                             |                  |
| #n-1<br>#n | DTC#m (High Byte)<br>DTC#m (Low Byte)                                             | C<br>C              | xx<br>xx                       | DTCmHI<br>DTCmLO |

<sup>a</sup> C = Conditional. DTC#1 - DTC#m are only included if # of DTC parameter value ≠ 0x00.

## 8.3.3 Parameter definition

The # of DTC parameter reports the emission-related DTC(s) currently (at the time of the request message processing) stored in the ECU(s).

## 8.3.4 Message example

The tables below show how the “request emission-related DTCs” service shall be implemented. The external test equipment requests emission-related DTCs from the vehicle. The ECU#1 (ECM) has six (6) DTCs stored, the ECU#2 (TCM) has one (1) DTC stored, and the ECU#3 (ABS/Traction Control) has no DTC stored.

- ECU#1 (ECM): P0143, P0196, P0234, P02CD, P0357, P0A24
- ECU#2 (TCM): P0443
- ECU#3 (ABS/Traction Control): no emission-related DTC stored

Table 151 — Request emission-related diagnostic trouble codes request message

| <b>Message Direction:</b> |                                             | External test equipment → All ECUs |          |
|---------------------------|---------------------------------------------|------------------------------------|----------|
| <b>Message Type:</b>      |                                             | Request                            |          |
| Data Byte                 | Description (all values are in hexadecimal) | Byte Value                         | Mnemonic |
| #1                        | Request emission-related DTCs request SID   | 0x03                               | SIDRQ    |

**Table 152 — Request emission-related diagnostic trouble codes response message**

| <b>Message Direction:</b> |                                                               | ECU#1 → External test equipment |                 |
|---------------------------|---------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                               | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>            | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request emission-related DTCs response SID                    | 0x43                            | SIDPR           |
| #2                        | # of DTC {number of emission-related DTCs stored in this ECU} | 0x06                            | #OFDTC          |
| #3                        | DTC High Byte of P0143                                        | 0x01                            | DTC1HI          |
| #4                        | DTC Low Byte of P0143                                         | 0x43                            | DTC1LO          |
| #5                        | DTC High Byte of P0196                                        | 0x01                            | DTC2HI          |
| #6                        | DTC Low Byte of P0196                                         | 0x96                            | DTC2LO          |
| #7                        | DTC High Byte of P0234                                        | 0x02                            | DTC3HI          |
| #8                        | DTC Low Byte of P0234                                         | 0x34                            | DTC3LO          |
| #9                        | DTC High Byte of P02CD                                        | 0x02                            | DTC4HI          |
| #10                       | DTC Low Byte of P02CD                                         | 0xCD                            | DTC4LO          |
| #11                       | DTC High Byte of P0357                                        | 0x03                            | DTC5HI          |
| #12                       | DTC Low Byte of P0357                                         | 0x57                            | DTC5LO          |
| #13                       | DTC High Byte of P0A24                                        | 0x0A                            | DTC6HI          |
| #14                       | DTC Low Byte of P0A24                                         | 0x24                            | DTC6LO          |

**Table 153 — Request emission-related diagnostic trouble codes response message**

| <b>Message Direction:</b> |                                                               | ECU#3 → External test equipment |                 |
|---------------------------|---------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                               | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>            | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request emission-related DTCs response SID                    | 0x43                            | SIDPR           |
| #2                        | # of DTC {number of emission-related DTCs stored in this ECU} | 0x00                            | #OFDTC          |

**Table 154 — Request emission-related diagnostic trouble codes response message**

| <b>Message Direction:</b> |                                                               | ECU#2 → External test equipment |                 |
|---------------------------|---------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                               | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>            | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Request emission-related DTCs response SID                    | 0x43                            | SIDPR           |
| #2                        | # of DTC {number of emission-related DTCs stored in this ECU} | 0x01                            | #OFDTC          |
| #3                        | DTC High Byte of P0443                                        | 0x04                            | DTC1HI          |
| #4                        | DTC Low Byte of P0443                                         | 0x43                            | DTC1LO          |

## 8.4 Service 0x04 — Clear/Reset emission-related diagnostic information

### 8.4.1 Functional description

The purpose of this service is to provide a means for the external test equipment to command ECUs to clear all emission-related diagnostic information. This includes:

- MIL and number of diagnostic trouble codes (can be read with Service 0x01, PID 0x01);
- clear the I/M (Inspection/Maintenance) readiness bits (can be read with Service 0x01, PID 0x01);
- confirmed diagnostic trouble codes (can be read with Service 0x03);
- pending diagnostic trouble codes (can be read with Service 0x07);
- diagnostic trouble code for freeze frame data (can be read with Service 0x02, PID 0x02);
- freeze frame data (can be read with Service 0x02);
- status of system monitoring tests (can be read with Service 0x01, PID 0x41);
- on-board monitoring test results (can be read with Service 0x06);
- distance traveled while MIL is activated (can be read with Service 0x01, PID 0x21);
- number of warm-ups since DTCs cleared (can be read with Service 0x01, PID 0x30);
- distance traveled since DTCs cleared (can be read with Service 0x01, PID 0x31);
- engine run time while MIL is activated (can be read with Service 0x01, PID 0x4D);
- engine run time since DTCs cleared (can be read with Service 0x01, PID 0x4E);
- reset misfire counts of Standardized Test ID 0x0B to zero (can be read with Service 0x06).

Other manufacturer-specific “clearing/resetting” actions may also occur in response to this request message. All ECUs shall respond to this request message with ignition ON and with the engine not running.

For safety and/or technical design reasons, ECUs that cannot perform this operation under other conditions, such as with the engine running, shall send a negative response message with response code 0x22 - conditionsNotCorrect.

Some OBD regulations may require that all OBD ECUs clear diagnostic information under the same conditions (all ECUs must clear diagnostic information with the engine off). If one ECU cannot clear diagnostic information with the engine running, then all OBD ECUs are required to respond in the same manner and not clear diagnostic information with the engine running.

### 8.4.2 Message data bytes

#### 8.4.2.1 Clear/Reset emission-related diagnostic information request message definition

**Table 155 — Clear/Reset emission-related diagnostic information request message**

| Data Byte | Parameter Name                                                  | Cvt | Hex Value | Mnemonic |
|-----------|-----------------------------------------------------------------|-----|-----------|----------|
| #1        | Clear/reset emission-related diagnostic information request SID | M   | 0x04      | SIDRQ    |

#### 8.4.2.2 Clear/Reset emission-related diagnostic information response message definition

**Table 156 — Clear/Reset emission-related diagnostic information response message**

| Data Byte | Parameter Name                                                   | Cvt | Hex Value | Mnemonic |
|-----------|------------------------------------------------------------------|-----|-----------|----------|
| #1        | Clear/reset emission-related diagnostic information response SID | M   | 0x44      | SIDPR    |

#### 8.4.3 Parameter definition

This service does not support any parameters.

#### 8.4.4 Message example

The example below shows how the “clear/reset emission-related diagnostic information” service shall be implemented if ignition is ON and the engine is not running. The external test equipment commands the vehicle to “clear/reset emission-related diagnostic information”.

**Table 157 — Clear/Reset emission-related diagnostic information request message**

| <b>Message Direction:</b> |                                                                 | External test equipment → All ECUs |          |  |
|---------------------------|-----------------------------------------------------------------|------------------------------------|----------|--|
| <b>Message Type:</b>      |                                                                 | Request                            |          |  |
| Data Byte                 | Description (all values are in hexadecimal)                     | Byte Value                         | Mnemonic |  |
| #1                        | Clear/reset emission-related diagnostic information request SID | 0x04                               | SIDRQ    |  |

**Table 158 — Clear/Reset emission-related diagnostic information response message**

| <b>Message Direction:</b> |                                                                  | ECU#1 → External test equipment |          |  |
|---------------------------|------------------------------------------------------------------|---------------------------------|----------|--|
| <b>Message Type:</b>      |                                                                  | Response                        |          |  |
| Data Byte                 | Description (all values are in hexadecimal)                      | Byte Value                      | Mnemonic |  |
| #1                        | Clear/reset emission-related diagnostic information response SID | 0x44                            | SIDPR    |  |

**Table 159 — Clear/Reset emission-related diagnostic information response message**

| <b>Message Direction:</b> |                                                                  | ECU#2 → External test equipment |          |  |
|---------------------------|------------------------------------------------------------------|---------------------------------|----------|--|
| <b>Message Type:</b>      |                                                                  | Response                        |          |  |
| Data Byte                 | Description (all values are in hexadecimal)                      | Byte Value                      | Mnemonic |  |
| #1                        | Clear/reset emission-related diagnostic information response SID | 0x44                            | SIDPR    |  |

Table 160 shows a negative response to “clear/reset emission-related diagnostic information” for an ECU that cannot clear diagnostic information with the engine running.

**Table 160 — Negative response message**

| <b>Message Direction:</b> |                                                                 | ECU#1 → External test equipment |                 |
|---------------------------|-----------------------------------------------------------------|---------------------------------|-----------------|
| <b>Message Type:</b>      |                                                                 | Response                        |                 |
| <b>Data Byte</b>          | <b>Description (all values are in hexadecimal)</b>              | <b>Byte Value</b>               | <b>Mnemonic</b> |
| #1                        | Negative Response Service Identifier                            | 0x7F                            | SIDNR           |
| #2                        | Clear/reset emission-related diagnostic information request SID | 0x04                            | SIDRQ           |
| #3                        | Negative Response Code: conditionsNotCorrect                    | 0x22                            | NR_CNC          |

## 8.5 Service 0x05 — Request oxygen sensor monitoring test results

Service 0x05 is not supported for ISO 15765-4. The functionality of Service 0x05 is implemented in Service 0x06.

## 8.6 Service 0x06 — Request on-board monitoring test results for specific monitored systems

### 8.6.1 Functional description

The purpose of this service is to allow access to the results for On-Board Diagnostic monitoring tests of specific components/systems that are continuously monitored (e.g. misfire monitoring for gasoline vehicles) and non-continuously monitored (e.g. catalyst system).

The request message for test values includes an On-Board Diagnostic Monitor ID (see SAE J1979-DA) that indicates the information requested. The response message for test values includes Unit and Scaling information which is defined in SAE J1979-DA. The vehicle manufacturer shall use Unit and Scaling IDs that most closely match the physical quantities used for monitoring in order to make the information more useful to a service technician for diagnostic purposes, e.g. an On-Board Diagnostic Monitor ID in which the monitor checks for a pressure change shall utilize a Unit and Scaling ID which includes pressure in the description.

The vehicle manufacturer is responsible for assigning “Manufacturer Defined Test IDs” for different tests of a monitored system. The latest valid test values (results) are to be retained, even over multiple ignition OFF cycles, until replaced by more recent test values (results). Test values (results) are requested by On-Board Diagnostic Monitor ID. Test values (results) are always reported with the Minimum and Maximum Test Limits. The Unit and Scaling ID included in the response message defines the scaling and unit to be used by the external test equipment to display the test values (results), Minimum Test Limit, and Maximum Test Limit information.

If an On-Board Diagnostic Monitor has not been completed at least once since a “clear/reset emission-related diagnostic information” request was carried out or battery disconnect that erased the latest valid test values, then the parameters Test Value (Results), Minimum Test Limit, and Maximum Test Limit shall be set to zero (0x0000) values. Note that for some unit and scaling IDs, 0x0000 translates to a non-zero result (e.g. Unit and Scaling ID 0x16 for temperature, 0x0000 displays as -40.0 deg C) so some monitors that have not completed may show test results, minimum limits, and maximum limits that, after scaling, are all equal but are non-zero.

Not all On-Board Diagnostic Monitor IDs are applicable or supported by all systems. On-Board Diagnostic Monitor ID 0x00 is a bit-encoded value that indicates for each ECU which On-Board Diagnostic Monitor IDs are supported. On-Board Diagnostic Monitor ID 0x00 indicates support for On-Board Diagnostic Monitor IDs from 0x01 to 0x20. On-Board Diagnostic Monitor ID 0x20 indicates support for On-Board Diagnostic Monitor IDs 0x21 through 0x40, etc. This is the same concept for PIDs/TIDs/INFOTYPES support in Services 0x01, 0x02, 0x06, 0x08, and 0x09. On-Board Diagnostic Monitor ID 0x00 is required for those ECUs that respond to a corresponding Service 0x06 request message as specified in SAE J1979-DA.

The request message including supported On-Board Diagnostic Monitor IDs may contain up to six (6) OBDMIDs. A request message including an On-Board Diagnostic Monitor ID, which reports test values shall only contain one (1) OBDMID. External test equipment shall not request a combination of OBDMIDs supported and a single OBDMID, which report test values. The ECU shall support requests for up to six (6) supported OBDMIDs and only one (1) OBDMID which reports test values.

A unique method must be utilized for displaying data for monitors that have multiple tests. Many OBD monitors have multiple tests that are done in either a serial or parallel manner. If a monitor uses multiple OBD Monitor ID/Test ID combinations that may not all complete at the same time, the following method shall be used to update the stored test results at the time of monitor completion.

After the monitor completes, update all Monitor ID/Test ID combinations (or “test results”) that were utilized by the monitor with appropriate passing or failing results. If a test result (or “Monitor ID/Test ID”) was not utilized during this monitoring event, set the Test Values and Minimum and Maximum Test Limits to their initial values (0x0000, test not completed). Test results from the previously completed monitoring events shall not be mixed with test results from the current completed monitoring event.

In some cases, test results (or “Monitor ID/Test ID combinations”) will be displayed as being incomplete even though the monitor (as indicated by PID 0x41) was successfully completed and either passed or failed. In other cases, some Test IDs will show passing results while others will show failing results after the monitor (as indicated by PID 0x41) was successfully completed and failed. Note that OBD-II regulations prohibit a passing monitor from showing any failing test results. If an initial, serial test indicates a failure and a subsequent re-test of the system indicates a passing result, the test that was utilized to make the passing determination should be displayed, while the failing test that was utilized to make the initial determination should be reset to its initial values (0x0000, test not completed).

An example for a serial monitor is an evaporative leakage monitor where the monitor first checks a reference leak and then starts to execute the actual leakage check. If the reference test fails, then the leakage test is not executed.

As an example of a parallel monitor, a purge valve flow monitor can pass by having a large rich lambda shift, a large lean lambda shift or a large engine rpm increase. If the purge valve is activated and a large rich lambda shift occurs, the Test ID for the rich lambda shift would show a passing result while the other two Test IDs would show incomplete. Since some Test IDs for a completed monitor will show incomplete, PID 0x41 must be used to determine monitor completion status.

## 8.6.2 Message data bytes

### 8.6.2.1 Request on-board monitoring test results for specific monitored systems request message definition (read-supported OBDMIDs)

**Table 161 — Request on-board monitoring test results for specific monitored systems request message (read-supported OBDMIDs)**

| Data Byte                                                                                                   | Parameter Name                                                                      | Cvt            | Hex Value | Mnemonic |
|-------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------|-----------|----------|
| #1                                                                                                          | Request on-board monitoring test results for specific monitored systems request SID | M              | 0x06      | SIDRQ    |
| #2                                                                                                          | On-Board Diagnostic Monitor ID (OBDMIDs supported: SAE J1979-DA)                    | M              | xx        | OBDMID   |
| #3                                                                                                          | On-Board Diagnostic Monitor ID (OBDMIDs supported: SAE J1979-DA)                    | U <sup>a</sup> | xx        | OBDMID   |
| #4                                                                                                          | On-Board Diagnostic Monitor ID (OBDMIDs supported: SAE J1979-DA)                    | U              | xx        | OBDMID   |
| #5                                                                                                          | On-Board Diagnostic Monitor ID (OBDMIDs supported: SAE J1979-DA)                    | U              | xx        | OBDMID   |
| #6                                                                                                          | On-Board Diagnostic Monitor ID (OBDMIDs supported: SAE J1979-DA)                    | U              | xx        | OBDMID   |
| #7                                                                                                          | On-Board Diagnostic Monitor ID (OBDMIDs supported: SAE J1979-DA)                    | U              | xx        | OBDMID   |
| <sup>a</sup> U = User Optional. OBDMID may be included to avoid multiple OBDMID supported request messages. |                                                                                     |                |           |          |

To request OBDMIDs supported range from 0xC1 - 0xFF, another request message with OBDMID#1 = 0xC0 and OBDMID#2 = 0xE0 shall be sent to the vehicle

### 8.6.2.2 Request on-board monitoring test results for specific monitored systems response message definition (report supported OBDMIDs)

ECU(s) must respond to all supported ranges if requested. A range is defined as a block of 32 OBDMIDs (e.g. range #1: OBDMID 0x01 - 0x20). The ECU shall not respond to unsupported OBDMID ranges unless subsequent ranges have a supported OBDMID(s).

**Table 162 — Request on-board monitoring test results for specific monitored systems response message (report supported OBDMIDs)**

| Data Byte | Parameter Name                                                                                                                                                                                   | Cvt             | Hex Value | Mnemonic  |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------|-----------|
| #1        | Request on-board monitoring test results for specific monitored systems response SID                                                                                                             | M               | 0x46      | SIDPR     |
| #2        | data record of supported OBDMID = [<br>1 <sup>st</sup> supported OBDMID<br>Data A: supported OBDMIDs,<br>Data B: supported OBDMIDs,<br>Data C: supported OBDMIDs,<br>Data D: supported OBDMIDs ] | M               | xx        | OBDMIDREC |
| #3        |                                                                                                                                                                                                  | M               | xx        | OBDMID    |
| #4        |                                                                                                                                                                                                  | M               | xx        | DATA_A    |
| #5        |                                                                                                                                                                                                  | M               | xx        | DATA_B    |
| #6        |                                                                                                                                                                                                  | M               | xx        | DATA_C    |
| :         | :                                                                                                                                                                                                | :               | :         | :         |
| #n-4      | data record of supported OBDMID = [<br>m <sup>th</sup> supported OBDMID<br>Data A: supported OBDMIDs,<br>Data B: supported OBDMIDs,<br>Data C: supported OBDMIDs,<br>Data D: supported OBDMIDs ] | C1 <sup>a</sup> | xx        | OBDMIDREC |
| #n-3      |                                                                                                                                                                                                  | C2 <sup>b</sup> | xx        | OBDMID    |
| #n-2      |                                                                                                                                                                                                  | C2              | xx        | DATA_A    |
| #n-1      |                                                                                                                                                                                                  | C2              | xx        | DATA_B    |
| #n        |                                                                                                                                                                                                  | C2              | xx        | DATA_C    |

<sup>a</sup> C1 = Conditional. OBDMID value shall be the same value as included in the request message if supported by the ECU.

<sup>b</sup> C2 = Conditional. Value indicates OBDMIDs supported; range of supported OBDMIDs depends on selected OBDMID value (see C1).

The response message shall only include the OBDMID(s) and Data A to D, which are supported by the ECU. If the request message includes a OBDMID value(s) which are not supported by the ECU, those shall not be included in the response message.

### 8.6.2.3 Request on-board monitoring test results for specific monitored systems request message definition (read OBDMID test values)

**Table 163 — Request on-board monitoring test results for specific monitored systems request message (read OBDMID test values)**

| Data Byte | Parameter Name                                                                      | Cvt | Hex Value | Mnemonic |
|-----------|-------------------------------------------------------------------------------------|-----|-----------|----------|
| #1        | Request on-board monitoring test results for specific monitored systems request SID | M   | 0x06      | SIDRQ    |
| #2        | On-Board Diagnostic Monitor ID                                                      | M   | xx        | OBDMID   |