
**Road vehicles — Communication
between vehicle and external
equipment for emissions-related
diagnostics —**

**Part 5:
Emissions-related diagnostic services**

*Véhicules routiers — Communications entre un véhicule et un
équipement externe pour le diagnostic relatif aux émissions —*

Partie 5: Services de diagnostic relatif aux émissions



STANDARDSISO.COM : Click to view the full PDF of ISO 15031-5:2015



COPYRIGHT PROTECTED DOCUMENT

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	vi
Introduction	vii
1 Scope	1
2 Normative references	1
3 Terms, definitions, and abbreviated terms	2
3.1 Terms and definitions	2
3.2 Abbreviated terms	4
4 Conventions	6
5 Document overview	6
6 Technical requirements	6
6.1 General requirements	6
6.2 Diagnostic service requirements	6
6.2.1 Multiple responses to a single data request	6
6.2.2 Application timing parameter definition	7
6.2.3 Minimum time between requests from external test equipment	18
6.2.4 Data not available	26
6.2.5 Maximum values	36
6.2.6 Invalid signals	36
6.3 Diagnostic message format	36
6.3.1 Addressing method	36
6.3.2 Maximum message length	37
6.3.3 Request/Response message format	37
6.3.4 Response code parameter definition	38
6.3.5 Header byte definition of ISO 9141-2, ISO 14230-4, and SAE J1850	39
6.3.6 Header byte definition of ISO 15765-4	40
6.3.7 Data bytes definition of ISO 9141-2, ISO 14230-4, SAE J1850, and ISO 15765-4	40
6.3.8 Non-data bytes included in diagnostic messages with SAE J1850	40
6.3.9 Non-data bytes included in diagnostic messages with ISO 9141-2 and ISO 14230-4	41
6.4 Byte order convention	41
6.5 Allowance for expansion and enhanced diagnostic services	41
6.6 Definition of PIDs for services 01 ₁₆ and 02 ₁₆	41
6.7 Format of data to be displayed	41
7 Diagnostic service definition for ISO 9141-2, ISO 14230-4, and SAE J1850	42
7.1 Service 01 ₁₆ — Request current powertrain diagnostic data	42
7.1.1 Functional description	42
7.1.2 Message data bytes	42
7.1.3 Parameter definition	43
7.1.4 Message example	44
7.2 Service 02 ₁₆ — Request powertrain freeze frame data	47
7.2.1 Functional description	47
7.2.2 Message data bytes	48
7.2.3 Parameter definition	49
7.2.4 Message example	49
7.3 Service 03 ₁₆ — Request emission-related diagnostic trouble codes	51
7.3.1 Functional description	51
7.3.2 Message data bytes	52
7.3.3 Parameter definition	53
7.3.4 Message example	53
7.4 Service 04 ₁₆ — Clear/reset emission-related diagnostic information	56
7.4.1 Functional description	56
7.4.2 Message data bytes	56

7.4.3	Parameter definition	57
7.4.4	Message example	57
7.5	Service 05 ₁₆ — Request oxygen sensor monitoring test results	58
7.5.1	Functional description	58
7.5.2	Message data bytes	58
7.5.3	Parameter definition	59
7.5.4	Message example	61
7.6	Service 06 ₁₆ — Request On-board monitoring test results for specific monitored systems	63
7.6.1	Functional description	63
7.6.2	Message data bytes	64
7.6.3	Parameter definition	65
7.6.4	Message example	66
7.7	Service 07 ₁₆ — Request emission-related diagnostic trouble codes detected during current or last completed driving cycle	68
7.7.1	Functional description	68
7.7.2	Message data bytes	68
7.7.3	Parameter definition	69
7.7.4	Message example	69
7.8	Service 08 ₁₆ — Request control of on-board system, test, or component	69
7.8.1	Functional description	69
7.8.2	Message data bytes	69
7.8.3	Parameter definition	71
7.8.4	Message example	71
7.9	Service 09 ₁₆ — Request vehicle information	72
7.9.1	Functional description	72
7.9.2	Message data bytes	72
7.9.3	Parameter definition	73
7.9.4	Message example	74
8	Diagnostic service definition for ISO 15765-4	91
8.1	Service 01 ₁₆ — Request current powertrain diagnostic data	91
8.1.1	Functional description	91
8.1.2	Message data bytes	92
8.1.3	Parameter definition	94
8.1.4	Message example	94
8.2	Service 02 ₁₆ — Request powertrain freeze frame data	97
8.2.1	Functional description	97
8.2.2	Message data bytes	98
8.2.3	Parameter definition	100
8.2.4	Message example	100
8.3	Service 03 ₁₆ — Request emission-related diagnostic trouble codes	103
8.3.1	Functional description	103
8.3.2	Message data bytes	104
8.3.3	Parameter definition	104
8.3.4	Message example	104
8.4	Service 04 ₁₆ — Clear/Reset emission-related diagnostic information	106
8.4.1	Functional description	106
8.4.2	Message data bytes	107
8.4.3	Parameter definition	107
8.4.4	Message example	107
8.5	Service 05 ₁₆ — Request oxygen sensor monitoring test results	108
8.6	Service 06 ₁₆ — Request on-board monitoring test results for specific monitored systems	108
8.6.1	Functional description	108
8.6.2	Message data bytes	109
8.6.3	Parameter definition	112
8.6.4	Message example	117

8.7	Service 07 ₁₆ — Request emission-related diagnostic trouble codes detected during current or last completed driving cycle	119
8.7.1	Functional description	119
8.7.2	Message data bytes	120
8.7.3	Parameter definition	120
8.7.4	Message example	120
8.8	Service 08 ₁₆ — Request control of on-board system, test, or component	120
8.8.1	Functional description	120
8.8.2	Message data bytes	121
8.8.3	Parameter definition	123
8.8.4	Message example	123
8.9	Service 09 ₁₆ — Request vehicle information	124
8.9.1	Functional description	124
8.9.2	Message data bytes	125
8.9.3	Parameter definition	126
8.9.4	Message example	127
8.10	Service 0A ₁₆ — Request emission-related diagnostic trouble codes with permanent status	138
8.10.1	Functional description	138
8.10.2	Message data bytes	139
8.10.3	Parameter definition	139
8.10.4	Message example	139
Bibliography		140

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

This third edition cancels and replaces the second edition (ISO 15031-5:2011), which has been technically revised.

ISO 15031 consists of the following parts, under the general title *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics*:

- *Part 1: General information and use case definition*
- *Part 2: Guidance on terms, definitions, abbreviations and acronyms*
- *Part 3: Diagnostic connector and related electrical circuits, specification and use*
- *Part 4: External test equipment*
- *Part 5: Emissions-related diagnostic services*
- *Part 6: Diagnostic trouble code definitions*
- *Part 7: Data link security*

Introduction

Overview

ISO 15031 consists of a number of parts which, taken together, provide a coherent self-consistent set of specifications to facilitate emissions-related diagnostics. ISO 15031-1 provides an introduction to the series of International Standards. ISO 15031-2 through ISO 15031-7 are based on SAE recommended practices. This part of ISO 15031 is based on SAE J1979.

This International Standard includes the communication between the vehicle's On-Board Diagnostic (OBD) systems and test equipment implemented across vehicles within the scope of the legislated emissions-related OBD.

To achieve this, it is based on the Open Systems Interconnection (OSI) Basic Reference Model in accordance with ISO/IEC 7498-1 and ISO/IEC 10731, which structures communication systems into seven layers. When mapped on this model, the services specified by this International Standard are broken into the following layers in accordance with [Table 1](#).

- Diagnostic services (layer 7), specified in the following:
 - this part of ISO 15031;
 - ISO 27145-3 (WWH-OBD).
- Presentation layer (layer 6), specified in the following:
 - ISO 15031-2, SAE J1930-DA;
 - this part of ISO 15031, SAE J1979-DA;
 - ISO 15031-6, SAE J2012-DA;
 - ISO 27145-2, SAE J2012-DA.
- Session layer services (layer 5), specified in the following:
 - ISO 14229-2 supports ISO 15765-4 DoCAN and ISO 14230-4 DoK-Line protocols;
 - ISO 14229-2 is not applicable to the SAE J1850 and ISO 9141-2 protocols.
- Transport layer services (layer 4), specified in the following:
 - ISO 15765-2;
 - SAE J1850 defined in this part of ISO 15031;
 - ISO 9141-2 defined in this part of ISO 15031;
 - ISO 14230-4, defined in this part of ISO 15031.
- Network layer services (layer 3), specified in the following:
 - ISO 15765-2;
 - SAE J1850 defined in this part of ISO 15031;
 - ISO 9141-2 defined in this part of ISO 15031;
 - ISO 14230-4 defined in this part of ISO 15031.
- Data link layer (layer 2), specified in the following:
 - ISO 15765-4, ISO 11898-1, and ISO 11898-2;

- SAE J1850;
- ISO 9141-2;
- ISO 14230-2.
- Physical layer (layer 1), specified in the following:
 - ISO 15765-4, ISO 11898-1, and ISO 11898-2;
 - SAE J1850;
 - ISO 9141-2;
 - ISO 14230-1.

Table 1 — Legislated emissions-related OBD/WWH^a-OBD diagnostic specifications applicable to the OSI layers


Applicability	OSI 7 layers	Emissions-related OBD communication requirements				Emissions-related WWH-OBD communication requirements			
Seven layers according to ISO/IEC 7498-1 and ISO/IEC 10731	Application (layer 7)	ISO 15031-5/SAE J1979				ISO 27145-3			
	Presentation (layer 6)	ISO 15031-2, ISO 15031-5, ISO 15031-6				ISO 27145-2			
		SAE J1930-DA, SAE J1979-DA, SAE J2012-DA				SAE J1930-DA, SAE J1979-DA, SAE J2012-DA			
	Session (layer 5)	Not applicable		ISO 14229-2					
	Transport (layer 4)	ISO 15031-5		ISO 14230-4	ISO 15765-2	ISO 15765-4	ISO 15765-2	ISO 15765-4	ISO 13400-2
	Network (layer 3)								
	Data link (layer 2)	SAE J1850	ISO 9141-2	ISO 14230-2	ISO 11898-1, ISO 11898-2		ISO 11898-1, ISO 11898-2	ISO 13400-3	
	Physical (layer 1)			ISO 14230-1					
a World-Wide Harmonized.									

SAE document reference concept

ISO 15031 references several SAE documents which contain all terms, data, and DTC (diagnostic trouble code) definitions. This is illustrated in [Figure 1](#).

Additional information on the content of the referenced documents is given below:

- SAE J1930: the document is concerned with a procedure for naming objects and systems and with the set of words from which names are built. It references SAE J1930-DA which contains all standardized naming objects, terms, and abbreviations.
- SAE J1979: the document is concerned with the definition of emissions-related diagnostic services (diagnostic test modes). It references SAE J1979-DA which contains all standardized data items such as PIDs, Test IDs, Monitor IDs, and INFOTYPE IDs.
- SAE J2012: the document is concerned with the procedure for defining emissions-related DTCs. It references SAE J2012-DA which contains all standardized data items such as DTCs and FTBs (failure type bytes).

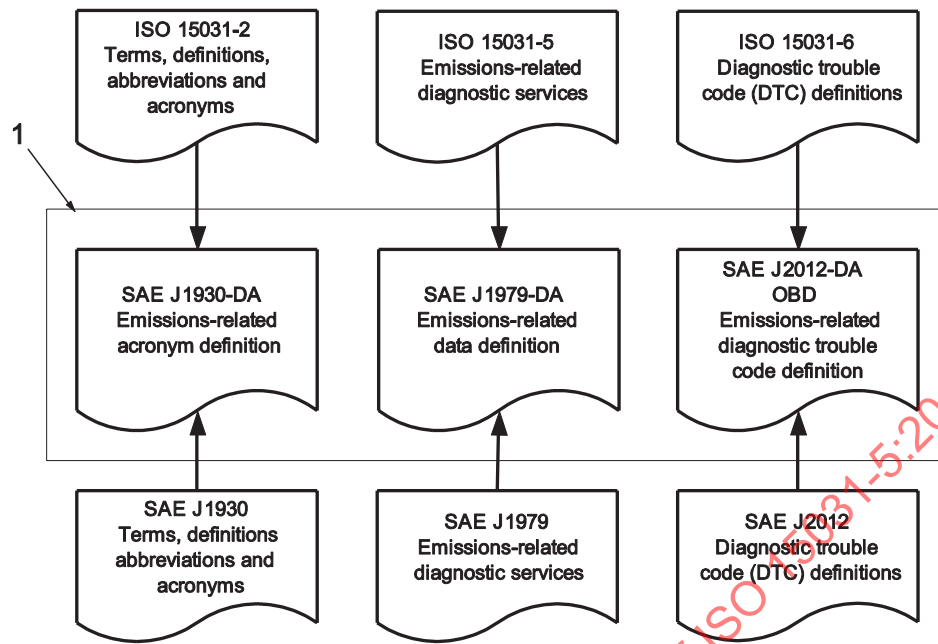**Key**

1 SAE Digital Annexes

Figure 1 — SAE Digital Annex document reference

OB D regulations require passenger cars and light, medium, and heavy duty trucks to support a minimum set of diagnostic information to external (off-board) “generic” test equipment.

SAE J1979-DA (OB D) Digital Annex

This part of ISO 15031 references SAE J1979-DA. SAE J1979-DA is concerned with the definition of the following:

- Parameter Identifiers (PIDs);
- Test Identifiers (TIDs);
- OB D Monitor Identifiers (OB DMIDs);
- Unit and Scaling Identifiers (UASIDs);
- INFOTYPES (INFOTYPES).

SAE Digital Annex revision procedure

New emissions-related regulatory requirements drive new in-vehicle technology to lower emissions. New technology-related OB D monitor data and DTCs need to be standardized to support the external (off-board) “generic” test equipment. All relevant information is proposed by the automotive industry represented by members of the appropriate SAE task force.

The revision request form and instructions for updating the registers to this part of ISO 15031 can be obtained on the Registration Authority’s website at:

<http://www.sae.org/servlets/works/committeeHome.do?comtID=TEVDS14>

The column titled “Resources” shows a document with the title: J1979-DA_Revision_Request_Form.doc. Double click on the name and you will be asked to download the document with the file name:

SAE_J1979-DA_Revision_Request_Form.doc

ISO 15031-5:2015(E)

Fill out the revision request form with your request.

Please send an e-mail with the completed revision request form as an attachment to:

SAE Headquarters
755 West Big Beaver Road
Suite 1600
Troy, MI 48084-4093, USA
Fax: +1 (248) 273-2494
Email: saej1979@sae.org

STANDARDSISO.COM : Click to view the full PDF of ISO 15031-5:2015

Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics —

Part 5: Emissions-related diagnostic services

1 Scope

This part of ISO 15031 is intended to satisfy the data reporting requirements of On-Board Diagnostic (OBD) regulations in the United States and Europe and any other region that may adopt similar requirements in the future. This part of ISO 15031 specifies

- a) message formats for request and response messages,
- b) timing requirements between request messages from external test equipment and response messages from vehicles and between those messages and subsequent request messages,
- c) behaviour of both the vehicle and external test equipment if data are not available, and
- d) a set of diagnostic services, with corresponding content of request and response messages, to satisfy OBD regulations.

This part of ISO 15031 includes capabilities required to satisfy OBD requirements for multiple regions, model years, engine types, and vehicle types. Those regulations are not yet final for some regions and are expected to change in the future. This part of ISO 15031 makes no attempt to interpret the regulations and does not include applicability of the included diagnostic services and data parameters for various vehicle applications. The user of this part of ISO 15031 is responsible for verifying the applicability of each clause of this part of ISO 15031 for a specific vehicle, engine, model year, and region.

This part of ISO 15031 specifies diagnostic services and functionally addressed request/response messages required to be supported by motor vehicles and external test equipment for diagnostic purposes which pertain to motor vehicle emission-related data. Any external test equipment meeting the requirements of ISO 15031-4 use these messages to retrieve emissions-related information from the vehicle.

Each clause in this part of ISO 15031 which specifies additional details to existing clauses of ISO 9141-2, ISO 14230-4, SAE J1850, and ISO 15765-4 supersede those specifications.

This part of ISO 15031 references SAE J1979-DA (Digital Annex), which includes all definitions of PIDs, OBDMIDs, TIDs, and INFOTYPES.

This part of ISO 15031 provides the mechanism to satisfy the requirements included in the country-specific regulations and not all capabilities included in this part of ISO 15031 are required by the country-specific regulations. This part of ISO 15031 is not considered a final authority for interpretation of the regulations. Therefore, readers should determine the applicability of capabilities defined in this part of ISO 15031 for their own specific needs.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 9141-2:1994, *Road vehicles — Diagnostic systems — Part 2: CARB requirements for interchange of digital information*

ISO 14229-2, *Road vehicles — Unified diagnostic services (UDS) — Part 2: Session layer services*

ISO 14230-2, *Road vehicles — Diagnostic communication over K-Line (DoK-Line) — Part 2: Data link layer*

ISO 14230-4:2000, *Road vehicles — Diagnostic systems — Keyword Protocol 2000 — Part 4: Requirements for emission-related systems*

ISO 15765-2, *Road vehicles — Diagnostic communication over Controller Area Network (DoCAN) — Part 2: Transport protocol and network layer services*

ISO 15765-4, *Road vehicles — Diagnostic communication over Controller Area Network (DoCAN) — Part 4: Requirements for emissions-related systems*

ISO 15031-2, *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics — Part 2: Guidance on terms, definitions, abbreviations and acronyms*

SAE J1930-DA, *Digital Annex of Electrical/Electronic Systems Diagnostic Terms, Definitions, Abbreviations, and Acronyms*

SAE J1979-DA, *Digital Annex of E/E Diagnostic Test Modes*

SAE J2012-DA, *Digital Annex of Diagnostic Trouble Code Definitions and Failure Type Byte Definitions*

3 Terms, definitions, and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 14229-2, ISO 14230-2, ISO 15031-2, and ISO 15765-2 and the following apply.

3.1.1

absolute throttle position sensor

value intended to represent the throttle opening

Note 1 to entry: For systems where the output is proportional to the input voltage, this value is the percent of maximum input signal. For systems where the output is inversely proportional to the input voltage, this value is 100 % minus the percent of maximum input signal. Throttle position at idle usually indicates greater than 0 % and throttle position at wide open throttle usually indicates less than 100 %.

3.1.2

bank

specific group of cylinders sharing a common control sensor

Note 1 to entry: Bank 1 always contains cylinder number 1 and bank 2 the opposite bank.

Note 2 to entry: If there is only one bank, the DTCs for bank #1 DTCs are used and the word bank may be omitted. With a single “bank” system utilizing multiple sensors, bank #1 DTCs are used in identifying the sensors as #1, #2, and #3 in order as they move further away from the cylinder.

3.1.3

base fuel schedule

fuel calibration schedule programmed into the powertrain control module or PROM when manufactured or when updated by an off-board source, prior to any learned on-board correction

3.1.4**calculated load value**

(spark ignition vehicles) typically an indication of the current airflow divided by peak airflow at wide open throttle as a function of rpm, where airflow is corrected for altitude and ambient temperature

Note 1 to entry: Both spark ignition and compression ignition vehicles can use an alternate definition that substitutes engine torque in place of airflow in the calculation.

Note 2 to entry: This definition provides a number (without unit) and provides the service technician with an indication of the percent engine capacity that is being used.

3.1.5**client**

function that is part of the tester and that makes use of the diagnostic services

Note 1 to entry: A tester normally makes use of other functions such as database management, specific interpretation, and man-machine interface.

3.1.6**continuous monitoring**

sampling at a rate no fewer than two samples per second

Note 1 to entry: If, for control purposes, a computer input is sampled less frequently, the signal of the component may instead be evaluated each time sampling occurs.

3.1.7**convention****Cvt**

column integrated in each message table which marks each parameter included

Note 1 to entry: The following conventions are used: C = Conditional: the parameter marked "C" in a request/response message is present only under a condition specified in the bottom row of the message table; M = Mandatory: the parameter marked "M" in a request/response message table is always present; U = User (optional): the parameter marked "U" in a request/response message table is supplied depending on dynamic usage by the manufacturer. The convention recommends a mnemonic, which might be used for implementation. In no case is the specified mnemonic ever a mandatory requirement for any implementation.

3.1.8**electronic control unit****ECU**

generic term for any electronic control unit

3.1.9**emissions-related DTC**

DTC which is set when a malfunction causes vehicle emissions to exceed legislated emission thresholds or is otherwise required to be set as specified by on-board diagnostics legislation (e.g. disables another part of the diagnostic system)

Note 1 to entry: Normally, the malfunction indicator (MI) is illuminated at the same time as the emissions-related DTC is set. The determination of which DTCs are emissions-related is made by the vehicle manufacturer for each vehicle, as specified by on-board diagnostic legislation.

3.1.10**fuel trim****FT**

feedback adjustments to the base fuel schedule

Note 1 to entry: Short-term fuel trim refers to dynamic or instantaneous adjustments. Long-term fuel trim refers to much more gradual adjustments to the fuel calibration schedule than short-term trim adjustments. These long-term adjustments compensate for vehicle differences and gradual changes that occur over time.

3.1.11

negative numbers

signed binary, the most significant bit (MSB) of the binary number used to indicate positive (0)/negative (1)

Note 1 to entry: 2's complement: negative numbers are represented by complementing the binary number and then adding 1.

EXAMPLE $-0,99 = 8001_{16} = 1000\ 0000\ 0000\ 0001_2$

$0 = 0000_{16} = 0000\ 0000\ 0000\ 0000_2$

$+0,99 = 7FFF_{16} = 0111\ 1111\ 1111\ 1111_2$

Note 2 to entry: $(-0,99) + (+0,99) = 0$.

3.1.12

number

expressed by this symbol “#”

3.1.13

P2, P3 timing parameter

application timing parameters for the ECU(s) and the external test equipment

3.1.14

P2_{CAN_min} timing parameter

CAN application timing parameter with the minimum value for the ECU(s) and the external test equipment to start the response message

3.1.15

P2_{CAN_max} timing parameter

CAN application timing parameter with the maximum value for the ECU(s) and the external test equipment to indicate a response message

3.1.16

P2_{reload} timing parameter

CAN application timing parameter with the maximum value (P2_{CAN_max}) for external test equipment only

3.1.17

server

function that is part of an ECU that provides the diagnostic services

Note 1 to entry: This part of ISO 15031 differentiates between the server, i.e. the function, and the electronic control unit so that it remains independent from the implementation.

3.1.18

service

information exchange initiated by a client (external test equipment) in order to require diagnostic information from a server (ECU) and/or to modify its behavior for diagnostic purposes

Note 1 to entry: This is also the equivalent of test mode or mode.

3.2 Abbreviated terms

.con confirmation

.ind indication

.req request

CRC	cyclic redundancy check
CVN	calibration verification number
DTC	diagnostic trouble code
ECM	engine control module
ERR	error detection byte
EWMA	exponential weighted moving average
FF	first frame
ISR	interrupt service routine
LSB	least significant bit
MI	malfunction indicator
MIL	malfunction indicator light
MSB	most significant bit
N_PDU	network protocol data unit
N/A	not applicable
NRC	negative response code
NVRAM	non-volatile memory
OBDMID OBD	monitor identifier
PID	parameter identifier
PCI	protocol control information
RSP	in-frame response
SF	single frame
SOM	start of message
T_AE	virtual transport interface address extension
T_Data[]	virtual transport interface data field
T_Mtype	virtual transport interface message type
T_Length	virtual transport interface length information
T_PDU	virtual transport interface protocol data unit
T_Result	virtual transport interface result
T_SA	virtual transport interface source address
T_TA	virtual transport interface target address
T_Tatype	virtual transport interface target address type

TCM	transmission control module
TID	test identifier
UASID	unit and scaling identifier
VIN	vehicle identification number

4 Conventions

This International Standard is based on the conventions specified in the OSI Service Conventions (ISO/IEC 10731) as they apply for diagnostic services.

5 Document overview

[Figure 2](#) illustrates the emissions-related OBD in ISO 15765-4, SAE J1850, ISO 9141-2, and ISO 14230-4. The protocol initialization identifies whether ISO 15765-4 DoCAN or SAE J1850 or ISO 14230-4 DoK-Line or ISO 9141-2 is the data link layer supported by the vehicle. This International Standard references the standards as an applicable data link for emissions-related OBD.

This part of ISO 15031 specifies the applicable emissions-related diagnostic services. It specifies the data record structures and references SAE J1930-DA, SAE J1979-DA, and SAE J2012-DA which include all emissions-related OBD data definitions.

6 Technical requirements

6.1 General requirements

The requirements specified in this Clause are necessary to ensure proper operation of both the external test equipment and the vehicle during diagnostic procedures. External test equipment, when using the messages specified, shall not affect normal operation of the emission control system.

IMPORTANT — New emissions-related vehicle technology required the definition of new PIDs and INFOTYPEs. The data parameter set for several new definitions exceed the specified limit of message length for ISO 9141-2, ISO 14230-4, and SAE J1850 protocols. It is the vehicle manufacturer's responsibility to implement the ISO 15765-4 DoCAN protocol in order to achieve legislative compliance of the emissions-related OBD systems in the vehicle.

6.2 Diagnostic service requirements

6.2.1 Multiple responses to a single data request

The request messages are functional messages, which means that the external test equipment will request data without knowledge of which ECU(s) on the vehicle will respond. In some vehicles, multiple ECUs might respond with the information requested. Any external test equipment requesting information shall therefore have provisions for receiving multiple responses.

IMPORTANT — All emissions-related OBD ECUs, which at least support one of the services defined in this part of ISO 15031, shall support service 01₁₆ and PID 00₁₆. Service 01₁₆ with PID 00₁₆ is defined as the universal "initialization/keep alive/ping" message for all emissions-related OBD ECUs.

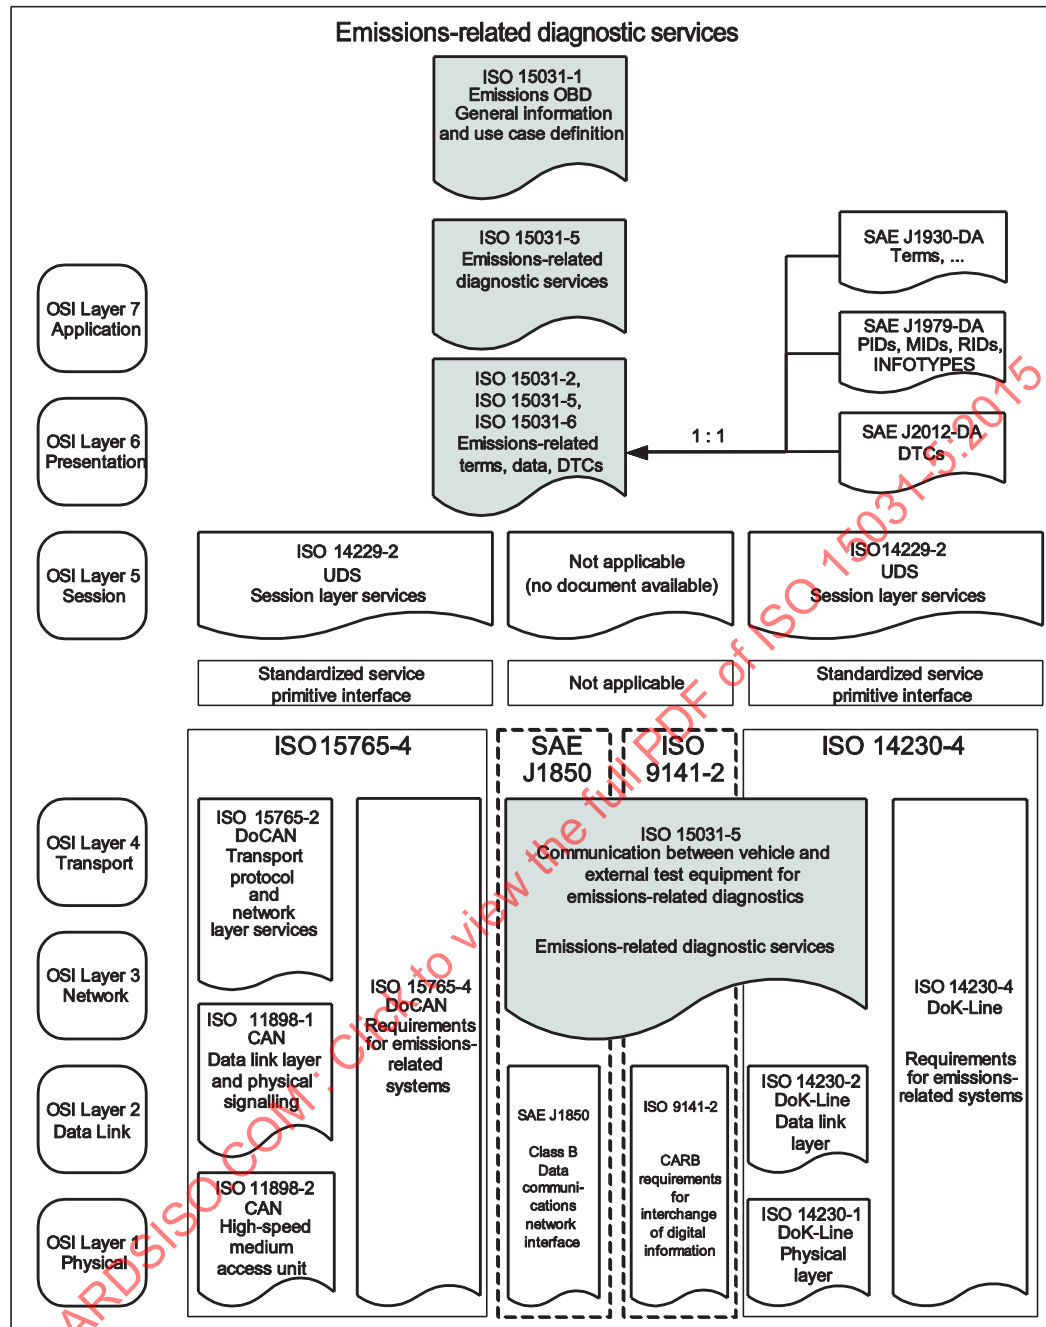


Figure 2 — Emissions-related OBD in ISO 15765-4, SAE J1850, ISO 9141-2, and ISO 14230-4 according to OSI model

6.2.2 Application timing parameter definition

6.2.2.1 Overview

The definition of P2 and P3 is included in this Clause. A subscript is added to each timing parameter to identify the following protocol:

- P2_{K-line}, P3_{K-line}: P2, P3 for ISO 9141-2 and ISO 14230-4 protocols;
- P2_{J1850}: P2 for SAE J1850 protocol;
- P2_{CAN}: P2 for ISO 15765-4 protocol.

IMPORTANT — The vehicle manufacturer is responsible for specifying a shorter P2 timing window than specified in this part of ISO 15031 for each emission-related server/ECU in the vehicle in order to make sure that network topology delays of the vehicle architecture are considered.

6.2.2.2 Definition for ISO 9141-2

For ISO 9141-2 interfaces, data link layer response time requirements (P1, P4) are specified in ISO 9141-2.

[Table 2](#) specifies the application timing parameter values for P2 and P3.

Table 2 — Definition of ISO 9141-2 application timing parameter values

Parameter	Minimum value ms	Maximum value ms	Description
P2 _{K-line} Key Bytes: 08 ₁₆ 08 ₁₆	25	50	Time between external test equipment request message and the transmission of the ECU(s) response message(s). Each OBD ECU shall start sending its response message within P2 _{K-line} after the request message has been correctly received. Subsequent response messages shall also be transmitted within P2 _{K-line} of the previous response message for multiple message responses.
P2 _{K-line} Key Bytes: 94 ₁₆ 94 ₁₆	0	50	Time between external test equipment request message and the transmission of the ECU response message(s). The OBD ECU shall start sending its response message within P2 _{K-line} after the request message has been correctly received. Subsequent response messages shall also be transmitted within P2 _{K-line} of the previous response message for multiple message responses.
P3 _{K-line}	55	5 000	Time between the end of an ECU(s) successful transmission of response message(s) and start of new external test equipment request message. The external test equipment may send a new request message if all response messages related to the previously sent request message have been received and if P3 _{K-line} minimum time has expired. ECU implementation guideline: TX (transmit) and RX (receive) lines are connected. Each transmitted byte is read back by the receiver in the ECU. Upon the reception of a received byte, e.g. last byte of a request message (checksum) from the tester, the ECU shall reset the P3 timer value to zero. If the ECU supports the request message, it will start transmitting the response message within the P2 timing window. Each transmitted byte will cause the P3 timer value to be reset. If the ECU does not support the request and does not send a response message, then in a single OBD ECU system, the P3 is started after the last byte received of the request message. In a multiple OBD ECU system, a response message by one or more ECUs shall cause the P3 timer value to be reset in all ECUs including any ECU not supporting the request message.

6.2.2.3 Definition for ISO 14230-4

For ISO 14230-4 interfaces, data link layer response time requirements are specified in ISO 14230-4.

[Table 3](#) specifies the application timing parameter values for P2 and P3.

Table 3 — Definitions of ISO 14230-4 application timing parameter values

Parameter	Minimum value ms	Maximum value ms	Description
P2 _{K-line}	25	50	Time between external test equipment request message and the transmission of the ECU(s) response message(s). Each OBD ECU shall start sending its response message within P2 _{K-line} after the request message has been correctly received. Subsequent response messages shall also be transmitted within P2 _{K-line} of the previous response message for multiple message responses.
P3 _{K-line}	55	5 000	Time between the end of an ECU(s) successful transmission of response message(s) and start of new external test equipment request message. The external test equipment may send a new request message if all response messages related to the previously sent request message have been received and if P3_{K-line} minimum time has expired. ECU implementation guideline: TX (transmit) and RX (receive) line are connected. Each transmitted byte is read back by the receiver in the ECU. Upon the reception of a received byte, e.g. last byte of a request message (checksum) from the tester, the ECU shall reset the P3 timer value to zero. If the ECU supports the request message, it will start transmitting the response message within the P2 timing window. Each transmitted byte will cause the P3 timer value to be reset. If the ECU does not support the request and does not send a response message, then in a single OBD ECU system, the P3 is started with the last byte received of the request message. In a multiple OBD ECU system, a response message by any one or more ECUs shall cause the P3 timer value to be reset in all ECUs including any ECU not supporting the request message.

6.2.2.4 Data link layer interface adaptation

6.2.2.4.1 General information

This part of ISO 15031 makes use of the data link layer services defined in ISO 14230-2 for the transmission and reception of diagnostic messages. This section defines the mapping of the virtual data link PDU (T_PDU) in ISO 14229-2 onto the K-Line data link layer PDU (DL_PDU) in ISO 14230-2.

NOTE The data link layer services are used to perform the application layer and diagnostic session management timing.

6.2.2.4.2 Mapping of data link independent service primitives onto K-Line data link dependent service primitives

Table 4 specifies the mapping interface between the ISO 14230-2 DoK-Line Part 2: Data link layer services and the ISO 14229-2 UDS Part 2.

Table 4 — Mapping of T_PDU service primitives onto DL_PDU service primitives

Transport/network layer service primitives (data link independent according to ISO 14229-2)	DoK-Line data link layer service primitives (data link dependent according to ISO 14230-2)
T_Data.indication	DL_Data.indication
T_DataSOM.indication	DL_DataFB.indication
T_Data.confirm	DL_Data.confirm
T_Data.request	DL_Data.request

6.2.2.4.3 Mapping of T_PDU onto DL_PDU for message transmission

The parameters of the application layer protocol data unit defined to request the transmission of a diagnostic service request/response are mapped in accordance with [Table 5](#) onto the parameters of the data link layer protocol data unit for the transmission of a message in the client/server.

Table 5 — Mapping of T_PDU parameter onto DL_PDU parameter


T_PDU parameter (data link independent according to ISO 14229-2)	DL_PDU parameter (DoK-Line data link dependent according to ISO 14230-2)
T_Mtype	N/A (always set to “diagnostics”)
T_SA	DL_SA
T_TA	DL_TA
T_TAtype	DL_TAtype
T_AE	N/A
T_Data []	< MessageData >
T_Length	< Length >
T_Result	< DL_Result >

6.2.2.5 Implementation guidance example for ISO 9141-2 and ISO 14230-4 protocols

This subclause provides an implementation example for client/external test equipment and server/ECU. It is assumed that the client (external test equipment) communicates to a vehicle with two (2) emission-related OBD servers (ECUs). The client requests a CVN, which is only supported by server #1 (ECU#1) with two (2) response messages. Server #2 (ECU#2) is not flash programmable. [Figure 3](#) graphically depicts the timing handling in the client and two (2) servers for a functionally addressed request message. A description following [Figure 3](#) references the points marked in the figure.

From a server point of view, there is no difference in the timing handling compared to a physically addressed request message. The server shall reset the P3_{K-line} timer value on each received byte regardless of whether the byte is part of a request message or a response message from any other server or an echo from its transmit line. There are several methods in which a server can implement the timing handling. The implementation of timing parameters is not part of this part of ISO 15031 but has an important system supplier responsibility. Some general server timing parameter implementation guidelines are described in this subclause. The server time stamps each receiver interrupt event and restarts/resets the P3_{K-line_server} timer or timing value, e.g. ISR time stamps received byte, and processing of the received information is performed outside the ISR. For simplification of the diagram, [Figure 3](#) only shows a P3_{K-line_server} restart after the reception of the first byte and last byte (checksum) of a received message. The P3_{K-line_server} restart is required on each received byte. The received message can be either a request message from the client or a response message from any other server connected and initialized by the 33₁₆ address. If the server has received a complete message, it compares the target address with the 33₁₆ address.

[Figure 3](#) shows the client and two (2) initialized servers connected via K-line (either ISO 9141-2 or ISO 14230-4 protocol). The relevant events for the client and both servers are marked and described.

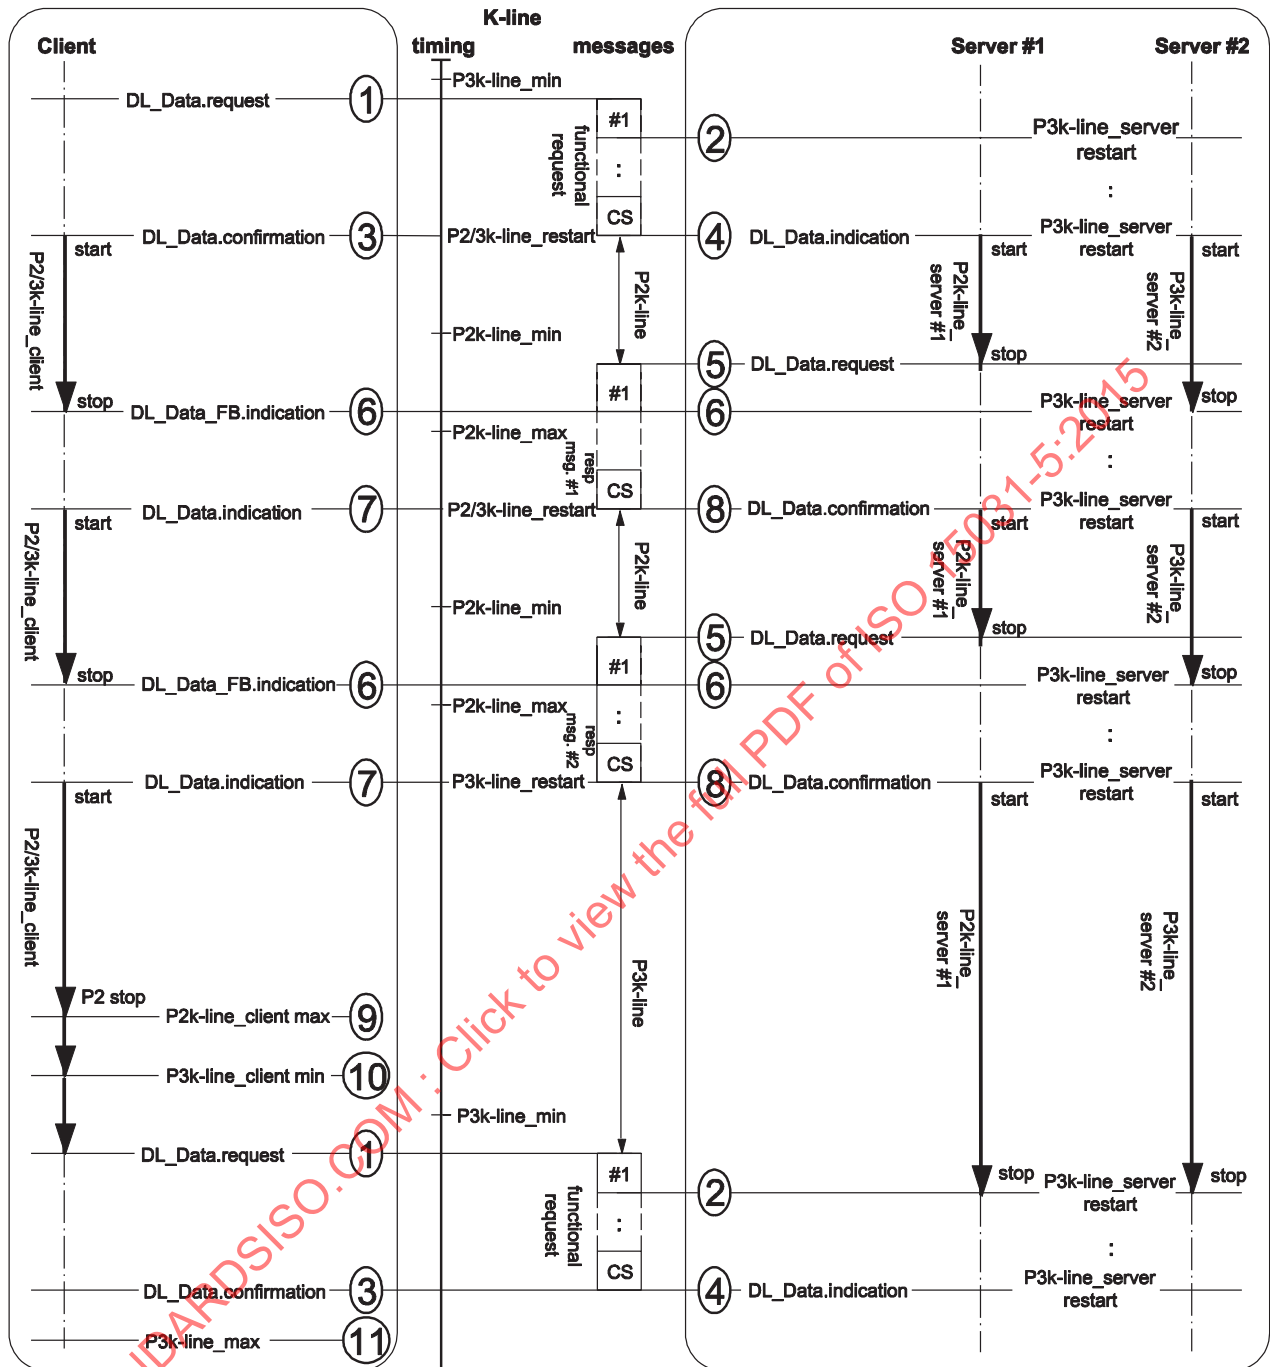

Key

- 1 The diagnostic application of the client starts the transmission of a functionally addressed request message by issuing a T_Data.request to its data link layer. The data link layer transmits the request message to the servers.
- 2 Both servers and the client receive a byte of a message via a receive interrupt by the UART. The ISR (interrupt service routine) either restarts the P2_K-line/P3_K-line timers or time stamps the received byte.
- 3 The completion of the request message is indicated in the client with T_Data.confirmation. When receiving the T_Data.confirmation, the client starts its P2_K-line and P3_K-line timer using the default reload values P2_K-line_max and P3_K-line_max.

- 4 If the last message byte is received, each server checks whether the received message includes a target address which matches the 33₁₆ address. If the result is a match (server #1 and #2), then the completion of the request message is indicated in the servers via T_Data.indication and each server determines whether it supports the request and has a message available to respond with. If a server determines that the address in the received message is different from 33₁₆ or if the address is a match but no response needs to be sent (server #2), the P2 timer is stopped. Since the P3_{K-line} timer has already been restarted, no further action is required. If a response message is available and has to be sent (server #1, but not server #2), then the transmission of the response message shall be started after P2_{K-line_min} timing is expired.
- 5 Server #1 starts the response message by indicating a T_Data.request from the application to the data link layer and at the same time stops its P2_{K-line} timer.
- 6 Both servers and the client receive a byte of a message via a receive interrupt by the UART. The ISR (interrupt service routine) restarts the P2_{K-line}/P3_{K-line} timers or time stamps the received byte and the client issues a T_Data_FB.indication to the application layer.
- 7 The completion of the response message is indicated in the client with T_Data.indication. When receiving the T_Data.indication, the client starts its P2_{K-line} and P3_{K-line} timer using the default reload values P2_{K-line_max} and P3_{K-line_max}.
- 8 Both servers have received the last byte of a message via a receive interrupt by the UART. The ISR (interrupt service routine) either resets the P2_{K-line}/P3_{K-line} timers or time stamps the received byte. The completion of the response message (e.g. length and checksum check) is indicated in server #1 via T_Data.confirmation. If server #1 does not want to send further response messages, it stops its P2 timer. In server #2, the message is received and the P3_{K-line} timer is restarted, but no T_Data.indication is forwarded to the application because the target address does not match the 33₁₆ (target address of this message is the tester address F1₁₆).
- 9 The client application detects a P2_{K-line_max} timeout, which indicates that all response messages from all servers are received.
- 10 The client application indicates that P3_{K-line_min} is reached and that the P3_{K-line} timing window is now open to send a new request message (see 1).
- 11 P3_{K-line_max} timeout indicates that the client is required to start a new initialization prior to sending a new request message.

Figure 3 — ISO 9141-2 and ISO 14230-4 protocol client and server timing behaviour

6.2.2.6 Definition for SAE J1850

For SAE J1850 network interfaces, the on-board systems shall respond to a request within P2_{J1850} of a request or a previous response message. With multiple response messages possible from a single request message, this allows as much time as is necessary for all ECUs to access the data link and transmit their response message(s). If there is no response message within this time period, the external test equipment can either assume no response message will be received, or if a response message has already been received, that no more response messages will be received. The application timing parameter value P2_{J1850} is specified in [Table 6](#).

Table 6 — Definition of SAE J1850 application timing parameter values

Parameter	Minimum value ms	Maximum value ms	Description
P2 _{J1850}	0	100	Time between external test equipment request message and the successful transmission of the ECU(s) response message(s). Each OBD ECU shall attempt to send its response message (or at least the first of multiple response messages) within P2 _{J1850} after the request message has been correctly received. Subsequent response messages shall also be transmitted within P2 _{J1850} of the previous response message for multiple message responses.

6.2.2.7 Definition for ISO 15765-4

For CAN bus systems based on ISO 15765-4, the (all) responding ECU(s) of the on-board system shall start the response message to a request message within $P2_{CAN}$. [Table 7](#) specifies the application timing parameter values for $P2$.

Table 7 — Definition of ISO 15765-4 application timing parameter values

Parameter	Minimum value $P2_{CAN_min}$ ms	Maximum value $P2_{CAN_max}$ ms	Description
$P2_{CAN}$	0	50	This is a system-wide parameter related to diagnostic response times. Each server (ECU) is required to respond to a request between $P2_{CAN_min}$ and $P2_{CAN_max}$. A client (tester) shall wait for at least $P2_{CAN_max}$ for the single-frame (SF) or first-frame (FF) of a response. $P2_{CAN}$ is the time until the first indication of a multiple-frame response message (FirstFrame). The client shall not process the response until the complete message (last ConsecutiveFrame) has been received. For clients (testers) which also support UDSONCAN for enhanced diagnostics, a $P2_{reload}$ mechanism is required. Upon receiving the SF or FF, the client (tester) shall reload its $P2_{CAN}$ timer with a value of at least $P2_{CAN_max}$ and restart the timer. Once the client's (tester's) $P2_{CAN}$ timer expires without receiving a SF or FF, the client (tester) may assume no more responses are forthcoming.
$P2^*_{CAN}$	0	5 000	Time between the successful reception of a negative response message with NRC 78₁₆ and the next response message (positive or negative message). See Table 11 for a list of which services support the use of NRC 78₁₆.

NOTE The network layer timing parameters for the multiple-frame response are not shown. Network layer timing requirements for legislated diagnostic messages are specified in ISO 15765-4.

6.2.2.8 Transport/Network layer interface adaptation

6.2.2.8.1 General information

This part of ISO 15031 makes use of the network layer services defined in ISO 15765-2 for the transmission and reception of diagnostic messages. This section defines the mapping of the virtual data link PDU (T_PDU) onto the independent transport/network layer protocol data units of the CAN data link specific network layer (N_PDU).

NOTE The transport/network layer services are used to perform the application layer and diagnostic session management timing.

6.2.2.8.2 Mapping of data link independent service primitives onto CAN data link dependent service primitives

[Table 8](#) specifies the mapping interface between the ISO 15765-2 DoCAN Part 2 and the ISO 14229-2 UDS Part 2.

Table 8 — Mapping of T_PDU service primitives onto N_PDU service primitives

Transport/network layer service primitives (data link independent according to ISO 14229-2)	DoCAN network layer service primitives (data link dependent according to ISO 15765-2)
T_Data.indication	N_USData.indication
T_DataSOM.indication	N_USDataFF.indication
T_Data.confirm	N_USData.confirm
T_Data.request	N_USData.request

6.2.2.8.3 Mapping of T_PDU onto N_PDU for message transmission

The parameters of the application layer protocol data unit defined to request the transmission of a diagnostic service request/response are mapped in accordance with [Table 9](#) onto the parameters of the network layer protocol data unit for the transmission of a message in the client/server.


The network layer confirmation of the successful transmission of the message (N_USData.con) is forwarded to the application because it is needed in the application for starting those actions, which shall be executed immediately after the transmission of the request/response message (ECUReset, BaudrateChange, etc.).

Table 9 — Mapping of T_PDU parameter onto N_PDU parameter

T_PDU parameter (data link independent according to ISO 14229-2)	N_PDU parameter (CAN data link dependent according to ISO 15765-2)
T_Mtype	N_Mtype
T_SA	N_SA
T_TA	N_TA
T_TAtype	N_TAtype
T_AE	N_AE
T_Data []	<MessageData>
T_Length	<Length>
T_Result	<N_Result>

6.2.2.9 Implementation guidance example for ISO 15765-4 protocol**6.2.2.9.1 Functional OBD communication during default session**

[Figure 4](#) graphically depicts the timing handling in the client and three servers for a functionally addressed request message during the default session. A description following [Figure 4](#) references the points marked in the figure.

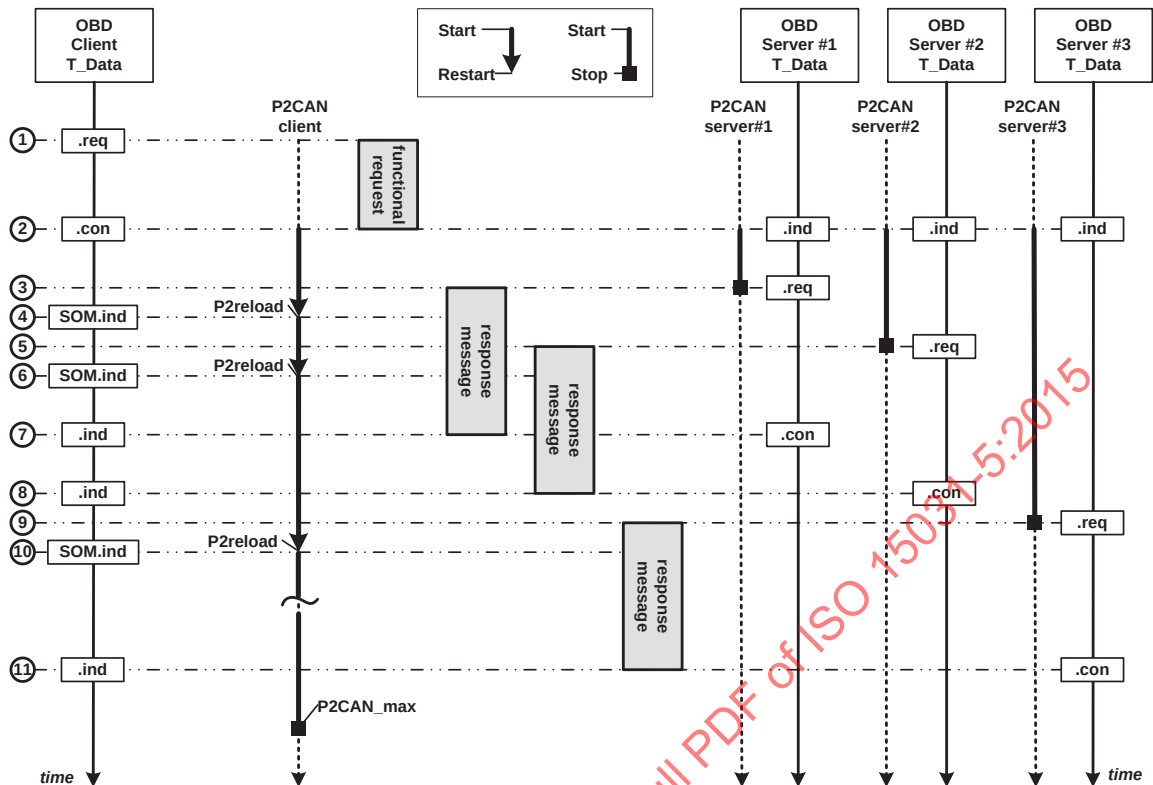

Key

- 1 Client T_Data.req: diagnostic application issues functionally addressed request message to network layer.
- 2 All server T_Data.ind: network layer issues to diagnostic application the reception of a request message. All servers start the $P2_{CAN}$ timer using the value of $P2_{CAN} = P2_{CAN_max}$.
Client T_Data.con: network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its $P2_{CAN_Client}$ timer using the default reload value $P2_{CAN} = P2_{CAN_max}$.
- 3 Server #1 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within $P2_{CAN}$. The response message can be a multi-frame or single-frame response message.
- 4 Client T_DataSOM.ind: network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Reload $P2_{CAN}$ with $P2_{CAN_max}$ value.
- 5 Server #2 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within $P2_{CAN}$. The response message can be a multi-frame or single-frame response message.
- 6 Client T_DataSOM.ind: network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Reload $P2_{CAN}$ with $P2_{CAN_max}$ value.
- 7 Server #1 T_Data.con: network layer issues to diagnostic application the completion of the response message. Client T_Data.ind: network layer issues to diagnostic application the completion of the response message.
- 8 Server #2 T_Data.con: network layer issues to diagnostic application the completion of the response message. Client T_Data.ind: network layer issues to diagnostic application the completion of the response message.
- 9 Server #3 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within $P2_{CAN}$. The response message can be a multi-frame or single-frame response message.
- 10 Client T_DataSOM.ind: network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Reload $P2_{CAN}$ with $P2_{CAN_max}$ value.
- 11 Server #2 T_Data.con: network layer issues to diagnostic application the completion of the response message. Client T_Data.ind: network layer issues to diagnostic application the completion of the response message.

Figure 4 — Functional OBD communication — Default response timing

6.2.2.9.2 Functional OBD communication with enhanced response timing

[Figure 5](#) illustrates the timing handling in the client and three (3) servers for a functionally addressed request message during the default session, where one server requests an enhanced response timing via a negative response message including NRC 78₁₆. A description following [Figure 5](#) references the points marked in the figure.

STANDARDSISO.COM : Click to view the full PDF of ISO 15031-5:2015



- 17

- 10 Server #1 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within P2_{CAN}
- 11 Client T_DataSOM.ind: network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Since the received response message is a positive response message, the NRCPendingCounter server #1 is decremented by 1 (1-1 = 0). Client reloads P2_{CAN} with P2_{CAN_max} value.
- 12 Server #2 T_Data.con: network layer issues to diagnostic application the completion of the response message. Client T_Data.ind: network layer issues to diagnostic application the completion of the response message.
- 13 Server #1 T_Data.con: network layer issues to diagnostic application the completion of the response message. Client T_Data.ind: network layer issues to diagnostic application the completion of the response message

Figure 5 — Functional OBD communication — Enhanced response timing

6.2.3 Minimum time between requests from external test equipment

6.2.3.1 ISO 9141-2, ISO 14230-4 — Minimum time between requests from external test equipment

For ISO 9141-2 (K-line) interfaces, the required times between request messages are specified in ISO 9141-2.

For ISO 14230-4 (K-line) interfaces, the required times between request messages are specified in ISO 14230-4. [Figure 6](#) shows an example of a request message followed by four (4) response messages and another request message.

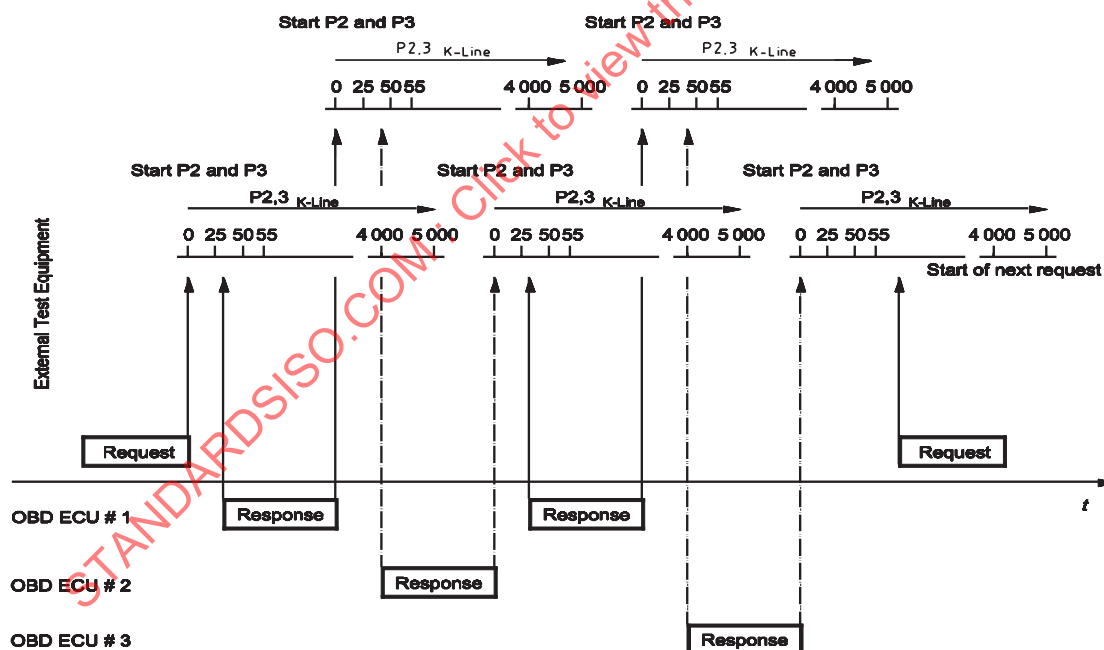


Figure 6 — ISO 9141-2 (Key bytes: 08₁₆ 08₁₆) and ISO 14230-4 application timing parameter overview

6.2.3.2 SAE J1850 — Minimum time between requests from external test equipment

For SAE J1850 network interfaces, external test equipment shall always wait for a response message from the previous request or “no response” time-out before sending another request message. If the number of response messages is known and all response messages have been received, then the external test equipment is permitted to send the next request message immediately. If the number of

response messages is not known, then the external test equipment shall wait at least $P2_{J1850}$ maximum time.

Figure 7 illustrates an example of a request message followed by four (4) response messages and another request message.

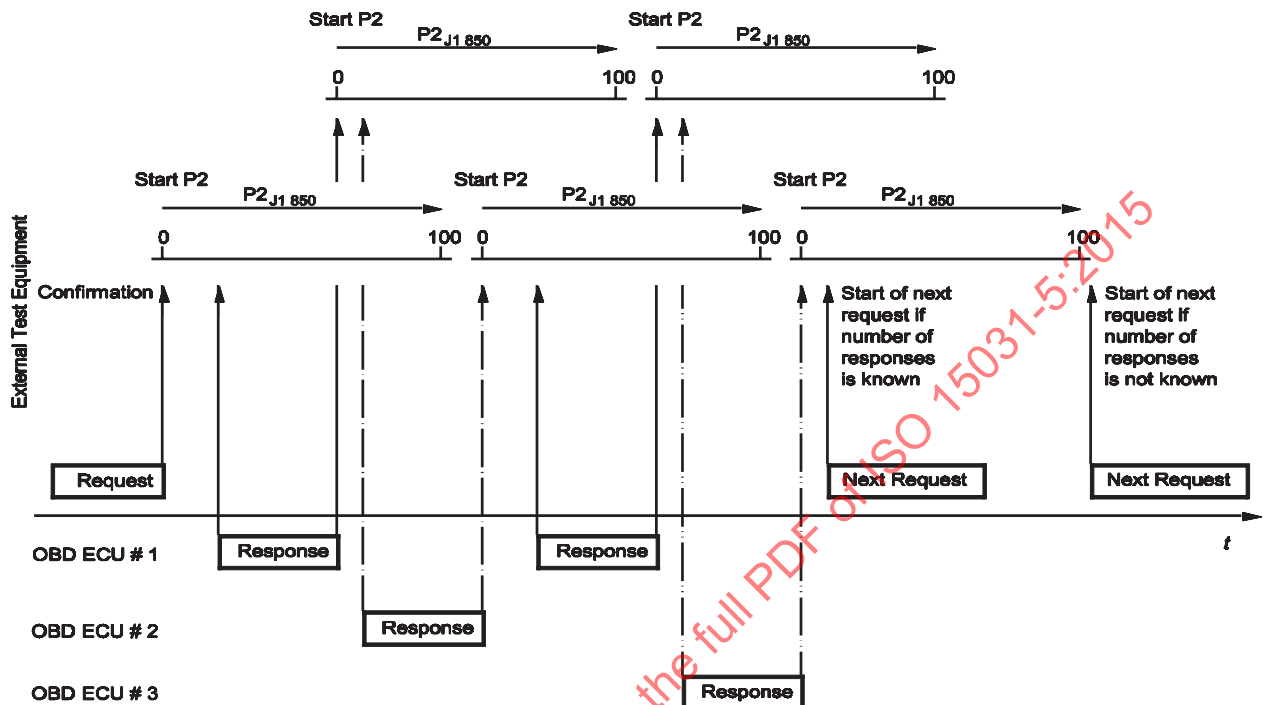



Figure 7 — SAE J1850 application timing parameter overview

6.2.3.3 ISO 15765-4 — Minimum time between requests from external test equipment

For ISO 15765-4 network interfaces, the external test equipment may send a new request message immediately after it has determined that all responses related to the previously sent request message have been received. If the external test equipment does not know whether it has received all response messages, (e.g. after sending the initial OBD request message: Service 01₁₆, PID 00₁₆), it shall wait until $P2_{CAN_max}$ expires before sending another request. The timer $P2_{CAN}$ of the external test equipment starts with the confirmation of a successful transmission of the request message.

Figure 8 illustrates an example of a request message followed by three (3) single-frame response messages and another request message.

IMPORTANT — The $P2_{CAN_reload}$ is performed by the client to identify whether more emissions-related OBD ECUs will send a response message. The $P2_{CAN_reload}$ is not defined to check whether the entire response message is sent within $P2_{CAN_max}$ timing.

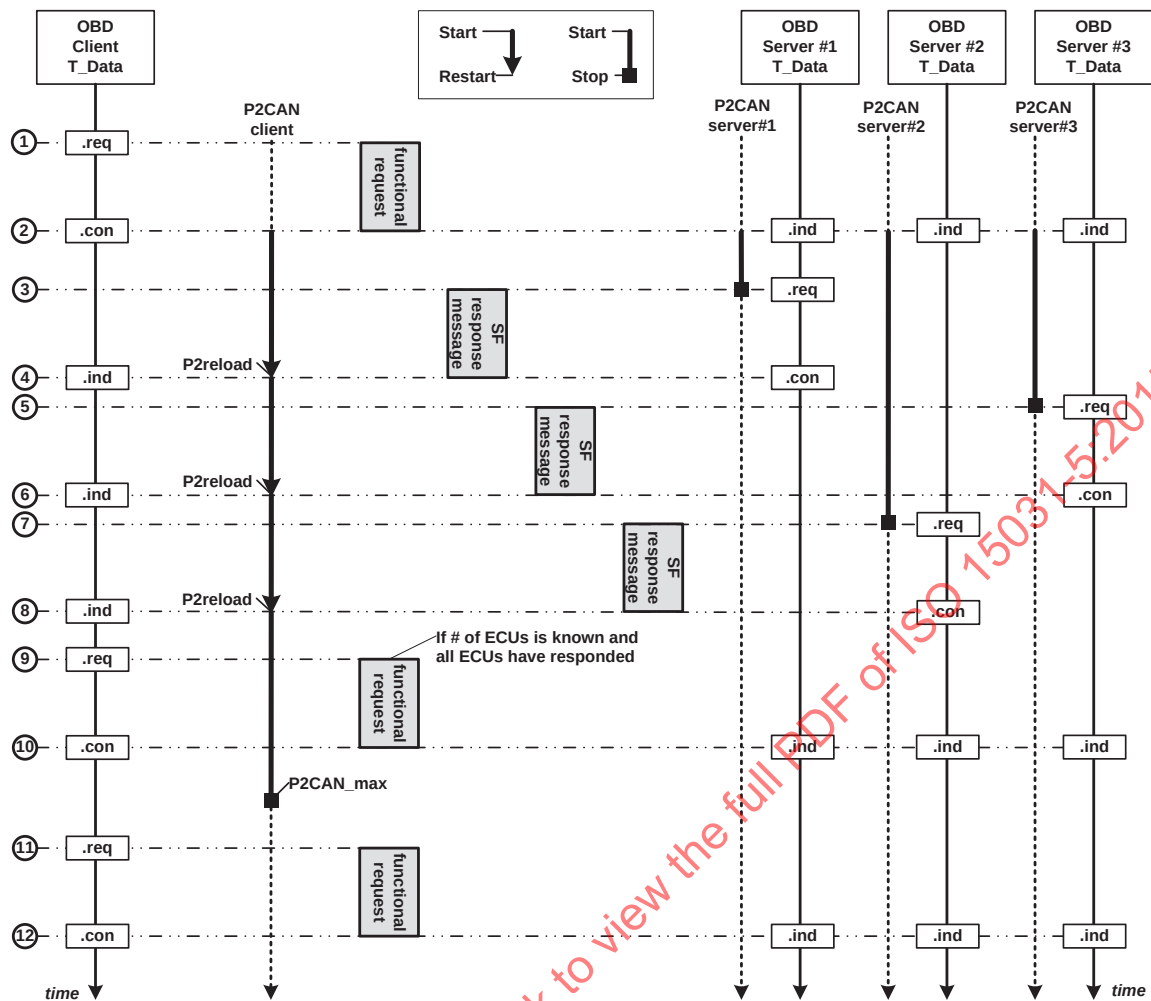


Key

- 1 Client T_Data.req: diagnostic application issues functionally addressed request message to network layer.
- 2 All server T_Data.ind: network layer issues to diagnostic application the reception of a request message. All servers start the P2CAN timer using the value of $P2_{CAN} = P2_{CAN_max}$.
Client T_Data.con: network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its P2CAN timer using the default reload value $P2_{CAN} = P2_{CAN_max}$.
- 3 Server #1 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within P2CAN. The response message is a single-frame message.
- 4 Server #1 T_Data.con: network layer issues to diagnostic application the completion of the response message. Client T_Data.ind: network layer issues to diagnostic application the completion of the response message. Client reloads P2CAN with P2CAN_max value.
- 5 Server #3 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within P2CAN. The response message is a single-frame message.
- 6 Server #3 T_Data.con: network layer issues to diagnostic application the completion of the response message. Client T_Data.ind: network layer issues to diagnostic application the completion of the response message. Client reloads P2CAN with P2CAN_max value.
- 7 Server #2 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within P2CAN. The response message is a single-frame message.
- 8 Server #2 T_Data.con: network layer issues to diagnostic application the completion of the response message. Client T_Data.ind: network layer issues to diagnostic application the completion of the response message. Client reloads P2CAN with P2CAN_max value.
- 9 Client T_Data.req: diagnostic application issues functionally addressed request message to network layer. The client knows the number of ECUs which shall have responded to the previous request. Since all response messages have been received, the client is already allowed to issue a new functional request message

- 10 All server T_Data.ind: network layer issues to diagnostic application the reception of a request message. All servers start the $P2_{CAN}$ timer using the value of $P2_{CAN} = P2_{CAN_max}$.
Client T_Data.con: network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its $P2_{CAN}$ timer using the default reload value $P2_{CAN} = P2_{CAN_max}$ (not shown in figure).
- 11 Client T_Data.req: diagnostic application issues functionally addressed request message to network layer. The client does not know the number of ECUs which shall have responded to the previous request. Therefore, the client shall wait until $P2_{CAN} = P2_{CAN_max}$ before it issues a new functional request message.
- 12 All server T_Data.ind: network layer issues to diagnostic application the reception of a request message. All servers start the $P2_{CAN}$ timer using the value of $P2_{CAN} = P2_{CAN_max}$ (not shown in figure).
Client T_Data.con: network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its $P2_{CAN}$ timer using the default reload value $P2_{CAN} = P2_{CAN_max}$ (not shown in figure).

Figure 8 — ISO 15765-4 application timing parameter (single-frame response messages) overview

[Figure 9](#) illustrates an example of a request message followed by one (1) multiple-frame response message and two (2) single frames and another request message. The next request message can be sent immediately by the external test equipment after completion of all response messages in case the transmission of the response messages takes longer than $P2_{CAN_max}$, even if the external test equipment does not know the number of responding ECUs.

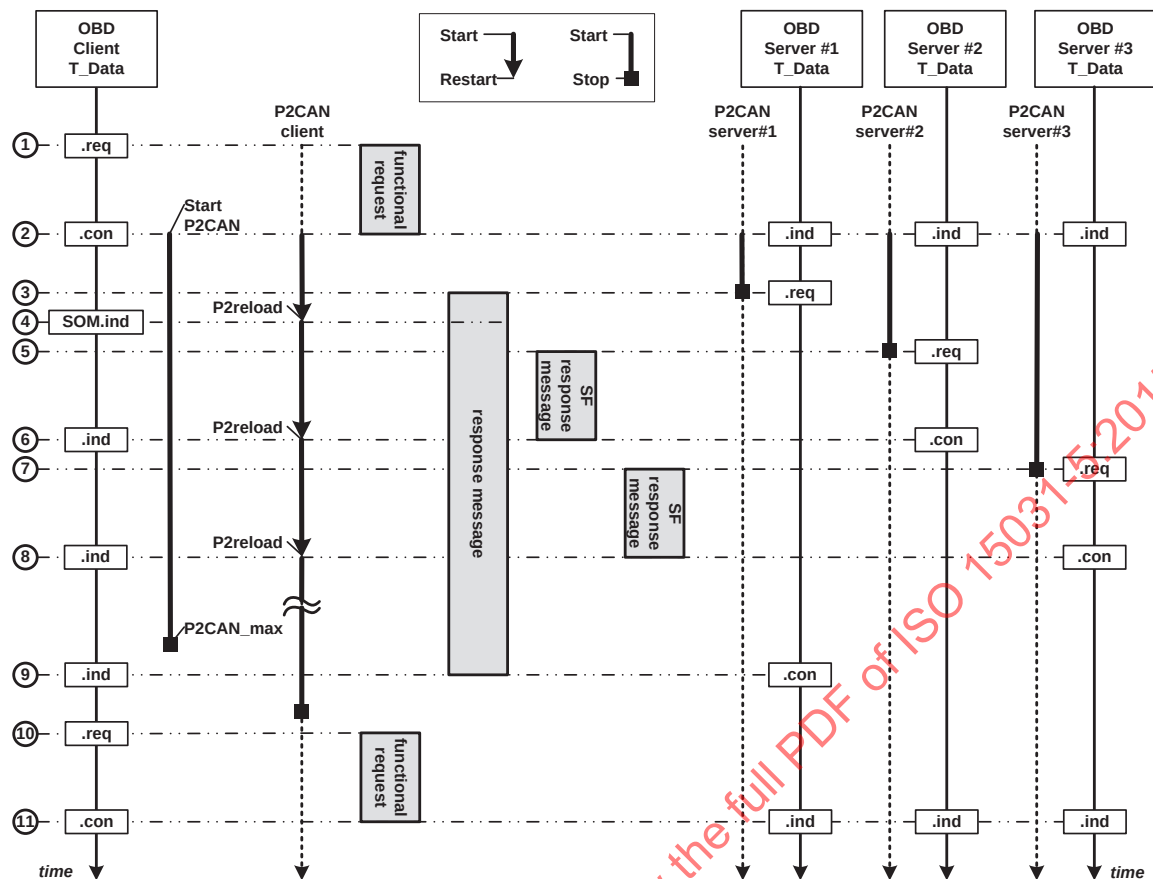


Key

- 1 Client T_Data.req: diagnostic application issues functionally addressed request message to network layer.
- 2 All server T_Data.ind: network layer issues to diagnostic application the reception of a request message. All servers start the P2CAN timer using the value of $P2_{CAN} = P2_{CAN_max}$.
Client T_Data.con: network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its P2CAN timer using the default reload value $P2_{CAN} = P2_{CAN_max}$.
- 3 Server #1 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within P2CAN.
- 4 Client T_DataSOM.ind: network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Client reloads P2CAN with P2CAN_max value.
- 5 Server #2 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within P2CAN. The response message is a single-frame message.
- 6 Server #2 T_Data.con: network layer issues to diagnostic application the completion of the response message.
Client T_Data.ind: network layer issues to diagnostic application the completion of the response message. Client reloads P2CAN with P2CAN_max value.
- 7 Server #3 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within P2CAN. The response message is a single-frame message.
- 8 Server #3 T_Data.con: network layer issues to diagnostic application the completion of the response message.
Client T_Data.ind: network layer issues to diagnostic application the completion of the response message. Client reloads P2CAN with P2CAN_max value.
- 9 Server #1 T_Data.con: network layer issues to diagnostic application the completion of the response message.
Client T_Data.ind: network layer issues to diagnostic application the completion of the response message.

- 10 Client T_Data.req: diagnostic application issues functionally addressed request message to network layer. The client does not know the number of ECUs which shall have responded to the previous request. Therefore, the client shall wait until $P2_{CAN} = P2_{CAN_max}$ before it issues a new functional request message.
- 11 All server T_Data.ind: network layer issues to diagnostic application the reception of a request message. All servers start the $P2_{CAN}$ timer using the value of $P2_{CAN} = P2_{CAN_max}$.
Client T_Data.con: network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its $P2_{CAN}$ timer using the default reload value $P2_{CAN} = P2_{CAN_max}$.

Figure 9 — ISO 15765-4 functional OBDonCAN communication — Multiple-frame response not finished within $P2_{CAN}$

[Figure 10](#) illustrates an example of a request message followed by one (1) multiple-frame response message and two (2) single frames (completion within $P2_{CAN_max}$) and another request message. The next request message can be sent immediately by the external test equipment after completion of all response messages if the external test equipment knows the number of responding ECUs. If not, it needs to wait with the next request message to send until $P2_{CAN_max}$ is expired.

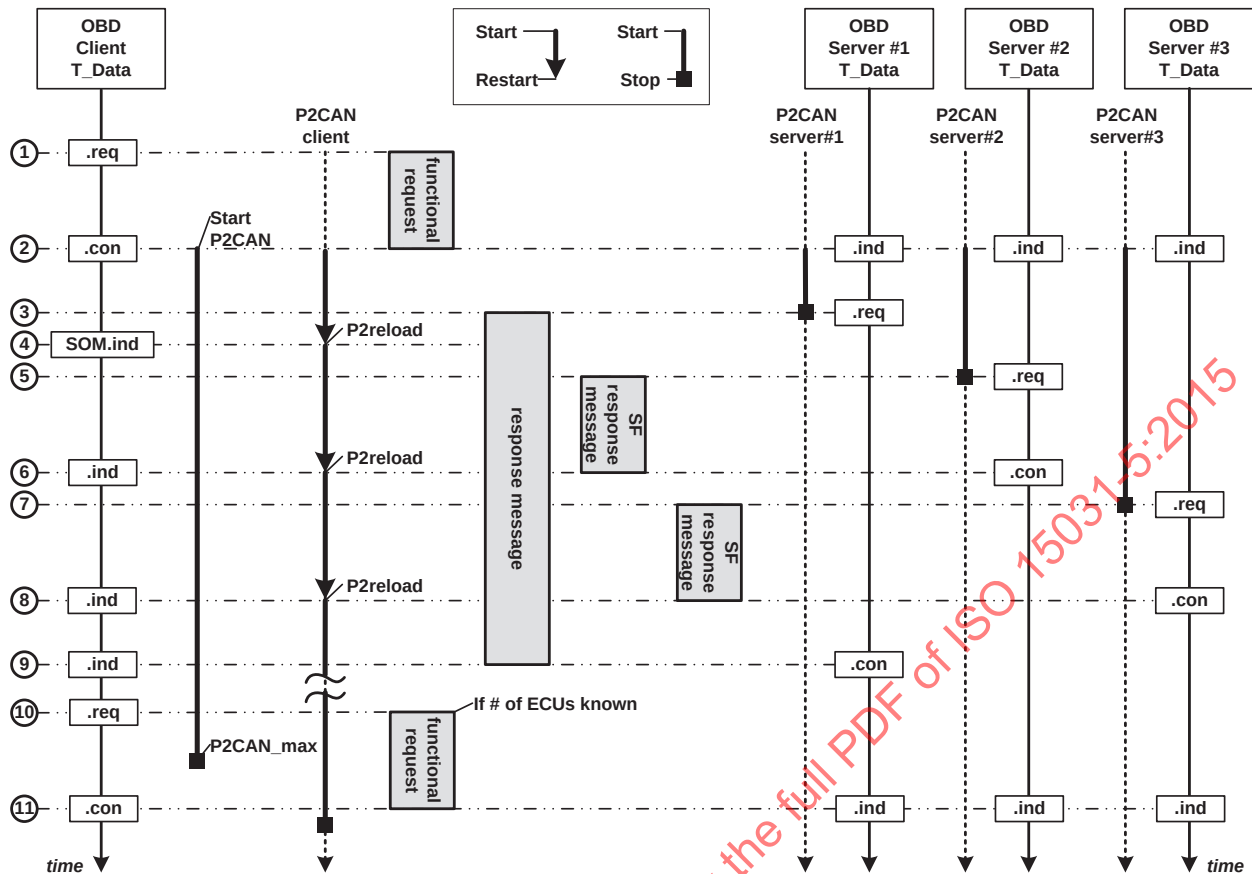

Key

- 1 Client T_Data.req: diagnostic application issues functionally addressed request message to network layer.
- 2 All server T_Data.ind: network layer issues to diagnostic application the reception of a request message. All servers start the P2CAN timer using the value of P2CAN = P2CAN_max. Client T_Data.con: network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its P2CAN timer using the default reload value P2CAN = P2CAN_max.
- 3 Server #1 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within P2CAN.
- 4 Client T_DataSOM.ind: network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Client reloads P2CAN with P2CAN_max value.
- 5 Server #2 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within P2CAN. The response message is a single-frame message.
- 6 Server #2 T_Data.con: network layer issues to diagnostic application the completion of the response message. Client T_Data.ind: network layer issues to diagnostic application the completion of the response message. Client reloads P2CAN with P2CAN_max value.
- 7 Server #3 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within P2CAN. The response message is a single-frame message.
- 8 Server #3 T_Data.con: network layer issues to diagnostic application the completion of the response message. Client T_Data.ind: network layer issues to diagnostic application the completion of the response message. Client reloads P2CAN with P2CAN_max value.
- 9 Server #1 T_Data.con: network layer issues to diagnostic application the completion of the response message. Client T_Data.ind: network layer issues to diagnostic application the completion of the response message.


- 10 Client T_Data.req: diagnostic application issues functionally addressed request message to network layer. The client knows the number of ECUs which shall have responded to the previous request. Therefore, the client is not required to wait until the time window has reached $P2_{CAN_max}$ before it issues a new functional request message.
- 11 All server T_Data.ind: network layer issues to diagnostic application the reception of a request message. All servers start the $P2_{CAN}$ timer using the value of $P2_{CAN} = P2_{CAN_max}$.
 Client T_Data.con: network layer issues to diagnostic application the confirmation of the completion of the request message. Client starts its $P2_{CAN}$ timer using the default reload value $P2_{CAN} = P2_{CAN_max}$.

Figure 10 — ISO 15765-4 functional OBDonCAN communication — Multiple-frame response finished within $P2_{CAN}$

NOTE The network layer timing parameters for the multiple-frame response are not shown. Network layer timing requirements for legislated diagnostic messages are specified in ISO 15765-4.

6.2.3.4 ECU behaviour to a request for supported/non-supported OBD information

[Figure 11](#) illustrates an example of a typical vehicle OBD configuration.

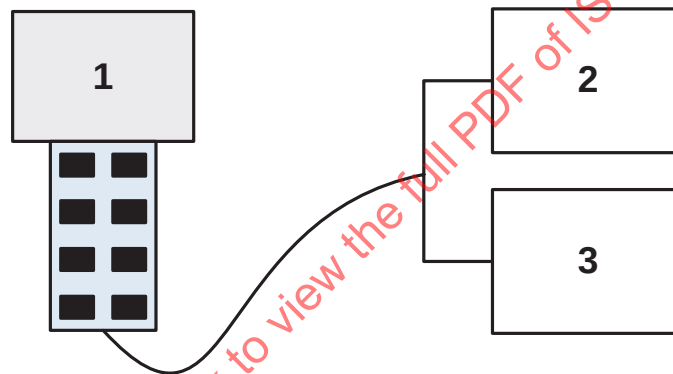

Key

- 1 external test equipment
- 2 ECM (engine control module)
- 3 TCM (transmission control module)

Figure 11 — Example of external test equipment connected to two (2) OBD ECUs

A service shall only be implemented by an ECU if supported with data (e.g. PID/OBD Monitor ID/Test ID/INFOTYPE supported), except for Service 01₁₆ and PID 00₁₆ which shall be supported by all emissions-related ECUs.

Typically, the ECM supports OBD Monitor IDs, which the TCM does not support. In case the external test equipment requests the status of such OBD Monitor ID supported by the ECM, the ECM sends a positive response message and the TCM does not send a response message (no negative response message allowed). The external test equipment knows that the TCM will not send a positive response message based on the OBD Monitor ID supported information retrieved prior to the latter request.

This shall be implemented to enhance the overall diagnostic communication performance between the external test equipment and the vehicle ECUs (see [6.2.3.3](#)).

6.2.4 Data not available

6.2.4.1 ISO 9141-2, ISO 14230-4, and SAE J1850 — Data not available

There are two conditions for which data are considered not available. One condition is that the service is not supported and the other is that the service is supported but data are currently not available.

For SAE J1850 and ISO 9141-2 interfaces, there will be no reject message to a functional request message if the request is not supported by the ECU. This prevents response messages from all ECUs that do not support a service or a specific data value.

For ISO 14230-4 interfaces, there will be a response message to every request message either positive (with data) or negative. In order to avoid unnecessary communication, the ECU(s) which does (do) not support a functionally requested PID, TID, or INFOTYPE is permitted not to send a negative response message because another ECU will send a positive response message. Format and possible codes of negative responses are specified in [6.3.4](#).

Some services are supported by a vehicle but data might not always be available when requested. For Services 05₁₆ and 06₁₆, if the test has not been run since test results were cleared, or for Service 02₁₆, if freeze frame data has not been stored, or for Service 09₁₆, if the engine is running, valid data will not be available. For these conditions, the manufacturer has the option either to not respond or to respond with data that are invalid (ISO 9141-2 and SAE J1850 only). The functional description for these services discusses the method to determine if the data are valid.

6.2.4.2 ISO 15765-4 — Data not available

There are five (5) conditions for which data are considered not available:

- a) Request message is not supported: The ECU(s) which does (do) not support the functional request message shall not send any response message;
- b) Request message is supported but data are not supported: The ECU(s) which does (do) support the functional request message but does (do) not support the requested data (e.g. PID, OBD Monitor ID, TID, or INFOTYPE) is (are) not allowed to send a negative response message because another ECU will send a positive response message. If the external test equipment sends a message including multiple PIDs and each emission-related ECU does not support all requested PIDs, then each ECU shall send a positive response message including the supported PID(s) and data values and shall not send a negative response message. If an ECU does not support any of the PIDs requested, it is not allowed to send a negative response message;
- c) Request message is supported but data are currently not available: The ECU(s) which does (do) support the functional request message but does (do) not currently have the requested data available shall respond with a negative response message with NRC 22₁₆ - ConditionsNotCorrect (negative response message format is specified in [6.3.3](#)). For Services 01₁₆, 02₁₆, 03₁₆, 06₁₆, 07₁₆, and 0A₁₆, the use of a negative response message including NRC 22₁₆ is not permitted. For Services 04₁₆, 08₁₆, and 09₁₆, the use of a NRC 22₁₆ is allowed. Use of 22₁₆ for Service 09₁₆ CVN request may be restricted by OBD regulations;
- d) Request message is supported but data are not available within P2 timing: The behaviour of the ECU(s) and the external test equipment is specified in [6.2.4.3](#);
- e) Request message is supported but service cannot be performed within P2 timing: The behaviour of the ECU(s) and the external test equipment is specified in [6.2.4.3](#). For Services 04₁₆ and 09₁₆, the use of an NRC 78₁₆ is allowed.

6.2.4.3 Data not available within P2 timing

6.2.4.3.1 Overview

The following subclauses specify the request/response message handling for each protocol if the data are not available within the P2 timing in the ECU(s). The description in the subsection only applies to Service 09₁₆, INFOTYPE 06₁₆ calibration verification numbers.

6.2.4.3.2 ISO 9141-2 — Data not available within P2 timing

If an ECU(s) supports the functional request message but does not have the requested data available within P2 timing, then a retry message handling routine shall be performed as follows:

- a) If the response message is not received within $P2_{K-Line}$, the external test equipment shall stop retrying the request message after one (1) minute from the original request;
- b) The retry message shall be sent at least every four (4) seconds (between 55 ms and 4 000 ms). The retry message keeps the bus alive and prevents the external test equipment from having to re-initialize the bus ($P3_{K-Line}$ time out);
- c) The ECUs, which either have already sent a positive response message or have not sent a positive response message, shall not restart the requested internal routine again;
- d) The external test equipment shall record if all ECUs have sent the expected number of response messages;
- e) After successful completion of all response messages, the external test equipment shall send a request message which is “not equal” to the “Repeated Request” message.

Additional description is included in the functional description of the corresponding service.

[Figure 12](#) illustrates the ISO 9141-2 (key bytes: 08₁₆ 08₁₆) data not available within P2 timing handling overview.

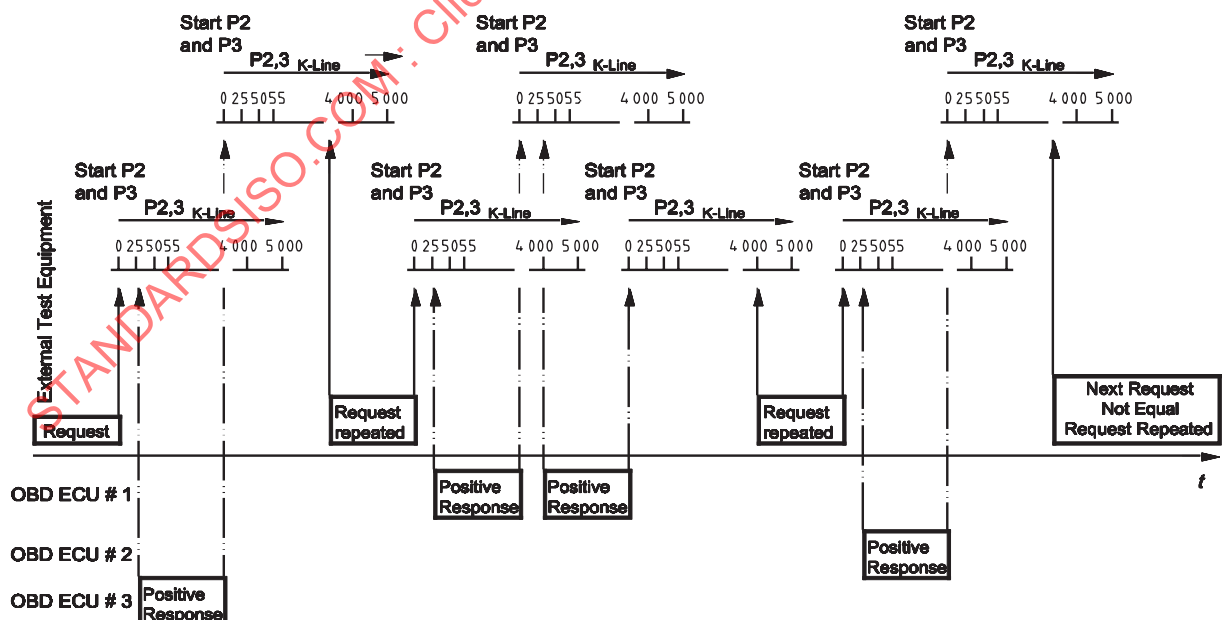


Figure 12 — ISO 9141-2 (key bytes: 08₁₆ 08₁₆) data not available within P2 timing handling overview

For the ISO 9141-2 protocol, the response message timing P2_{K-Line} shall be in accordance with Table 2. The P2_{K-line_min} application timing parameter value depends on the key bytes as listed:

- Key bytes: 08₁₆ 08₁₆: P2_{K-line_min} = 25 ms;
- Key bytes: 94₁₆ 94₁₆: P2_{K-line_min} = 0 ms.

6.2.4.3.3 ISO 14230-4 — Data not available within P2 timing

If an ECU(s) supports the functional request message but does not have the requested data available within P2 timing, handling shall be performed as follows:

- a) The ECU(s) shall respond with a negative response message with NRC 78₁₆ - RequestCorrectlyReceived-ResponsePending within P2 timing;
- b) ECUs which require more time than P2_{K-Line} to perform the requested action shall repeat the negative response message with NRC 78₁₆ prior to expiration of P2_{K-Line} until the positive response message is available;
- c) After all positive response messages have been received or a time out P2_{K-Line_max} has occurred, the external test equipment shall wait until P3_{K-Line_min} is reached to send a new request message.

Figure 13 illustrates the ISO 14230-4 negative response code RC = 78₁₆ handling overview.

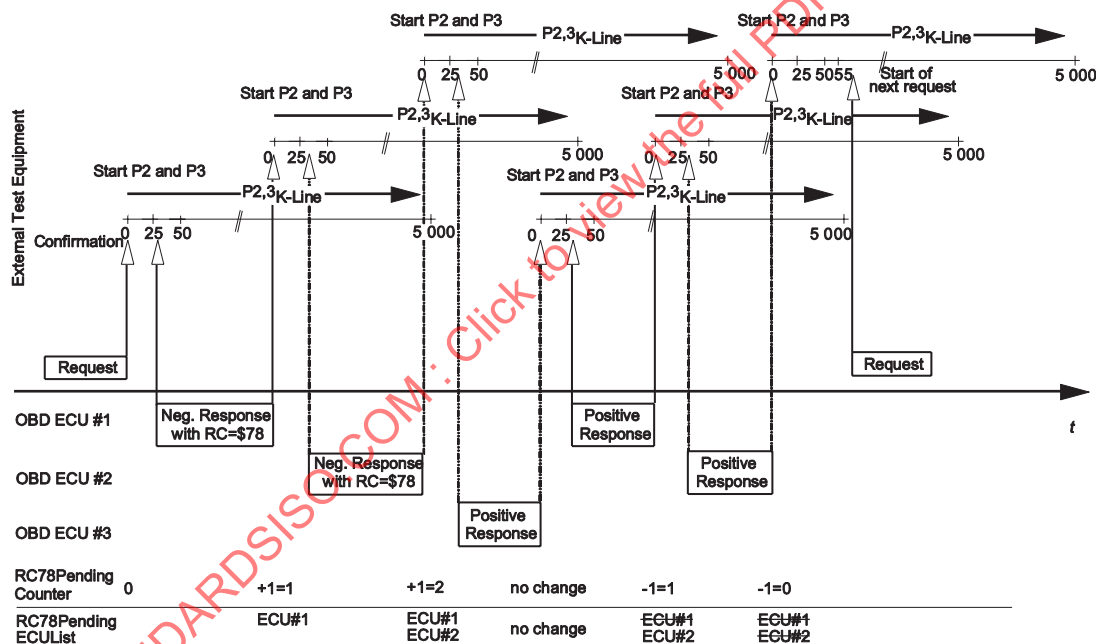


Figure 13 — ISO 14230-4:— Negative response code RC = 78₁₆ handling overview

6.2.4.3.4 SAE J1850 — Data not available within P2 timing

If an ECU(s) supports the functional request message but does not have the requested data available within P2 timing, then a retry message handling routine shall be performed as follows:

- a) If the response message is not received within P2_{J1850}, the external test equipment shall wait 30 (30 ± 1) s and then retry the request message;
- b) The retry message shall be stopped after one (1) minute from the original request;
- c) The external test equipment shall record if all ECUs have sent the expected number of response messages.

An additional description is included in the functional description of the corresponding service.

Figure 14 illustrates the SAE J1850 data not available within P2 timing handling overview.

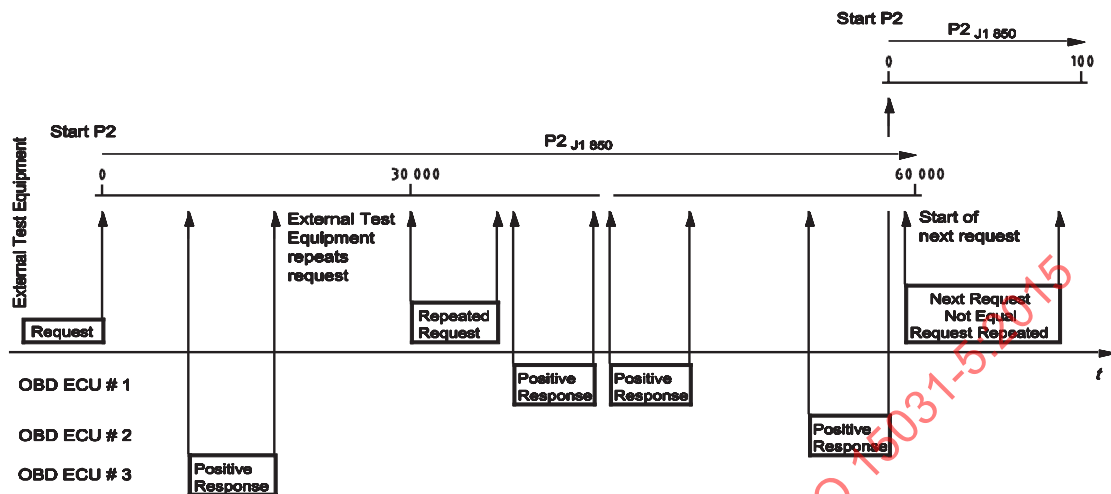


Figure 14 — SAE J1850 — Data not available within P2 timing handling overview

6.2.4.3.5 Data not available test conditions for protocols: ISO 9141-2, ISO 14230-4, and SAE J1850

There are two conditions for which data are considered not available:

- Service is not supported;
- Service is supported but data are not available at the time that the request is made.

Table 10 indicates the proper server/ECU response for each protocol as detailed in 6.2.4.1.

Table 10 — Proper response from server/ECU with ISO 9141-2, ISO 14230-4, and SAE J1850 protocol

Service	Condition	ISO 9141-2	SAE J1850	ISO 14230-4	NRC
00 ₁₆ or 0A ₁₆ -0F ₁₆	Not allowed	The ECU shall not respond.	The ECU shall not respond.	ECU can either not respond or send a negative response.	11
01 ₁₆	Not supported	All ECUs shall respond to Service 01 ₁₆ PID 00 ₁₆ if Service 01 ₁₆ is supported. If Service 01 ₁₆ is not supported, no response is allowed.	All ECUs shall respond to Service 01 ₁₆ PID 00 ₁₆ if Service 01 ₁₆ is supported. If Service 01 ₁₆ is not supported, no response is allowed.	All ECUs shall respond to Service 01 ₁₆ PID 00 ₁₆ if Service 01 ₁₆ is supported. If Service 01 ₁₆ is not supported, ECU can either not respond or send a negative response.	11 ₁₆
	Unsupported PID requested	No response preferred, positive response is allowed.	No response preferred, positive response is allowed.	ECU can either not respond or send a negative response.	12 ₁₆
	Supported PID requested	Positive response is required.	Positive response is required.	Positive response is required.	N/A

Table 10 (continued)

Service	Condition	ISO 9141-2	SAE J1850	ISO 14230-4	NRC
02 ₁₆	Not supported	The ECU shall not respond.	The ECU shall not respond.	ECU can either not respond or send a negative response.	11 ₁₆
	Supported PID requested, no Freeze Frame stored	PID 02 ₁₆ indicates 0000 ₁₆ , but if PIDs are requested, ECU can either not respond or send invalid data, except if supported PIDs (00 ₁₆ , 20 ₁₆ , ...) have been requested, then the ECU shall send a response with the supported PID and data bytes.	PID 02 ₁₆ indicates 0000 ₁₆ , but if PIDs are requested, ECU can either not respond or send invalid data, except if supported PIDs (00 ₁₆ , 20 ₁₆ , ...) have been requested, then the ECU shall send a response with the supported PID and data bytes.	PID 02 ₁₆ indicates 0000 ₁₆ , but if PIDs are requested, ECU can either not respond or send a negative response, except if supported PIDs (00 ₁₆ , 20 ₁₆ , ...) have been requested, then the ECU shall send a response with the supported PID and data bytes.	12 ₁₆
	Unsupported PID requested, no Freeze Frame stored	No response preferred, positive response is allowed.	No response preferred, positive response is allowed.	ECU can either not respond or send a negative response.	12 ₁₆
	Supported PID requested, Freeze Frame stored	Positive response is required.	Positive response is required.	Positive response is required.	N/A
	Unsupported PID requested, Freeze Frame stored	No response preferred, positive response is allowed.	No response preferred, positive response is allowed.	ECU can either not respond or send a negative response.	12 ₁₆
03 ₁₆ /07 ₁₆	Not supported	The ECU shall not respond.	The ECU shall not respond.	ECU can either not respond or send a negative response.	11 ₁₆
	Supported, no DTCs stored	No response preferred, positive response indicating no DTCs is allowed.	No response preferred, positive response indicating no DTCs is allowed.	Positive response indicating no DTCs is required.	N/A
	Supported, DTCs stored	Positive response is required.	Positive response is required.	Positive response is required.	N/A
04 ₁₆	Not supported	The ECU shall not respond.	The ECU shall not respond.	ECU can either not respond or send a negative response.	11 ₁₆
	Supported, conditions not correct	The ECU shall not respond.	The ECU shall not respond.	Negative response is required.	22 ₁₆
	Supported, conditions correct	Positive response is required.	Positive response is required.	Positive response is required.	N/A

Table 10 (continued)

Service	Condition	ISO 9141-2	SAE J1850	ISO 14230-4	NRC
05 ₁₆ /06 ₁₆	Not supported	The ECU shall not respond.	The ECU shall not respond.	ECU can either not respond or send a negative response.	16 ₁₁
05 ₁₆ /06 ₁₆	Supported TID requested, no stored data available	If TIDs are requested, ECU can either not respond or send invalid data.	If TIDs are requested, ECU can either not respond or send invalid data.	If TIDs are requested, ECU can either not respond or send invalid data or send negative response.	12 ₁₆
	Unsupported TID requested, no stored data available	No response preferred, positive response is allowed.	No response preferred, positive response is allowed.	ECU can either not respond or send a negative response.	12 ₁₆
	Supported TID requested, stored data available	Positive response is required.	Positive response is required.	Positive response is required.	N/A
	Unsupported TID requested, stored data available	No response preferred, positive response is allowed.	No response preferred, positive response is allowed.	ECU can either not respond or send a negative response.	12 ₁₆
08 ₁₆	Not supported	The ECU shall not respond.	The ECU shall not respond.	ECU can either not respond or send a negative response.	11 ₁₆
	Supported TID requested, conditions correct	Respond within P2 timing.	Respond within P2 timing.	Respond within P2 timing.	N/A
	Supported TID requested, conditions not correct	The ECU shall not respond or may respond with a manufacturer-specified value as DATA A, which corresponds to the reason the test cannot be run.	The ECU shall not respond or may respond with a manufacturer-specified value as DATA A, which corresponds to the reason the test cannot be run.	Negative response is required or may respond with a manufacturer-specified value as DATA A which corresponds to the reason the test cannot be run.	22 ₁₆
	Unsupported TID requested	No response preferred, positive response is allowed.	No response preferred, positive response is allowed.	ECU can either not respond or send a negative response.	12 ₁₆
09 ₁₆	Not supported	The ECU shall not respond.	The ECU shall not respond.	ECU can either not respond or send a negative response.	11 ₁₆
	Supported INFOTYPE requested, data available (VIN, CVN, CALID)	Positive response is required.	Positive response is required.	Positive response is required.	N/A

Table 10 (continued)

Service	Condition	ISO 9141-2	SAE J1850	ISO 14230-4	NRC
	Supported INFOTYPE requested, data not available, conditions correct (CVN)	Respond within 1 min; do not restart CVN calculation. Test tool sends retry message every 0,055 to 4,0 s.	Respond within 1 min; do not restart CVN calculation. Test tool sends retry message after 30 s.	One or multiple negative response message(s) required within $P2_{\max}$ (25 – 50 ms) until positive response is sent.	78 ₁₆
	Supported INFOTYPE requested, data not available, conditions not correct (CVN), prior to 2005 MY only	The ECU shall not respond.	The ECU shall not respond.	Negative response is required.	22 ₁₆
	Unsupported INFOTYPE requested	No response preferred, positive response is allowed.	No response preferred, positive response is allowed.	ECU can either not respond or send a negative response.	12 ₁₆

NOTE 1 ISO 9141-2 and SAE J1850 do not support negative response codes.

NOTE 2 Negative response structure follows the scheme: 7F₁₆, ServiceID, NRC (e.g. 7F₁₆, 01₁₆, 11₁₆).


6.2.4.3.6 ISO 15765-4 — Data not available within P2 timing or service cannot be performed within P2 timing

The ECU(s) which does (do) support the functional request message but does (do) not have the requested data available within P2 timing or cannot perform the requested service within P2 timing shall perform the following handling:

- The ECU(s) shall respond with a negative response message with NRC 78₁₆ - RequestCorrectlyReceived-ResponsePending within P2 timing (not allowed for Service 01₁₆, 02₁₆, 03₁₆, 06₁₆, 07₁₆, and 0A₁₆ requests);
- After correct reception of the negative response message with NRC 78₁₆, the $P2_{\text{CAN_max}}$ parameter timing value shall be set to $P2^*_{\text{CAN_max}}$ (5 000 ms) by the external test equipment and the ECU which has sent the negative response message;
- If another ECU also sends a negative response message with NRC 78₁₆, the $P2_{\text{CAN_max}}$ timing parameter value shall be reloaded to $P2^*_{\text{CAN_max}}$;
- ECUs which require more than $P2^*_{\text{CAN_max}}$ to perform the requested action shall repeat the negative response message with NRC 78₁₆ prior to expiration of $P2^*_{\text{CAN_max}}$ until correct reception of the positive response message;
- After all positive response messages have been received or timed out, $P2^*_{\text{CAN_max}}$ has occurred, the $P2_{\text{CAN_max}}$ timing parameter shall be reset to the values specified in [Table 7](#).

The vehicle manufacturer is responsible to ensure that the network architecture of the vehicle does not cause timing delays that exceed $P2_{\text{CAN_max}}$ timing when responding to Services 01₁₆, 02₁₆, 03₁₆, 06₁₆, 07₁₆, 08₁₆, and 0A₁₆ requests because a negative response message with NRC 78₁₆ shall not be allowed.

[Figure 15](#) illustrates the negative response message handling with NRC 78₁₆ for the ISO 15765-4 interface.

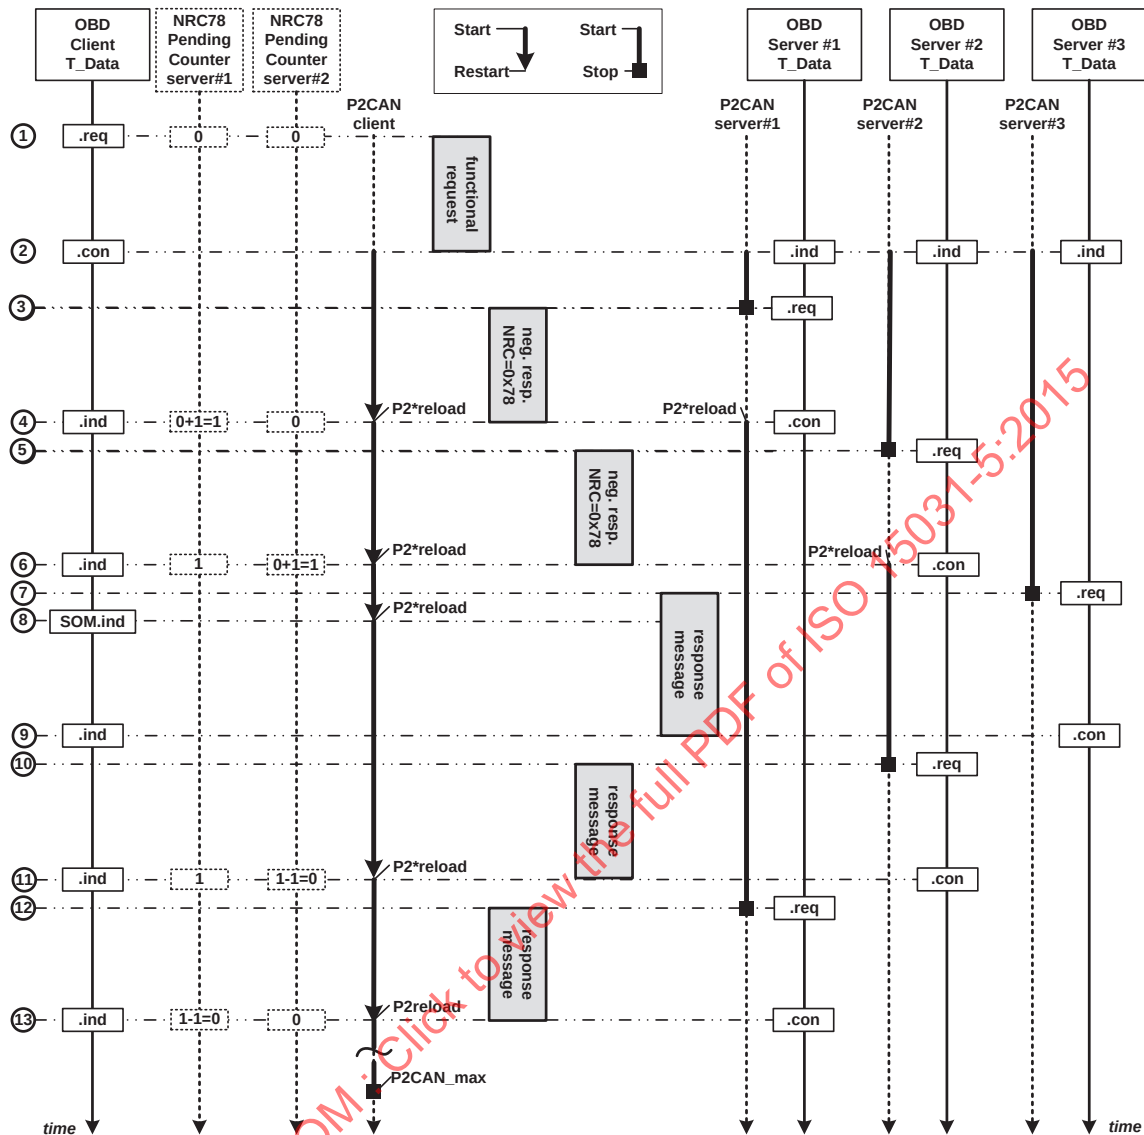

Key

- 1 Client T_Data.req: diagnostic application issues functionally addressed request message to network layer.
- 2 All server T_Data.ind: network layer issues to diagnostic application the reception of a request message. All servers start the $P2_{CAN}$ timer using the value of $P2_{CAN} = P2_{CAN_max}$.
Client T_Data.con: network layer issues to diagnostic application the confirmation of the completion of the request message. All NRCPendingCounter = 0. Client starts its $P2_{CAN}$ timer using the default reload value $P2_{CAN} = P2_{CAN_max}$.
- 3 Server #1 T_Data.req: diagnostic application does not have the positive response message ready and issues negative response message with NRC = 78₁₆ by a T_Data.req to the network layer within $P2_{CAN}$.
- 4 Client T_Data.ind: network layer issues to diagnostic application the reception of a message. Since the received response message is a negative response message with NRC = 78₁₆, the NRCPendingCounter for server #1 is incremented by 1 ($0+1=1$).
Client reloads $P2_{CAN}$ with $P2_{CAN_max}$ value.
Server #1 T_Data.con: network layer issues to diagnostic application the completion of the response message.
- 5 Server #2 T_Data.req: diagnostic application does not have the positive response message ready and issues negative response message with NRC = 78₁₆ by a T_Data.req to the network layer within $P2_{CAN}$.
- 6 Client T_Data.ind: network layer issues to diagnostic application the reception of a message. Since the received response message is a negative response message with NRC = 78₁₆, the NRCPendingCounter server #2 is incremented by 1 ($0+1=1$).
Client reloads $P2_{CAN}$ with $P2_{CAN_max}$ value.
Server #2 T_Data.con: network layer issues to diagnostic application the completion of the response message.

- 7 Server #3 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within P2_{CAN}.
- 8 Client T_DataSOM.ind: network layer issues to diagnostic application the reception of a StartOfMessage which is initiated by the reception of a FirstFrame indication on CAN (see ISO 15765-2). Client reloads P2_{CAN} with P2*_{CAN_max} value.
- 9 Server #3 T_Data.con: network layer issues to diagnostic application the completion of the response message.
Client T_Data.ind: network layer issues to diagnostic application the completion of the response message.
- 10 Server #2 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within P2_{CAN}. The response message is a single-frame message.
- 11 Server #2 T_Data.con: network layer issues to diagnostic application the completion of the response message.
Client T_Data.ind: network layer issues to diagnostic application the completion of the response message. Since the received response message is a positive response message, the NRCPendingCounter server #2 is decremented by 1 (1-1 = 0). Client reloads P2_{CAN} with P2*_{CAN_max} value.
- 12 Server #1 T_Data.req: diagnostic application has prepared the response message and issues a T_Data.req to network layer within P2_{CAN}. The response message is a single-frame message.
- 13 Server #1 T_Data.con: network layer issues to diagnostic application the completion of the response message.
Client T_Data.ind: network layer issues to diagnostic application the completion of the response message. Since the received response message is a positive response message, the NRCPendingCounter server #1 is decremented by 1 (1-1 = 0). Client reloads P2_{CAN} with P2*_{CAN_max} value.

Figure 15 — ISO 15765-4:— Negative response code NRC = 78₁₆ handling overview

6.2.4.3.7 Data not available — Test conditions for protocol: ISO 15765-4 Diagnostic communication over CAN

The following are the five (5) conditions for which data are considered not available:

- service is not supported;
- service is supported but data are not supported;
- service is supported but data are not available at the time that the request is made;
- service is supported but data are not available within P2 timing;
- service is supported but cannot be performed within P2 timing.

[Table 11](#) indicates the proper server/ECU response as detailed in [6.2.4.2](#).

Table 11 — Proper response from server/ECU for ISO 15765-4 protocol

Service	Condition	ISO 15765-4	NRC
01 ₁₆	Not supported	All ECUs shall respond to Service 01 ₁₆ PID 00 ₁₆ if Service 01 ₁₆ is supported. If Service 01 ₁₆ is not supported, no response is allowed.	N/A
	Unsupported PID requested	The ECU shall not respond.	N/A
	Supported PID requested	Positive response is required (no negative response message with NRC 78 ₁₆ allowed).	N/A
	Support PID 00 ₁₆ requested during initialization	Positive response is required or negative response for max of 5 times.	21 ₁₆

Table 11 (continued)

Service	Condition	ISO 15765-4	NRC
02 ₁₆	Not supported	The ECU shall not respond.	N/A
	Supported PID, frame XX ₁₆ requested, no Freeze Frame stored	1) The ECU shall respond to PID 02 ₁₆ frame XX ₁₆ ; PID 02 ₁₆ frame XX ₁₆ shall indicate 0000 ₁₆ . 2) The ECU shall respond with support PIDs for frame XX ₁₆ (00 ₁₆ , 20 ₁₆ , ...). 3) If PIDs other than support PIDs or PID 02 ₁₆ are requested, the ECU shall not respond.	N/A
	Unsupported PID, frame XX ₁₆ requested, no Freeze Frame stored	PID 02 ₁₆ frame XX ₁₆ indicates 0000 ₁₆ , but if any other PIDs are requested, ECU shall not respond.	N/A
	Supported PID, frame XX ₁₆ requested, Freeze Frame stored	1) The ECU shall respond to PID 02 ₁₆ frame XX ₁₆ within P2 timing. 2) The ECU shall respond with support PIDs for frame XX ₁₆ (00 ₁₆ , 20 ₁₆ ...) within P2 timing and shall respond to PIDs frame XX ₁₆ indicated as supported within P2 timing.	N/A
	Unsupported PID, frame XX ₁₆ requested, Freeze Frame stored	The ECU shall not respond.	N/A
03 ₁₆ / 07 ₁₆ / 0A ₁₆	Not supported	The ECU shall not respond.	N/A
	Supported, no DTCs stored	Positive response indicating no DTCs is required.	N/A
	Supported, DTCs stored	Positive response including the stored DTCs is required.	N/A
04 ₁₆	Not supported	The ECU shall not respond.	N/A
	Supported, conditions not correct	Negative response is required.	22 ₁₆
	Supported, conditions correct	Positive response message required. Multiple negative response messages allowed within a maximum time of 5 000 ms after request until positive response is required.	78
06 ₁₆	Not supported	The ECU shall not respond.	N/A
	Supported OBDMID requested, no stored data available	Positive response required; test values, min and max limits shall be set to 00 ₁₆ .	N/A
	Unsupported OBDMID requested, no stored data available	The ECU shall not respond.	N/A
	Supported OBDMID requested, stored data available	Positive response is required.	N/A
	Unsupported OBDMID requested, stored data available	The ECU shall not respond.	N/A
08 ₁₆	Not supported	The ECU shall not respond.	N/A
	Supported TID requested, conditions correct	Positive response is required.	N/A
	Supported TID requested, conditions not correct	Negative response required.	22 ₁₆
	Unsupported TID requested	The ECU shall not respond.	N/A

Table 11 (continued)

Service	Condition	ISO 15765-4	NRC
09 ₁₆	Not supported	The ECU shall not respond.	N/A
	Supported INFOTYPE requested, data available (VIN, CVN, CALID)	Positive response is required.	N/A
	Supported INFOTYPE requested, data not available, conditions correct (CVN)	Initial negative response message required within P2 _{max} (50 ms) and consecutive negative response message(s) is (are) required within P2 _{max} (5.0 s) until positive response is sent.	78 ₁₆
	Supported INFOTYPE requested, data not available, conditions not correct (CVN), prior to 2005 MY only	Negative response is required. (Use of NRC 22 ₁₆ may be restricted by OBD regulations.)	22 ₁₆
	Unsupported INFOTYPE requested	The ECU shall not respond.	N/A
00 ₁₆ , 05 ₁₆ or 0B ₁₆ – 0F ₁₆	Not allowed	The ECU shall not respond.	N/A

NOTE Negative response structure follows the scheme: 7F₁₆, ServiceID, NRC (e.g. 7F₁₆, 01₁₆, 11₁₆).

6.2.5 Maximum values

If the data value exceeds the maximum value possible to be sent, the on-board system shall send the maximum value possible (FF₁₆ or FFFF₁₆). The external test equipment shall display the maximum value or an indication of data too high. This is not normally critical for real-time diagnostics, but, for example, in the case of a misfire at high vehicle speed with resulting freeze frame data stored, this will be very valuable diagnostic information.

6.2.6 Invalid signals

In distributed network architectures, certain OBD devices may be hardwired to other ECUs or may be independent OBD mechatronic devices, e.g. smart sensor/actuator connected through a network from another ECU (both referred to as remote OBD devices). When remote OBD devices are not hardwired to the OBD ECU and the data are not received over the data bus from the specific remote OBD device, this might occur for two reasons; either the remote ECU is not functioning and sending any data, or the OBD device that is hardwired to the remote ECU has failed and the remote ECU is sending a message with invalid data for the OBD remote device. In either one of these cases, the primary OBD ECU shall report Service 01₁₆ and Service 02₁₆ data parameters as the minimum or maximum value to indicate that the signal has not been received. A PID which includes this invalid data (no signal) shall either be reported with a minimum value (00₁₆ or 0000₁₆) or maximum value (FF₁₆ or FFFF₁₆), e.g. PID 0D₁₆ "Vehicle Speed Sensor" = FF₁₆ = 255 km/h, PID 2F₁₆ "Fuel Level Input" = 00₁₆ = 0,0 %. The reported value shall be determined by the manufacturer based on system design and network architecture to represent the least likely value to be expected under normal conditions.

6.3 Diagnostic message format

6.3.1 Addressing method

Functional addressing shall be used for all request messages because the external test equipment does not know which system on the vehicle has the information that is needed.

6.3.2 Maximum message length

6.3.2.1 ISO 9141-2, ISO 14230-4, SAE J1850 — Maximum message length

The maximum message length for request and response messages is limited to seven (7) data bytes.

For SAE J1850 and ISO 9141-2 interfaces, each unique diagnostic message specified in this part of ISO 15031 is a fixed length, although not all messages are the same length. For Services 01₁₆ and 02₁₆, message length is determined by parameter identification (PID). Several PIDs, e.g. 06₁₆ – 09₁₆, require reading of PIDs 13₁₆ and/or 1D₁₆ to determine whether a data byte B is included in the response message. For Service 05₁₆, message length is determined by Test ID. For other services, the message length is determined by the service. This enables the external test equipment to check for proper message length and to recognize the end of the message without waiting for possible additional data bytes. For ISO 14230-4 interfaces, the message length is always determined by the length information included in the first byte of the header.

6.3.2.2 ISO 15765-4 — Maximum message length

The maximum message length is specified in ISO 15765-4. For request messages, the message length is limited to seven (7) data bytes.

6.3.3 Request/Response message format

6.3.3.1 ISO 9141-2, ISO 14230-4, SAE 1850, ISO 15765-4 — Request message format

[Table 12](#) specifies the request message format.

Table 12 — Request message format for ISO 9141-2, ISO 14230-4, SAE J1850, ISO 15765-4

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request Service Identifier	M	XX ₁₆	SIDRQ
#2	service-specific data byte#1	U	XX ₁₆	—
#3	service-specific data byte#2	U	XX ₁₆	—
#4	service-specific data byte#3	U	XX ₁₆	—
#5	service-specific data byte#4	U	XX ₁₆	—
#6	service-specific data byte#5	U	XX ₁₆	—
#7	service-specific data byte#6	U	XX ₁₆	—

The message format defined for some services for the ISO 15765-4 protocol allows for an optional number of data bytes in the request message sent by the external test equipment. If these are included in the request message, support of those optional data bytes becomes mandatory for the server/ECU.

6.3.3.2 ISO 9141-2, ISO 14230-4, SAE J1850 — Positive response message format

[Table 13](#) specifies the positive response message format.

Table 13 — Positive response message format for ISO 9141-2, ISO 14230-4, SAE J1850

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Positive Response Service Identifier	M	XX ₁₆	SIDPR
#2	service-specific data byte#1	U	XX ₁₆	—
#3	service-specific data byte#2	U	XX ₁₆	—
#4	service-specific data byte#3	U	XX ₁₆	—
#5	service-specific data byte#4	U	XX ₁₆	—
#6	service-specific data byte#5	U	XX ₁₆	—
#7	service-specific data byte#6	U	XX ₁₆	—

6.3.3.3 ISO 15765-4 — Positive response message format

Table 14 specifies the positive response message format.

Table 14 — Positive response message format for ISO 15765-4

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Positive Response Service Identifier	M	XX ₁₆	SIDPR
#2	service-specific data byte#1	U	XX ₁₆	—
#3	service-specific data byte#2	U	XX ₁₆	—
#4	service-specific data byte#3	U	XX ₁₆	—
:	:	:	:	—
#n-2	service-specific data byte#m-2	U	XX ₁₆	—
#n-1	service-specific data byte#m-1	U	XX ₁₆	—
#n	service-specific data byte#m	U	XX ₁₆	—
n: This value depends on the response message length.				
m: This value depends on the response message length – 1.				

6.3.3.4 ISO 14230-4, ISO 15765-4 — Negative response message format

This subclause includes additions, exceptions, and/or restrictions for ISO 14230-4 and ISO 15765-4.

Table 15 specifies the negative response message format.

Table 15 — Negative response message format for ISO 14230-4, ISO 15765-4

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Negative Response Service Identifier	M	7F ₁₆	SIDNR
#2	Request Service Identifier	M	XX ₁₆	SIDRQ
#3	Response Code	M	XX ₁₆	RC_

6.3.4 Response code parameter definition

Response codes shall be implemented in an ECU that supports a service(s) not having valid data available at the time of a request or which cannot respond with valid data available within P2_{K-Line} and P2_{CAN} timing.

Table 16 defines negative response codes.

Table 16 — Negative response code (NRC) definition

Supported by ISO Protocol	Byte Value	Definition of Response Code	Mnemonic
14230-4	10 ₁₆	generalReject This response code indicates that the service is rejected but the server (ECU) does not specify the reason of the rejection.	GR
14230-4	11 ₁₆	serviceNotSupported This response code indicates that the requested action will not be taken because the server (ECU) does not support the requested service.	SNS
14230-4	12 ₁₆	subFunctionNotSupported-InvalidFormat This response code indicates that the requested action will not be taken because the server (ECU) does not support the arguments of the request message or the format of the argument bytes does not match the pre-scribed format for the specified service.	SFNSIF

Table 16 (continued)

Supported by ISO Protocol	Byte Value	Definition of Response Code	Mnemonic
14230-4	21 ₁₆	busy-RepeatRequest	BRR
15765-4		This response code indicates that the server (ECU) is temporarily too busy to perform the requested operation. For ISO 15765-4 protocol, the client (external test equipment) shall behave as defined in ISO 15765-4. In a multi-client (more than one external test equipment, e.g. telematic client) environment, the diagnostic request message of one client might be blocked temporarily by a negative response message with response code 21₁₆ while another client finishes a diagnostic task. Therefore, this negative response code (NRC) is only allowed to be used during the initialization sequence of the protocol. NOTE If the server (ECU) is able to perform the diagnostic task but needs additional time to finish the task and prepares the response message, the negative response message with response code 78₁₆ is used instead of 21₁₆.	
14230-4 15765-4	22 ₁₆	conditionsNotCorrectOrRequestSequenceError This response code indicates that the requested action will not be taken because the server (ECU) prerequisite conditions are not met. This request might also occur when sequence-sensitive requests are issued in the wrong order.	CNCORSE
14230-4 15765-4	78 ₁₆	requestCorrectlyReceived-ResponsePending This response code indicates that the request message was received correctly and that any parameters in the request message were valid but the action to be performed may not be completed yet. This response code can be used to indicate that the request message was properly received and does not need to be re-transmitted but the server (ECU) is not yet ready to receive another request. The negative response message with this response code may be repeated by the ECU(s) within $P2K-Line = P2_{CAN} - P2_{max}^*$ until the positive response message with the requested data is available.	RCR-RP

6.3.5 Header byte definition of ISO 9141-2, ISO 14230-4, and SAE J1850

The first three (3) bytes of all diagnostic messages are the header bytes.

For SAE J1850 and ISO 9141-2 interfaces, the value of the first header byte is dependent on the bit rate of the data link and the type of message (see SAE J1850 and ISO 9141-2). The second header byte has a value that depends on the type of message, either a request or a response.

For ISO 14230-4 interfaces, the value of the first header byte indicates the addressing mode (physical/functional) and the length of the data field. The second header byte is the address of the receiver of the message. The third header byte for all interfaces is the physical address of the sender of the message. The external test equipment has the address F1₁₆. Other service tools shall use addresses in the range from F0₁₆ to FD₁₆. The response to all request messages will be independent of the address of the external test equipment requesting the information. Vehicle manufacturers shall not use the header bytes defined in this part of ISO 15031 for any purpose other than emissions-related diagnostic messages. When they are used, they shall conform to this specification.

[Table 17](#) defines the diagnostic message format for ISO 9141-2, ISO 14230-4, and SAE J1850 protocols.

Table 17 — Diagnostic message format for ISO 9141-2, ISO 14230-4, SAE J1850

Header Bytes (Hex)			Data Bytes								
Priority/Type	Target Address (hex)	Source Address (hex)	#1	#2	#3	#4	#5	#6	#7	ERR	RESP
Diagnostic Request at 10,4 kbit/s: SAE J1850 and ISO 9141-2											
68 ₁₆	6A ₁₆	F1 ₁₆	Maximum 7 data bytes							Yes	No
Diagnostic Response at 10,4 kbit/s: SAE J1850 and ISO 9141-2											
48 ₁₆	6B ₁₆	ECU addr	Maximum 7 data bytes							Yes	No
Diagnostic Request at 10,4 kbit/s (ISO 14230-4)											
11LL LLLL ₂	33 ₁₆	F1 ₁₆	Maximum 7 data bytes							Yes	No
Diagnostic Response at 10,4 kbit/s (ISO 14230-4)											
10LL LLLL ₂	F1 ₁₆	ECU addr	Maximum 7 data bytes							Yes	No
Diagnostic Request at 41,6 kbit/s (SAE J1850)											
61 ₁₆	6A ₁₆	F1 ₁₆	Maximum 7 data bytes							Yes	Yes
Diagnostic Response at 41,6 kbit/s (SAE J1850)											
41 ₁₆	6B ₁₆	ECU addr	Maximum 7 data bytes							Yes	Yes

NOTE LL LLLL = Length of data bytes; RESP = In-frame response; ERR = Error detection.

6.3.6 Header byte definition of ISO 15765-4

Each CAN frame is identified by a CAN Identifier. The size of the identifier is either 11 bit or 29 bit. The CAN identifier shall always be followed by an eight (8) byte CAN frame data field [see ISO 15765-4; section "Data length code (DLC)"]. Depending on the message type, up to three (3) bytes (FlowControl) are used for the PCI (protocol control information) prior to the service identifier (only included in single frame or first frame) and data bytes of the message.

[Table 18](#) defines the diagnostic message format for ISO 15765-4 protocol.

Table 18 — Diagnostic message format for ISO 15765-4

Header Bytes	CAN frame data field							
CAN Identifier (11 or 29 bit)	#1	#2	#3	#4	#5	#6	#7	#8

6.3.7 Data bytes definition of ISO 9141-2, ISO 14230-4, SAE J1850, and ISO 15765-4

For the ISO 9141-2, ISO 14230-4, and the SAE J1850 protocol, the first data byte following the header is the diagnostic service identifier and the remaining data bytes vary depending on the specific diagnostic service. For the ISO 15765-4 protocol, the first data byte following the CAN Identifier in a single frame and first frame is the PCI (protocol control information, number of bytes varies, depending on frame type), then diagnostic service identifier, and the remaining data bytes vary depending on the specific diagnostic service.

6.3.8 Non-data bytes included in diagnostic messages with SAE J1850

All diagnostic messages use a cyclic redundancy check (CRC) as in SAE J1850 as the error detection byte (ERR). In-frame response (RSP) is specified as optional in SAE J1850. For messages specified in this part of ISO 15031, the RSP byte is required in all request and response messages at 41,6 kbit/s and is not allowed for messages at 10,4 kbit/s. The in-frame response byte shall be the node address of the device transmitting the RSP. SAE J1850 specifies additional message elements that may be included in diagnostic messages. Use of these message elements is beyond the scope of this part of ISO 15031 but needs to be considered when specifying total diagnostic messages.

6.3.9 Non-data bytes included in diagnostic messages with ISO 9141-2 and ISO 14230-4

Messages will include a checksum, specified in ISO 9141-2 and ISO 14230-4, after the data bytes as the error detection byte (ERR). There is no provision for an in-frame response.

In the bit position convention, some data byte values include descriptions that are based on bit positions within the byte. The convention used is that the most significant bit (MSB) is referred to as “bit 7” and the least significant bit (LSB) is referred to as “bit 0,” as shown in [Figure 16](#).

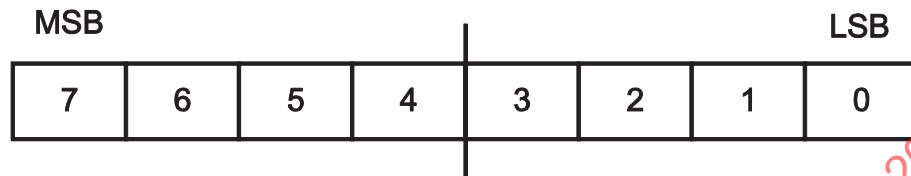


Figure 16 — Bit position within a data byte

6.4 Byte order convention

When reporting data larger than one byte, the Most Significant Byte (or high byte) is reported as first data byte followed by the next most significant bytes. The Least Significant Byte (or low byte) is reported as the last data byte. This convention is shown in numerous examples throughout this part of ISO 15031.

6.5 Allowance for expansion and enhanced diagnostic services

This part of ISO 15031 allows for the addition of diagnostic services both as industry standards and manufacturer-specific services. The diagnostic services 00₁₆ through 0F₁₆ are ISO/SAE reserved.

6.6 Definition of PIDs for services 01₁₆ and 02₁₆

All PIDs are defined in SAE J1979-DA.

IMPORTANT — Several new PIDs have been defined in SAE J1979-DA based on new emissions-related vehicle technology. The data size of those PIDs exceeds the maximum message length of the non-CAN protocols (SAE J1850, ISO 9141-2, ISO 14230-4). Those PIDs are not supported by the non-CAN protocols.

6.7 Format of data to be displayed

[Table 19](#) indicates the type of data and minimum requirements for the display format.

Table 19 — Format of data to be displayed

Data	Services	Display Format
Device ID – source address of response	All	ISO 9141-2: Hexadecimal (00 ₁₆ to FF ₁₆) ISO 14230-4: Hexadecimal (00 ₁₆ to FF ₁₆) SAE J1850: Hexadecimal (00 ₁₆ to FF ₁₆) ISO 15765-4: Hexadecimal (11 bit or 29 bit CAN Identifier)
Parameter ID (PID)	01 ₁₆ and 02 ₁₆	Hexadecimal (00 ₁₆ to FF ₁₆) description (see SAE J1979-DA)
Frame number	02 ₁₆	Decimal (0 to 255)
Data values	01 ₁₆ and 02 ₁₆	See SAE J1979-DA
Diagnostic trouble codes	03 ₁₆ , 07 ₁₆ , and 0A ₁₆	“P”, “B”, “C”, or “U”, plus 4 hexadecimal characters and/or DTC definition (see SAE J2012-DA)

Table 19 (continued)

Data	Services	Display Format
Test ID	05 ₁₆ , 06 ₁₆ , and 08 ₁₆	Hexadecimal (00 ₁₆ to FF ₁₆)
Test value and test limits	05 ₁₆	Engineering units for Test IDs less than 80 ₁₆ (see SAE J1979-DA) – decimal (0 to 255) for Test IDs greater than 80 ₁₆
Test value and test limits	06 ₁₆	Decimal (0 to 65 535)
Component ID	06 ₁₆	Hexadecimal (00 ₁₆ to 7F ₁₆)
Optional data bytes	08 ₁₆	4 bytes, each decimal (0 to 255) (see SAE J1979-DA)
Vehicle information type	09 ₁₆	Hexadecimal (00 ₁₆ to 7F ₁₆) (see SAE J1979-DA)
Vehicle information data	09 ₁₆	See SAE J1979-DA

NOTE ISO 15031-4/SAE J1978 specifies further guidelines and examples on displaying Service 01₁₆ through 09₁₆ data.

7 Diagnostic service definition for ISO 9141-2, ISO 14230-4, and SAE J1850

7.1 Service 01₁₆ — Request current powertrain diagnostic data

7.1.1 Functional description

The purpose of this service is to allow access to current emission-related data values, including analogue inputs and outputs, digital inputs and outputs, and system status information. The request for information includes parameter identification (PID) value that indicates to the on-board system the specific information requested. PID specifications, scaling information, and display formats are included in SAE J1979-DA.

The ECU(s) shall respond to this message by transmitting the requested data value last determined by the system. All data values returned for sensor readings will be actual readings, not default or substitute values used by the system because of a fault with that sensor.

Not all PIDs are applicable or supported by all systems. PID 00₁₆ is a bit-encoded PID that indicates, for each ECU, which PIDs that ECU supports. PID 00₁₆ shall be supported by all ECUs that respond to a Service 01₁₆ request because the external test equipment that conforms to SAE J1978 uses the presence of a response message by the vehicle to this request message to determine which protocol is supported for diagnostic communications. SAE J1979-DA defines how to encode supported PIDs.

IMPORTANT — All emissions-related OBD ECUs which support at least one of the services defined in this part of ISO 15031 shall support Service 01₁₆ and PID 00₁₆. Service 01₁₆ with PID 00₁₆ is defined as the universal “initialization/keep alive/ping” message for all emissions-related OBD ECUs.

7.1.2 Message data bytes

7.1.2.1 Request current powertrain diagnostic data request message definition (read-supported PIDs)

Table 20 — Request current powertrain diagnostic data request message (read-supported PIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data request SID	M	01 ₁₆	SIDRQ
#2	PID (see SAE J1979-DA)	M	XX ₁₆	PID

7.1.2.2 Request current powertrain diagnostic data response message definition (report supported PIDs)

Table 21 — Request current powertrain diagnostic data response message (report supported PIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	M	41 ₁₆	SIDPR
#2	data record of supported PID = [supported PID data A, data B, data C, data D]	M	XX ₁₆	PIDREC_ PID
#3		M	XX ₁₆	DATA_A
#4		M	XX ₁₆	DATA_B
#5		M	XX ₁₆	DATA_C
#6		M	XX ₁₆	DATA_D

7.1.2.3 Request current powertrain diagnostic data request message definition (read PID value)

Table 22 — Request current powertrain diagnostic data request message (read PID value)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data request SID	M	01	SIDRQ
#2	PID (see SAE J1979-DA)	M/C ^a	XX ₁₆	PID

^a C = Conditional — PID value is one of the supported PIDs of previous response message.

7.1.2.4 Request current powertrain diagnostic data response message definition (report PID value)

Table 23 — Request current powertrain diagnostic data response message (report PID value)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	M	41 ₁₆	SIDPR
#2	data record of 1 st supported PID = [PID data A, data B, data C, data D]	M	XX ₁₆	PIDREC_ PID
#3		M	XX ₁₆	DATA_A
#4		C ^a	XX ₁₆	DATA_B
#5		C	XX ₁₆	DATA_C
#6		C	XX ₁₆	DATA_D

^a C = Conditional — data B - D depend on selected PID value.

The PID, which is included in the request message, may be supported by all emission-related ECUs, which shall comply with this specification. Therefore, multiple response messages are sent by the vehicle ECUs.

7.1.3 Parameter definition

7.1.3.1 PIDs supported

SAE J1979-DA specifies the interpretation of the data record of supported PIDs.

7.1.3.2 PID and data byte descriptions

SAE J1979-DA specifies standardized emission-related parameters.

7.1.4 Message example

The example below shows how the “Request current powertrain diagnostic data” service shall be implemented.

7.1.4.1 Step #1: Request supported PIDs from vehicle

The external test equipment requests supported PIDs (PID = 00₁₆, 20₁₆) from the vehicle. Refer to SAE J1979-DA to interpret the data bytes in the response messages.

Table 24 — Request current powertrain diagnostic data request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data request SID	01 ₁₆	SIDRQ
#2	PID used to determine PID support for PIDs 01 ₁₆ - 20 ₁₆	00 ₁₆	PID

Table 25 — Request current powertrain diagnostic data response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	41 ₁₆	SIDPR
#2	PID requested	00 ₁₆	PID
#3	Data byte A, representing support for PIDs 01 ₁₆ , 03 ₁₆ - 08 ₁₆	10111111 ₂ = BF ₁₆	DATA_A
#4	Data byte B, representing support for PIDs 09 ₁₆ , 0B ₁₆ - 10 ₁₆	10111111 ₂ = BF ₁₆	DATA_B
#5	Data byte C, representing support for PIDs 11 ₁₆ , 13 ₁₆ , 15 ₁₆	10101000 ₂ = A8 ₁₆	DATA_C
#6	Data byte D, representing support for PIDs 19 ₁₆ , 1C ₁₆ , 20 ₁₆	10010001 ₂ = 91 ₁₆	DATA_D

Table 26 — Request current powertrain diagnostic data response message

Message Direction:	ECU#2 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	41 ₁₆	SIDPR
#2	PID requested	00 ₁₆	PID
#3	Data byte A, representing support for PID 01 ₁₆	10000000b = 80 ₁₆	DATA_A
#4	Data byte B, representing support for PID 0D ₁₆	00001000b = 08 ₁₆	DATA_B
#5	Data byte C, representing no support for PIDs 11 ₁₆ - 18 ₁₆	00000000b = 00 ₁₆	DATA_C
#6	Data byte D, representing no support for PIDs 19 ₁₆ - 20 ₁₆	00000000b = 00 ₁₆	DATA_D

Table 27 — Request current powertrain diagnostic data request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data request SID	01 ₁₆	SIDRQ
#2	PID requested	20 ₁₆	PID

Table 28 — Request current powertrain diagnostic data response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	41 ₁₆	SIDPR
#2	PID requested	20 ₁₆	PID
#3	Data byte A, representing support for PID 21 ₁₆	10000000b = 80 ₁₆	DATA_A
#4	Data byte B, representing no support for PIDs 29 ₁₆ – 30 ₁₆	00000000b = 00 ₁₆	DATA_B
#5	Data byte C, representing no support for PIDs 31 ₁₆ – 38 ₁₆	00000000b = 00 ₁₆	DATA_C
#6	Data byte D, representing no support for PIDs 39 ₁₆ – 40 ₁₆	00000000b = 00 ₁₆	DATA_D

NOTE ECU#2 does not send a response message because it indicated with the previous response message that it does not support PID 20₁₆.

Now the external test equipment creates an internal list of supported PIDs for each ECU. The ECU#1 (ECM) supports the following PIDs: 01₁₆, 03₁₆, 09₁₆, 0B₁₆ – 11₁₆, 13₁₆, 15₁₆, 19₁₆, 1C₁₆, 20₁₆, 21₁₆. The ECU#2 (TCM) supports the PIDs 01₁₆ and 0D₁₆.

7.1.4.2 Step #2: Request PID from vehicle

The external test equipment requests the following PID from the vehicle:

- PID 01₁₆: Number of emission-related powertrain DTCs and MIL status, PID is supported by ECU#1 (ECM) and ECU#2 (TCM)

Table 29 — Request current powertrain diagnostic data request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data request SID	01 ₁₆	SIDRQ
#2	PID: Number of emission-related powertrain DTCs and MIL status	01 ₁₆	PID

Table 30 — Request current powertrain diagnostic data response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	41 ₁₆	SIDPR
#2	PID: Number of emission-related powertrain DTCs and MIL status	01 ₁₆	PID
#3	MIL: ON; Number of emission-related powertrain DTCs: 01 ₁₆	81 ₁₆	DATA_A
#4	Misfire -, Fuel system -, Comprehensive monitoring	07 ₁₆	DATA_B

Table 30 (continued)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#5	Catalyst -, Heated catalyst -, ..., monitoring supported	EF ₁₆	DATA_C
#6	Catalyst -, Heated catalyst -, ..., monitoring test complete/not complete	63 ₁₆	DATA_D

Table 31 — Request current powertrain diagnostic data response message

Message Direction:		ECU#2 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	41 ₁₆	SIDPR
#2	PID: Number of emission-related powertrain DTCs and MIL status	01 ₁₆	PID
#3	MIL: OFF; Number of emission-related powertrain DTCs: 01 ₁₆	01 ₁₆	DATA_A
#4	Comprehensive monitoring: supported, test complete	04 ₁₆	DATA_B
#5	Catalyst -, Heated catalyst -, ..., monitoring supported	00 ₁₆	DATA_C
#6	Catalyst -, Heated catalyst -, ..., monitoring test complete/not complete	00 ₁₆	DATA_D

The ECU#1 (ECM) reports MIL commanded on, one stored DTC, all monitors as supported, catalyst, heated catalyst, oxygen sensor and oxygen sensor heater as not completed, and all other monitors as completed.

The ECU#2 (TCM) reports MIL commanded off, one stored DTC, comprehensive components monitor as supported and complete, and all other monitors as not supported.

The external test equipment requests the following PID from the vehicle:

— PID 19₁₆: Bank 2 - Sensor 2, PID is supported by ECU#1 (ECM).

Table 32 — Request current powertrain diagnostic data request message

Message Direction:		External test equipment → All ECUs	
Message Type:		Request	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data request SID	01 ₁₆	SIDRQ
#2	PID: Oxygen Sensor Output Voltage (B2 - S2) Short-term Fuel Trim (B2 - S2)	19 ₁₆	PID

Table 33 — Request current powertrain diagnostic data response message

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	41 ₁₆	SIDPR
#2	PID: Oxygen Sensor Output Voltage (B2 - S2) Short-term Fuel Trim (B2 - S2)	19 ₁₆	PID
#3	Oxygen Sensor Output Voltage (B2 - S2): 0,8 Volt	A0 ₁₆	DATA_A
#4	Short-term Fuel Trim (B2 - S2): 93,7 %	78 ₁₆	DATA_B

NOTE ECU#2 does not support PID 19₁₆ and therefore does not send a response message.

7.2 Service 02₁₆ — Request powertrain freeze frame data

7.2.1 Functional description

The purpose of this service is to allow access to emission-related data values in a freeze frame. This allows expansion to meet manufacturer-specific requirements not necessarily related to the required freeze frame and not necessarily containing the same data values as the required freeze frame. The request message includes a parameter identification (PID) value that indicates to the on-board system the specific information requested. PID specifications, scaling information, and display formats for the freeze frame are included in SAE J1979-DA.

The ECU(s) shall respond to this message by transmitting the requested data value stored by the system. All data values returned for sensor readings will be actual stored readings, not default or substitute values used by the system because of a fault with that sensor.

Not all PIDs are applicable or supported by all systems. PID 00₁₆ is a bit-encoded PID that indicates, for each ECU, which PIDs that ECU supports. Therefore, PID 00₁₆ shall be supported by all ECUs that respond to a Service 02₁₆ request as specified, even if the ECU does not have a freeze frame stored at the time of the request.

SAE J1979-DA defines how to encode supported PIDs.

PID 02₁₆ indicates the DTC that caused the freeze frame data to be stored. If freeze frame data are not stored in the ECU, the system shall report 0000₁₆ as the DTC. Any data reported when the stored DTC is 0000₁₆ may not be valid.

The frame number byte shall indicate 00₁₆ for the mandated freeze frame data. Manufacturers may optionally save additional freeze frames and use this service to obtain that data by specifying the freeze frame number in the request message. If a manufacturer uses these additional freeze frames, they will be stored under conditions specified by the manufacturer and contain data specified by the manufacturer.

7.2.2 Message data bytes

7.2.2.1 Request powertrain freeze frame data request message definition (read-supported PIDs)

Table 34 — Request powertrain freeze frame data request message (read-supported PIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request powertrain freeze frame data request SID	M	02 ₁₆	SIDRQ
#2	PID (see SAE J1979-DA)	M	XX ₁₆	PID
#3	frame #	M	XX ₁₆	FRNO

7.2.2.2 Request powertrain freeze frame data response message definition (report supported PIDs)

Table 35 — Request powertrain freeze frame data response message (report supported PIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request powertrain freeze frame data response SID	M	42 ₁₆	SIDPR
#2	PID	M	XX ₁₆	PID
#3	frame #	M	XX ₁₆	FRNO
#4	data record of supported PIDs = [Data A: supported PIDs,	M	XX ₁₆	DATA_REC_ DATA_A
#5	Data B: supported PIDs,	M	XX ₁₆	DATA_B
#6	Data C: supported PIDs,	M	XX ₁₆	DATA_C
#7	Data D: supported PIDs]	M	XX ₁₆	DATA_D

7.2.2.3 Request powertrain freeze frame data request message definition (read freeze frame PID value)

Table 36 — Request powertrain freeze frame data request message (read freeze frame PID value)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data request SID	M	02 ₁₆	SIDRQ
#2	PID (see SAE J1979-DA)	M/C ^a	XX ₁₆	PID
#3	frame #	M	XX ₁₆	FRNO

^a C = Conditional. PID value shall be one of the supported PIDs of previous response message.

7.2.2.4 Request powertrain freeze frame data response message definition (report freeze frame PID value)

Table 37 — Request powertrain freeze frame data response message (report freeze frame PID value)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request powertrain freeze frame data response SID	M	42 ₁₆	SIDPR
#2	PID	M	XX ₁₆	PID
#3	frame #	M	XX ₁₆	FRNO
#4	data record = [Data A, Data B, Data C, Data D]	M	XX ₁₆	DATA_A
#5		C ^a	XX ₁₆	DATA_B
#6		C	XX ₁₆	DATA_C
#7		C	XX ₁₆	DATA_D

^a C = Conditional. Data B - D depend on selected PID value.

7.2.3 Parameter definition

7.2.3.1 PIDs supported

SAE J1979-DA specifies the interpretation of the data record of supported PIDs.

7.2.3.2 PID and data byte descriptions

SAE J1979-DA specifies standardized emission-related parameters.

7.2.3.3 Frame # description

The frame number identifies the freeze frame, which includes emission-related data values in case an emission-related DTC is detected by the ECU.

7.2.4 Message example

7.2.4.1 General

The example below shows how the “Request powertrain freeze frame data” service shall be implemented.

7.2.4.2 Step #1: Request supported powertrain freeze frame PIDs from vehicle

The external test equipment requests all supported powertrain freeze frame PIDs of freeze frame 00₁₆ from the vehicle. Refer to the example of Service 01₁₆ on how to request supported PIDs.

As a result of the supported PID request, the external test equipment creates an internal list of supported PIDs for each ECU. ECU#1 (ECM) supports the following PIDs: 02₁₆ – 09₁₆, 0B₁₆ – 0E₁₆. ECU#2 (TCM) does not support any PIDs for this service.

7.2.4.3 Step #2: Request PID 02₁₆ “DTC which caused freeze frame to be stored” from vehicle

7.2.4.3.1 Case #1: Freeze frame data are stored in ECU#1

Now the external test equipment requests PID 02₁₆ of freeze frame 00₁₆ from the vehicle. Since the ECU#2 (TCM) does not store a freeze frame data record, only the ECU#1 (ECM) will send a response message.

In this example, the freeze frame data are stored based on a DTC P0130 occurrence. The parameter value of PID 02₁₆ “DTC that caused required freeze frame data storage” is set to the DTC P0130.

Table 38 — Request powertrain freeze frame data request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request powertrain freeze frame data request SID	02 ₁₆	SIDRQ
#2	PID: DTC that caused required freeze frame data storage	02 ₁₆	PID
#3	Frame #	00 ₁₆	FRNO

Table 39 — Request powertrain freeze frame data response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request powertrain freeze frame data response SID	42 ₁₆	SIDPR
#2	PID: DTC that caused required freeze frame data storage	02 ₁₆	PID
#3	Frame #: 00	00 ₁₆	FRNO
#4	DTC High Byte of P0130	01 ₁₆	DATA_A
#5	DTC Low Byte of P0130	30 ₁₆	DATA_B

7.2.4.3.2 Case #2: No freeze frame data are stored in any ECU

If no freeze frame data are stored, then the ECU(s) which support(s) this service but does (do) not have any freeze frame stored shall send a response message with the parameter values of DATA_A and DATA_B of PID 02₁₆ “DTC that caused required freeze frame data storage” set to 0000₁₆.

Table 40 — Request powertrain freeze frame data request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request powertrain freeze frame data request SID	02 ₁₆	SIDRQ
#2	PID: DTC that caused required freeze frame data storage	02 ₁₆	PID
#3	Frame #: 00	00 ₁₆	FRNO

**Table 41 — Request powertrain freeze frame data response message
(Service 02₁₆, PID 02₁₆, Frame # 00₁₆)**

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request powertrain freeze frame data response SID	42 ₁₆	SIDPR
#2	PID: DTC that caused required freeze frame data storage	02 ₁₆	PID
#3	Frame #: 00	00 ₁₆	FRNO
#4	DTC High Byte: zero value indicates that no freeze frame is stored	00 ₁₆	DATA_A
#5	DTC Low Byte: zero value indicates that no freeze frame is stored	00 ₁₆	DATA_B

NOTE The DTC value reported is 0000₁₆, therefore no valid freeze frame data are stored for supported PIDs.

7.3 Service 03₁₆ — Request emission-related diagnostic trouble codes

7.3.1 Functional description

The purpose of this service is to enable the external test equipment to obtain “confirmed” emission-related DTCs. This shall be a two-step process for the external test equipment:

- Step 1: Send a Service 01₁₆, PID 01₁₆ request to get the number of emission-related DTCs from all ECUs that have this available. Each ECU that has a DTC(s) stored will respond with a message that includes the number of stored codes to be reported. If an ECU that is capable of storing emission-related DTCs does not have stored DTCs, then that ECU shall respond with a message indicating zero (0) DTCs are stored;
- Step 2: Send a Service 03₁₆ request for all emission-related DTCs. Each ECU that has DTCs will respond with one or more messages, each containing up to three (3) DTCs. If no emission-related DTCs are stored in the ECU, then the ECU may not respond to this request.

If additional DTCs are set between the time that the number of DTCs is reported by an ECU and the DTCs are reported by an ECU, then the number of DTCs reported could exceed the number expected by the external test equipment. In this case, the external test equipment shall repeat this cycle until the number of DTCs reported equals the number expected based on the Service 01₁₆, PID 01₁₆ response.

DTCs are transmitted in two (2) bytes of information for each DTC. The first two (2) bits (high order) of the first (1) byte for each DTC indicate whether the DTC is a powertrain, chassis, body, or network DTC (refer to SAE J2012 for additional interpretation of this structure). The second two (2) bits shall indicate the first (1) digit of the DTC (0 through 3). The second (2) nibble of the first (1) byte and the entire second (2) byte are the next three (3) hexadecimal characters of the actual DTC reported hexadecimal. A powertrain DTC transmitted as 0143₁₆ shall be displayed as P0143 (see [Figure 17](#)).

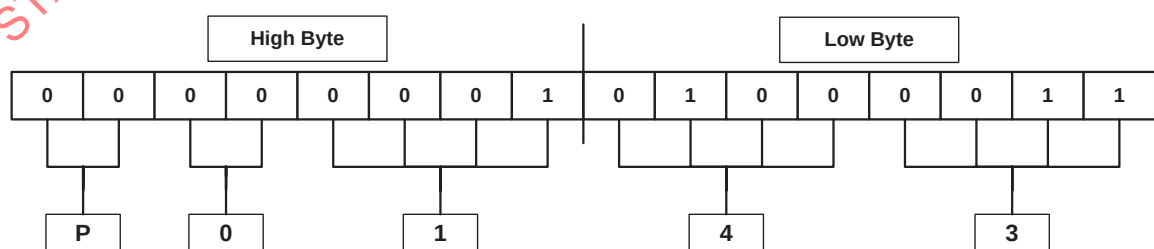


Figure 17 — Diagnostic trouble code encoding example DTC P0143

If fewer than three (3) DTCs are reported, the response message used to report DTCs shall have their unused bytes set to zero (0) to maintain the required fixed message length for all messages. If there

are no DTCs to report, a response message is allowed but not required for SAE J1850 and ISO 9141-2 interfaces. For ISO 14230-4 interfaces, the ECU will respond with a report containing no DTCs (DTC#1, DTC#2, and DTC#3 shall be all set to 00₁₆).

7.3.2 Message data bytes

7.3.2.1 Request current powertrain diagnostic data request message definition (PID 01₁₆)

Table 42 — Request current powertrain diagnostic data request message (PID 01₁₆)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data request SID	M	01 ₁₆	SIDRQ
#2	PID {Number of emission-related DTCs and MIL status}	M	01 ₁₆	PID

7.3.2.2 Request current powertrain diagnostic data response message definition (PID 01₁₆)

Table 43 — Request current powertrain diagnostic data response message (PID 01₁₆)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	M	41 ₁₆	SIDPR
#2	PID {number of emission-related DTCs and MIL status}	M	01 ₁₆	PID
#3	data record = [Data A Data B, Data C, Data D]	M	XX ₁₆	DATA_REC_ DATA_A
#4		M	XX ₁₆	DATA_B
#5		M	XX ₁₆	DATA_C
#6		M	XX ₁₆	DATA_D

7.3.2.3 Request emission-related DTC request message definition

Table 44 — Request emission-related DTC request message

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request emission-related DTC request SID	M	03 ₁₆	SIDRQ

7.3.2.4 Request emission-related DTC response message definition

Table 45 — Request emission-related DTC response message

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request emission-related DTC response SID	M	43 ₁₆	SIDPR
#2	DTC#1 (High Byte)	M/C ^a	XX ₁₆	DTC1HI
#3	DTC#1 (Low Byte)	M/C	XX ₁₆	DTC1LO
#4	DTC#2 (High Byte)	M/C	XX ₁₆	DTC2HI
#5	DTC#2 (Low Byte)	M/C	XX ₁₆	DTC2LO
#6	DTC#3 (High Byte)	M/C	XX ₁₆	DTC3HI
#7	DTC#3 (Low Byte)	M/C	XX ₁₆	DTC3LO

^a C = Conditional. DTC#1, DTC#2, and DTC#3 are always present. If no valid DTC number is included, the DTC values shall contain 00₁₆.

7.3.3 Parameter definition

This service does not support any parameters.

7.3.4 Message example

The example below shows how the “Request emission-related DTCs” service shall be implemented. The external test equipment requests emission-related DTCs from the vehicle. The vehicle supports the ISO 14230-4 protocol. The ECU#1 (ECM) has six (6) DTCs stored, the ECU#2 (TCM) has one (1) DTC stored, and the ECU#3 (ABS/Traction Control) has no DTC stored.

- ECU#1 (ECM): P0143, P0196, P0234, P02CD, P0357, P0A24
- ECU#2 (TCM): P0443
- ECU#3 (ABS/Traction Control): no DTC stored (response message is optional for ISO 9141-2 and SAE J1850)

The external test equipment requests the following PID from the vehicle:

- PID 01₁₆: Number of emission-related DTCs and MIL status, PID is supported by ECU#1 (ECM), ECU#2 (TCM), and ECU#3 (ABS/Traction Control)

Table 46 — Request current powertrain diagnostic data request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data request SID	01 ₁₆	SIDRQ
#2	PID: Number of emission-related DTCs and MIL status	01 ₁₆	PID

Table 47 — Request current powertrain diagnostic data response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	41 ₁₆	SIDPR
#2	PID: Number of emission-related DTCs and MIL status	01 ₁₆	PID
#3	MIL: ON; Number of emission-related DTCs: 06 ₁₆	86 ₁₆	DATA_A
#4	Misfire -, Fuel system -, Comprehensive monitoring	33 ₁₆	DATA_B
#5	Catalyst -, Heated catalyst -, ..., monitoring supported	FF ₁₆	DATA_C
#6	Catalyst -, Heated catalyst -, ..., monitoring test complete/not complete	63 ₁₆	DATA_D

Table 48 — Request current powertrain diagnostic data response message

Message Direction:	ECU#2 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	41 ₁₆	SIDPR
#2	PID: Number of emission-related DTCs and MIL status	01 ₁₆	PID
#3	MIL: OFF; Number of emission-related DTCs: 01 ₁₆	01 ₁₆	DATA_A

Table 48 (continued)

Message Direction:	ECU#2 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#4	Comprehensive monitoring: supported, test complete	44 ₁₆	DATA_B
#5	Catalyst -, Heated catalyst -, ..., monitoring supported	00 ₁₆	DATA_C
#6	Catalyst -, Heated catalyst -, ..., monitoring test complete/not complete	00 ₁₆	DATA_D

Table 49 — Request current powertrain diagnostic data response message

Message Direction:	ECU#3 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	41 ₁₆	SIDPR
#2	PID: Number of emission-related DTCs and MIL status	01 ₁₆	PID
#3	MIL: OFF; Number of emission-related DTCs: 00 ₁₆	00 ₁₆	DATA_A
#4	Comprehensive monitoring: supported, test complete	00 ₁₆	DATA_B
#5	Catalyst -, Heated catalyst -, ..., monitoring supported	00 ₁₆	DATA_C
#6	Catalyst -, Heated catalyst -, ..., monitoring test complete/not complete	00 ₁₆	DATA_D

The external test equipment requests emission-related DTCs because ECU#1 has six (6) DTCs stored, ECU#2 has one (1) DTC stored, and ECU#3 has no (0) DTC stored.

Table 50 — Request emission-related diagnostic trouble codes request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request emission-related DTC request SID	03 ₁₆	SIDRQ

Table 51 — Request emission-related diagnostic trouble codes response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request emission-related DTC response SID	43 ₁₆	SIDPR
#2	DTC#1 High Byte of P0143	01 ₁₆	DTC1HI
#3	DTC#1 Low Byte of P0143	43 ₁₆	DTC1LO
#4	DTC#2 High Byte of P0196	01 ₁₆	DTC2HI
#5	DTC#2 Low Byte of P0196	96 ₁₆	DTC2LO
#6	DTC#3 High Byte of P0234	02 ₁₆	DTC3HI
#7	DTC#3 Low Byte of P0234	34 ₁₆	DTC3LO

Table 52 — Request emission-related diagnostic trouble codes response message

Message Direction:	ECU#2 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request emission-related DTC response SID	43 ₁₆	SIDPR
#2	DTC#1 High Byte of P0443	04 ₁₆	DTC1HI
#3	DTC#1 Low Byte of P0443	43 ₁₆	DTC1LO
#4	DTC#2 High Byte: 00 ₁₆	00 ₁₆	DTC2HI
#5	DTC#2 Low Byte: 00 ₁₆	00 ₁₆	DTC2LO
#6	DTC#3 High Byte: 00 ₁₆	00 ₁₆	DTC3HI
#7	DTC#3 Low Byte: 00 ₁₆	00 ₁₆	DTC3LO

Table 53 — Request emission-related diagnostic trouble codes response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request emission-related DTC response SID	43 ₁₆	SIDPR
#2	DTC#1 High Byte of P02CD	02 ₁₆	DTC1HI
#3	DTC#1 Low Byte of P02CD	CD ₁₆	DTC1LO
#4	DTC#2 High Byte of P0357	03 ₁₆	DTC2HI
#5	DTC#2 Low Byte of P0357	57 ₁₆	DTC2LO
#6	DTC#3 High Byte of P0A24	0A ₁₆	DTC3HI
#7	DTC#3 Low Byte of P0A24	24 ₁₆	DTC3LO

Table 54 — Request emission-related diagnostic trouble codes response message

Message Direction:	ECU#3 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request emission-related DTC response SID	43 ₁₆	SIDPR
#2	DTC#1 High Byte: P0000	00 ₁₆	DTC1HI
#3	DTC#1 Low Byte: P0000	00 ₁₆	DTC1LO
#4	DTC#2 High Byte: P0000	00 ₁₆	DTC2HI
#5	DTC#2 Low Byte: P0000	00 ₁₆	DTC2LO
#6	DTC#3 High Byte: P0000	00 ₁₆	DTC3HI
#7	DTC#3 Low Byte: P0000	00 ₁₆	DTC3LO

For ISO 9141-2 and SAE J1850 protocols, the ECU#3 response message is optional because there is no DTC stored. If ISO 14230-4 protocol is supported by the vehicle, ECU#3 shall send a positive response message with no DTCs.

7.4 Service 04₁₆ — Clear/reset emission-related diagnostic information

7.4.1 Functional description

The purpose of this service is to provide a means for the external test equipment to command ECUs to clear all emission-related diagnostic information. This includes the following:

- MIL and number of diagnostic trouble codes (can be read with Service 01₁₆, PID 01₁₆);
- clear the I/M (inspection/maintenance) readiness bits (can be read with Service 01₁₆, PID 01₁₆);
- confirmed diagnostic trouble codes (can be read with Service 03₁₆);
- pending diagnostic trouble codes (can be read with Service 07₁₆);
- diagnostic trouble code for freeze frame data (can be read with Service 02₁₆, PID 02₁₆);
- freeze frame data (can be read with Service 02₁₆);
- oxygen sensor test data (can be read with Service 05₁₆);
- status of system monitoring tests (can be read with Service 01₁₆, PID 41₁₆);
- on-board monitoring test results (can be read with Service 06₁₆);
- distance travelled while MIL is activated (can be read with Service 01₁₆, PID 21₁₆);
- number of warm-ups since DTCs cleared (can be read with Service 01₁₆, PID 30₁₆);
- distance travelled since DTCs cleared (can be read with Service 01₁₆, PID 31₁₆);
- engine run time while MIL is activated (can be read with Service 01₁₆, PID 4D₁₆);
- engine run time time since DTCs cleared (can be read with Service 01₁₆, PID 4E₁₆).

Other manufacturer-specific “clearing/resetting” actions may also occur in response to this request message. For safety and/or technical design reasons, some ECUs may not respond to this service under all conditions. All ECUs shall respond to this service request with the ignition ON and with the engine not running. ECUs that cannot perform this operation under other conditions, such as with the engine running, will ignore the request with SAE J1850 and ISO 9141-2 interfaces or will send a negative response message with ISO 14230-4 interfaces, as described in ISO 14230-4.

7.4.2 Message data bytes

7.4.2.1 Clear/reset emission-related diagnostic information request message definition

Table 55 — Clear/Reset emission-related diagnostic information request message

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Clear/reset emission-related diagnostic information request SID	M	04	SIDRQ

7.4.2.2 Clear/reset emission-related diagnostic information response message definition

Table 56 — Clear/Reset emission-related diagnostic information response message

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Clear/reset emission-related diagnostic information response SID	M	44	SIDPR

7.4.3 Parameter definition

This service does not support any parameters.

7.4.4 Message example

This example is based on the example of Service 03₁₆ as described in 7.3.4. The external test equipment commands the vehicle to clear/reset emission-related diagnostic information with the engine running. The ECU#1 (ECM) and ECU#2 (TCM) will send a response message to confirm that all emission-related diagnostic information is cleared. For ISO 9141-2 and SAE J1850 protocols, ECU#3 (ABS/Traction control) will not send a response message because the conditions to perform the requested action are not met. For ISO 14230-4 protocol, ECU#3 will send a negative response message with NRC 22₁₆ - conditionsNotCorrect. In such case the external test equipment shall post a message with "Stop engine and turn ON ignition" and then repeat the Service 04₁₆ command and check for response messages from all emission-related ECUs installed in the vehicle.

Table 57 — Clear/reset emission-related diagnostic information request message

Message Direction:		External test equipment → All ECUs	
Message Type:		Request	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Clear/reset emission-related diagnostic information request SID	04 ₁₆	SIDRQ

Table 58 — Clear/reset emission-related diagnostic information response message

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Clear/reset emission-related diagnostic information response SID	44 ₁₆	SIDPR

Table 59 — Clear/reset emission-related diagnostic information response message

Message Direction:		ECU#2 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Clear/reset emission-related diagnostic information response SID	44 ₁₆	SIDPR

Table 60 — Negative response message

Message Direction:		ECU#3 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Negative Response Service Identifier	7F ₁₆	SIDNR
#2	Clear/reset emission-related diagnostic information request SID	04 ₁₆	SIDRQ
#3	Negative Response Code: conditionsNotCorrect	22 ₁₆	NR_CNC

For ISO 14230-4 protocol, the conditions of ECU#3 to clear/reset emissions-related diagnostic information is not met. Therefore, ECU#3 sends a negative response message with NRC "conditionsNotCorrect". The external test equipment shall repeat the request after the conditions of the vehicle have changed by the user. Now, all ECUs shall send a positive response message to the external test equipment to confirm successful operation of the clear/reset emission-related diagnostic information service.

7.5 Service 05₁₆ — Request oxygen sensor monitoring test results

7.5.1 Functional description

The purpose of this service is to allow access to the on-board oxygen sensor monitoring test results. The same information may be obtained by the use of Service 06₁₆.

The request message for test results includes a Test ID value that indicates the information requested. Test value definitions, scaling information, and display formats are included in SAE J1979-DA.

Many methods may be used to calculate test results for this service by different manufacturers. If data values are to be reported using these messages that are different from those specified, ranges of test values have been assigned that can be used which have standard units of measure. The external test equipment can convert these values and display them in the standard units.

The ECU shall respond to this message by transmitting the requested test data last determined by the system. The latest test results are to be retained, even over multiple ignition OFF cycles, until replaced by more recent test results. Test results are requested by Test ID.

Not all test values are applicable or supported by all vehicles. An optional feature of this service is for the ECU to indicate which Test IDs are supported. Test ID 00₁₆ is a bit-encoded value that indicates support for Test IDs from 01₁₆ to 20₁₆. Test ID 20₁₆ indicates support for Test IDs 21₁₆ through 40₁₆, etc. This is the same concept as used for PID support in Services 01₁₆ and 02₁₆ as specified in SAE J1979-DA. If Test ID 00₁₆ is not supported, then the ECU does not use this feature to indicate Test ID support.

7.5.2 Message data bytes

7.5.2.1 Request oxygen sensor monitoring test results request message definition (read-supported TIDs)

Table 61 — Request oxygen sensor monitoring test results request message (read-supported TIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request oxygen sensor monitoring test results request SID	M	05 ₁₆	SIDRQ
#2	Test ID (see SAE J1979-DA)	M	XX ₁₆	TID
#3	O2 Sensor #	M	XX ₁₆	O2SNO

Table 62 — Request oxygen sensor monitoring test results response message (report supported TIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request oxygen sensor monitoring test results response SID	M	45 ₁₆	SIDPR
#2	Test ID	M	XX ₁₆	TID
#3	O2 Sensor #	M	XX ₁₆	O2SNO
#4	data record of supported test IDs = [Data A: supported Test IDs, Data B: supported Test IDs, Data C: supported Test IDs, Data D: supported Test IDs]	M	XX ₁₆	DATA_A
#5		M	XX ₁₆	DATA_B
#6		M	XX ₁₆	DATA_C
#7		M	XX ₁₆	DATA_D

7.5.2.2 Request oxygen sensor monitoring test results request message definition (read TID values)

Table 63 — Request oxygen sensor monitoring test results request message (read TID values)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request oxygen sensor monitoring test results request SID	M	05 ₁₆	SIDRQ
#2	Test ID	M	XX ₁₆	TID
#3	O2 Sensor #	M	XX ₁₆	O2SNO

7.5.2.3 Request oxygen sensor monitoring test results response message definition (report TID values)

Table 64 — Request oxygen sensor monitoring test results response message (report TID values)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request oxygen sensor monitoring test results response SID	M	45 ₁₆	SIDPR
#2	Test ID	M	XX ₁₆	TID
#3	O2 Sensor #	M	XX ₁₆	O2SNO
#4	data record of Test ID = [Test Value	M	XX ₁₆	TESTVAL
#5	Minimum Limit	C ^a	XX ₁₆	MINLIMIT
#6	Maximum Limit]	C	XX ₁₆	MAXLIMIT

^a C = Conditional. If the supported test ID is a constant (01₁₆ – 04₁₆), the parameters Minimum and Maximum Limit shall not be included.

7.5.3 Parameter definition

7.5.3.1 Test IDs supported

The Test IDs supported is the same concept as used for PID support in Services 01₁₆ and 02₁₆ as specified in SAE J1979-DA.

7.5.3.2 Test ID and data byte descriptions

SAE J1979-DA specifies standardized and vehicle manufacturer specific Test ID ranges.

7.5.3.3 Oxygen sensor location definition

The oxygen sensor location value used in the request message shall indicate the oxygen sensor location as defined by PID 13₁₆ or 1D₁₆ as specified in SAE J1979-DA.

Table 65 — Oxygen sensor location description

Oxygen sensor location (one, and only one bit can be set to a 1)		
Bit	Sensor location ^a	Alternative sensor location ^b
0	Bank 1 - Sensor 1	Bank 1 - Sensor 1
1	Bank 1 - Sensor 2	Bank 1 - Sensor 2
2	Bank 1 - Sensor 3	Bank 2 - Sensor 1
3	Bank 1 - Sensor 4	Bank 2 - Sensor 2
4	Bank 2 - Sensor 1	Bank 3 - Sensor 1
5	Bank 2 - Sensor 2	Bank 3 - Sensor 2
6	Bank 2 - Sensor 3	Bank 4 - Sensor 1
7	Bank 2 - Sensor 4	Bank 4 - Sensor 2

^a If Service 01₁₆ PID 13₁₆ supported.

^b If Service 01₁₆ PID 1D₁₆ supported.

7.5.3.4 Test result description

Table 66 — Test result description

Hex	# of bytes	Description
00 ₁₆ – FF ₁₆	1	The test result parameter includes either a constant or a calculated value depending on the Test ID.


7.5.3.5 Minimum and maximum test limit description

The minimum and maximum test limit description shown in [Table 67](#) defines the test limit value which is either a minimum or a maximum value to which the test results are compared. The test limit is a one-byte unsigned numeric value (0 - 255).

Table 67 — Minimum and maximum test limit description

Test Limit	# of bytes	Description
Minimum	1	The minimum test limit (only for calculated test result) is the minimum value to which the test result is compared.
Maximum	1	The maximum test limit (only for calculated test result) is the maximum value to which the test result is compared.

For results of latest mandated on-board oxygen sensor monitoring test, see [Figure 18](#).

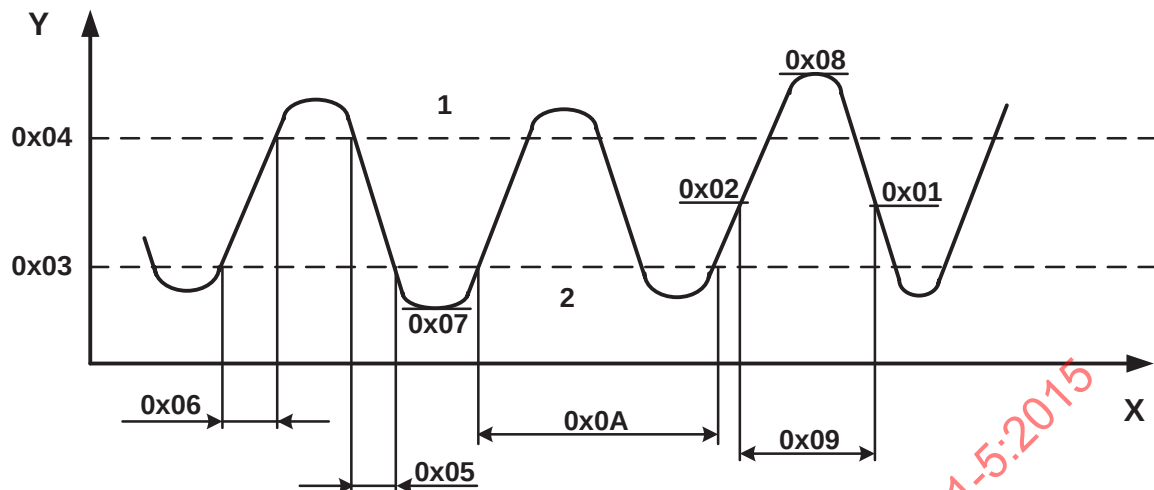**Key**

- 1 rich
- 2 lean

Figure 18 — Test ID value example**7.5.4 Message example**

The example below shows how the “Request oxygen sensor monitoring test results” service shall be implemented.

7.5.4.1 Step #1: Request oxygen sensor monitoring test results (request for supported Test IDs) from vehicle

The external test equipment requests all supported Test IDs from the vehicle. Refer to the example of Service 01₁₆ for how to request supported PIDs (same concept is used for supported TIDs). PID 13₁₆ is supported by ECU#1. This is important information for the external test equipment in order to identify the correct O2 sensor location.

As a result of the supported TID request, the external test equipment creates an internal list of supported TIDs for each ECU: The ECU#1 (ECM) supports Test IDs 01₁₆ - 06₁₆, 70₁₆, 71₁₆, and 81₁₆. The ECU#2 (TCM) does not support any Test IDs.

7.5.4.2 Step #2: Request oxygen sensor monitoring test results from vehicle

The external test equipment sends two (2) “Request oxygen sensor monitoring test results” request messages to the vehicle. The two (2) request messages include the following Test IDs:

- 1st request message: Test IDs 01₁₆;
- 2nd request message: Test IDs 05₁₆.

In general, the external test equipment should read the test status of Service 01₁₆ PID 01₁₆ prior to execution Service 05₁₆ with Test ID 01₁₆ and 05₁₆ to verify whether the tests are supported and completed. The test values reported may be invalid if the test is not completed.

Table 68 — Request oxygen sensor monitoring test results request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request oxygen sensor monitoring test results request SID	05 ₁₆	SIDRQ
#2	TID: Rich to lean sensor threshold voltage (constant)	01 ₁₆	TID
#3	O2 Sensor #: Bank 1 - Sensor 1	01 ₁₆	O2SNO

Table 69 — Request oxygen sensor monitoring test results response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request oxygen sensor monitoring test results response SID	45 ₁₆	SIDPR
#2	TID: Rich to lean sensor threshold voltage (constant)	01 ₁₆	TID
#3	O2 Sensor #: Bank 1 - Sensor 1	01 ₁₆	O2SNO
#4	Test Limit: 450 mV	5A ₁₆	TESTVAL

NOTE ECU#2 does not support any Test IDs and therefore does not send a response message.

Table 70 — Request oxygen sensor monitoring test results request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request oxygen sensor monitoring test results request SID	05 ₁₆	SIDRQ
#2	TID: Rich to lean sensor switch time (calculated)	05 ₁₆	TID
#3	O2 Sensor #: Bank 1 - Sensor 1	01 ₁₆	O2SNO

Table 71 — Request oxygen sensor monitoring test results response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request oxygen sensor monitoring test results response SID	45 ₁₆	SIDPR
#2	TID: Rich to lean sensor switch time (calculated)	05 ₁₆	TID
#3	O2 Sensor #: Bank 1 - Sensor 1	01 ₁₆	O2SNO
#4	Test Limit: 72 ms (milliseconds)	12 ₁₆	TESTVAL
#5	Minimum Limit: 0 ms	00 ₁₆	MINLIMIT
#6	Maximum Limit: 100 ms	19 ₁₆	MAXLIMIT

7.6 Service 06₁₆ — Request On-board monitoring test results for specific monitored systems

7.6.1 Functional description

The purpose of this service is to allow access to the results of On-Board Diagnostic monitoring tests for specific components/systems. Examples are catalyst monitoring and the evaporative system monitoring.

The vehicle manufacturer is responsible for assigning Test IDs and Component IDs for tests of different systems and components. The latest valid test results are to be retained, even over multiple ignition OFF cycles, until replaced by more recent test results. Test results are requested by Test ID. Test results are reported only for supported combinations of test limit type and component ID, and are reported as positive (unsigned) values. Only one test limit is included in a response message, but that limit could be either a minimum or a maximum limit. If both a minimum and maximum test limit are to be reported, then two (2) response messages will be transmitted, in any order. The most significant bit (MSB) of the “test limit type/component ID” byte will be used to indicate the test limit type.

A feature of this service is for the ECU to indicate which Test IDs are supported. Test ID 00₁₆ is a bit-encoded value that indicates support for Test IDs from 01₁₆ to 20₁₆. Test ID 20₁₆ indicates support for Test IDs 21₁₆ through 40₁₆, etc. This is the same concept as used for PID support in Services 01₁₆ and 02₁₆ as specified in SAE J1979-DA.

This service can be used as an alternative to Service 05₁₆ to report oxygen sensor test results.

A unique method shall be utilized for displaying data for monitors that have multiple tests. Many OBD monitors have multiple tests that are done in either a serial or parallel manner. If a monitor uses multiple Test ID/Component ID combinations that may not all complete at the same time, the following method shall be used to update the stored test results at the time of monitor completion.

After the monitor completes, update all Test ID/Component ID combinations (or “test results”) that were utilized by the monitor with appropriate passing or failing results. If a test result (or “Test ID/Component ID”) was not utilized during this monitoring event, set the Test Values and Minimum and Maximum Test Limits to their initial values (test not completed). Test results from the previously completed monitoring events shall not be mixed with test results from the current completed monitoring event.

In some cases, test results (or “Test ID/Component ID combinations”) will be displayed as being incomplete even though the monitor (as indicated by PID 41₁₆) was successfully completed and either passed or failed. In other cases, some Test IDs will show passing results while others will show failing results after the monitor (as indicated by PID 41₁₆) was successfully completed and failed. Note that OBD-II regulations prohibit a passing monitor from showing any failing test results. If an initial serial test indicates a failure and a subsequent re-test of the system indicates a passing result, the test that was utilized to make the passing determination should be displayed while the failing test that was utilized to make the initial determination should be reset to its initial values (test not completed).

As an example of a serial monitor, an evaporative system monitor can fail for a large evaporative system leak and never continue to test for small leaks or very small leaks. In this case, the Component ID for the large leak would show a failing result, while the small leak test and the very small leak test would show incomplete. As an example of the parallel monitor, a purge valve flow monitor can pass by having a large rich lambda shift, a large lean lambda shift, or a large engine rpm increase. If the purge valve is activated and a large rich lambda shift occurs, the Component ID for the rich lambda shift would show a passing result while the other two Component IDs would show incomplete. Since some Component IDs for a completed monitor will show incomplete, PID 41₁₆ shall be used to determine monitor completion status.

7.6.2 Message data bytes

7.6.2.1 Request on-board monitoring test results for specific monitored systems request message definition (read-supported TIDs)

Table 72 — Request on-board monitoring test results for specific monitored systems request message (read-supported TIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request on-board monitoring test results for specific monitored systems request SID	M	06 ₁₆	SIDRQ
#2	Test ID (see SAE J1979-DA)	M	XX ₁₆	TID

7.6.2.2 Request on-board monitoring test results for specific monitored systems response message definition (report supported TIDs)

Table 73 — Request on-board monitoring test results for specific monitored systems response message (report supported TIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request on-board monitoring test results for specific monitored systems response SID	M	46 ₁₆	SIDPR
#2	Test ID	M	XX ₁₆	TID
#3	Filler Byte	M	FF ₁₆	FB
#4	data record of supported Test IDs = [Data A: supported Test IDs, Data B: supported Test IDs, Data C: supported Test IDs, Data D: supported Test IDs]	M	XX ₁₆	DATA_REC_
#5		M	XX ₁₆	DATA_A
#6		M	XX ₁₆	DATA_B
#7		M	XX ₁₆	DATA_C

7.6.2.3 Request on-board monitoring test results for specific monitored systems request message definition (read test results)

Table 74 — Request on-board monitoring test results for specific monitored systems request message (read test results)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request on-board monitoring test results for specific monitored systems request SID	M	06 ₁₆	SIDRQ
#2	Test ID (request test results)	M	XX ₁₆	TID

7.6.2.4 Request on-board monitoring test results for Specific monitored systems response message definition (report test results)

Table 75 — Request on-board monitoring test results for specific monitored systems response message (report test results)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request on-board monitoring test results for specific monitored systems response SID	M	46 ₁₆	SIDPR
#2	Test ID (report test results)	M	XX ₁₆	TID
#3	Test Limit Type and Component ID	M	XX ₁₆	TLTCID
#4 #5 #6 #7	data record of supported Test IDs = [Test Value (High Byte) Test Value (Low Byte) Test Limit (High Byte) Test Limit (Low Byte)]	M M Ca C	XX ₁₆ XX ₁₆ XX ₁₆ XX ₁₆	TIDREC_ TVHI TVLO TLHI TLLO
	a C = Conditional. If Test Limit is either a Minimum or a Maximum Limit depends on the parameter Test Limit Type and Component ID value (bit 7).			

7.6.3 Parameter definition

7.6.3.1 Test IDs supported

The Test IDs supported is the same concept as used for PID support in Services 01₁₆ and 02₁₆ as specified in SAE J1979-DA.

7.6.3.2 Test ID and data byte descriptions

SAE J1979-DA specifies standardized and vehicle manufacturer-specific Test ID ranges, which are permitted to be supported in this service.

NOTE For ISO 9141-2, SAE J1850, and ISO 14230-4 protocols that SAE J1979-DA is recommended but not required. This is for backward compatibility and only applies to Test ID range 01₁₆ – 1F₁₆.

7.6.3.3 Test Limit Type and Component ID description

The Test Limit Type and Component ID is a one (1) byte parameter and are defined in [Table 76](#).

Table 76 — Test Limit Type and Component ID description

Parameter Name	Bit	Description
Component ID	0 - 6	Component ID - manufacturer specified - necessary when multiple components or systems are present on the vehicle and have the same definition of Test ID. If the same test is performed on more than one component, multiple test results shall be reported for that Test ID. For example, a test for bank 1 catalyst can be the same as a test for a bank 2 catalyst, or a test for a pre-catalyst oxygen sensor can be the same as a test for a post-catalyst oxygen sensor. In either case, a request for a single Test ID would result in two test results being reported with different Component IDs.
Test Limit Type	7	Most significant bit (MSB) indicates type of test limit, where 0 - test limit is maximum value - test fails if test value is greater than this value, and 1 - test limit is minimum value - test fails if test value is less than this value.

7.6.3.4 Test Result description

The Test Result represents the test result and is defined in [Table 77](#).

Table 77 — Test Result description

Parameter Name	# of Bytes	Description
Test Result	2 (High and Low Byte)	Test Result - this value shall be less than or equal to the test limit if MSB of Test Limit Type and Component ID byte is "0", and shall be greater than or equal to the test limit if MSB of Test Limit Type and Component ID byte is "1". The Test Value is a two-byte unsigned numeric value (0 – 65 535).

7.6.3.5 Test Limit description

The Test Limit is defined in [Table 78](#).

Table 78 — Test Limit description

Parameter Name	# of Bytes	Description
Test Limit	2 (High and Low Byte)	The Test Limit value is either a minimum or a maximum value to which the test results are compared. The Test Limit is a two-byte unsigned numeric value (0 – 65 535).

7.6.4 Message example

[Tables 79](#) to [81](#) below show how the "request on-board monitoring test results for specific monitored systems" service shall be implemented.

7.6.4.1 Step #1: Request on-board monitoring test results for specific monitored systems (request for supported Test IDs)

The external test equipment requests all supported Test IDs from the vehicle. Refer to the example of Service 01₁₆ for guidance on requesting supported PIDs (the same concept is used for supported TIDs).

As a result of the supported TID request, the external test equipment creates an internal list of supported TIDs for each ECU. ECU#1 (ECM) supports Test ID 02. ECU#2 (TCM) does not support any Test IDs.

7.6.4.2 Step #2: Request on-board monitoring test results for specific monitored systems

The external test equipment sends a "request on-board monitoring test results for specific monitored systems" request message with one (1) supported Test ID to the vehicle. The response messages indicate which Component IDs are supported. The request message includes the following Test ID:

Test ID 02₁₆ - Lean to rich sensor threshold voltage (constant), (supported Component IDs: 04₁₆, 16₁₆).

In general, the external test equipment should read the test status of Service 01₁₆ PID 01₁₆ prior to executing Service 06₁₆ with Test ID 01₁₆ and 06₁₆ to verify whether the tests are supported and completed. The test values reported may be invalid if the test is not completed.

Table 79 — Request on-board monitoring test results for specific monitored systems request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request on-board monitoring test results for specific monitored systems request SID	06 ₁₆	SIDRQ
#2	TID Lean to rich sensor threshold voltage (constant)	02 ₁₆	TID

Table 80 — Request on-board monitoring test results for specific monitored systems response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request on-board monitoring test results for specific monitored systems response SID	46 ₁₆	SIDPR
#2	TID Lean to rich sensor threshold voltage (constant)	02 ₁₆	TID
#3	Test Limit Type: test limit is minimum value; Component ID: 04	84 ₁₆	TLTCID
#4	Test Value High Byte: test fails if test value is less than test limit	00 ₁₆	TVHI
#5	Test Value Low Byte: test fails if test value is less than test limit	10 ₁₆	TVLO
#6	Minimum Test Limit High Byte	00 ₁₆	TLHI
#7	Minimum Test Limit Low Byte	00 ₁₆	TLLO

NOTE ECU#2 does not support any Test IDs and therefore does not send a response message.

Table 81 — Request on-board monitoring test results for specific monitored systems response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request on-board monitoring test results for specific monitored systems response SID	46 ₁₆	SIDPR
#2	TID Lean to rich sensor threshold voltage (constant)	02 ₁₆	TID
#3	Test Limit Type: test limit is maximum value; Component ID: 16 ₁₆	16 ₁₆	TLTCID
#4	Test Value High Byte: test fails if test value is greater than test limit	00 ₁₆	TVHI
#5	Test Value Low Byte: test fails if test value is greater than test limit	32 ₁₆	TVLO
#6	Maximum Test Limit High Byte	00 ₁₆	TLHI
#7	Maximum Test Limit Low Byte	20 ₁₆	TLLO

NOTE The above example shows that the test in ECU#1 for Test ID 02₁₆ and Component ID 04₁₆ passed and that the test in ECU#1 for Test ID 02₁₆ and Component ID 16₁₆ failed.

7.7 Service 07₁₆ — Request emission-related diagnostic trouble codes detected during current or last completed driving cycle

7.7.1 Functional description

The purpose of this service is to enable the external test equipment to obtain “pending” diagnostic trouble codes detected during current or last completed driving cycle for emission-related components/systems. Service 07₁₆ is required for all DTCs and is independent of Service 03₁₆. The intended use of this data is to assist the service technician after a vehicle repair and after clearing diagnostic information by reporting test results after a single driving cycle. If the test failed during the driving cycle, the DTC associated with that test will be reported. Test results reported by this service do not necessarily indicate a faulty component/system. If test results indicate a failure after additional driving, then the MIL will be illuminated and a DTC will be set and reported with Service 03₁₆, indicating a faulty component/system. This service can always be used to request the results of the latest test, independent of the setting of a DTC.

Test results for these components/systems are reported in the same format as the DTCs in Service 03₁₆ (see the functional description for Service 03₁₆).

If fewer than three (3) DTC values are reported for failed tests, the response messages used to report the test results shall be filled with 00₁₆ to fill seven (7) data bytes. This maintains the required fixed message length for all messages.

If there is no test failure to report, responses are permitted but not required for SAE J1850 and ISO 9141-2 interfaces. For ISO 14230-4 interfaces, the ECU will respond with a report containing no codes (all DTC values shall contain 00₁₆).

7.7.2 Message data bytes

7.7.2.1 Request emission-related diagnostic trouble codes detected during current or last completed driving cycle request message definition

Table 82 — Request emission-related diagnostic trouble codes detected during current or last completed driving cycle request message

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request emission-related diagnostic trouble codes detected during current or last completed driving cycle request SID	M	07 ₁₆	SIDRQ

7.7.2.2 Request emission-related diagnostic trouble codes detected during current or last completed driving cycle response message definition

Table 83 — Request emission-related diagnostic trouble codes detected during current or last completed driving cycle response message

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request emission-related diagnostic trouble codes detected during current or last completed driving cycle response SID	M	47 ₁₆	SIDPR
#2	DTC#1 (High Byte)	M/C ^a	XX ₁₆	DTC1HI
#3	DTC#1 (Low Byte)	M/C	XX ₁₆	DTC1LO
#4	DTC#2 (High Byte)	M/C	XX ₁₆	DTC2HI
#5	DTC#2 (Low Byte)	M/C	XX ₁₆	DTC2LO
#6	DTC#3 (High Byte)	M/C	XX ₁₆	DTC3HI
#7	DTC#3 (Low Byte)	M/C	XX ₁₆	DTC3LO

^a C = Conditional. DTC#1, DTC#2, and DTC#3 are always present. If no valid DTC number is included, the DTC values shall contain 00₁₆.

7.7.3 Parameter definition

This service does not support any parameters.

7.7.4 Message example

Refer to message example of Service 03₁₆.

7.8 Service 08₁₆ — Request control of on-board system, test, or component

7.8.1 Functional description

The purpose of this service is to enable the external test equipment to control the operation of an on-board system, test, or component.

The data bytes will be specified, if necessary, for each Test ID in SAE J1979-DA and will be unique for each Test ID. If any data bytes are unused for any test, they shall be filled with 00₁₆ to maintain a fixed message length.

Possible uses for these data bytes in the request message are to

- turn on-board system/test/component on,
- turn on-board system/test/component off, and
- cycle on-board system/test/component for “*n*” seconds.

Possible uses for these data bytes in the response message are to

- report system status, and
- report test results.

A feature of this service is for the ECU to indicate which Test IDs are supported. Test ID 00₁₆ is a bit-encoded value that indicates support for Test IDs from 01₁₆ to 20₁₆. Test ID 20₁₆ indicates support for Test IDs 21₁₆ through 40₁₆, etc. This is the same concept as used for PID support in Services 01₁₆ and 02₁₆ as specified in SAE J1979-DA.

7.8.2 Message data bytes

7.8.2.1 Request control of on-board device request message definition (read-supported TIDs)

Table 84 — Request control of on-board device request message (read-supported TIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request control of on-board device request SID	M	08 ₁₆	SIDRQ
#2	Test ID (see SAE J1979-DA)	M	XX ₁₆	TID
#3	data record of Test ID = [Data A, Data B, Data C, Data D, Data E]	M	00 ₁₆	TIDREC_ DATA_A
#4		M	00 ₁₆	DATA_B
#5		M	00 ₁₆	DATA_C
#6		M	00 ₁₆	DATA_D
#7		M	00 ₁₆	DATA_E

7.8.2.2 Request control of on-board device response message definition (report supported TIDs)

Table 85 — Request control of on-board device response message (report supported TIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request control of on-board device response SID	M	48 ₁₆	SIDPR
#2	Test ID	M	XX ₁₆	TID
#3	Filler Byte	M	00 ₁₆	FB
#4	data record of supported Test IDs = [Data A: supported Test IDs, Data B: supported Test IDs, Data C: supported Test IDs, Data D: supported Test IDs]	M	XX ₁₆	TIDREC_ DATA_A
#5		M	XX ₁₆	DATA_B
#6		M	xXX ₁₆	DATA_C
#7		M	XX ₁₆	DATA_D

7.8.2.3 Request control of on-board device request message definition (read TID values)

Table 86 — Request control of on-board device request message (read TID values)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request control of on-board device request SID	M	08 ₁₆	SIDRQ
#2	Test ID (request Test ID values)	M	XX ₁₆	TID
#3	data record of Test ID = [Data A, Data B, Data C, Data D, Data E]	M/C ^a	XX ₁₆	TIDREC_ DATA_A
#4		M/C	XX ₁₆	DATA_B
#5		M/C	XX ₁₆	DATA_C
#6		M/C	XX ₁₆	DATA_D
#7		M/C	XX ₁₆	DATA_E

^a C = Conditional. Data A to E shall be filled with 00₁₆ if unused.

7.8.2.4 Request control of on-board device response message definition (report TID values)

Table 87 — Request control of on-board device response message (report TID values)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request control of on-board device request SID	M	48 ₁₆	SIDRQ
#2	Test ID (request Test ID values)	M	XX ₁₆	TID
#3	data record of Test ID = [Data A, Data B, Data C, Data D, Data E]	M/C ^a	XX ₁₆	TIDREC_ DATA_A
#4		M/C	XX ₁₆	DATA_B
#5		M/C	XX ₁₆	DATA_C
#6		M/C	XX ₁₆	DATA_D
7		M/C	XX ₁₆	DATA_E

^a C = Conditional. Data A to E shall be filled with 00₁₆ if unused.

7.8.3 Parameter definition

7.8.3.1 Test IDs supported

Refer to SAE J1979-DA.

7.8.3.2 Test ID and data byte descriptions

Refer to SAE J1979-DA.

7.8.4 Message example

Tables 88 and 89 show how “request control of on-board system, test, or component” service shall be implemented.

7.8.4.1 Step #1: Request control of on-board system, test, or component (request for supported Test IDs)

The external test equipment requests all supported Test IDs from the vehicle. Refer to the example of Service 01₁₆ for guidance on requesting supported Test IDs (the same concept is used for supported TIDs).

As a result of the supported TID request, the external test equipment creates an internal list of supported PIDs for each ECU. ECU#1 (ECM) supports Test ID 01₁₆. ECU#2 (TCM) does not support any Test IDs and therefore does not send a response message.

7.8.4.2 Step #2: Request control of on-board device (Service 08₁₆, Test ID 01₁₆)

The external test equipment sends a “request control of on-board device” message with one (1) supported Test ID 01₁₆ to the vehicle.

Table 88 — Request control of on-board device request message

Message Direction:		External test equipment → All ECUs	
Message Type:		Request	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request control of on-board device request SID	08 ₁₆	SIDRQ
#2	TID: Evaporative system leak test	01 ₁₆	TID
#3	Data A: 00 ₁₆	00 ₁₆	DATA_A
#4	Data B: 00 ₁₆	00 ₁₆	DATA_B
#5	Data C: 00 ₁₆	00 ₁₆	DATA_C
#6	Data D: 00 ₁₆	00 ₁₆	DATA_D
#7	Data E: 00 ₁₆	00 ₁₆	DATA_E

Table 89 — Request control of on-board device response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request control of on-board device response SID	48 ₁₆	SIDPR
#2	TID: Evaporative system leak test	01 ₁₆	TID
#3	Data A: 00 ₁₆	00 ₁₆	DATA_A
#4	Data B: 00 ₁₆	00 ₁₆	DATA_B
#5	Data C: 00 ₁₆	00 ₁₆	DATA_C
#6	Data D: 00 ₁₆	00 ₁₆	DATA_D
#7	Data E: 00 ₁₆	00 ₁₆	DATA_E

NOTE ECU#2 does not support the Test ID and therefore does not send a response message.

7.9 Service 09₁₆ — Request vehicle information

7.9.1 Functional description

The purpose of this service is to enable the external test equipment to request vehicle-specific vehicle information such as Vehicle Identification Number (VIN) and Calibration IDs. Some of this information may be required by regulations and some should be reported in a standard format if supported by the vehicle manufacturer. INFOTYPES are defined in SAE J1979-DA.

A feature of this service is for the ECU to indicate which INFOTYPES are supported (support of INFOTYPE 00₁₆ is required for ISO 9141-2). INFOTYPE 00₁₆ is a bit-encoded value that indicates support for INFOTYPES from 01₁₆ to 20₁₆. INFOTYPE 20₁₆ indicates support for INFOTYPES 21₁₆ through 40₁₆, etc. This is the same concept as used for PID support in Services 01₁₆ and 02₁₆ as specified in SAE J1979-DA.

The external test equipment shall maintain a list of ECUs which support the INFOTYPES not equal to 00₁₆ in order to justify whether it expects a response message from this ECU or not. For request messages with INFOTYPES not equal to 00₁₆, the positive response messages may not be sent by the ECU(s) within the P2_{max} timing window as specified in 6.2.2.

If INFOTYPE 02₁₆ (VIN) is indicated as supported, the ECU shall respond within P2_{max} timing even if the VIN is missing or incomplete. For example, a development ECU may respond with FF₁₆ characters for VIN because the VIN has not been programmed.

7.9.2 Message data bytes

7.9.2.1 Request vehicle information request message definition (read-supported INFOTYPE)

Table 90 — Request vehicle information request message (read-supported INFOTYPE)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request vehicle information request SID	M	09 ₁₆	SIDRQ
#2	INFOTYPE (see SAE J1979-DA)	M	XX ₁₆	INFotyp

7.9.2.2 Request vehicle information response message definition (report supported INFOTYPE)

Table 91 — Request vehicle information response message (report supported INFOTYPE)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request vehicle information response SID	M	49 ₁₆	SIDPR
#2	INFOTYPE	M	XX ₁₆	INFotyp_
#3	MessageCount	M	XX ₁₆	MC
#4	data record of INFOTYPE = [Data A: supported INFOTYPEs, Data B: supported INFOTYPEs, Data C: supported INFOTYPEs, Data D: supported INFOTYPEs]	M	XX ₁₆	DATAREC_
#5		M	XX ₁₆	DATA_A
#6		M	XX ₁₆	DATA_B
#7		M	XX ₁₆	DATA_C
		M	XX ₁₆	DATA_D

7.9.2.3 Request vehicle information request message definition (read INFOTYPE values)

Table 92 — Request vehicle information request message (read INFOTYPE values)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request vehicle information request SID	M	09 ₁₆	SIDRQ
#2	INFOTYPE	M	XX ₁₆	INFotyp_

7.9.2.4 Request vehicle information response message definition (report INFOTYPE values)

Table 93 — Request vehicle information response message (report INFOTYPE values)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request vehicle information response SID	M	49 ₁₆	SIDPR
#2	INFOTYPE	M	XX ₁₆	INFotyp_
#3	MessageCount	M	XX ₁₆	MC_
#4	data record of INFOTYPE = [Data A, Data B, Data C, Data D]	M/C ^a	XX ₁₆	DATA_A
#5		M/C	XX ₁₆	DATA_B
#6		M/C	XX ₁₆	DATA_C
#7		M/C	XX ₁₆	DATA_D

^a C = Conditional. Data A to D is only present if the requested INFOTYPE equals an even number.

7.9.3 Parameter definition

7.9.3.1 Vehicle information types supported

Refer to SAE J1979-DA.

7.9.3.2 Vehicle information types and data byte descriptions

Refer to SAE J1979-DA.

7.9.3.3 MessageCount description

The MessageCount parameter has two (2) definitions depending on the INFOTYPE parameter value:

- INFOTYPE parameter values 01₁₆, 03₁₆, 05₁₆, 07₁₆, 09₁₆, 0C₁₆: In this case, the MessageCount parameter includes a value which represents the number of response messages to be sent by the server (ECU) to report the Data A to D referenced by the corresponding INFOTYPE parameter value. The MessageCount parameter value is a “static value”.
- INFOTYPE parameter values 02₁₆, 04₁₆, 06₁₆, 08₁₆, 0A₁₆, 0B₁₆, 0D₁₆: In this case, the MessageCount parameter includes a value which represents a dynamic counter starting with the value of 1 and incremented by 1 in the following response messages (assuming error-free transmission of the response message). The MessageCount parameter value is a “dynamic incremented value” (increments of 1). The last response message shall include an incremented MessageCount value which matches the reported MessageCount parameter value previously reported by the server (ECU) with the odd INFOTYPE (even INFOTYPE – 1).

Refer to SAE J1979-DA.

7.9.4 Message example

The tables below show how the “request vehicle information” service shall be implemented.

7.9.4.1 Step #1: Request vehicle information (request supported INFOTYPE) from vehicle

The external test equipment requests all supported INFOTYPES from the vehicle. Refer to the example of Service 01₁₆ for guidance on requesting supported PIDs (the same concept is used for supported INFOTYPES). As a result of the supported INFOTYPE request, the external test equipment creates an internal list of supported INFOTYPES for each ECU: ECU#1 (ECM) supports the following INFOTYPES: 01₁₆, 02₁₆, 03₁₆, 04₁₆, 05₁₆, 06₁₆, 07₁₆, and 08₁₆. Since there is only one ECU which meets emission-related legislative requirements, no response messages from another ECU will occur.

7.9.4.2 Step #2: Request INFOTYPES from vehicle

Now the external test equipment requests the following INFOTYPE:

- INFOTYPE 01₁₆: MC_VIN = 5 response messages; supported by ECU#1.

Table 94 — Request vehicle information request message

Message Direction:		External test equipment → All ECUs	
Message Type:		Request	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information request SID	09 ₁₆	SIDRQ
#2	INFOTYPE: MessageCount VIN	01 ₁₆	INFTYP

Table 95 — Request vehicle information response message

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: MessageCount VIN	01 ₁₆	INFTYP
#3	MessageCount VIN = 5 response messages	05 ₁₆	MC_VIN

Now the external test equipment requests the following INFOTYPE:

— INFOTYPE 02₁₆: VIN = [1G1JC5444R7252367] supported by ECU#1.

Table 96 — Request vehicle information request message

Message Direction:		External test equipment → All ECUs	
Message Type:		Request	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information request SID	09 ₁₆	SIDRQ
#2	INFOTYPE: VIN	02 ₁₆	INFOTYP

Table 97 — Request vehicle information response message (1)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: VIN	02 ₁₆	INFOTYP
#3	MessageCount VIN = 1 st response message	01 ₁₆	MC_VIN
#4	Data A: Filler Byte byte	00 ₁₆	DATA_A
#5	Data B: Filler Byte byte	00 ₁₆	DATA_B
#6	Data C: Filler Byte byte	00 ₁₆	DATA_C
#7	Data D: '1'	31 ₁₆	DATA_D

Table 98 — Request vehicle information response message (2)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: VIN	02 ₁₆	INFOTYP
#3	MessageCount VIN = 2 nd response message	02 ₁₆	MC_VIN
#4	Data A: 'G'	47 ₁₆	DATA_A
#5	Data B: '1'	31 ₁₆	DATA_B
#6	Data C: 'J'	4A ₁₆	DATA_C
#7	Data D: 'C'	43 ₁₆	DATA_D

Table 99 — Request vehicle information response message (3)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: VIN	02 ₁₆	INFTYP
#3	MessageCount VIN = 3 rd response message	03 ₁₆	MC_VIN
#4	Data A: '5'	35 ₁₆	DATA_A
#5	Data B: '4'	34 ₁₆	DATA_B
#6	Data C: '4'	34 ₁₆	DATA_C
#7	Data D: '4'	34 ₁₆	DATA_D

Table 100 — Request vehicle information response message (4)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: VIN	02 ₁₆	INFTYP
#3	MessageCount VIN = 4 th response message	04 ₁₆	MC_VIN
#4	Data A: 'R'	52 ₁₆	DATA_A
#5	Data B: '7'	37 ₁₆	DATA_B
#6	Data C: '2'	32 ₁₆	DATA_C
#7	Data D: '5'	35 ₁₆	DATA_D

Table 101 — Request vehicle information response message (5)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: VIN	02 ₁₆	INFTYP
#3	MessageCount VIN = 5 th response message	05 ₁₆	MC_VIN
#4	Data A: '2'	32 ₁₆	DATA_A
#5	Data B: '3'	33 ₁₆	DATA_B
#6	Data C: '6'	36 ₁₆	DATA_C
#7	Data D: '7'	37 ₁₆	DATA_D

Now the external test equipment requests the following INFOTYPE:

— INFOTYPE 03₁₆: MessageCount Calibration ID = 08₁₆; supported by ECU#1.

Table 102 — Request vehicle information request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information request SID	09 ₁₆	SIDRQ
#2	INFOTYPE: MessageCount Calibration ID	03 ₁₆	INFTYP

Table 103 — Request vehicle information response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: MessageCount Calibration ID	03 ₁₆	INFTYP
#3	MessageCount Calibration ID = 8 response messages	08 ₁₆	MC_CALID

Now the external test equipment requests the following INFOTYPE:

- INFOTYPE 04₁₆: CALID#1 = [JMB*36761500]; supported by ECU#1;
- INFOTYPE 04₁₆: CALID#2 = [JMB*47872611]; supported by ECU#1.

Table 104 — Request vehicle information request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information request SID	09 ₁₆	SIDRQ
#2	INFOTYPE: Calibration ID	04 ₁₆	INFTYP

Table 105 — Request vehicle information response message (1)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Calibration ID	04 ₁₆	INFTYP
#3	MessageCount Calibration ID#1 = 1 st response message	01 ₁₆	MC_CALID
#4	Data A: 'J'	4A ₁₆	DATA_A
#5	Data B: 'M'	4D ₁₆	DATA_B
#6	Data C: 'B'	42 ₁₆	DATA_C
#7	Data D: '*'	2A ₁₆	DATA_D

Table 106 — Request vehicle information response message (2)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Calibration ID	04 ₁₆	INFTYP
#3	MessageCount Calibration ID#1 = 2 nd response message	02 ₁₆	MC_CALID
#4	Data A: '3'	33 ₁₆	DATA_A
#5	Data B: '6'	36 ₁₆	DATA_B
#6	Data C: '7'	37 ₁₆	DATA_C
#7	Data D: '6'	36 ₁₆	DATA_D

Table 107 — Request vehicle information response message (3)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Calibration ID	04 ₁₆	INFTYP
#3	MessageCount Calibration ID#1 = 3 rd response message	03 ₁₆	MC_CALID
#4	Data A: '1'	31 ₁₆	DATA_A
#5	Data B: '5'	35 ₁₆	DATA_B
#6	Data C: '0'	30 ₁₆	DATA_C
#7	Data D: '0'	30 ₁₆	DATA_D

Table 108 — Request vehicle information response message (4)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Calibration ID	04 ₁₆	INFTYP
#3	MessageCount Calibration ID#1 = 4 th response message	04 ₁₆	MC_CALID
#4	Data A: Filler Byte byte	00 ₁₆	DATA_A
#5	Data B: Filler Byte byte	00 ₁₆	DATA_B
#6	Data C: Filler Byte byte	00 ₁₆	DATA_C
#7	Data D: Filler Byte byte	00 ₁₆	DATA_D

Table 109 — Request vehicle information response message (5)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Calibration ID	04 ₁₆	INFTYP
#3	MessageCount Calibration ID#2 = 5 th response message	05 ₁₆	MC_CALID
#4	Data A: 'J'	4A ₁₆	DATA_A
#5	Data B: 'M'	4D ₁₆	DATA_B
#6	Data C: 'B'	42 ₁₆	DATA_C
#7	Data D: '*'	2A ₁₆	DATA_D

Table 110 — Request vehicle information response message (6)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Calibration ID	04 ₁₆	INFTYP
#3	MessageCount Calibration ID#2 = 6 th response message	06 ₁₆	MC_CALID
#4	Data A: '4'	34 ₁₆	DATA_A
#5	Data B: '7'	37 ₁₆	DATA_B
#6	Data C: '8'	38 ₁₆	DATA_C
#7	Data D: '7'	37 ₁₆	DATA_D

Table 111 — Request vehicle information response message (7)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Calibration ID	04 ₁₆	INFTYP
#3	MessageCount Calibration ID#2 = 7 th response message	07 ₁₆	MC_CALID
#4	Data A: '2'	32 ₁₆	DATA_A
#5	Data B: '6'	36 ₁₆	DATA_B
#6	Data C: '1'	31 ₁₆	DATA_C
#7	Data D: '1'	31 ₁₆	DATA_D

Table 112 — Request vehicle information response message (8)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Calibration ID	04 ₁₆	INFOTYP
#3	MessageCount Calibration ID#2 = 8 th response message	08 ₁₆	MC_CALID
#4	Data A: Filler Byte byte	00 ₁₆	DATA_A
#5	Data B: Filler Byte byte	00 ₁₆	DATA_B
#6	Data C: Filler Byte byte	00 ₁₆	DATA_C
#7	Data D: Filler Byte byte	00 ₁₆	DATA_D

Now the external test equipment requests the following INFOTYPE:

- INFOTYPE 05₁₆: MessageCount Calibration Verification Number = 02₁₆; supported by ECU#1.

Table 113 — Request vehicle information request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information request SID	09 ₁₆	SIDRQ
#2	INFOTYPE: MessageCount Calibration Verification Number	05 ₁₆	INFOTYP

Table 114 — Request vehicle information response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: MessageCount Calibration Verification Number	05 ₁₆	INFOTYP
#3	MessageCount Calibration Verification Number = 2 response messages	02 ₁₆	MC_CVN

Now the external test equipment requests the following INFOTYPE:

- INFOTYPE 06₁₆: CVN#1 = [17 91 BC 82]; supported by ECU#1;
- INFOTYPE 06₁₆: CVN#2 = [16 E0 62 BE]; supported by ECU#1.

Table 115 — Request vehicle information request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information request SID	09 ₁₆	SIDRQ
#2	INFOTYPE: Calibration Verification Number	06 ₁₆	INFOTYP

Table 116 — Request vehicle information response message (1)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Calibration Verification Number	06 ₁₆	INFTYP
#3	MessageCount Calibration Verification Number = 1 st response message	01 ₁₆	MC_CVN
#4	Data A: 17	17 ₁₆	DATA_A
#5	Data B: 91	91 ₁₆	DATA_B
#6	Data C: BC	BC ₁₆	DATA_C
#7	Data D: 82	82 ₁₆	DATA_D

Depending on which protocol the vehicle supports, the following situations might occur.

If the vehicle supports ISO 9141-2, the external test equipment might need to repeat the request message multiple times before the ECU(s) send a response message.

If the vehicle supports SAE J1850, the external test equipment might need to repeat the request message before the ECU(s) send a response message.

If the vehicle supports ISO 14230-4, the ECU(s) may send a negative response message with NRC 22₁₆ - conditionsNotCorrect if, for example, the engine is running. After the vehicle conditions have been adjusted to meet this service request, the external test equipment shall repeat the request message and the ECU(s) shall send a positive response message.

Table 117 — Request vehicle information response message (2)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Calibration Verification Number	06 ₁₆	INFTYP
#3	MessageCount Calibration Verification Number = 2 nd response message	02 ₁₆	MC_CVN
#4	Data A: 16 ₁₆	16 ₁₆	DATA_A
#5	Data B: E0 ₁₆	E0 ₁₆	DATA_B
#6	Data C: 62 ₁₆	62 ₁₆	DATA_C
#7	Data D: BE ₁₆	BE ₁₆	DATA_D

Now the external test equipment requests the following INFOTYPE:

— INFOTYPE 07₁₆: MessageCount In-use Performance Tracking = 08₁₆; supported by ECU#1.

Table 118 — Request vehicle information request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information request SID	09 ₁₆	SIDRQ
#2	INFOTYPE: MessageCount In-use Performance Tracking	07 ₁₆	INFTYP

Table 119 — Request vehicle information response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: MessageCount In-use Performance Tracking	07 ₁₆	INFTYP
#3	MessageCount In-use Performance Tracking = 8 response messages	08 ₁₆	MC_IPT

Now the external test equipment requests the following INFOTYPE:

— INFOTYPE 08₁₆: MC_IPT = 8 response messages; supported by ECU#1.

Table 120 — Request vehicle information request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information request SID	09 ₁₆	SIDRQ
#2	INFOTYPE: In-use Performance Tracking	08 ₁₆	INFTYP

Table 121 — Request vehicle information response message (1)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: In-use Performance Tracking	08 ₁₆	INFTYP
#3	MessageCount In-use Performance Tracking = 1 st response message	01 ₁₆	MC_IPT
#4	OBDCOND_A: 1024 counts	04 ₁₆	OBDCOND_A
#5	OBDCOND_B: 1024 counts	00 ₁₆	OBDCOND_B
#6	IGNCNTR_A: 3337 counts	0D ₁₆	IGNCNTR_A
#7	IGNCNTR_B: 3337 counts	09 ₁₆	IGNCNTR_B

Table 122 — Request vehicle information response message (2)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: In-use Performance Tracking	08 ₁₆	INFTYP
#3	MessageCount In-use Performance Tracking = 2 nd response message	02 ₁₆	MC_IPT
#4	CATCOMP1_A: 824 counts	03 ₁₆	CATCOMP1_A
#5	CATCOMP1_B: 824 counts	38 ₁₆	CATCOMP1_B
#6	CATCOND1_A: 945 counts	03 ₁₆	CATCOND1_A
#7	CATCOND1_B: 945 counts	B1 ₁₆	CATCOND1_B

Table 123 — Request vehicle information response message (3)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: In-use Performance Tracking	08 ₁₆	INFTYP
#3	MessageCount In-use Performance Tracking = 3 rd response message	03 ₁₆	MC_IPT
#4	CATCOMP2_A: 711 counts	02 ₁₆	CATCOMP2_A
#5	CATCOMP2_B: 711 counts	C7 ₁₆	CATCOMP2_B
#6	CATCOND2_A: 945 counts	03 ₁₆	CATCOND2_A
#7	CATCOND2_B: 945 counts	B1 ₁₆	CATCOND2_B

Table 124 — Request vehicle information response message (4)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: In-use Performance Tracking	08 ₁₆	INFTYP
#3	MessageCount In-use Performance Tracking = 4 th response message	04 ₁₆	MC_IPT
#4	O2SCOMP1_A: 737 counts	02 ₁₆	O2SCOMP1_A
#5	O2SCOMP1_B: 737 counts	E1 ₁₆	O2SCOMP1_B
#6	O2SCOND1_A: 924 counts	03 ₁₆	O2SCOND1_A
#7	O2SCOND1_B: 924 counts	9C ₁₆	O2SCOND1_B

Table 125 — Request vehicle information response message (5)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: In-use Performance Tracking	08 ₁₆	INFOTYP
#3	MessageCount In-use Performance Tracking = 5 th response message	05 ₁₆	MC_IPT
#4	O2SCOMP2_A: 724 counts	02 ₁₆	O2SCOMP2_A
#5	O2SCOMP2_B: 724 counts	D4 ₁₆	O2SCOMP2_B
#6	O2SCOND2_A: 833 counts	03 ₁₆	O2SCOND2_A
#7	O2SCOND2_B: 833 counts	41 ₁₆	O2SCOND2_B

Table 126 — Request vehicle information response message (6)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: In-use Performance Tracking	08 ₁₆	INFOTYP
#3	MessageCount In-use Performance Tracking = 6 th response message	06 ₁₆	MC_IPT
#4	EGRCOMP_A: 997 counts	03 ₁₆	EGRCOMP_A
#5	EGRCOMP_B: 997 counts	E5 ₁₆	EGRCOMP_B
#6	EGRCOND_A: 1010 counts	03 ₁₆	EGRCOND_A
#7	EGRCOND_B: 1010 counts	F2 ₁₆	EGRCOND_B

Table 127 — Request vehicle information response message (7)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: In-use Performance Tracking	08 ₁₆	INFOTYP
#3	MessageCount In-use Performance Tracking = 7 th response message	07 ₁₆	MC_IPT
#4	AIRCOMP_A: 937 counts	03 ₁₆	AIRCOMP_A
#5	AIRCOMP_B: 937 counts	A9 ₁₆	AIRCOMP_B
#6	AIRCOND_A: 973 counts	03 ₁₆	AIRCOND_A
#7	AIRCOND_B: 973 counts	CD ₁₆	AIRCOND_B

Table 128 — Request vehicle information response message (8)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: In-use Performance Tracking	08 ₁₆	INFOTYP
#3	MessageCount In-use Performance Tracking = 8 th response message	08 ₁₆	MC_IPT
#4	EVAPCOMP_A: 68 counts	00 ₁₆	EVAPCOMP_A
#5	EVAPCOMP_B: 68 counts	44 ₁₆	EVAPCOMP_B
#6	EVAPCOND_A: 97 counts	00 ₁₆	EVAPCOND_A
#7	EVAPCOND_B: 97 counts	61 ₁₆	EVAPCOND_B

Now the external test equipment requests the following InfoType:

— InfoType 09₁₆: MessageCount ECUName = 0A₁₆; supported by ECU#1.

Table 129 — Request vehicle information request message

Message Direction:		External test equipment → All ECUs	
Message Type:		Request	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information request SID	09 ₁₆	SIDRQ
#2	INFOTYPE: MessageCount ECUName	09 ₁₆	INFOTYP

Table 130 — Request vehicle information response message

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: MessageCount ECUName	09 ₁₆	INFOTYP
#3	MessageCount ECUName = 5 response messages	05 ₁₆	MC_ECUNM

Now the external test equipment requests the following InfoType

— InfoType 0A₁₆: ECUName = [ECM –EngineControl] supported by ECU#1.

Table 131 — Request vehicle information request message

Message Direction:		External test equipment → All ECUs	
Message Type:		Request	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information request SID	09 ₁₆	SIDRQ
#2	INFOTYPE: ECUName	0A ₁₆	INFOTYP

Table 132 — Request vehicle information response message (1)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: ECUName	0A ₁₆	INFTYP
#3	MessageCount ECUName = 1st response message	01 ₁₆	MC_ECUNM
#4	DATA A: 'E'	45 ₁₆	DATA A
#5	DATA B: 'C'	43 ₁₆	DATA B
#6	DATA C: 'M'	4D ₁₆	DATA C
#7	DATA D: 00 ₁₆	00 ₁₆	DATA D

Table 133 — Request vehicle information response message (2)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: ECUName	0A ₁₆	INFTYP
#3	MessageCount In-use ECUName = 2nd response message	02 ₁₆	MC_ECUNM
#4	DATA A: '-'	2D ₁₆	DATA A
#5	DATA B: 'E'	45 ₁₆	DATA B
#6	DATA C: 'n'	6E ₁₆	DATA C
#7	DATA D: 'g'	67 ₁₆	DATA D

Table 134 — Request vehicle information response message (3)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: ECUName	0A ₁₆	INFTYP
#3	MessageCount In-use ECUName = 3rd response message	03 ₁₆	MC_ECUNM
#4	DATA A: 'i'	69 ₁₆	DATA A
#5	DATA B: 'n'	6E ₁₆	DATA B
#6	DATA C: 'e'	65 ₁₆	DATA C
#7	DATA D: 'C'	43 ₁₆	DATA D

Table 135 — Request vehicle information response message (4)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	InfoType: ECUName	0A ₁₆	INFTYP

Table 135 (continued)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#3	MessageCount ECUName = 4th response message	04 ₁₆	MC_ECUNM
#4	DATA A: 'o'	6F ₁₆	DATA A
#5	DATA B: 'n'	6E ₁₆	DATA B
#6	DATA C: 't'	74 ₁₆	DATA C
#7	DATA D: 'r'	72 ₁₆	DATA D

Table 136 — Request vehicle information response message (5)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: ECUName	0A ₁₆	INFTYP
#3	MessageCount ECUName = 5th response message	05 ₁₆	MC_ECUNM
#4	DATA A: 'o'	6F ₁₆	DATA A
#5	DATA B: 'l'	6C ₁₆	DATA B
#6	DATA C: 00 ₁₆	00 ₁₆	DATA C
#7	DATA D: 00 ₁₆	00 ₁₆	DATA D

Now the external test equipment requests the following InfoType:

— InfoType 0C₁₆: MessageCount ESN = 0D₁₆; supported by ECU#1.

Table 137 — Request vehicle information request message

Message Direction:		External test equipment → All ECUs	
Message Type:		Request	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information request SID	09 ₁₆	SIDRQ
#2	INFOTYPE: MessageCount ESN	0C ₁₆	INFTYP

Table 138 — Request vehicle information response message

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: MessageCount ESN	0C ₁₆	INFTYP
#3	MessageCount ESN = 5 response messages	05 ₁₆	MC_ESN

Now the external test equipment requests the following InfoType:

— InfoType 0D₁₆: Engine Serial Number = [BRAND 3217486] supported by ECU#1.

Table 139 — Request vehicle information request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information request SID	09 ₁₆	SIDRQ
#2	INFOTYPE: ESN	0D ₁₆	INFTYP

Table 140 — Request vehicle information response message (1)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Engine Serial Number	0D ₁₆	INFTYP
#3	MessageCount ESN = 1st response message	01 ₁₆	MC_ESN
#4	DATA A: 00 ₁₆	00 ₁₆	DATA A
#5	DATA B: 00 ₁₆	00 ₁₆	DATA B
#6	DATA C: 00 ₁₆	00 ₁₆	DATA C
#7	DATA D: 00 ₁₆	00 ₁₆	DATA D

Table 141 — Request vehicle information response message (2)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Engine Serial Number	0D ₁₆	INFTYP
#3	MessageCount In-use ESN = 2nd response message	02 ₁₆	MC_ESN
#4	DATA A: 00 ₁₆	00 ₁₆	DATA A
#5	DATA B: 00 ₁₆	00 ₁₆	DATA B
#6	DATA C: 00 ₁₆	00 ₁₆	DATA C
#7	DATA D: 'B'	42 ₁₆	DATA D

Table 142 — Request vehicle information response message (3)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Engine Serial Number	0D ₁₆	INFTYP
#3	MessageCount In-use ESN = 3rd response message	03 ₁₆	MC_ESN
#4	DATA A: 'R'	52 ₁₆	DATA A
#5	DATA B: 'A'	41 ₁₆	DATA B
#6	DATA C: 'N'	4E ₁₆	DATA C
#7	DATA D: 'D'	44 ₁₆	DATA D

Table 143 — Request vehicle information response message (4)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Engine Serial Number	0D ₁₆	INFTYP
#3	MessageCount ESN = 4th response message	04 ₁₆	MC_ESN
#4	DATA A: ''	20 ₁₆	DATA A
#5	DATA B: '3'	33 ₁₆	DATA B
#6	DATA C: '2'	32 ₁₆	DATA C
#7	DATA D: '1'	31 ₁₆	DATA D

Table 144 — Request vehicle information response message (5)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: Engine Serial Number	0D ₁₆	INFTYP
#3	MessageCount ESN = 5th response message	05 ₁₆	MC_ESN
#4	DATA A: '7'	37 ₁₆	DATA A
#5	DATA B: '4'	34 ₁₆	DATA B
#6	DATA C: '8'	38 ₁₆	DATA C
#7	DATA D: '6'	36 ₁₆	DATA D

Now the external test equipment requests the following InfoType:

- InfoType 0E₁₆: Exhaust Regulation Or Type Approval Number = [DOC-CR-934567] supported by ECU#1.

Table 145 — Request vehicle information request message

Message Direction:		External test equipment → All ECUs	
Message Type:		Request	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information request SID	09 ₁₆	SIDRQ
#2	INFOTYPE: MessageCount EROTAN	0E ₁₆	INFTYP

Table 146 — Request vehicle information response message

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: MessageCount EROTAN	0E ₁₆	INFTYP
#3	MessageCount EROTAN = 5 response messages	05 ₁₆	MC_EROTAN

Now the external test equipment requests the following InfoType:

- InfoType 0F₁₆: MC_EROTAN = 5 response messages; supported by ECU#1.

Table 147 — Request vehicle information request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information request SID	09 ₁₆	SIDRQ
#2	INFOTYPE: EROTAN	0F ₁₆	INFOTYP

Table 148 — Request vehicle information response message (1)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: EROTAN	0F ₁₆	INFOTYP
#3	MessageCount EROTAN = 1st response message	01 ₁₆	MC_EROTAN
#4	DATA A: 00 ₁₆	00 ₁₆	DATA A
#5	DATA B: 00 ₁₆	00 ₁₆	DATA B
#6	DATA C: 00 ₁₆	00 ₁₆	DATA C
#7	DATA D: 00 ₁₆	00 ₁₆	DATA D

Table 149 — Request vehicle information response message (2)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: EROTAN	0F ₁₆	INFOTYP
#3	MessageCount EROTAN = 2nd response message	02 ₁₆	MC_EROTAN
#4	DATA A: 00 ₁₆	00 ₁₆	DATA A
#5	DATA B: 00 ₁₆	00 ₁₆	DATA B
#6	DATA C: 00 ₁₆	00 ₁₆	DATA C
#7	DATA D: 'D'	44 ₁₆	DATA D

Table 150 — Request vehicle information response message (3)

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: EROTAN	0F ₁₆	INFOTYP
#3	MessageCount EROTAN = 3rd response message	03 ₁₆	MC_EROTAN
#4	DATA A: 'O'	4F ₁₆	DATA A

Table 150 (continued)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#5	DATA B: 'C'	43 ₁₆	DATA B
#6	DATA C: '-'	2D ₁₆	DATA C
#7	DATA D: 'C'	43 ₁₆	DATA D

Table 151 — Request vehicle information response message (4)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: In-use Performance Tracking	0F ₁₆	INFTYP
#3	MessageCount EROTAN = 4th response message	04 ₁₆	MC_EROTAN
#4	DATA A: 'R'	52 ₁₆	DATA A
#5	DATA B: '-'	2D ₁₆	DATA B
#6	DATA C: '9'	39 ₁₆	DATA C
#7	DATA D: '3'	33 ₁₆	DATA D

Table 152 — Request vehicle information response message (5)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request vehicle information response SID	49 ₁₆	SIDPR
#2	INFOTYPE: EROTAN	0F ₁₆	INFTYP
#3	MessageCount EROTAN = 5th response message	05 ₁₆	MC_EROTAN
#4	DATA A: '4'	34 ₁₆	DATA A
#5	DATA B: '5'	35 ₁₆	DATA B
#6	DATA C: '6'	36 ₁₆	DATA C
#7	DATA D: '7'	37 ₁₆	DATA D

8 Diagnostic service definition for ISO 15765-4

8.1 Service 01₁₆ — Request current powertrain diagnostic data

8.1.1 Functional description

The purpose of this service is to allow access to current emission-related data values, including analogue inputs and outputs, digital inputs and outputs, and system status information. The request for information includes parameter identification (PID) value that indicates to the on-board system the specific information requested. PID specifications, scaling information, and display formats are included in SAE J1979-DA.

The ECU(s) shall respond to this message by transmitting the requested data value last determined by the system. All data values returned for sensor readings shall be actual readings, not default or substitute values used by the system because of a fault with that sensor.

Not all PIDs are applicable or supported by all systems. PID 00₁₆ is a bit-encoded value that indicates which PIDs are supported for each ECU. PID 00₁₆ indicates support for PIDs from 01₁₆ to 20₁₆. PID 20₁₆ indicates support for PIDs 21₁₆ through 40₁₆, etc. This is the same concept for PIDs/OBD Monitor IDs/TIDs/INFOTYPEs support in Services 01₁₆, 02₁₆, 06₁₆, 08₁₆, 09₁₆. PID 00₁₆ is required for those ECUs that respond to a corresponding Service 01₁₆ request message as specified in SAE J1979-DA.

IMPORTANT — All emissions-related OBD ECUs which at least support one of the services defined in this part of ISO 15031, shall support Service 01₁₆ and PID 00₁₆. Service 01₁₆ with PID 00₁₆ is defined as the universal “initialization/keep alive/ping” message for all emissions-related OBD ECUs.

The request message may contain up to six (6) PIDs. External test equipment is not allowed to request a combination of PIDs supported and PIDs which report data values. The ECU shall support requests for up to six (6) PIDs. The request message may contain the same PID multiple times. The ECU shall treat each PID as a separate parameter and respond with data for each PID (data returned may be different for the same PID) as often as requested.

The order of the PIDs in the response message is not required to match the order in the request message.

8.1.2 Message data bytes

8.1.2.1 Request current powertrain diagnostic data request message definition (read-supported PIDs)

Table 153 — Request current powertrain diagnostic data request message (read-supported PIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data request SID	M	01 ₁₆	SIDRQ
#2	PID#1 (PIDs supported: see SAE J1979-DA)	M	XX ₁₆	PID
#3	PID#2 (PIDs supported: see SAE J1979-DA)	U ^a	XX ₁₆	PID
#4	PID#3 (PIDs supported: see SAE J1979-DA)	U	XX ₁₆	PID
#5	PID#4 (PIDs supported: see SAE J1979-DA)	U	XX ₁₆	PID
#6	PID#5 (PIDs supported: see SAE J1979-DA)	U	XX ₁₆	PID
#7	PID#6 (PIDs supported: see SAE J1979-DA)	U	XX ₁₆	PID

^a U = User Optional. PID may be included to avoid multiple PID supported request messages.

To request PIDs supported range from C1₁₆ to FF₁₆, another request message with PID#1 = C0₁₆ and PID#2 = E0₁₆ shall be sent to the vehicle.

8.1.2.2 Request current powertrain diagnostic data response message definition (report supported PIDs)

ECU(s) shall respond to all supported ranges if requested. A range is defined as a block of 32 PIDs (e.g. range #1: PID 01₁₆ - 20₁₆). The ECU shall not respond to unsupported PID ranges unless subsequent ranges have a supported PID(s).

Table 154 — Request current powertrain diagnostic data response message (report supported PIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	M	41 ₁₆	SIDPR
#2	data record of supported PIDs = [1 st supported PID Data A: supported PIDs, Data B: supported PIDs, Data C: supported PIDs, Data D: supported PIDs]	M	XX ₁₆	PIDREC_ PID
#3		M	XX ₁₆	DATA_A
#4		M	XX ₁₆	DATA_B
#5		M	XX ₁₆	DATA_C
#6		M	XX ₁₆	DATA_D
:	:	:	:	:
#n-4	data record of supported PIDs = [m th supported PID Data A: supported PIDs, Data B: supported PIDs, Data C: supported PIDs, Data D: supported PIDs]	C1 ^a	XX ₁₆	PIDREC_ PID
#n-3		C2 ^b	XX ₁₆	DATA_A
#n-2		C2	XX ₁₆	DATA_B
#n-1		C2	XX ₁₆	DATA_C
#n		C2	XX ₁₆	DATA_D
^a C1 = Conditional. PID value shall be the same value as included in the request message if supported by the ECU.				
^b C2 = Conditional. Value indicates PIDs supported; range of supported PIDs depends on selected PID value (see C1).				

The response message shall only include the PID(s) and Data A to D which are supported by the ECU. If the request message includes a PID value(s) which is (are) not supported by the ECU, those shall not be included in the response message.

8.1.2.3 Request current powertrain diagnostic data request message definition (read PID values)

Table 155 — Request current powertrain diagnostic data request message

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data request SID	M	01 ₁₆	SIDRQ
#2	PID#1 (see SAE J1979-DA)	M	XX ₁₆	PID
#3	PID#2 (see SAE J1979-DA)	U ^a	XX ₁₆	PID
#4	PID#3 (see SAE J1979-DA)	U	XX ₁₆	PID
#5	PID#4 (see SAE J1979-DA)	U	XX ₁₆	PID
#6	PID#5 (see SAE J1979-DAB)	U	XX ₁₆	PID
#7	PID#6 (see SAE J1979-DAB)	U	XX ₁₆	PID
^a U = User Optional. The parameter may be either present or not.				

8.1.2.4 Request current powertrain diagnostic data response message definition (report PID values)

Table 156 — Request current powertrain diagnostic data response message

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	M	41 ₁₆	SIDPR
#2	data record of 1 st supported PID = [PID#1	M	XX ₁₆	PIDREC_ PID
#3	data #1.1,	M	XX ₁₆	DATA_1.1
:	:	:	XX ₁₆	:
#j+1	data #1.j]	C1 ^a	XX ₁₆	DATA_1.j
:	:	:	:	:
:	data record of m th supported PID = [PID#m	C2 ^b	XX ₁₆	PIDREC_ PID
:	data #m.1,	C2	XX ₁₆	DATA_m.1
:	:	:	:	:
#n	data #m.k]	C3 ^c	XX ₁₆	DATA_1.k

^a C1 = Conditional. Data depends on selected PID value.

^b C2 = Conditional. Parameter is only present if supported by the ECU.

^c C3 = Conditional. Parameters and values for data depend on selected PID number and are only included if PID is supported by the ECU.

Not all PIDs which are included in the request message may be supported by all emission-related ECUs, which shall comply with this part of ISO 15031. Therefore, each vehicle ECU, which supports at least one (1) PID, shall send a response message including the PID(s) with data.

8.1.3 Parameter definition

8.1.3.1 PIDs supported

SAE J1979-DA specifies the interpretation of the data record of supported PIDs.

8.1.3.2 PID and data byte descriptions

SAE J1979-DA specifies standardized emission-related parameters.

8.1.4 Message example

Tables 133 to 135 show how the “request current powertrain diagnostic data” service shall be implemented.

8.1.4.1 Step #1: Request supported PIDs from vehicle

The external test equipment requests supported PIDs (00₁₆, 20₁₆, 40₁₆, 60₁₆, 80₁₆, A0₁₆) from the vehicle. Refer to SAE J1979-DA to interpret the data bytes in the response messages.

ECU(s) shall respond to all supported ranges if requested. A range is defined as a block of 32 PIDs (e.g. range #1: PID 01₁₆ - 20₁₆). The ECU shall not respond to unsupported PID ranges unless subsequent ranges have a supported PID(s).

Table 157 — Request current powertrain diagnostic data request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (All PID values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data request SID	01 ₁₆	SIDRQ
#2	PID used to determine PID support for PIDs 01 ₁₆ - 20 ₁₆	00 ₁₆	PID
#3	PID used to determine PID support for PIDs 21 ₁₆ - 40 ₁₆	20 ₁₆	PID
#4	PID used to determine PID support for PIDs 41 ₁₆ - 60 ₁₆	40 ₁₆	PID
#5	PID used to determine PID support for PIDs 61 ₁₆ - 80 ₁₆	60 ₁₆	PID
#6	PID used to determine PID support for PIDs 81 ₁₆ - A0 ₁₆	80 ₁₆	PID
#7	PID used to determine PID support for PIDs A1 ₁₆ - C0 ₁₆	A0 ₁₆	PID

Table 158 — ECU#1 response: Request current powertrain diagnostic data response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (All PID values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	41 ₁₆	SIDPR
#2	PID requested	00 ₁₆	PID
#3	Data byte A, representing support for PIDs 01 ₁₆ , 03 ₁₆ - 08 ₁₆	10111111 ₂ = BF ₁₆	DATA_A
#4	Data byte B, representing support for PIDs 09 ₁₆ , 0B ₁₆ - 10 ₁₆	10111111 ₂ = BF ₁₆	DATA_B
#5	Data byte C, representing support for PIDs 11 ₁₆ , 13 ₁₆ , 15 ₁₆	10101000 ₂ = A8 ₁₆	DATA_C
#6	Data byte D, representing support for PIDs 19 ₁₆ , 1C ₁₆ , 20 ₁₆	10010001 ₂ = 91 ₁₆	DATA_D
#7	PID requested	20 ₁₆	PID
#8	Data byte A, representing support for PID 21 ₁₆	10000000 ₂ = 80 ₁₆	DATA_A
#9	Data byte B, representing no support for PIDs 29 ₁₆ - 30 ₁₆	00000000 ₂ = 00 ₁₆	DATA_B
#10	Data byte C, representing no support for PIDs 31 ₁₆ - 38 ₁₆	00000000 ₂ = 00 ₁₆	DATA_C
#11	Data byte D, representing no support for PIDs 39 ₁₆ - 40 ₁₆	00000000 ₂ = 00 ₁₆	DATA_D

Table 159 — ECU#2 response: Request current powertrain diagnostic data response message

Message Direction:	ECU#2 → External test equipment		
Message Type:	Response		
Data Byte	Description (All PID values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	41 ₁₆	SIDPR
#2	PID requested	00 ₁₆	PID
#3	Data byte A, representing support for PID 01 ₁₆	10000000 ₂ = 80 ₁₆	DATA_A
#4	Data byte B, representing support for PID 0D ₁₆	00001000 ₂ = 08 ₁₆	DATA_B
#5	Data byte C, representing no support for PIDs 11 ₁₆ - 18 ₁₆	00000000 ₂ = 00 ₁₆	DATA_C
#6	Data byte D, representing no support for PIDs 19 ₁₆ - 20 ₁₆	00000000 ₂ = 00 ₁₆	DATA_D

Now the external test equipment creates an internal list of supported PIDs for each ECU. ECU#1 (ECM) supports the following PIDs: 01₁₆, 03₁₆ - 09₁₆, 0B₁₆ - 11₁₆, 13₁₆, 15₁₆, 19₁₆, 1C₁₆, 20₁₆, 21₁₆.

ECU#2 (TCM) supports the following PIDs: 01₁₆ and 0D₁₆.

8.1.4.2 Step #2: Request multiple PIDs from vehicle

Now the external test equipment requests a combination of a maximum of six (6) PIDs in one request message to gain best performance of displaying current data:

- PID 15₁₆: Bank 1 - Sensor 2, PID is supported by ECU#1;
- PID 01₁₆: Number of emission-related DTCs and MIL status, PID is supported by ECU#1 and #2;
- PID 05₁₆: Engine coolant temperature, PID is supported by ECU#1;
- PID 03₁₆: Fuel system 1 status, PID is supported by ECU#1;
- PID 0C₁₆: Engine speed, PID is supported by ECU#1;
- PID 0D₁₆: Vehicle speed, PID is supported by ECU#2.

Table 160 — Request current powertrain diagnostic data request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (All PID values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data request SID	01 ₁₆	SIDRQ
#2	PID: Bank 1 - Sensor 2	15 ₁₆	PID(15)
#3	PID: Number of emission-related DTCs and MIL status	01 ₁₆	PID(01)
#4	PID: Engine coolant temperature	05 ₁₆	PID(05)
#5	PID: Fuel system 1 status	03 ₁₆	PID(03)
#6	PID: Engine speed	0C ₁₆	PID(0C)
#7	PID: Vehicle speed	0D ₁₆	PID(0D)

Table 161 — ECU#1 response: Request current powertrain diagnostic data response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (All PID values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	41 ₁₆	SIDPR
#2	PID #1: Engine coolant temperature	05 ₁₆	PID(05)
#3	Data #1.1	6E ₁₆	DATA(A)
#4	PID #2: Number of emission-related DTCs and MIL status	01 ₁₆	PID(01)
#5	Data #2.1: MIL: ON; Number of emission-related DTCs: 03	83 ₁₆	DATA(A)
#6	Data #2.2: Misfire -, Fuel system -, Comprehensive monitoring	07 ₁₆	DATA(B)
#7	Data #2.3: Catalyst -, Heated catalyst -, ..., monitoring supported	EF ₁₆	DATA(C)
#8	Data #2.4: Catalyst -, Heated catalyst -, ..., monitoring test complete/not complete	63 ₁₆	DATA(D)
#9	PID #3: Bank 1 - Sensor 2	15 ₁₆	PID(15)
#10	Data #3.1: Bank 2 - Sensor 2: 0,8 Volt	A0 ₁₆	DATA(A)
#11	Data #3.2: Bank 2 - Sensor 2: 93,7 %	78 ₁₆	DATA(B)
#12	PID #4: Engine speed	0C ₁₆	PID(0C)
#13	Data #4.1: 667 rpm	0A ₁₆	DATA(A)

Table 161 (continued)

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (All PID values are in hexadecimal)	Byte Value	Mnemonic
#14	Data #4.2: 667 rpm	6B ₁₆	DATA(B)
#15	PID #5: Fuel system 1 status	03 ₁₆	PID(03)
#16	Data #5.1: Closed loop - using oxygen sensor(s) as feedback for fuel control	02 ₁₆	DATA(A)
#17	Data #5.2:	00 ₁₆	DATA(B)

Table 162 — ECU#2 response: Request current powertrain diagnostic data response message

Message Direction:		ECU#2 → External test equipment	
Message Type:		Response	
Data Byte	Description (All PID values are in hexadecimal)	Byte Value	Mnemonic
#1	Request current powertrain diagnostic data response SID	41 ₁₆	SIDPR
#2	PID #1: Vehicle speed	0D ₁₆	PID(0D)
#3	Data #1.1:	23 ₁₆	DATA(A)
#4	PID #2: Number of emission-related DTCs and MIL status	01 ₁₆	PID(01)
#5	Data #2.1: MIL: OFF; Number of emission-related DTCs: 01	01 ₁₆	DATA(A)
#6	Data #2.2: Comprehensive monitoring: supported, test complete	04 ₁₆	DATA(B)
#7	Data #2.3: Catalyst -, Heated catalyst -, ... monitoring supported	00 ₁₆	DATA(C)
#8	Data #2.4: Catalyst -, Heated catalyst -, ... monitoring test complete/not complete	00 ₁₆	DATA(D)

ECU #1 (ECM) reports MIL commanded on, three stored DTCs, all monitors as supported, catalyst, heated catalyst, oxygen sensor and oxygen sensor heater as not completed, and all other monitors as completed.

ECU #2 (TCM) reports MIL commanded off, one stored DTC, comprehensive components monitor as supported and complete, and all other monitors as not supported.

8.2 Service 02₁₆ — Request powertrain freeze frame data

8.2.1 Functional description

The purpose of this service is to allow access to emission-related data values in a freeze frame. This allows expansion to meet manufacturer-specific requirements not necessarily related to the required freeze frame and not necessarily containing the same data values as the required freeze frame. The request message includes a parameter identification (PID) value that indicates to the on-board system the specific information requested. PID specifications, scaling information, and display formats for the freeze frame are included in SAE J1979-DA.

The ECU(s) shall respond to this message by transmitting the requested data value stored by the system. All data values returned for sensor readings shall be actual stored readings, not default or substitute values used by the system because of a fault with that sensor.

Service 02₁₆ PID 02₁₆ indicates the DTC that caused the freeze frame data to be stored. If freeze frame data are not stored in the ECU, the system shall report 0000₁₆ as the DTC.

The frame number byte shall indicate 00₁₆ for the freeze frame data. Manufacturers may optionally save additional freeze frames and use this service to obtain that data by specifying the freeze frame

number in the request message. If a manufacturer uses these additional freeze frames, they shall be stored under conditions specified by the manufacturer and contain data specified by the manufacturer.

Not all PIDs are applicable or supported by all systems. PID 00₁₆ is a bit-encoded value that indicates for each ECU, for each frame, which PIDs are supported. Different freeze frames can support a different set of PIDs depending on the DTC that caused the frame to be stored. PID 00₁₆ indicates support for PIDs from 01₁₆ to 20₁₆. PID 20₁₆ indicates support for PIDs 21₁₆ through 40₁₆, etc. This is the same concept for PIDs/TIDs/INFOTYPEs support in Services 01₁₆, 02₁₆, 06₁₆, 08₁₆, 09₁₆. PID 00₁₆ is required for those ECUs that respond to a corresponding Service 02₁₆ request message as specified in SAE J1979-DA.

The order of the PIDs in the response message is not required to match the order in the request message.

External test equipment shall not request a combination of PIDs supported and PIDs which report data values. The ECU shall support requests for up to three (3) PIDs. The request message may contain the same PID multiple times. The ECU shall treat each PID as a separate parameter and respond with data for each PID as often as requested.

8.2.2 Message data bytes

8.2.2.1 Request powertrain freeze frame data request message definition (read-supported PIDs)

Table 163 — Request powertrain freeze frame data request message (read-supported PIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request powertrain freeze frame data request SID	M	02 ₁₆	SIDRQ
#2	PID#1 (PIDs supported: SAE J1979-DA)	M	XX ₁₆	PID
#3	frame #	M	XX ₁₆	FRNO_
#4	PID#2 (PIDs supported: SAE J1979-DA)	U ^a	XX ₁₆	PID
#5	frame #	U/C ^b	XX ₁₆	FRNO_
#6	PID#3 (PIDs supported: SAE J1979-DA)	U	XX ₁₆	PID
#7	frame #	U/C	XX ₁₆	FRNO_
^a U = User Optional. PID may be included to reduce multiple PID supported request messages.				
^b C = Conditional. Parameter is only included if the preceding PID# is included.				

To request PIDs supported range from 61₁₆ - FF₁₆, multiple request messages with PIDs = 60₁₆, 80₁₆, A0₁₆, C0₁₆, and E0₁₆ shall be sent to the vehicle.

8.2.2.2 Request powertrain freeze frame data response message definition (report supported PIDs)

The ECU(s) shall respond to all supported ranges if requested. A range is defined as a block of 32 PIDs (e.g. range #1: PID 01₁₆ - 20₁₆). The ECU shall not respond to unsupported PID ranges unless subsequent ranges have a supported PID(s).

Table 164 — Request powertrain freeze frame data response message (report supported PIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request powertrain freeze frame data response SID	M	42 ₁₆	SIDPR
#2	1 st supported PID	M	00 ₁₆	PID
^a C1 = Conditional. PID value shall be the same value as included in the request message if supported by the ECU.				
^b C2 = Conditional. Value indicates PIDs supported; range of supported PIDs depends on selected PID value (see C1).				

Table 164 (continued)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#3	frame #	M	XX ₁₆	FRNO_
#4	data record of supported PIDs = [Data A: supported PIDs, Data B: supported PIDs, Data C: supported PIDs, Data D: supported PIDs]	M	XX ₁₆	DATAREC_ DATA_A
#5		M	XX ₁₆	DATA_B
#6		M	XX ₁₆	DATA_C
#7		M	XX ₁₆	DATA_D
:	:	:	:	:
#n-5	m th supported PID	C1 ^a	XX ₁₆	PID
#n-4	frame #	C1	XX ₁₆	FRNO_
#n-3	data record of supported PIDs = [Data A: supported PIDs, Data B: supported PIDs, Data C: supported PIDs, Data D: supported PIDs]	C2 ^b	XX ₁₆	DATAREC_ DATA_A
#n-2		C2	XX ₁₆	DATA_B
#n-1		C2	XX ₁₆	DATA_C
#n		C2	XX ₁₆	DATA_D
^a C1 = Conditional. PID value shall be the same value as included in the request message if supported by the ECU.				
^b C2 = Conditional. Value indicates PIDs supported; range of supported PIDs depends on selected PID value (see C1).				

The response message shall only include the PID(s) and Data A to D which are supported by the ECU. If the request message includes a PID value(s) which is (are) not supported by the ECU, those shall not be included in the response message.

8.2.2.3 Request powertrain freeze frame data request message definition (read freeze frame PID values)

Table 165 — Request powertrain freeze frame data request message (read freeze frame PID values)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request powertrain freeze frame data request SID	M	02 ₁₆	SIDRQ
#2	PID#1 (see SAE J1979-DA)	M	XX ₁₆	PID
#3	frame #	M	XX ₁₆	FRNO
#4	PID#2 (see SAE J1979-DA)	U ^a	XX ₁₆	PID
#5	frame #	C1 ^b	XX ₁₆	FRNO
#6	PID#3 (see SAE J1979-DA)	U	XX ₁₆	PID
#7	frame #	C1	XX ₁₆	FRNO
^a U = User Optional. The parameter may be either present or not.				
^b C1 = Conditional. Parameter is only present if the preceding PID# is present.				

8.2.2.4 Request powertrain freeze frame data response message definition (report freeze frame PID values)

Table 166 — Request powertrain freeze frame data response message (report freeze frame PID values)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request powertrain freeze frame data response SID	M	42 ₁₆	SIDPR
#2	1 st supported PID	M	XX ₁₆	PID
#3	frame #	M	XX ₁₆	FRNO_
#4	data record of 1 st supported PID = [data #1.1, data #1.2, : data #1.j]	M	XX ₁₆	PIDREC_ DATA_1.1
#5		C1 ^a	XX ₁₆	DATA_1.2
:		:	XX ₁₆	:
#j+3		C1	XX ₁₆	DATA_1.j
:		:	:	:
#n	m th supported PID	C2 ^b	XX ₁₆	PID_
#n+1	frame #	C2	XX ₁₆	FRNO_
#n+2	data record of m th supported PID = [data #m.1, data #m.2, : data #m.k]	C4 ^c	XX ₁₆	PIDREC_ DATA_m.1
#n+3		C4 ^d	XX ₁₆	DATA_m.2
:		:	:	:
#n+k+1		C4	XX ₁₆	DATA_m.k

^a C1 = Conditional. Data depends on selected PID.

^b C2 = Conditional. Parameter shall be the same value as included in the request message and only present if supported.

^c C3 = Conditional. Data #m.1 shall be included if preceding PID is supported.

^d C4 = Conditional. Parameters and values for data depend on selected PID number.

8.2.3 Parameter definition

8.2.3.1 PIDs supported

SAE J1979-DA specifies the interpretation of the data record of supported PIDs.

8.2.3.2 PID and data byte descriptions

SAE J1979-DA specifies standardized emission-related parameters.

8.2.3.3 Frame number description

The frame number identifies the freeze frame, which includes emission-related data values in case an emission-related DTC is detected by the ECU.

8.2.4 Message example

The tables below show how the “request powertrain freeze frame data” service shall be implemented.

8.2.4.1 Step #1: Request supported powertrain freeze frame PIDs from vehicle

The external test equipment requests all supported powertrain freeze frame PIDs of freeze frame 00₁₆ from the vehicle. Refer to the example of Service 01₁₆ for guidance on requesting supported PIDs.

As a result of the supported PID request, the external test equipment creates an internal list of supported PIDs for each ECU. ECU#1 (ECM) supports the following PIDs: 02₁₆ - 09₁₆, 0B₁₆ - 0E₁₆. ECU#2 (TCM) does not support any PIDs for this service.

8.2.4.2 Step #2: Request PID 02₁₆ “DTC which caused freeze frame to be stored” from vehicle

Case #1: Freeze frame data are stored in ECU#1:

Now the external test equipment requests PID 02₁₆ of freeze frame 00₁₆ from the vehicle. Since ECU#2 (TCM) does not store a freeze frame data record, only ECU#1 (ECM) will send a response message. In this example, the freeze frame data are stored based on a DTC P0130 occurrence. The parameter value of PID 02₁₆ “DTC that caused required freeze frame data storage” is set to the DTC P0130.

Table 167 — Request powertrain freeze frame data request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request powertrain freeze frame data request SID	02 ₁₆	SIDRQ
#2	PID: DTC that caused required freeze frame data storage	02 ₁₆	PID
#3	Frame #	00 ₁₆	FRNO

Table 168 — Request powertrain freeze frame data response message

Message Direction:	ECU#1 → External test equipment		
Message Type:	Response		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request powertrain freeze frame data response SID	42 ₁₆	SIDRQ
#2	PID: DTC that caused required freeze frame data storage	02 ₁₆	PID
#3	Frame #	00 ₁₆	FRNO
#4	DTC High Byte of P0130	01 ₁₆	DATA_A
#5	DTC Low Byte of P0130	30 ₁₆	DATA_B

NOTE ECU#2 does not store freeze frame data and therefore does not send a response message.

Now the external test equipment requests the parameter value of PID 0C₁₆ “Engine Speed”, PID 05₁₆ “Engine coolant temperature”, and PID 04₁₆ “Load”, stored in the freeze frame.

Table 169 — Request powertrain freeze frame data request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request powertrain freeze frame data request SID	02 ₁₆	SIDRQ
#2	PID: Engine Speed	0C ₁₆	PID
#3	Frame #	00 ₁₆	FRNO
#4	PID: Engine coolant temperature	05 ₁₆	PID
#5	Frame #	00 ₁₆	FRNO
#4	PID: Load	04 ₁₆	PID
#5	Frame #	00 ₁₆	FRNO

Table 170 — Request powertrain freeze frame data response message

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request powertrain freeze frame data response SID	42 ₁₆	SIDRQ
#2	PID: Engine Speed	0C ₁₆	PID
#3	Frame #	00 ₁₆	FRNO
#4	High Byte: Engine Speed: 2080 rpm	20 ₁₆	DATA_A
#5	Low Byte: Engine Speed: 2080 rpm	80 ₁₆	DATA_B
#6	PID: Load	04 ₁₆	PID
#7	Frame #	00 ₁₆	FRNO
#8	Load: 50,2 %	80 ₁₆	DATA_A
#9	PID: Engine coolant temperature	05 ₁₆	PID
#10	Frame #	00 ₁₆	FRNO
#11	Engine coolant temperature: 0 °C	28 ₁₆	DATA_A

Case #2: No freeze frame data are stored in any ECU:

If no freeze frame data are stored, then the parameter value of PID 02₁₆ “DTC that caused required freeze frame data storage” is set to 0000₁₆. If the external test equipment requests a PID excluding 00₁₆, 02₁₆, 20₁₆, 40₁₆, etc., the ECU shall not send a response message.

Table 171 — Request powertrain freeze frame data request message

Message Direction:		External test equipment → All ECUs	
Message Type:		Request	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request powertrain freeze frame data request SID	02 ₁₆	SIDRQ
#2	PID: DTC that caused required freeze frame data storage	02 ₁₆	PID
#3	Frame #	00 ₁₆	FRNO

Table 172 — Request powertrain freeze frame data response message

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request powertrain freeze frame data response SID	42 ₁₆	SIDRQ
#2	PID: DTC that caused required freeze frame data storage	02 ₁₆	PID
#3	Frame #	00 ₁₆	FRNO
#4	DTC High Byte of P0000 {no freeze frame data stored}	00 ₁₆	DATA_A
#5	DTC Low Byte of P0000 {no freeze frame data stored}	00 ₁₆	DATA_B

Case #3: Multiple freeze frames

Cases #1 and #2 imply a scenario where only the required freeze frame (frame 00₁₆) is stored. This scenario implies the use of static PID support data where PID support data for a given ECU does not change for different frames or different DTCs. Since the PID support data are static, it can be obtained even before a freeze frame is stored.

Manufacturers who wish to store multiple freeze frames or, where allowed by OBD regulations, who wish to store different PID data in freeze frame based on the DTC would be required to use dynamic PID support data. Dynamic PID support data allows for different PID support data for different freeze frames and for different DTCs. Because of this, dynamic PID support data are not valid until a freeze frame for a particular frame has been stored. Requesting PID support data before a freeze frame is stored would indicate that only PID 02₁₆ is supported.

External test equipment that supports dynamic PID support data for freeze frame retrieval will be compatible with ECUs that support static PID support data as well as dynamic PID support data and is therefore the recommended approach.

In this example, every freeze frame supports a different set of PIDs. PID support cannot be determined until after a freeze frame is stored. In order to determine if there are any frames stored, the external test equipment shall request PID 02₁₆ of freeze frame 00₁₆ from the vehicle, then request PID 02₁₆ frame 01₁₆, then request PID 02₁₆ frame 02₁₆, etc. Any frames that report a DTC will have freeze frame data stored. When a frame reports 0000₁₆, indicating no DTC stored and no freeze frame data, subsequent frames shall also report 0000₁₆. Note that this requires the ECU to store freeze frames in ascending order starting with frame 00₁₆, then 01₁₆, etc. There can be no gaps in the frame numbers, e.g. 00₁₆, then 02₁₆, then 05₁₆. If there are gaps, the tool would have to ask for every possible frame from 00₁₆ to FF₁₆ to make sure that all frames are available to the technician. Therefore, gaps are not allowed.

Next, the external test equipment presents a list of available DTCs to the technician. After the technician selects a DTC, the external test equipment requests the supported PIDs for the DTC the technician selected. Once the PIDs supported by that freeze frame have been determined, the external test equipment requests the supported PIDs for the frame associated with the DTC.

8.3 Service 03₁₆ — Request emission-related diagnostic trouble codes

8.3.1 Functional description

The purpose of this service is to enable the external test equipment to obtain “confirmed” emission-related DTCs.

Send a Service 03₁₆ request for all emission-related DTCs. Each ECU that has DTCs shall respond with one (1) message containing all emission-related DTCs. If an ECU does not have emission-related DTCs, then it shall respond with a message indicating no DTCs are stored by setting the parameter # of DTC to 00₁₆.

DTCs are transmitted in two (2) bytes of information for each DTC. The first two (2) bits (high order) of the first (1) byte for each DTC indicate whether the DTC is a powertrain, chassis, body, or network DTC (refer to SAE J2012 for additional interpretation of this structure). The second two (2) bits shall indicate the first digit of the DTC (0 through 3). The second (2) nibble of the first (1) byte and the entire second (2) byte are the next three (3) hexadecimal characters of the actual DTC reported as hexadecimal. A powertrain DTC transmitted as 0143₁₆ shall be displayed as P0143.

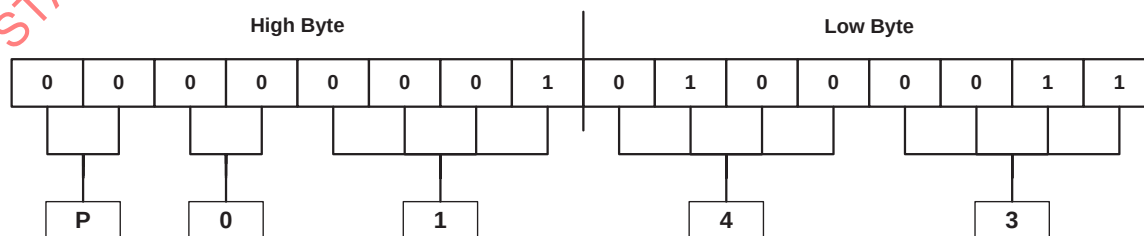


Figure 19 — Diagnostic trouble code encoding example DTC P0143

8.3.2 Message data bytes

8.3.2.1 Request emission-related DTC request message definition

Table 173 — Request emission-related DTC request message

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request emission-related DTC request SID	M	03 ₁₆	SIDRQ

8.3.2.2 Request emission-related DTC response message definition

Table 174 — Request emission-related DTC response message

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request emission-related DTC response SID	M	43 ₁₆	SIDPR
#2	# of DTC = [no emission-related DTCs stored emission-related DTCs stored]	M	XX ₁₆ = [00 ₁₆ , 01 ₁₆ – FF ₁₆	#OFDTC
#3	DTC#1 (High Byte)	C ^a	XX ₁₆	DTC1HI
#4	DTC#1 (Low Byte)	C	XX ₁₆	DTC1LO
:	:	:	XX ₁₆	
#n-1	DTC#m (High Byte)	C	XX ₁₆	DTCmHI
#n	DTC#m (Low Byte)	C	XX ₁₆	DTCmLO

^a C = Conditional. DTC#1 - DTC#m are only included if # of DTC parameter value ≠ 00₁₆.

8.3.3 Parameter definition

The # of DTC parameter reports the emission-related DTC(s) currently (at the time of the request message processing) stored in the ECU(s).

8.3.4 Message example

The tables below show how the “request emission-related DTCs” service shall be implemented. The external test equipment requests emission-related DTCs from the vehicle. The ECU#1 (ECM) has six (6) DTCs stored, the ECU#2 (TCM) has one (1) DTC stored, and the ECU#3 (ABS/Traction Control) has no DTC stored.

- ECU#1 (ECM): P0143, P0196, P0234, P02CD, P0357, P0A24
- ECU#2 (TCM): P0443
- ECU#3 (ABS/Traction Control): no emission-related DTC stored

Table 175 — Request emission-related diagnostic trouble codes request message

Message Direction:	External test equipment → All ECUs		
Message Type:	Request		
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request emission-related DTCs request SID	03 ₁₆	SIDRQ

Table 176 — Request emission-related diagnostic trouble codes response message

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request emission-related DTCs response SID	43 ₁₆	SIDPR
#2	# of DTC {number of emission-related DTCs stored in this ECU}	06 ₁₆	#OFDTC
#3	DTC High Byte of P0143	01 ₁₆	DTC1HI
#4	DTC Low Byte of P0143	43 ₁₆	DTC1LO
#5	DTC High Byte of P0196	01 ₁₆	DTC2HI
#6	DTC Low Byte of P0196	96 ₁₆	DTC2LO
#7	DTC High Byte of P0234	02 ₁₆	DTC3HI
#8	DTC Low Byte of P0234	34 ₁₆	DTC3LO
#9	DTC High Byte of P02CD	02 ₁₆	DTC4HI
#10	DTC Low Byte of P02CD	CD ₁₆	DTC4LO
#11	DTC High Byte of P0357	03 ₁₆	DTC5HI
#12	DTC Low Byte of P0357	57 ₁₆	DTC5LO
#13	DTC High Byte of P0A24	0A ₁₆	DTC6HI
#14	DTC Low Byte of P0A24	24 ₁₆	DTC6LO

Table 177 — Request emission-related diagnostic trouble codes response message

Message Direction:		ECU#3 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request emission-related DTCs response SID	43 ₁₆	SIDPR
#2	# of DTC {number of emission-related DTCs stored in this ECU}	00 ₁₆	#OFDTC

Table 178 — Request emission-related diagnostic trouble codes response message

Message Direction:		ECU#2 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Request emission-related DTCs response SID	43 ₁₆	SIDPR
#2	# of DTC {number of emission-related DTCs stored in this ECU}	01 ₁₆	#OFDTC
#3	DTC High Byte of P0443	04 ₁₆	DTC1HI
#4	DTC Low Byte of P0443	43 ₁₆	DTC1LO

8.4 Service 04₁₆ — Clear/Reset emission-related diagnostic information

8.4.1 Functional description

The purpose of this service is to provide a means for the external test equipment to command ECUs to clear all emission-related diagnostic information. This includes the following:

- MIL and number of diagnostic trouble codes (can be read with Service 01₁₆, PID 01₁₆);
- clear the I/M (Inspection/Maintenance) readiness bits (can be read with Service 01₁₆, PID 01₁₆);
- confirmed diagnostic trouble codes (can be read with Service 03₁₆);
- pending diagnostic trouble codes (can be read with Service 07₁₆);
- diagnostic trouble code for freeze frame data (can be read with Service 02₁₆, PID 02₁₆);
- freeze frame data (can be read with Service 02₁₆);
- status of system monitoring tests (can be read with Service 01₁₆, PID 41₁₆);
- on-board monitoring test results (can be read with Service 06₁₆);
- distance travelled while MIL is activated (can be read with Service 01₁₆, PID 21₁₆);
- number of warm-ups since DTCs cleared (can be read with Service 01₁₆, PID 30₁₆);
- distance travelled since DTCs cleared (can be read with Service 01₁₆, PID 31₁₆);
- engine run time while MIL is activated (can be read with Service 01₁₆, PID 4D₁₆);
- engine run time since DTCs cleared (can be read with Service 01₁₆, PID 4E₁₆);
- reset misfire counts of Standardized Test ID 0B₁₆ to zero (can be read with Service 06₁₆).

Other manufacturer-specific “clearing/resetting” actions may also occur in response to this request message. All ECUs shall respond to this request message with ignition ON and with the engine not running.

For safety and/or technical design reasons, ECUs that cannot perform this operation under other conditions, such as with the engine running, shall send a negative response message with NRC 22₁₆ - conditionsNotCorrect.

Some OBD regulations may require that all OBD ECUs clear diagnostic information under the same conditions (all ECUs shall clear diagnostic information with the engine off). If one ECU cannot clear diagnostic information with the engine running, then all OBD ECUs are required to respond in the same manner and not clear diagnostic information with the engine running.

8.4.2 Message data bytes

8.4.2.1 Clear/reset emission-related diagnostic information request message definition

Table 179 — Clear/reset emission-related diagnostic information request message

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Clear/reset emission-related diagnostic information request SID	M	04 ₁₆	SIDRQ

8.4.2.2 Clear/reset emission-related diagnostic information response message definition

Table 180 — Clear/reset emission-related diagnostic information response message

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Clear/reset emission-related diagnostic information response SID	M	44 ₁₆	SIDPR

8.4.3 Parameter definition

This service does not support any parameters.

8.4.4 Message example

The example below shows how the “clear/reset emission-related diagnostic information” service shall be implemented if ignition is ON and the engine is not running. The external test equipment commands the vehicle to “clear/reset emission-related diagnostic information”.

Table 181 — Clear/reset emission-related diagnostic information request message

Message Direction:	External test equipment → All ECUs			
Message Type:	Request			
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic	
#1	Clear/reset emission-related diagnostic information request SID	04 ₁₆	SIDRQ	

Table 182 — Clear/reset emission-related diagnostic information response message

Message Direction:	ECU#1 → External test equipment			
Message Type:	Response			
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic	
#1	Clear/reset emission-related diagnostic information response SID	44 ₁₆	SIDPR	

Table 183 — Clear/reset emission-related diagnostic information response message

Message Direction:	ECU#2 → External test equipment			
Message Type:	Response			
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic	
#1	Clear/reset emission-related diagnostic information response SID	44 ₁₆	SIDPR	

[Table 160](#) shows a negative response to “clear/reset emission-related diagnostic information” for an ECU that cannot clear diagnostic information with the engine running.

Table 184 — Negative response message

Message Direction:		ECU#1 → External test equipment	
Message Type:		Response	
Data Byte	Description (all values are in hexadecimal)	Byte Value	Mnemonic
#1	Negative Response Service Identifier	7F ₁₆	SIDNR
#2	Clear/reset emission-related diagnostic information request SID	04 ₁₆	SIDRQ
#3	Negative Response Code: conditionsNotCorrect	22 ₁₆	NR_CNC

8.5 Service 05₁₆ — Request oxygen sensor monitoring test results

Service 05₁₆ is not supported for ISO 15765-4. The functionality of Service 05₁₆ is implemented in Service 06₁₆.

8.6 Service 06₁₆ — Request on-board monitoring test results for specific monitored systems

8.6.1 Functional description

The purpose of this service is to allow access to the results for On-Board Diagnostic monitoring tests of specific components/systems that are continuously monitored (e.g. misfire monitoring for gasoline vehicles) and non-continuously monitored (e.g. catalyst system).

The request message for test values includes an On-Board Diagnostic Monitor ID (see SAE J1979-DA) that indicates the information requested. The response message for test values includes Unit and Scaling information which is defined in SAE J1979-DA. The vehicle manufacturer shall use Unit and Scaling IDs that most closely match the physical quantities used for monitoring in order to make the information more useful to a service technician for diagnostic purposes, e.g. an On-Board Diagnostic Monitor ID in which the monitor checks for a pressure change shall utilize a Unit and Scaling ID which includes pressure in the description.

The vehicle manufacturer is responsible for assigning “Manufacturer Defined Test IDs” for different tests of a monitored system. The latest valid test values (results) are to be retained, even over multiple ignition OFF cycles, until replaced by more recent test values (results). Test values (results) are requested by On-Board Diagnostic Monitor ID. Test values (results) are always reported with the Minimum and Maximum Test Limits. The Unit and Scaling ID included in the response message defines the scaling and unit to be used by the external test equipment to display the test values (results), Minimum Test Limit, and Maximum Test Limit information.

If an On-Board Diagnostic Monitor has not been completed at least once since a “clear/reset emission-related diagnostic information” request was carried out or battery disconnect that erased the latest valid test values, then the parameters Test Value (Results), Minimum Test Limit, and Maximum Test Limit shall be set to zero (0000₁₆) values. Note that for some unit and scaling IDs, 0000₁₆ translates to a non-zero result (e.g. Unit and Scaling ID 16₁₆ for temperature, 0000₁₆ displays as –40.0 °C) so some monitors that have not completed may show test results, minimum limits, and maximum limits that, after scaling, are all equal but are non-zero.

Not all On-Board Diagnostic Monitor IDs are applicable or supported by all systems. On-Board Diagnostic Monitor ID 00₁₆ is a bit-encoded value that indicates for each ECU which On-Board Diagnostic Monitor IDs are supported. On-Board Diagnostic Monitor ID 00₁₆ indicates support for On-Board Diagnostic Monitor IDs from 01₁₆ to 20₁₆. On-Board Diagnostic Monitor ID 20₁₆ indicates support for On-Board Diagnostic Monitor IDs 21₁₆ through 40₁₆, etc. This is the same concept for PIDs/TIDs/INFOTYPEs support in Services 01₁₆, 02₁₆, 06₁₆, 08₁₆, and 09₁₆. On-Board Diagnostic Monitor ID 00₁₆ is required for those ECUs that respond to a corresponding Service 06₁₆ request message as specified in SAE J1979-DA.

The request message including supported On-Board Diagnostic Monitor IDs may contain up to six (6) OBDMIDs. A request message including an On-Board Diagnostic Monitor ID, which reports test values shall only contain one (1) OBDMID. External test equipment shall not request a combination of OBDMIDs supported and a single OBDMID, which report test values. The ECU shall support requests for up to six (6) supported OBDMIDs and only one (1) OBDMID which reports test values.

A unique method shall be utilized for displaying data for monitors that have multiple tests. Many OBD monitors have multiple tests that are done in either a serial or parallel manner. If a monitor uses multiple OBD Monitor ID/Test ID combinations that may not all complete at the same time, the following method shall be used to update the stored test results at the time of monitor completion.

After the monitor completes, update all Monitor ID/Test ID combinations (or “test results”) that were utilized by the monitor with appropriate passing or failing results. If a test result (or “Monitor ID/Test ID”) was not utilized during this monitoring event, set the Test Values and Minimum and Maximum Test Limits to their initial values (0000₁₆, test not completed). Test results from the previously completed monitoring events shall not be mixed with test results from the current completed monitoring event.

In some cases, test results (or “Monitor ID/Test ID combinations”) will be displayed as being incomplete even though the monitor (as indicated by PID 41₁₆) was successfully completed and either passed or failed. In other cases, some Test IDs will show passing results while others will show failing results after the monitor (as indicated by PID 41₁₆) was successfully completed and failed. Note that OBD-II regulations prohibit a passing monitor from showing any failing test results. If an initial serial test indicates a failure and a subsequent re-test of the system indicates a passing result, the test that was utilized to make the passing determination should be displayed while the failing test that was utilized to make the initial determination should be reset to its initial values (0000₁₆, test not completed).

An example for a serial monitor is an evaporative leakage monitor where the monitor first checks a reference leak and then starts to execute the actual leakage check. If the reference test fails, then the leakage test is not executed.

As an example of a parallel monitor, a purge valve flow monitor can pass by having a large rich lambda shift, a large lean lambda shift, or a large engine rpm increase. If the purge valve is activated and a large rich lambda shift occurs, the Test ID for the rich lambda shift would show a passing result while the other two Test IDs would show incomplete. Since some Test IDs for a completed monitor will show incomplete, PID 41₁₆ shall be used to determine monitor completion status.

8.6.2 Message data bytes

8.6.2.1 Request on-board monitoring test results for specific monitored systems request message definition (read-supported OBDMIDs)

Table 185 — Request on-board monitoring test results for specific monitored systems request message (read-supported OBDMIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request on-board monitoring test results for specific monitored systems request SID	M	06 ₁₆	SIDRQ
#2	On-Board Diagnostic Monitor ID (OBDMIDs supported: SAE J1979-DA)	M	XX ₁₆	OBDMID
#3	On-Board Diagnostic Monitor ID (OBDMIDs supported: SAE J1979-DA)	U ^a	XX ₁₆	OBDMID
#4	On-Board Diagnostic Monitor ID (OBDMIDs supported: SAE J1979-DA)	U	XX ₁₆	OBDMID
#5	On-Board Diagnostic Monitor ID (OBDMIDs supported: SAE J1979-DA)	U	XX ₁₆	OBDMID

^a U = User Optional. OBDMID may be included to avoid multiple OBDMID supported request messages.

Table 185 (continued)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#6	On-Board Diagnostic Monitor ID (OBDMIDs supported: SAE J1979-DA)	U	XX ₁₆	OBDMID
#7	On-Board Diagnostic Monitor ID (OBDMIDs supported: SAE J1979-DA)	U	XX ₁₆	OBDMID
^a U = User Optional. OBDMID may be included to avoid multiple OBDMID supported request messages.				

To request OBDMIDs supported range from C1₁₆ - FF₁₆, another request message with OBDMID#1 = C0₁₆ and OBDMID#2 = E0₁₆ shall be sent to the vehicle.

8.6.2.2 Request on-board monitoring test results for specific monitored systems response message definition (report supported OBDMIDs)

ECU(s) shall respond to all supported ranges if requested. A range is defined as a block of 32 OBDMIDs (e.g. range #1: OBDMIDs 01₁₆ - 20₁₆). The ECU shall not respond to unsupported OBDMID ranges unless subsequent ranges have a supported OBDMID(s).

Table 186 — Request on-board monitoring test results for specific monitored systems response message (report supported OBDMIDs)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request on-board monitoring test results for specific monitored systems response SID	M	46 ₁₆	SIDPR
#2	data record of supported OBDMID = [1 st supported OBDMID Data A: supported OBDMIDs, Data B: supported OBDMIDs, Data C: supported OBDMIDs, Data D: supported OBDMIDs]	M	XX ₁₆	OBDMIDREC
#3		M	XX ₁₆	OBDMID
#4		M	XX ₁₆	DATA_A
#5		M	XX ₁₆	DATA_B
#6		M	XX ₁₆	DATA_C
#n-4	data record of supported OBDMID = [m th supported OBDMID Data A: supported OBDMIDs, Data B: supported OBDMIDs, Data C: supported OBDMIDs, Data D: supported OBDMIDs]	C1 ^a	XX ₁₆	DATA_D
#n-3		C2 ^b	XX ₁₆	OBDMIDREC
#n-2		C2	XX ₁₆	OBDMID
#n-1		C2	XX ₁₆	DATA_A
#n		C2	XX ₁₆	DATA_B
:	:	:	:	:
^a C1 = Conditional. OBDMID value shall be the same value as included in the request message if supported by the ECU.				
^b C2 = Conditional. Value indicates OBDMIDs supported; range of supported OBDMIDs depends on selected OBDMID value (see C1).				

The response message shall only include the OBDMID(s) and Data A to D, which are supported by the ECU. If the request message includes an OBDMID value(s) which is (are) not supported by the ECU, those shall not be included in the response message.

8.6.2.3 Request on-board monitoring test results for specific monitored systems request message definition (read OBDMID test values)

Table 187 — Request on-board monitoring test results for specific monitored systems request message (read OBDMID test values)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request on-board monitoring test results for specific monitored systems request SID	M	06 ₁₆	SIDRQ
#2	On-Board Diagnostic Monitor ID	M	XX ₁₆	OBDMID

8.6.2.4 Request on-board monitoring test results for specific monitored systems response message definition (report OBDMID test values)

Table 188 — Request on-board monitoring test results for specific monitored systems response message (report OBDMID test values)

Data Byte	Parameter Name	Cvt	Byte Value	Mnemonic
#1	Request on-board monitoring test results for specific monitored systems response SID	M	46 ₁₆	SIDPR
#2	data record of supported OBDMID = [			OBDMIDREC
	On-Board Diagnostic Monitor ID	M	XX ₁₆	OBDMID
#3	Std./Manuf. Defined TID#1	M	XX ₁₆	S/MDTID
#4	Unit And Scaling ID#1	M	XX ₁₆	UASID
#5	Test Value (High Byte)#1	M	XX ₁₆	TVHI
#6	Test Value (Low Byte)#1	M	XX ₁₆	TVLO
#7	Min Test Limit (High Byte)#1	M	XX ₁₆	MINTLHI
#8	Min Test Limit (Low Byte)#1	M	XX ₁₆	MINTLLO
#9	Max Test Limit (High Byte)#1	M	XX ₁₆	MAXTLHI
#10	Max Test Limit (Low Byte)#1]	M	XX ₁₆	MAXTLLO
:	:	:	:	:
#n-8	data record of supported OBDMID = [			OBDMIDREC
	On-Board Diagnostic Monitor ID	C1 ^a	XX ₁₆	OBDMID
#n-7	Std./Manuf. Defined TID#m	C2 ^b	XX ₁₆	S/MDTID
#n-6	Unit And Scaling ID#m	C2	XX ₁₆	UASID
#n-5	Test Value (High Byte)#m	C2	XX ₁₆	TVHI
#n-4	Test Value (Low Byte)#m	C2	XX ₁₆	TVLO
#n-3	Min Test Limit (High Byte)#m	C2	XX ₁₆	MINTLHI
#n-2	Min Test Limit (Low Byte)#m	C2	XX ₁₆	MINTLLO
#n-1	Max Test Limit (High Byte)#m	C2	XX ₁₆	MAXTLHI
#n	Max Test Limit (Low Byte)#m]	C2	XX ₁₆	MAXTLLO

^a C1 = Conditional. Parameter is only present if more than one (1) Manufacturer Defined TID is supported by the ECU for the requested Monitor ID.

^b C2 = Conditional. Parameter and value depend on selected Manufacturer Defined TID number and are only included if the Manufacturer Defined TID is supported by the ECU. The value shall be zero (00) in case the On-Board Diagnostic Monitor has not been completed at least once since clear/reset emission-related diagnostic information or battery disconnect.