
**Ophthalmic optics and instruments —
Electro-optical devices for enhancing low
vision**

*Optique et instruments ophtalmiques — Dispositifs électro-optiques
pour malvoyants*

STANDARDSISO.COM : Click to view the full PDF of ISO 15254:2009



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 15254:2009



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 15254 was prepared by Technical Committee ISO/TC 172, *Optics and photonics*, Subcommittee SC 7, *Ophthalmic optics and instruments*.

This second edition cancels and replaces the first edition (ISO 15254:2002), which has undergone minor revision to update normative references.

STANDARDSISO.COM : Click to view the full PDF of ISO 15254:2009

Ophthalmic optics and instruments — Electro-optical devices for enhancing low vision

1 Scope

This International Standard applies to electro-optical devices specified by the manufacturer for use by visually impaired persons, as low-vision aids.

It specifies electro-optical and mechanical requirements and test methods.

This International Standard does not cover optical devices for enhancing low vision which are specified in ISO 15253.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 12870, *Ophthalmic optics — Spectacle frames — Requirements and test methods*

ISO 15004-1, *Ophthalmic instruments — Fundamental requirements and test methods — Part 1: General requirements applicable to all ophthalmic instruments*

IEC 60601-1-1, *Medical electrical equipment — Part 1-1: General requirements for safety — Collateral standard: Safety requirements for medical electrical systems*

IEC 61000-4-2, *Electromagnetic compatibility (EMC) — Part 4-2: Testing and measuring techniques — Electrostatic discharge immunity test*

IEC 61000-4-3, *Electromagnetic compatibility (EMC) — Part 4-3: Testing and measurement techniques — Radiated, radio-frequency, electromagnetic field immunity test*

EN 55022, *Information technology equipment — Radio disturbance characteristics — Limits and methods of measurement* (IEC/CISPR 22:2005, modified + A1:2005)

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

electro-optical low-vision device

system intended for low vision that produces an image by electronic means

3.2

display size

horizontal and vertical dimensions of the display within which the image is visible

3.3

display magnification

ratio between any linear dimension of the displayed image and the corresponding dimension of the object

3.4

spatial resolution

smallest separation between two details in the object at which a pair of points may be recognized as being separate under a given set of conditions

3.5

object speed limit

maximum object speed which produces no discernible reduction in resolution

3.6

luminance ratio

ratio of the difference between the maximum and minimum luminance of the image to the minimum luminance

$$(L_{\max} - L_{\min})/L_{\min}$$

3.7

object table

device used to support and position the object being viewed

3.8

free working distance

(electro-optical low-vision device) accessible distance separating the camera or other image acquisition system and the object plane at a stated magnification

3.9

reverse polarity system

system that is capable of changing the polarity of the image from positive to negative or vice-versa

3.10

portable system

system that can be transported in its own package

4 Classification, designation and coding

Electro-optical low-vision devices are classified according to the following usage:

- a) hand-held;
- b) tabletop;
- c) portable system;
- d) head-mounted.

5 Requirements

5.1 General

Where a device is not designed as a complete system, the manufacturer shall state which displays are suitable to meet the requirements of this International Standard. The manufacturer shall also state the recommended display size for which the range of magnification applies.

5.2 Image characteristics

5.2.1 Spatial resolution

When tested in accordance with 7.2, using the level of illumination provided with the device or recommended by the manufacturer and with the device used as specified by the manufacturer, the system shall resolve a target consisting of line pairs measuring not more than 0,233 mm per pair (0,116 mm per element) within the central 70 % of the display size as declared by the manufacturer. The manufacturer shall state the magnification for which this level of spatial resolution is achieved.

5.2.2 Display magnification

When tested in accordance with 7.3, the display magnification over the central 20 % of the display shall be within ± 10 % of the value declared by the manufacturer.

5.2.3 Lateral variation of magnification

When tested in accordance with 7.4, the uniformity of the display magnification within the central 70 % of the linear dimensions of the display size as declared by the manufacturer shall be equal to the magnification at the centre of the display within ± 5 %.

5.2.4 Object speed limit

The system shall meet the spatial resolution requirements at a relative speed, between camera and object, of not less than 20 mm/s, and at the declared minimum magnification of the system.

5.2.5 Display luminance

The maximum display luminance shall be declared by the manufacturer when the contrast is set to the maximum specified by the manufacturer.

5.2.6 Luminance ratio

The luminance ratio shall be not less than 75 at the maximum display luminance.

5.3 Materials and construction

5.3.1 Object support

Objects having the dimensions of 300 mm $\times$ 220 mm, shall be accommodated by the display at its maximum magnification without changing the position of the object relative to its support.

5.3.2 Free working distance

Where the system is designed to have an accessible free working distance above the reading table, it shall, with the system set at maximum display magnification, be at least 100 mm.

5.3.3 Materials

Materials used in the construction, when used as intended by the manufacturer, shall, when applicable, conform to ISO 15004-1 and ISO 12870.

5.4 Electrical requirements

5.4.1 General

The system shall meet the fundamental requirements and test methods specified in ISO 15004-1.

5.4.2 Radio frequency interference

The electro-optical device shall comply with EN 55022 relative to radio interference.

5.4.3 Electrostatic discharge

The electro-optical device shall comply with IEC 61000-4-2 relative to electrostatic discharge.

5.4.4 Electromagnetic field

The electro-optical device shall comply with IEC 61000-4-3 relative to electromagnetic fields.

6 Environmental conditions of use

The electro-optical low-vision device shall, when in use, meet the fundamental environmental requirements and test conditions of ISO 15004-1.

7 Test methods

7.1 General

All the methods described are type tests. Equivalent alternative methods are acceptable, but it is the responsibility of the manufacturer/tester to demonstrate the equivalence of the methods used.

7.2 Spatial resolution test

7.2.1 Test principle

The following test arrangement shall be used to test the resolving power of electro-optical low-vision devices. An appropriate optotype or a Ronchi ruling or equivalent, oriented in the directions 90°, 180°, 45° and 135°, is used (see Figure 1 for an example). The criterion for assessing the resolution is the successful recognition of the optotype or the various directions of the ruling. The extent of the linear field of view in which the optotype can be resolved is measured.

The observer shall have a visual acuity of at least 1,0.

7.2.2 Test procedure

The observer shall wear any necessary corrective lenses for the viewing distance to the display.

To perform the test, place the target at the object position. The illumination of the target shall be as recommended by the manufacturer for normal use.

After alignment of the optotype, carry out the test at the maximum, mean and minimum values of the system magnification as declared by the manufacturer.

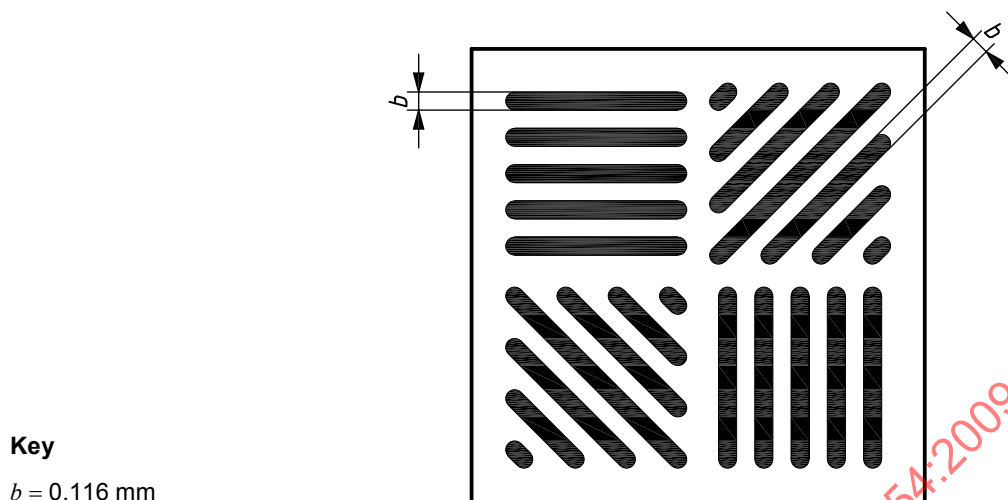


Figure 1 — Example of optotype for the spatial resolution test

7.3 Display magnification test

7.3.1 Equipment

Two identical measuring scales.

7.3.2 Procedure

Place one scale on the reading table and set the system at the minimum magnification. Then measure a length on that scale of 100 mm or some suitable value on the display with the other scale. The length on the scale on the display shall be the highest available to obtain the greatest accuracy.

Repeat the procedure with the system set at maximum magnification.

7.4 Lateral variation of magnification

When the method of 7.3.2 is repeated anywhere within the central 70 % of the display dimensions, the requirement of 5.2.3 shall be met.

8 Marking and instructions for use

8.1 Marking

Each device shall be marked with at least the following:

- identity of device and manufacturer, with model and serial number;
- product classification according to Clause 4;
- additional markings as required by IEC 60601-1-1, if applicable;
- manufacturer's stated range of magnification.

8.2 Documentation

Each device shall be accompanied by an instruction manual, in large print, giving instructions for care and maintenance of the device.