
**Collets with 8° setting angle for tool
shanks — Collets, nuts and fitting
dimensions**

*Pinces de serrage avec angle de réglage de 8° pour queues d'outil —
Pinces, écrous de serrage et dimensions d'assemblage*

STANDARDSISO.COM : Click to view the full PDF of ISO 15488:2003



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 15488:2003

© ISO 2003

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope.....	1
2 Normative references	1
3 Dimensions	1
3.1 General	1
3.2 Collets	2
3.3 Holder	4
3.4 Nut	5
3.5 Collet run-out tolerances.....	6
4 Material.....	7
4.1 Collet	7
4.2 Nut	7
5 Manufacturing requirements.....	7
5.1 Collet	7
5.2 Holder	7
5.3 Nut	7
6 Designation.....	8
6.1 Collet	8
6.2 Holder	8
6.3 Nut	8
6.4 Test mandrel	9
7 Marking.....	9
8 Operational set-up	9
Annex A (normative) Cone angle tolerances AT3 and AT4.....	11

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 15488 was prepared by Technical Committee ISO/TC 29, *Small tools*.

This second edition cancels and replaces the first edition (ISO 15488:1996), which has been technically revised. In particular, in Table 3, the values of d_{10} for nominal dimensions 25 mm and 32 mm as well, as the values of l_{10} for nominal values 25 mm, 32 mm and 40 mm, have been modified. Figure 5 has been modified for the sake of clarity.

Collets with 8° setting angle for tool shanks — Collets, nuts and fitting dimensions

1 Scope

This International Standard specifies the dimensions, materials and manufacturing requirements, and designation of collets (of form A or of form B) for tools with cylindrical shanks and their corresponding holders and nuts. For non-standardized clamping devices, such as clamping devices specified in drawings, these holders can be agreed upon between customer and supplier.

Form A applies to milling and any other application where a hard collet bore is required, provided that the clamping range of h10 be sufficient.

Form B applies for general purposes where an extended clamping range is required.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2768-1:1989, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*

3 Dimensions

3.1 General


Collets, holders and nuts need not correspond to Figures 1 to 3; only the given dimensions shall be complied with.

General tolerances: ISO 2768-m

3.2 Collets

See Figure 1 and Table 1.

Tolerances in millimetres,
surface roughness in micrometres

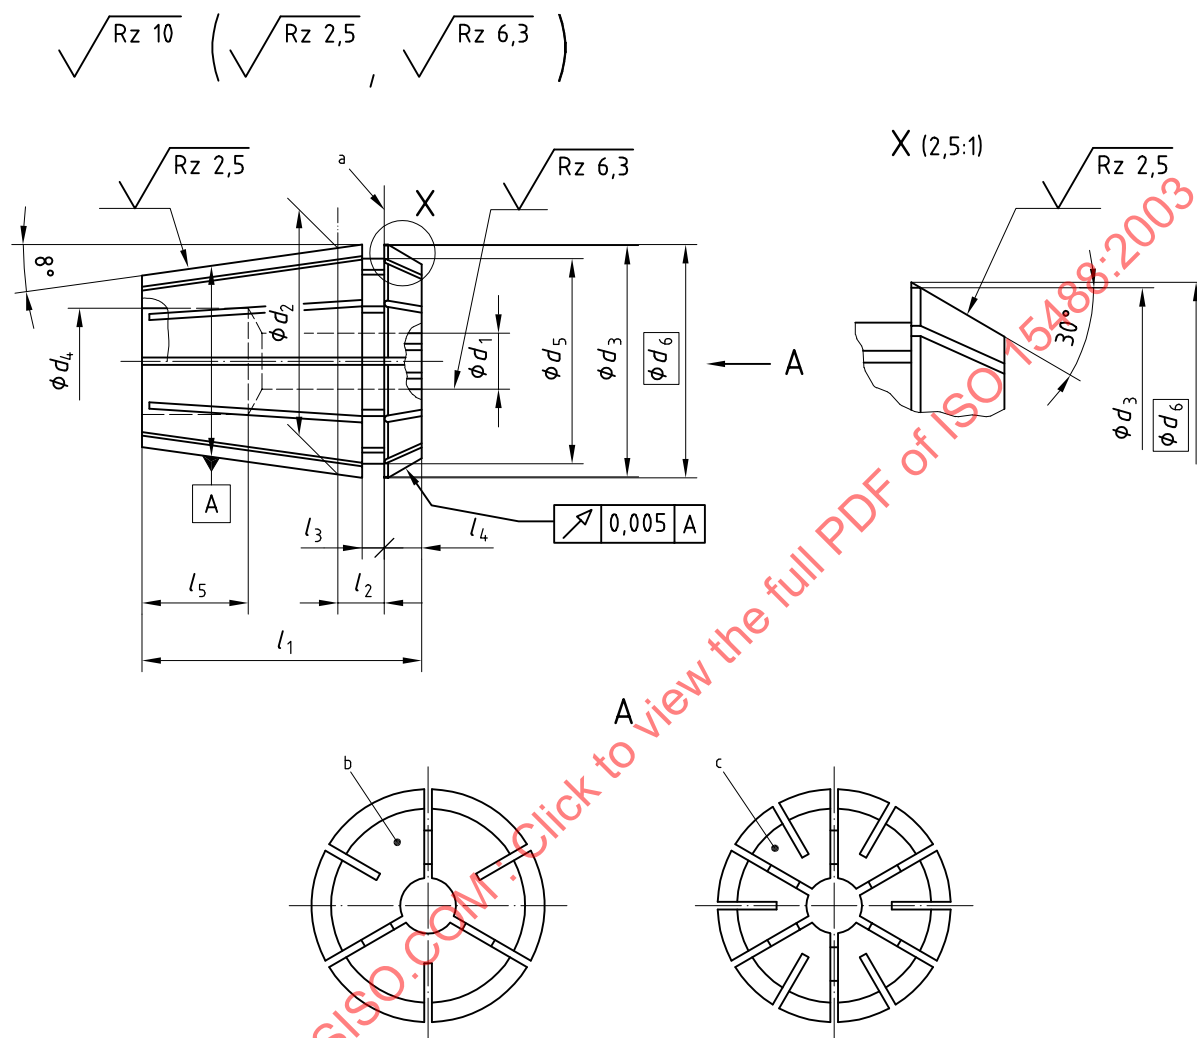

- a Reference area.
- b Form A, 6 to 8 slots.
- c Form B, 12 to 16 slots.

Figure 1 — Collets form A and form B

Table 1 — Collet dimensions

Nominal size	d_1		d_2	d_3		d_4		d_5	d_6		l_1	l_2		l_3		l_4	l_5
	H7			$0^{+0,2}_{-0}$		$0^{+0,2}_{-0}$			$0^{+0,2}_{-0}$			$0^{+0,2}_{-0}$					
	Form A ^a	Form B ^b		Form A	Form B	Form A	Form B		Form A	Form B		Form A	Form B				
	Nominal diameter			Form		Form			Form			Form		Form			
	from (incl.)	up to (incl.)		from (incl.)	up to (incl.)	A	B		A	B		A	B	A	B		
11	1	< 3	1	2,5	11	11,3	11,5	5	5	11,6	11,7	18	2	2	2	2,5	min. ± 0,2
	3	6	3	7					9,5								
16	1	< 5	1	4	16	16,74	17	7	7,5	17,1	17,25	27,5	2,3	2,3	2,7	4	9
	5	10	5	10					13,8								
20	1	< 7	1	6	20	20,74	21	9	10	21,1	21,3	31,5	2,4	2,4	2,8	4,8	12
	7	13	7	13					17,4								
25	1	< 8	2	7	25	25,74	26	10	12	26,1	26,3	34	2,5	2,5	3,1	5	13
	8	16	8	16					22								
32	2	< 8	3	7	32	32,74	33	12	15	33,1	33,35	40	2,7	2,7	3,6	5,5	15
	8	20	8	20					29,2								
40	3	< 9	4	8	40	40,74	41	14	20	41,1	41,4	46	3,5	3,5	4,1	7	18
	9	26	9	26					36,2								
a Form clamping range h10.																	
b Clamping range $-0^{+0,5}_{-0}$.																	
Nominal size 16 to 40, clamping range -1^{+0}_{-0} or, upon agreement, $-0^{+0,5}_{-0}$.																	

a Form clamping range h10.

b Clamping range $0^{+0,5}_{-0}$.Nominal size 16 to 40, clamping range 0^{+0}_{-1} or, upon agreement, $0^{+0,5}_{-0,5}$.

3.3 Holder

See Figure 2 and Table 2.

Tolerances in millimetres,
surface roughness in micrometers

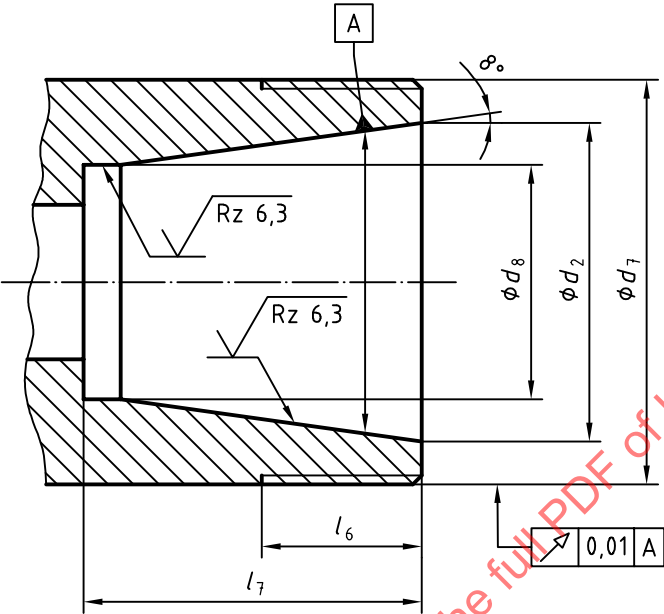


Figure 2 — Holder form C

Table 2 — Holder dimensions


Dimensions in millimetres

Nominal size		11	16	20	25	32	40
d_2	$\pm 0,05$	11	16	20	25	32	40
d_7	6g	M14 $\times$ 0,75	M22 $\times$ 1,5	M25 $\times$ 1,5	M32 $\times$ 1,5	M40 $\times$ 1,5	M50 $\times$ 1,5
d_8	$^{+0,5}_0$	7,5	10,5	13,5	18	23,5	30,5
l_6	min.	10	13	13,5	14	16	17
l_7	min.	17	22	26,5	29	34	38
(Form A or B)							

3.4 Nut

See Figure 3 and Table 3.

Tolerances in millimetres,
surface roughness in micrometres

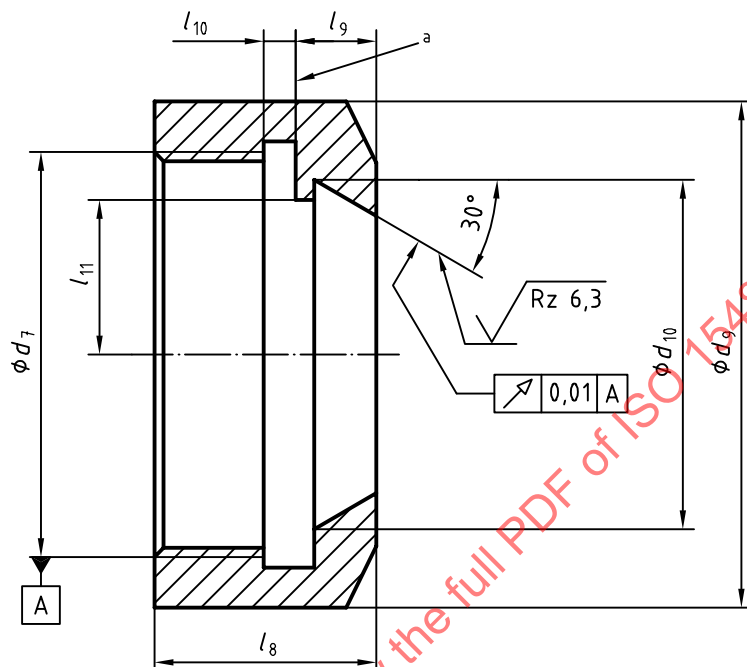

a Reference area.

Figure 3 — Nut form D

Table 3 — Nut dimensions

Dimensions in millimetres

Nominal size	d_7 6H	d_9	d_{10}	l_8	l_9	l_{10} 0 - 0,2	l_{11} max.
11	M14 × 0,75	19	12,1	11,3	3,1	1	5
16	M22 × 1,5	32	17,71	17,5	4,7	1,1	7,2
20	M25 × 1,5	35	21,76	19	5,5	1,2	9,2
25	M32 × 1,5	42	26,64	20	5,7	1,3	11,5
32	M40 × 1,5	50	33,57	22,5	6,2	1,6	14,9
40	M50 × 1,5	63	41,86	25,5	7,7	2,1	18,5


3.5 Collet run-out tolerances

Table 4 specifies collet run-out tolerances. These tolerances are checked as is shown in Figure 4 by the introduction of a test mandrel into the collet.

The diameter of the test mandrel is the nominal diameter of the collet.

For the test mandrel, the following specifications apply:

- a) diameter tolerance: $h6$;
- b) cylindricity: $0,002 \text{ mm}$;
- c) parallelism: $0,002 \text{ mm}$;
- d) roundness: $0,002 \text{ mm}$;
- e) surface without longitudinal marks;
- f) maximum surface roughness $Rz = 4 \text{ }\mu\text{m}$;
- g) surface hardness: $(58^{+3}_0) \text{ HRC}$.

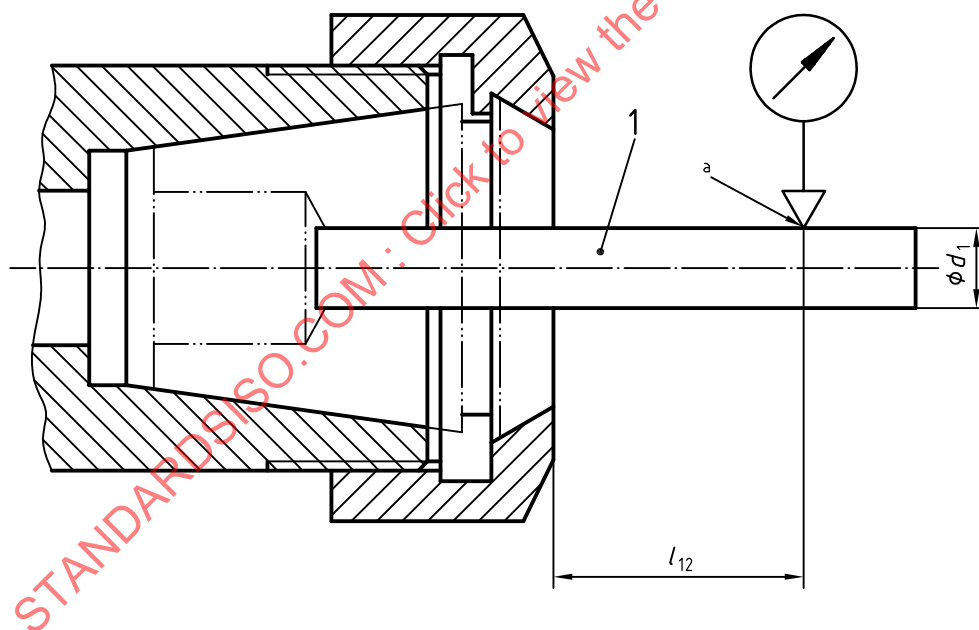

Key

1 test mandrel

a Test point.

Figure 4 — Testing of run-out tolerance

Table 4 — Collet run-out tolerance values

Dimensions in millimetres

d_1 H7 Nominal diameter		l_{12}	Run-out tolerance ^a	
above	up to (included)		Class 1 ^b	Class 2
1 (included)	1,6	6	0,01	0,015
1,6	3	10		
3	6	16		
6	10	25		
10	18	40	0,015	0,020
18	26	50		

^a Normal style collets are designed with run-out tolerance class 2. If class 1 is required, it shall be given separately, see 5.1.

^b In the case of applications where run-out tolerances class 1 are required, the accuracy of the whole system (machine tool spindle, holder, collet and tool) shall be observed.

4 Material

4.1 Collet

Steel, at manufacturer's discretion, with a tensile strength of at least 700 N/mm².

4.2 Nut

Steel, at manufacturer's discretion.

5 Manufacturing requirements

5.1 Collet

Collets form A and form B: bore and taper hardened, hardness (44^{+4}_0) HRC.

Tolerances of taper: AT3 in accordance with Table A.1.

Run-out tolerance: class 2, for normal styles.

5.2 Holder

Taper bore hardened, hardness (56^{+4}_0) HRC.

Tolerances of taper: AT4 in accordance with Table A.2.

5.3 Nut

Design at manufacturer's discretion.

6 Designation

6.1 Collet

A collet in accordance with this International Standard shall be designated by

- a) "Collet";
- b) reference to this International Standard, i.e. ISO 15488;
- c) form (A or B);
- d) nominal size;
- e) nominal diameter, d_1 , in millimetres;
- f) run-out tolerance in the case of class 1.

EXAMPLE 1 A collet of form B, nominal size 32 and nominal diameter $d_1 = 10$ mm is designated as follows:

Collet ISO 15488 - B 32 × 10

EXAMPLE 2 A collet of form B, nominal size 32, nominal diameter $d_1 = 10$ mm and of run-out tolerance class 1 is designated as follows:

Collet ISO 15488 - B 32 × 10 Cl1

6.2 Holder

A holder in accordance with this International Standard shall be designated by

- a) "Holder";
- b) reference to this International Standard, i.e. ISO 15488;
- c) form C;
- d) nominal size.

EXAMPLE A holder of form C and nominal size 32 is designated as follows:

Holder ISO 15488 - C 32

6.3 Nut

A nut in accordance with this International Standard shall be designated by

- a) "Nut";
- b) reference to this International Standard, i.e. ISO 15488;
- c) form D;
- d) nominal size.

EXAMPLE A nut of form D and nominal size 32 is designated as follows:

Nut ISO 15488 - D 32