

---

---

**Pneumatic fluid power — Cylinders  
with detachable mountings,  
1 000 kPa (10 bar) series, bores from  
32 mm to 320 mm — Basic, mounting  
and accessories dimensions**

*Transmissions pneumatiques — Vérins avec fixations détachables,  
série 1 000 kPa (10 bar), alésages de 32 mm à 320 mm — Dimensions  
de base, des fixations et des accessoires*



STANDARDSISO.COM : Click to view the full PDF of ISO 15552:2018



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Fax: +41 22 749 09 47  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

|                                                                       | Page      |
|-----------------------------------------------------------------------|-----------|
| Foreword .....                                                        | iv        |
| Introduction .....                                                    | v         |
| <b>1 Scope .....</b>                                                  | <b>1</b>  |
| <b>2 Normative references .....</b>                                   | <b>1</b>  |
| <b>3 Terms and definitions .....</b>                                  | <b>1</b>  |
| <b>4 Dimensions .....</b>                                             | <b>1</b>  |
| 4.1 Basic dimensions .....                                            | 1         |
| 4.2 Mounting dimensions .....                                         | 1         |
| 4.3 Accessories dimensions .....                                      | 2         |
| <b>5 Nominal stroke .....</b>                                         | <b>2</b>  |
| <b>6 Bore sizes .....</b>                                             | <b>2</b>  |
| <b>7 Mounting types .....</b>                                         | <b>3</b>  |
| <b>8 Accessory types .....</b>                                        | <b>3</b>  |
| <b>9 Product designation codes .....</b>                              | <b>3</b>  |
| <b>10 Identification statement (reference to this document) .....</b> | <b>3</b>  |
| <b>Bibliography .....</b>                                             | <b>18</b> |

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 131, *Fluid power systems*, Subcommittee SC 3, *Cylinders*.

This second edition cancels and replaces the first edition (ISO 15552:2004), which has been technically revised.

The main changes made are:

- Symbols for the accessory types have been made to be the same as the symbols in ISO 6099;
- Characteristics of the piston rod were added to 4.1;
- Product designation codes were added;
- The port size for each piston bore diameter was added to "Basic dimensions".

## Introduction

In pneumatic fluid power systems, power is transmitted and controlled through a gas under pressure within a circuit.

One component of such systems is the pneumatic cylinder. This is a device which converts power into linear mechanical force and motion. It consists of a movable element, i.e. a piston, and a piston rod, operating within a cylindrical bore.

To enable them to be fastened to user mechanisms, pneumatic cylinders comprise, in addition, some devices called “mountings”.

STANDARDSISO.COM : Click to view the full PDF of ISO 15552:2018

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 15552:2018

# Pneumatic fluid power — Cylinders with detachable mountings, 1 000 kPa (10 bar) series, bores from 32 mm to 320 mm — Basic, mounting and accessories dimensions

## 1 Scope

This document establishes a metric series of basic, mounting and accessories dimensions as required for interchangeability of single or double rod pneumatic cylinders with or without provision for magnetic sensors for a maximum rated pressure of 1 000 kPa (10 bar).

It applies to pneumatic cylinders with detachable mountings.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 273, *Fasteners — Clearance holes for bolts and screws*

ISO 3320, *Fluid power systems and components — Cylinder bores and piston rod diameters and area ratios — Metric series*

ISO 4393, *Fluid power systems and components — Cylinders — Basic series of piston strokes*

ISO 4395, *Fluid power systems and components — Cylinder piston rod end types and dimensions*

ISO 5598, *Fluid power systems and components — Vocabulary*

ISO 16030, *Pneumatic fluid power — Connections — Ports and stud ends*

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5598 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

## 4 Dimensions

### 4.1 Basic dimensions

The basic dimensions are given in [Tables 2](#) and [3](#) and shown in [Figures 2](#) and [3](#). The piston rod diameter shall be larger than the thread diameter (KK) to have a shouldered male thread end.

### 4.2 Mounting dimensions

The mounting dimensions are given in [Tables 4](#) to [9](#) and shown in [Figures 4](#) to [9](#).

The sign + after letters means that the stroke is to be added to the actual dimension.

4.3 Accessories dimensions

The accessories dimensions are given in [Tables 10 to 14](#) and shown in [Figures 10 to 14](#).

The tolerances of dimensions dependent on stroke included in the tables apply for strokes up to and including 1 250 mm. If strokes are longer than 1 250 mm, tolerances should be selected from national standards or by agreement between the manufacturer and user.

5 Nominal stroke

5.1 The nominal strokes shall be selected from the recommended values given in ISO 4393.

5.2 The nominal stroke tolerances are given in [Table 1](#) and shown in [Figure 1](#).

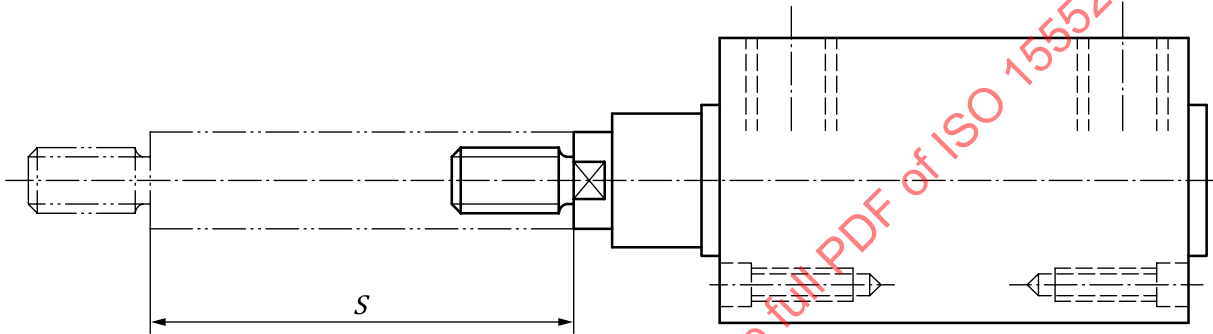


Figure 1 — Nominal stroke tolerances

Table 1 — Nominal stroke tolerances

| Dimensions in millimetres       |                     |                                       |
|---------------------------------|---------------------|---------------------------------------|
| Bore<br>AL                      | Nominal stroke<br>S | Nominal stroke tolerance <sup>a</sup> |
| 32<br>40<br>50                  | S ≤ 500             | +2<br>0                               |
|                                 | 500 < S ≤ 1 250     | +3,2<br>0                             |
| 63<br>80<br>100                 | S ≤ 500             | +2,5<br>0                             |
|                                 | 500 < S ≤ 1 250     | +4<br>0                               |
| 125<br>160<br>200<br>250<br>320 | S ≤ 500             | +4<br>0                               |
|                                 | 500 < S ≤ 1 250     | +5<br>0                               |

<sup>a</sup> See [4.3](#), paragraph 2.

6 Bore sizes

Included in this series are the following bore sizes AL in accordance with ISO 3320:

32 – 40 – 50 – 63 – 80 – 100 – 125 – 160 – 200 – 250 – 320 (in millimetres)

## 7 Mounting types

This document includes the following mounting types as described in ISO 6099:

- MF1 Head, rectangular flange (see [Table 4](#) and [Figure 4](#));
- MF2 Cap, rectangular flange (see [Table 4](#) and [Figure 4](#));
- MP2 Cap, detachable clevis (see [Table 5](#) and [Figure 5](#));
- MP4 Cap, detachable plain eye (see [Table 6](#) and [Figure 6](#));
- MP6 Cap, detachable eye with spherical bearing (see [Table 7](#) and [Figure 7](#));
- MS1 End angles (see [Table 8](#) and [Figure 8](#));
- MT4 Intermediate trunnion (male) fixed or mobile (see [Table 9](#) and [Figure 9](#)).

## 8 Accessory types

This document includes the following accessory types as described in ISO 6099:

- AA4-R Pivot pin plain (cotter pin or snap ring type) (see [Table 10](#) and [Figure 10](#));
- AA4-S Pivot pin plain (split pins) (see [Table 10](#) and [Figure 10](#));
- AA6-R Pivot pin, spherical bearing (cotter pin or snap ring type) (see [Table 11](#) and [Figure 11](#));
- AA6-S Pivot pin, spherical bearing (split pins) (see [Table 11](#) and [Figure 11](#));
- AB6 Clevis bracket, spherical eye, straight (see [Table 12](#) and [Figure 12](#));
- AB7 Eye bracket, in angle (see [Table 13](#) and [Figure 13](#));
- AT4 Trunnion bracket (see [Table 14](#) and [Figure 14](#)).

## 9 Product designation codes


A pneumatic cylinder with detachable mountings, mounting type = MT 4, bore = 80 mm, stroke = 200 mm, shall be designated as follows:

ISO 15552 – MT 4 – 80×200

## 10 Identification statement (reference to this document)

Use the following statement in test reports, catalogues, and sales literature when electing to comply with this document:

Basic, mounting and accessories dimensions of pneumatic cylinder according to ISO 15552 “*Pneumatic fluid power — Cylinders with detachable mountings, 1 000 kPa (10 bar) series, bores from 32 mm to 320 mm — Basic, mounting and accessories dimensions*”.

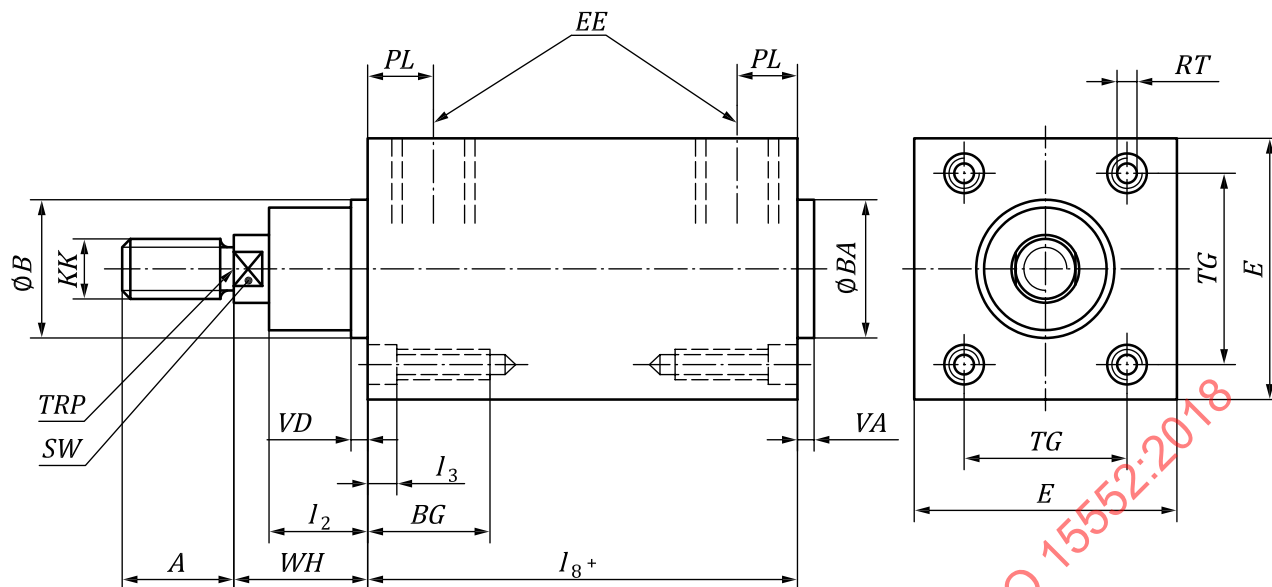**Key**

TRP theoretical reference point

**Figure 2 — Basic dimensions — Single rod cylinder**

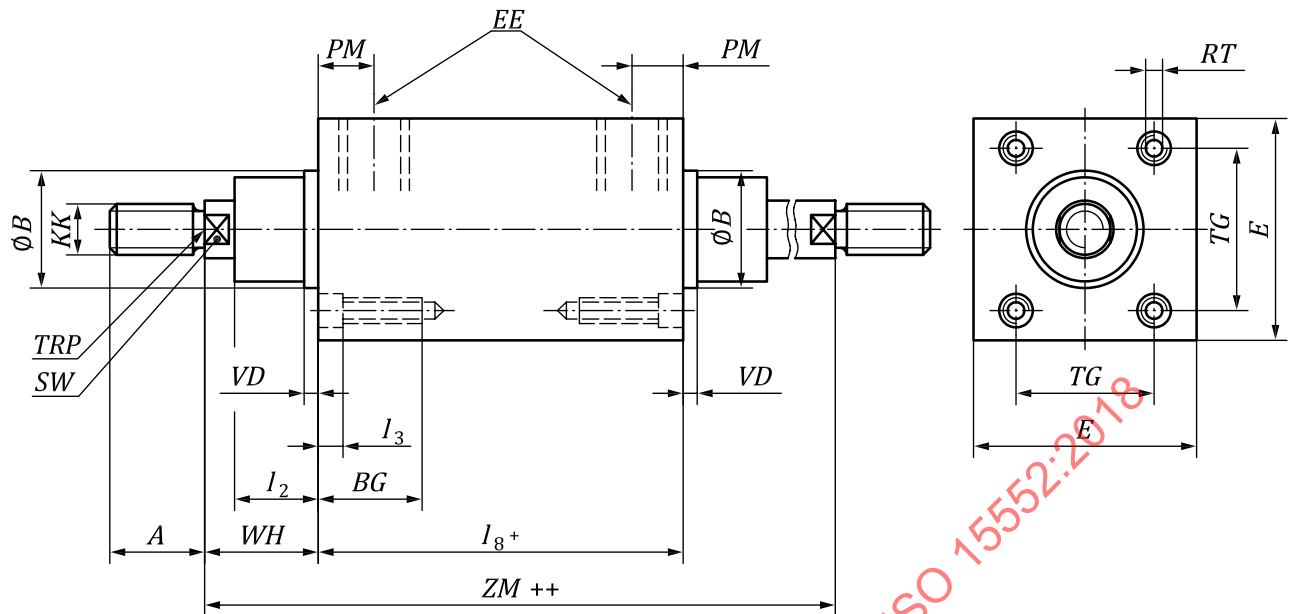
The connecting port and the cushion adjusting screw is placed on the same side as the port connection. The cushion adjusting screw has to be located within dimension  $E$ .

**Table 2 — Basic dimensions — Single rod cylinder**

Dimensions in millimetres

| <i>AL</i> | <i>EE<sup>b</sup></i> | <i>A</i> | <i>B</i><br><i>BA</i> | <i>BG</i> | <i>E</i> | <i>KK<sup>a</sup></i> | <i>l<sub>2</sub></i> | <i>l<sub>3</sub></i> | <i>l<sub>8</sub></i> |     | <i>PL</i> | <i>RT</i> | <i>SW</i> | <i>TG</i> |      | <i>VA</i> | <i>VD</i> | <i>WH</i> |     |      |
|-----------|-----------------------|----------|-----------------------|-----------|----------|-----------------------|----------------------|----------------------|----------------------|-----|-----------|-----------|-----------|-----------|------|-----------|-----------|-----------|-----|------|
|           |                       | 0<br>-2  | d11                   | min       | max      |                       | nom                  | tol                  | max                  | nom | tol       | min       |           |           | nom  | tol       | 0<br>-1   | min       | nom | tol  |
| 32        | G1/8"                 | 22       | 30                    | 16        | 50       | M10 × 1,25            | 20                   | -5                   | 5                    | 94  | ±0,4      | 13        | M6        | 10        | 32,5 | ±0,5      | 4         | 4         | 26  | ±1,4 |
| 40        | G1/4"                 | 24       | 35                    | 16        | 58       | M12 × 1,25            | 22                   |                      | 5                    | 105 | ±0,7      | 14        | M6        | 13        | 38   | ±0,5      | 4         | 4         | 30  | ±1,4 |
| 50        | G1/4"                 | 32       | 40                    | 16        | 70       | M16 × 1,5             | 29                   |                      | 5                    | 106 | ±0,7      | 14        | M8        | 17        | 46,5 | ±0,6      | 4         | 4         | 37  | ±1,4 |
| 63        | G3/8"                 | 32       | 45                    | 16        | 85       | M16 × 1,5             | 29                   |                      | 5                    | 121 | ±0,8      | 16        | M8        | 17        | 56,5 | ±0,7      | 4         | 4         | 37  | ±1,8 |
| 80        | G3/8"                 | 40       | 45                    | 17        | 105      | M20 × 1,5             | 35                   |                      | 0                    | 128 | ±0,8      | 16        | M10       | 22        | 72   | ±0,7      | 4         | 4         | 46  | ±1,8 |
| 100       | G1/2"                 | 40       | 55                    | 17        | 130      | M20 × 1,5             | 38                   |                      | 0                    | 138 | ±1        | 18        | M10       | 22        | 89   | ±0,7      | 4         | 4         | 51  | ±1,8 |
| 125       | G1/2"                 | 54       | 60                    | 20        | 157      | M27 × 2               | 50                   | -10                  | 0                    | 160 | ±1        | 18        | M12       | 27        | 110  | ±1,1      | 6         | 6         | 65  | ±2,2 |
| 160       | G3/4"                 | 72       | 65                    | 24        | 195      | M36 × 2               | 60                   |                      | 0                    | 180 | ±1,1      | 25        | M16       | 36        | 140  | ±1,1      | 6         | 6         | 80  | ±2,2 |
| 200       | G3/4"                 | 72       | 75                    | 24        | 238      | M36 × 2               | 70                   | -15                  | 0                    | 180 | ±1,6      | 25        | M16       | 36        | 175  | ±1,1      | 6         | 6         | 95  | ±2,2 |
| 250       | G1"                   | 84       | 90                    | 25        | 290      | M42 × 2               | 80                   |                      | 0                    | 200 | ±1,6      | 31        | M20       | 46        | 220  | ±1,5      | 10        | 10        | 105 | ±2,2 |
| 320       | G1"                   | 96       | 110                   | 28        | 353      | M48 × 2               | 90                   |                      | 0                    | 220 | ±2,2      | 31        | M24       | 55        | 270  | ±1,5      | 10        | 10        | 120 | ±2,2 |

<sup>a</sup> According to ISO 4395.<sup>b</sup> According to ISO 16030.

**Key**

TRP theoretical reference point

**Figure 3 — Basic dimensions — Double rod cylinder**

The connecting port and the cushion adjusting screw is placed on the same side as the port connection. The cushion adjusting screw has to be located within dimension  $E$ .

**Table 3 — Basic dimensions — Double rod cylinder**

| AL  | EE <sup>b</sup> | A              | B   | BG  | E   | KK <sup>a</sup> | $l_2$ | $l_3$ | $l_8$ | PM  | RT   | SW | TG  | VD  | WH   | ZM   |     |     |      |     |
|-----|-----------------|----------------|-----|-----|-----|-----------------|-------|-------|-------|-----|------|----|-----|-----|------|------|-----|-----|------|-----|
|     |                 | $\frac{0}{-2}$ | d11 | min | max |                 | nom   | max   | nom   | tol | min  |    | nom | tol | min  | nom  | tol |     |      |     |
| 32  | G1/8"           | 22             | 30  | 16  | 50  | M10 × 1,25      | 20    | -5    | 5     | 94  | ±0,4 | 13 | M6  | 10  | 32,5 | ±0,5 | 4   | 26  | ±1,4 | 146 |
| 40  | G1/4"           | 24             | 35  | 16  | 58  | M12 × 1,25      | 22    |       | 5     | 105 | ±0,7 | 14 | M6  | 13  | 38   | ±0,5 | 4   | 30  | ±1,4 | 165 |
| 50  | G1/4"           | 32             | 40  | 16  | 70  | M16 × 1,5       | 29    |       | 5     | 106 | ±0,7 | 14 | M8  | 17  | 46,5 | ±0,6 | 4   | 37  | ±1,4 | 180 |
| 63  | G3/8"           | 32             | 45  | 16  | 85  | M16 × 1,5       | 29    |       | 5     | 121 | ±0,8 | 16 | M8  | 17  | 56,5 | ±0,7 | 4   | 37  | ±1,8 | 195 |
| 80  | G3/8"           | 40             | 45  | 17  | 105 | M20 × 1,5       | 35    |       | 0     | 128 | ±0,8 | 16 | M10 | 22  | 72   | ±0,7 | 4   | 46  | ±1,8 | 220 |
| 100 | G1/2"           | 40             | 55  | 17  | 130 | M20 × 1,5       | 38    |       | 0     | 138 | ±1   | 18 | M10 | 22  | 89   | ±0,7 | 4   | 51  | ±1,8 | 240 |
| 125 | G1/2"           | 54             | 60  | 20  | 157 | M27 × 2         | 50    | -10   | 0     | 160 | ±1   | 18 | M12 | 27  | 110  | ±1,1 | 6   | 65  | ±2,2 | 290 |
| 160 | G3/4"           | 72             | 65  | 24  | 195 | M36 × 2         | 60    |       | 0     | 180 | ±1,1 | 25 | M16 | 36  | 140  | ±1,1 | 6   | 80  | ±2,2 | 340 |
| 200 | G3/4"           | 72             | 75  | 24  | 238 | M36 × 2         | 70    | -15   | 0     | 180 | ±1,6 | 25 | M16 | 36  | 175  | ±1,1 | 6   | 95  | ±2,2 | 370 |
| 250 | G1"             | 84             | 90  | 25  | 290 | M42 × 2         | 80    |       | 0     | 200 | ±1,6 | 31 | M20 | 46  | 220  | ±1,5 | 10  | 105 | ±2,2 | 410 |
| 320 | G1"             | 96             | 110 | 28  | 353 | M48 × 2         | 90    |       | 0     | 220 | ±2,2 | 31 | M24 | 55  | 270  | ±1,5 | 10  | 120 | ±2,2 | 460 |


a According to ISO 4395.

b According to ISO 16030.



Figure 1 consists of two schematic diagrams, (a) and (b), illustrating the Tool Reference Point (TRP) relative to a workpiece. In diagram (a), the TRP is located at the center of the workpiece, and the width of the workpiece is labeled as  $W$ . In diagram (b), the TRP is located at the edge of the workpiece, and the distance from the center of the workpiece to the TRP is labeled as  $ZF +$ .

© ISO 2018 – All rights reserved

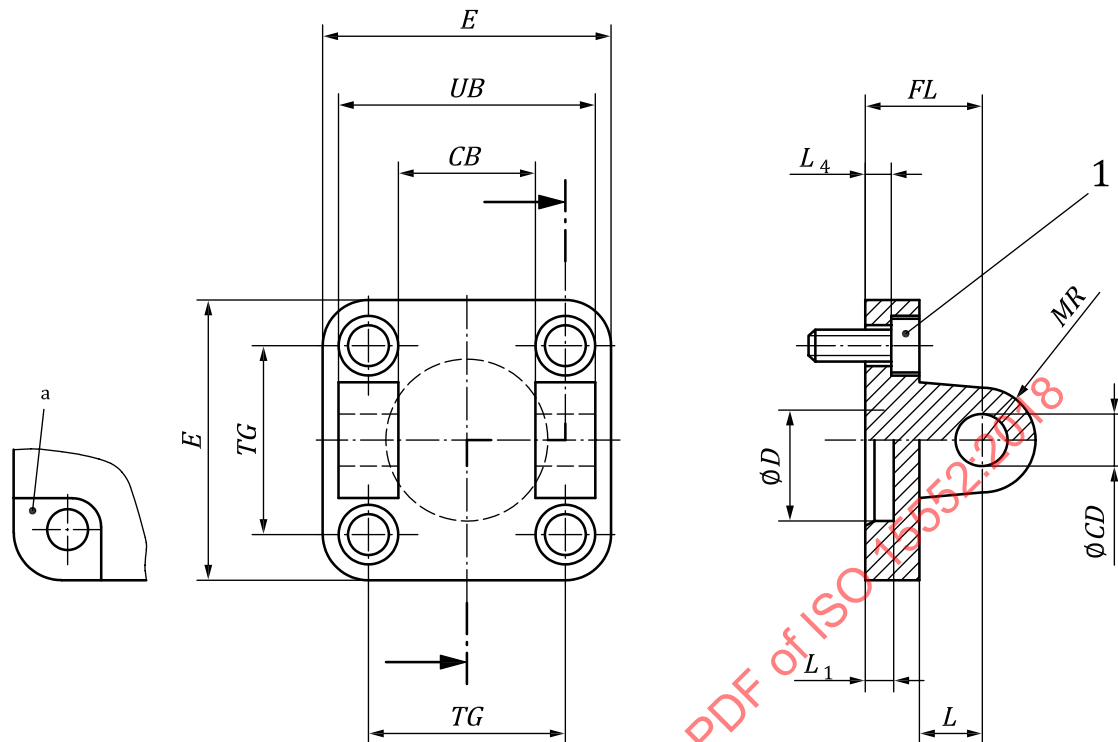**Key**

- 1 cap screw  
a Optional open counterbore.


**Figure 5 — Cap, detachable clevis (MP2)****Table 5 — Dimensions of cap, detachable clevis (MP2)**

Dimensions in millimetres


| <i>AL</i> | <i>E</i><br>max | <i>UB</i><br>h14 | <i>CB</i><br>H14 | <i>TG</i><br>nom<br>tol | <i>FL</i><br>±0,2 | <i>L<sub>1</sub></i><br>min | <i>L</i><br>min | <i>L<sub>4</sub></i><br>±0,5 | <i>D</i><br>H11 | <i>CD</i><br>H9 | <i>MR</i><br>max | Cap screw<br>size | <i>XD</i><br>nom<br>tol |
|-----------|-----------------|------------------|------------------|-------------------------|-------------------|-----------------------------|-----------------|------------------------------|-----------------|-----------------|------------------|-------------------|-------------------------|
| 32        | 50              | 45               | 26               | 32,5                    | ±0,2              | 22                          | 4,5             | 12                           | 5,5             | 30              | 10               | M6 × 20           | 142                     |
| 40        | 58              | 52               | 28               | 38                      |                   | 25                          | 4,5             | 15                           | 5,5             | 35              | 12               | M6 × 20           | 160                     |
| 50        | 70              | 60               | 32               | 46,5                    |                   | 27                          | 4,5             | 15                           | 6,5             | 40              | 12               | M8 × 20           | 170                     |
| 63        | 85              | 70               | 40               | 56,5                    |                   | 32                          | 4,5             | 20                           | 6,5             | 45              | 16               | M8 × 20           | 190                     |
| 80        | 105             | 90               | 50               | 72                      |                   | 36                          | 4,5             | 20                           | 10              | 45              | 16               | M10 × 25          | 210                     |
| 100       | 130             | 110              | 60               | 89                      |                   | 41                          | 4,5             | 25                           | 10              | 55              | 20               | M10 × 25          | 230                     |

Table 5 (continued)

| <i>AL</i> | <i>E</i><br>max | <i>UB</i><br>h14 | <i>CB</i><br>H14 | <i>TG</i> |      | <i>FL</i><br>±0,2 | <i>L</i> <sub>1</sub><br>min | <i>L</i><br>min | <i>L</i> <sub>4</sub><br>±0,5 | <i>D</i><br>H11 | <i>CD</i><br>H9 | <i>MR</i><br>max | Cap screw<br>size | <i>XD</i> |      |
|-----------|-----------------|------------------|------------------|-----------|------|-------------------|------------------------------|-----------------|-------------------------------|-----------------|-----------------|------------------|-------------------|-----------|------|
|           |                 |                  |                  | nom       | tol  |                   |                              |                 |                               |                 |                 |                  |                   | nom       | tol  |
| 125       | 157             | 130              | 70               | 110       | ±0,3 | 50                | 7                            | 30              | 10                            | 60              | 25              | 26               | M12 × 25          | 275       | ±2   |
| 160       | 195             | 170              | 90               | 140       |      | 55                | 7                            | 35              | 10                            | 65              | 30              | 31               | M16 × 30          | 315       |      |
| 200       | 238             | 170              | 90               | 175       |      | 60                | 7                            | 35              | 11                            | 75              | 30              | 31               | M16 × 30          | 335       |      |
| 250       | 290             | 200              | 110              | 220       |      | 70                | 11                           | 45              | 11                            | 90              | 40              | 41               | M20 × 35          | 375       |      |
| 320       | 353             | 220              | 120              | 270       |      | 80                | 11                           | 50              | 15                            | 110             | 45              | 46               | M24 × 40          | 420       | ±2,5 |

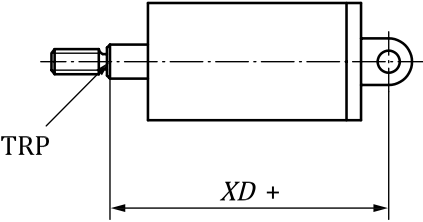

TRP Theoretical reference point.

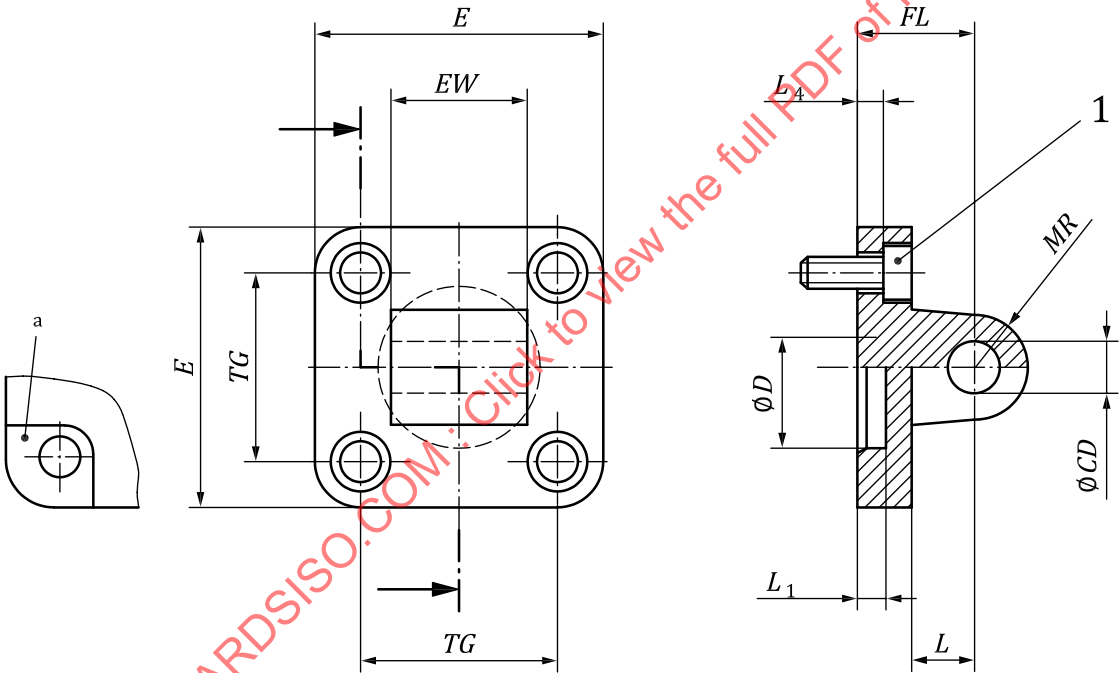

Key

1 cap screw


a Optional open counterbore.

Figure 6 — Cap, detachable plain eye (MP4)


Table 6 — Dimensions of cap, detachable plain eye (MP4)

Dimensions in millimetres

| <i>AL</i> | <i>E</i> | <i>EW</i> |              | <i>TG</i> |      | <i>FL</i> | <i>L</i> <sub>1</sub> | <i>L</i> | <i>L</i> <sub>4</sub> | <i>D</i> | <i>CD</i> | <i>MR</i> | Cap screw size | <i>XD</i> |       |
|-----------|----------|-----------|--------------|-----------|------|-----------|-----------------------|----------|-----------------------|----------|-----------|-----------|----------------|-----------|-------|
|           | max      | nom       | tol          | nom       | tol  | ±0,2      | min                   | min      | ±0,5                  | H11      | H9        | max       |                | nom       | tol   |
| 32        | 50       | 26        | -0,2<br>-0,6 | 32,5      | ±0,2 | 22        | 4,5                   | 12       | 5,5                   | 30       | 10        | 11        | M6 × 20        | 142       | ±1,25 |
| 40        | 58       | 28        |              | 38        |      | 25        | 4,5                   | 15       | 5,5                   | 35       | 12        | 13        | M6 × 20        | 160       |       |
| 50        | 70       | 32        |              | 46,5      |      | 27        | 4,5                   | 15       | 6,5                   | 40       | 12        | 13        | M8 × 20        | 170       |       |
| 63        | 85       | 40        |              | 56,5      |      | 32        | 4,5                   | 20       | 6,5                   | 45       | 16        | 17        | M8 × 20        | 190       | ±1,6  |
| 80        | 105      | 50        |              | 72        |      | 36        | 4,5                   | 20       | 10                    | 45       | 16        | 17        | M10 × 25       | 210       |       |
| 100       | 130      | 60        |              | 89        |      | 41        | 4,5                   | 25       | 10                    | 55       | 20        | 21        | M10 × 25       | 230       |       |
| 125       | 157      | 70        | -0,5<br>-1,2 | 110       | ±0,3 | 50        | 7                     | 30       | 10                    | 60       | 25        | 26        | M12 × 25       | 275       | ±2    |
| 160       | 195      | 90        |              | 140       |      | 55        | 7                     | 35       | 10                    | 65       | 30        | 31        | M16 × 30       | 315       |       |
| 200       | 238      | 90        |              | 175       |      | 60        | 7                     | 35       | 11                    | 75       | 30        | 31        | M16 × 30       | 335       |       |
| 250       | 290      | 110       |              | 220       |      | 70        | 11                    | 45       | 11                    | 90       | 40        | 41        | M20 × 35       | 375       |       |
| 320       | 353      | 120       |              | 270       |      | 80        | 11                    | 50       | 15                    | 110      | 45        | 46        | M24 × 40       | 420       |       |

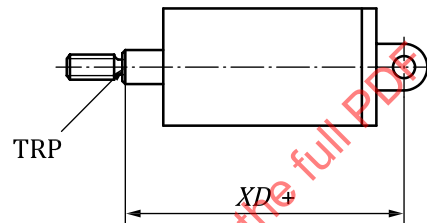

TRP Theoretical reference point.

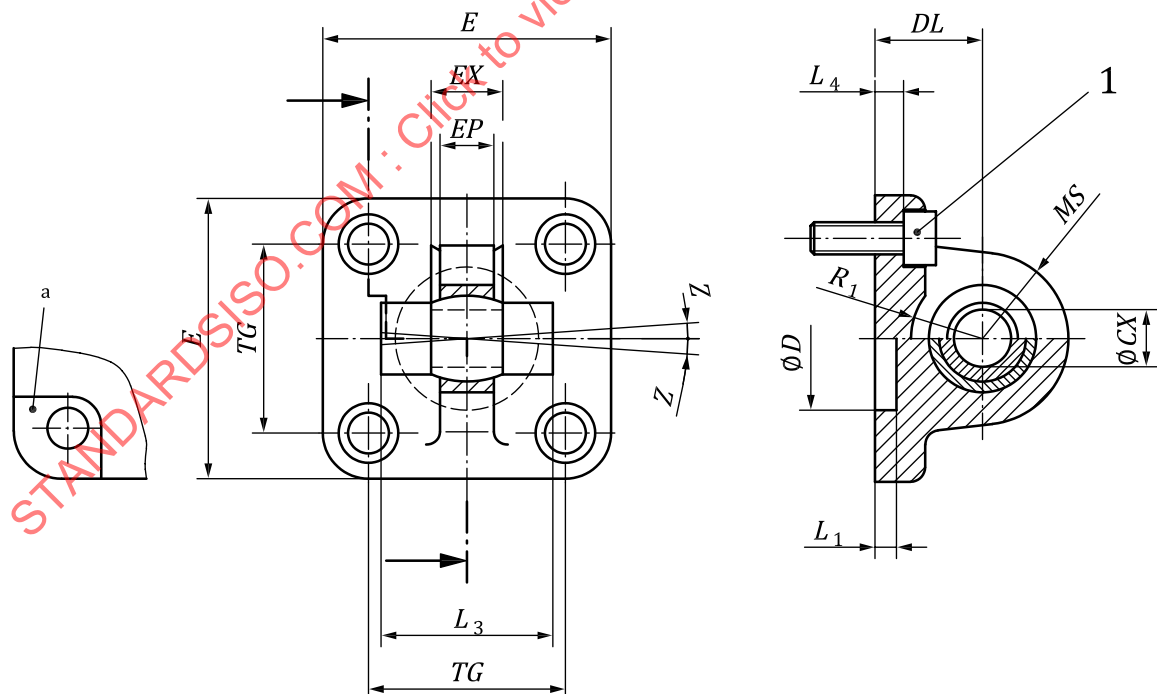**Key**

1 cap screw


a Optional counterbore.

Figure 7 — Cap, detachable eye with spherical bearing (MP6)


Table 7 — Dimensions of cap, detachable eye with spherical bearing (MP6)

Dimensions in millimetres

| AL  | CX | E   | EX   | MS  | EP   | DL   | R1  | TG   |      | D   | L <sub>1</sub> | L <sub>4</sub> | L <sub>3</sub> | Cap<br>screw<br>size | XN  |       | Z   |
|-----|----|-----|------|-----|------|------|-----|------|------|-----|----------------|----------------|----------------|----------------------|-----|-------|-----|
|     | H7 | max | ±0,1 | max | max  | ±0,2 | min | nom  | tol  | H11 | min            | ±0,5           | min            |                      | nom | tol   | min |
| 32  | 10 | 50  | 14   | 18  | 10,5 | 22   | 12  | 32,5 | ±0,2 | 30  | 4,5            | 5,5            | 36             | M6 × 20              | 142 | ±1,25 | 4°  |
| 40  | 12 | 58  | 16   | 18  | 12   | 25   | 14  | 38   | ±0,2 | 35  | 4,5            | 5,5            | 42             | M6 × 20              | 160 |       |     |
| 50  | 16 | 70  | 21   | 21  | 15   | 27   | 19  | 46,5 | ±0,2 | 40  | 4,5            | 6,5            | 48             | M8 × 20              | 170 |       |     |
| 63  | 16 | 85  | 21   | 23  | 15   | 32   | 19  | 56,5 | ±0,2 | 45  | 4,5            | 6,5            | 55             | M8 × 20              | 190 | ±1,6  |     |
| 80  | 20 | 105 | 25   | 28  | 18   | 36   | 24  | 72   | ±0,2 | 45  | 4,5            | 10             | 70             | M10 × 25             | 210 |       |     |
| 100 | 20 | 130 | 25   | 30  | 18   | 41   | 24  | 89   | ±0,2 | 55  | 4,5            | 10             | 80             | M10 × 25             | 230 |       |     |
| 125 | 30 | 157 | 37   | 40  | 25   | 50   | 32  | 110  | ±0,3 | 60  | 7              | 10             | 100            | M12 × 25             | 275 | ±2    |     |
| 160 | 35 | 195 | 43   | 44  | 30   | 55   | 38  | 140  | ±0,3 | 65  | 7              | 10             | 125            | M16 × 30             | 315 |       |     |
| 200 | 35 | 238 | 43   | 47  | 30   | 60   | 40  | 175  | ±0,3 | 75  | 7              | 11             | 125            | M16 × 30             | 335 |       |     |
| 250 | 40 | 290 | 49   | 53  | 35   | 70   | 44  | 220  | ±0,3 | 90  | 11             | 11             | 130            | M20 × 35             | 375 |       |     |
| 320 | 50 | 353 | 60   | 63  | 45   | 80   | 54  | 270  | ±0,3 | 110 | 11             | 15             | 160            | M24 × 40             | 420 |       |     |

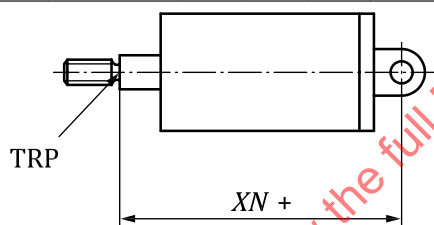

TRP Theoretical reference point.

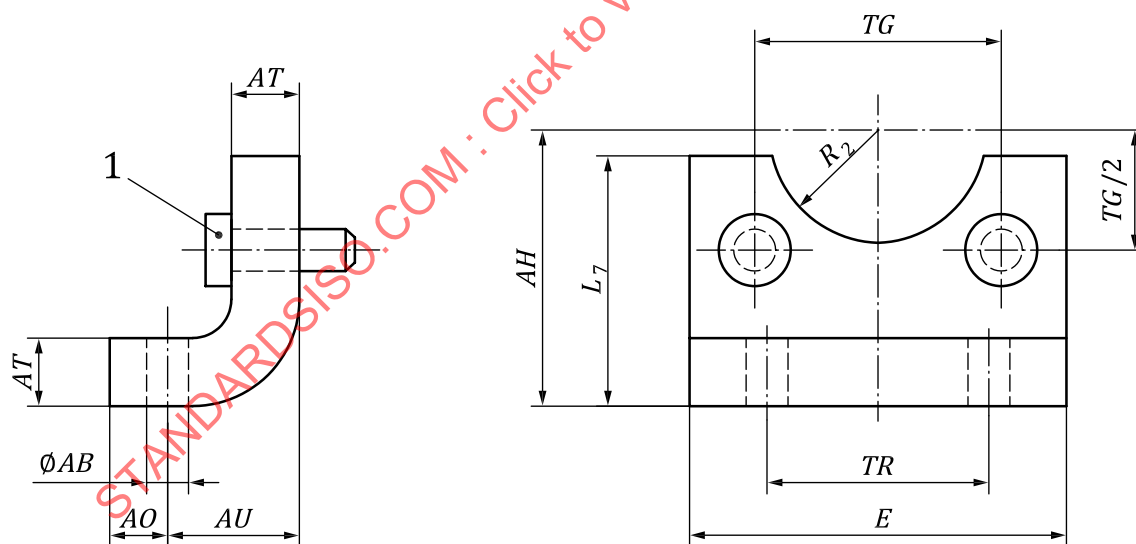

## Key


1 cap screw

Figure 8 — End angles (MS1)

Table 8 — Dimensions of end angles (MS1)

Dimensions in millimetres

| AL  | AB   | TG   |            | E   | TR  | AO | AU | AH  | L <sub>7</sub> |          | AT   |          | R <sub>2</sub> | Cap<br>screw<br>size | SA   |            | XA         |       |
|-----|------|------|------------|-----|-----|----|----|-----|----------------|----------|------|----------|----------------|----------------------|------|------------|------------|-------|
|     |      | H14  | nom<br>tol |     |     |    |    |     | max            | JS14     | max  | ±0,2     |                |                      | JS16 | nom<br>tol | nom<br>tol | H15   |
| 32  | 7    | 32,5 | ±0,2       | 50  | 32  | 11 | 24 | 32  | 32             | 0<br>-12 | 4    | ±0,3     | 15             | M6 × 16              | 142  | ±1,25      | 144        | ±1,25 |
| 40  | 10   | 38   |            | 58  | 36  | 15 | 28 | 36  | 36             | 0<br>-12 | 4    |          | 17,5           | M6 × 16              | 161  |            | 163        |       |
| 50  | 10   | 46,5 |            | 70  | 45  | 15 | 32 | 45  | 45             | 0<br>-14 | 5    |          | 20             | M8 × 20              | 170  |            | 175        |       |
| 63  | 10   | 56,5 |            | 85  | 50  | 15 | 32 | 50  | 50             | 0<br>-16 | 5    |          | 22,5           | M8 × 20              | 185  | 190        | ±1,6       |       |
| 80  | 12   | 72   |            | 105 | 63  | 20 | 41 | 63  | 63             | 6        | 22,5 | M10 × 20 | 210            | 215                  |      |            |            |       |
| 100 | 14,5 | 89   |            | 130 | 75  | 25 | 41 | 71  | 71             | 0<br>-19 | 6    | ±0,5     | 27,5           | M10 × 20             | 220  | 230        |            |       |
| 125 | 16,5 | 110  | ±0,3       | 157 | 90  | 25 | 45 | 90  | 90             | 0<br>-21 | 8    | ±1       | 30             | M12 × 25             | 250  |            | 270        | ±2    |
| 160 | 18,5 | 140  |            | 195 | 115 | 25 | 60 | 115 | 115            | 0<br>-23 | 10   |          | 32,5           | M16 × 30             | 300  |            | 320        |       |
| 200 | 24   | 175  |            | 238 | 135 | 35 | 70 | 135 | 135            | 0<br>-26 | 12   |          | 37,5           | M16 × 30             | 320  | ±2         | 345        |       |
| 250 | 28   | 220  |            | 290 | 165 | 40 | 75 | 165 | 165            | 0<br>-31 | 20   |          | 45             | M20 × 40             | 350  |            | 380        |       |
| 320 | 35   | 270  |            | 353 | 200 | 45 | 85 | 200 | 200            | 0<br>-38 | 23   |          | 55             | M24 × 45             | 390  | ±2,5       | 425        |       |

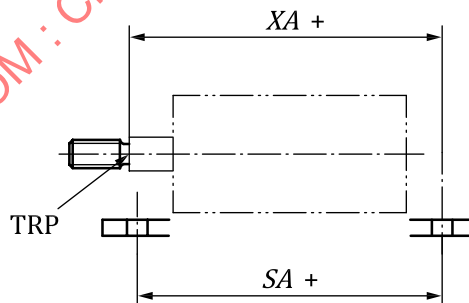

TRP Theoretical reference point.

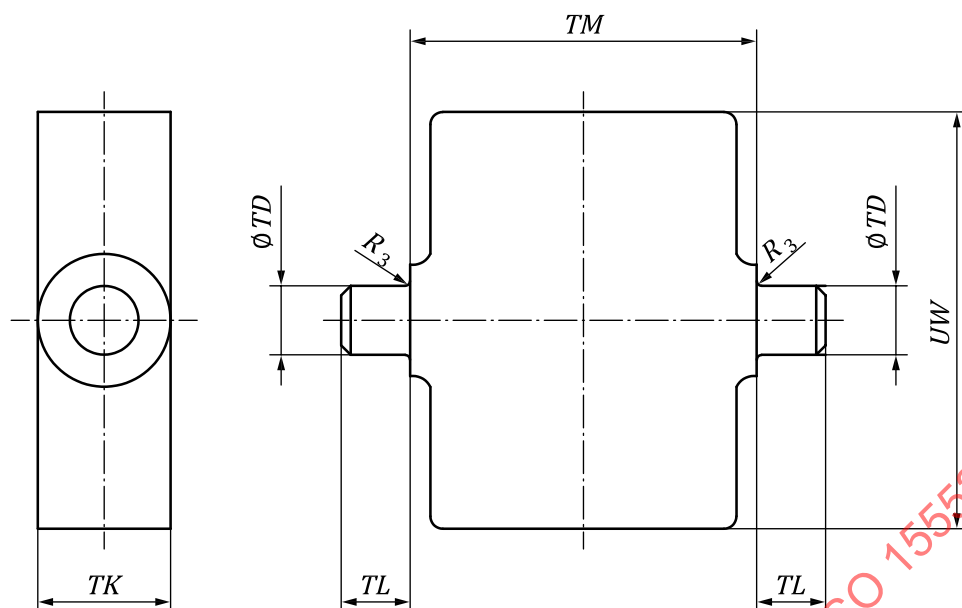
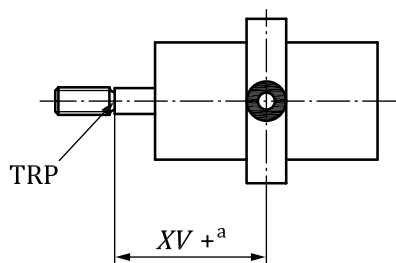


Figure 9 — Intermediate fixed or movable trunnions (male) (MT4)


Table 9 — Dimensions of intermediate fixed or movable trunnions (male) (MT4)

Dimensions in millimetres

| AL  | TM<br>h14 | UW<br>max | TL<br>h14 | TK<br>max | TD<br>e9 | R <sub>3</sub><br>max | XV<br>min |
|-----|-----------|-----------|-----------|-----------|----------|-----------------------|-----------|
| 32  | 50        | 65        | 12        | 25        | 12       | 1                     | 73        |
| 40  | 63        | 75        | 16        | 28        | 16       | 1,6                   | 82,5      |
| 50  | 75        | 95        | 16        | 28        | 16       | 1,6                   | 90        |
| 63  | 90        | 105       | 20        | 36        | 20       | 1,6                   | 97,5      |
| 80  | 110       | 130       | 20        | 36        | 20       | 1,6                   | 110       |
| 100 | 132       | 145       | 25        | 48        | 25       | 2                     | 120       |
| 125 | 160       | 175       | 25        | 50        | 25       | 2                     | 145       |
| 160 | 200       | 220       | 32        | 50        | 32       | 2,5                   | 170       |
| 200 | 250       | 260       | 32        | 50        | 32       | 2,5                   | 185       |
| 250 | 320       | 320       | 40        | 60        | 40       | 3,2                   | 205       |
| 320 | 400       | 400       | 50        | 70        | 50       | 3,2                   | 230       |

<sup>a</sup> XV max = XV min + stroke.

TRP Theoretical reference point.

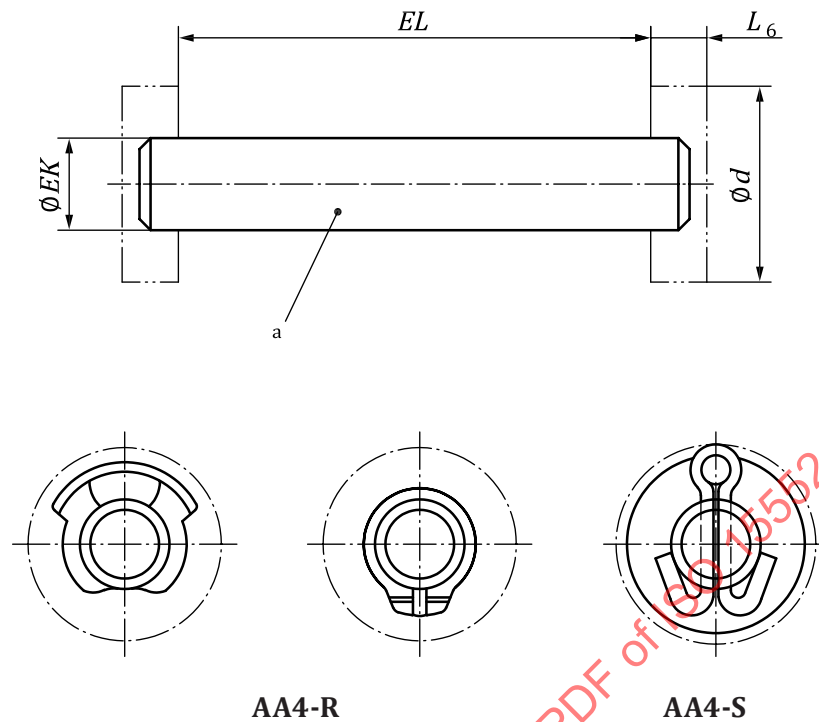


Examples of retaining methods (both ends)

- a This pin is used with MP2, MP4 and AB7 mountings

**Figure 10 — Pivot pin, plain (AA4-R and AA4-S)****Table 10 — Dimensions of pivot pin, plain (AA4-R and AA4-S)**

Dimensions in millimetres

| <i>AL</i> | <i>d</i><br>max | <i>EK</i><br>e8 | <i>EL</i> |         | <i>L<sub>6</sub></i><br>max |
|-----------|-----------------|-----------------|-----------|---------|-----------------------------|
|           |                 |                 | nom       | tol     |                             |
| 32        | 23              | 10              | 46        | +2<br>0 | 9                           |
| 40        | 25              | 12              | 53        |         | 9                           |
| 50        | 25              | 12              | 61        |         | 9                           |
| 63        | 32              | 16              | 71        |         | 11                          |
| 80        | 32              | 16              | 91        |         | 11                          |
| 100       | 40              | 20              | 111       |         | 11                          |
| 125       | 50              | 25              | 132       | +3<br>0 | 11                          |
| 160       | 62              | 30              | 172       |         | 17                          |
| 200       | 62              | 30              | 172       |         | 17                          |
| 250       | 72              | 40              | 202       |         | 22                          |
| 320       | 85              | 45              | 222       |         | 22                          |

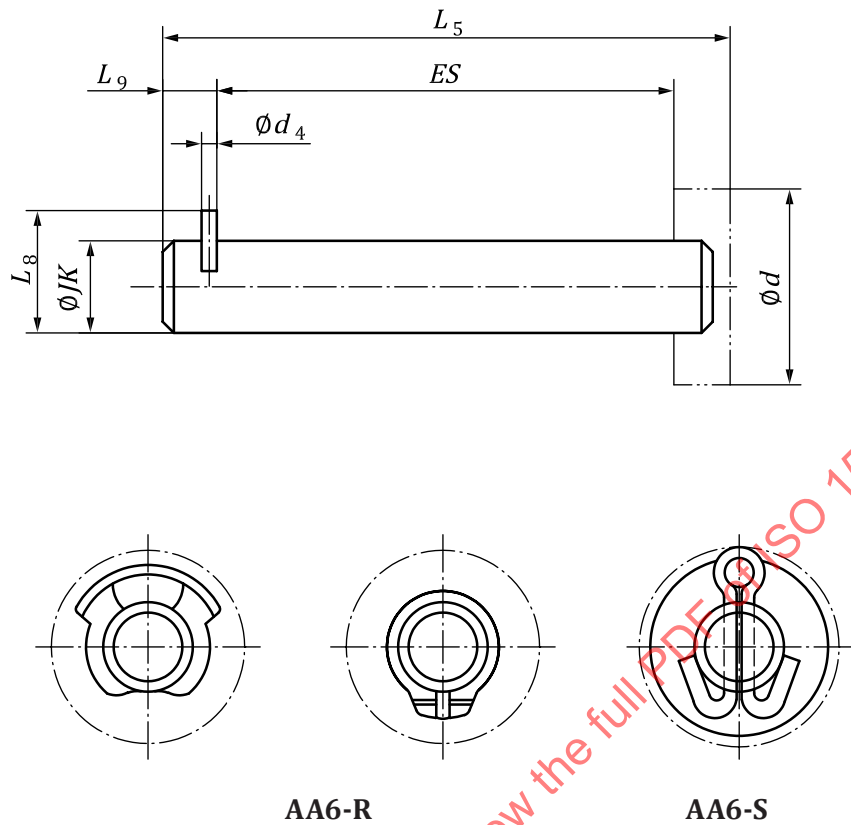

Example of retaining methods (only for the right-hand side)

Figure 11 — Pivot pin, spherical bearing (AA6-R and AA6-S)

Table 11 — Dimensions of pivot pin, spherical bearing (AA6-R and AA6-S)

Dimensions in millimetres

| <i>AL</i> | <i>d</i><br>max | <i>JK</i><br>h9 | <i>ES</i> |           | <i>L</i> <sub>5</sub><br>max | <i>L</i> <sub>9</sub><br>Js13 | <i>L</i> <sub>8</sub><br>Js13 | <i>d</i> <sub>4</sub><br>h12 |
|-----------|-----------------|-----------------|-----------|-----------|------------------------------|-------------------------------|-------------------------------|------------------------------|
|           |                 |                 | nom       | tol       |                              |                               |                               |                              |
| 32        | 23              | 10              | 31        | +0,2<br>0 | 46                           | 4,5                           | 14                            | 3                            |
| 40        | 25              | 12              | 36        |           | 53                           | 6                             | 16                            | 4                            |
| 50        | 25              | 16              | 41        |           | 58                           | 6                             | 20                            | 4                            |
| 63        | 32              | 16              | 47        |           | 66                           | 6                             | 20                            | 4                            |
| 80        | 32              | 20              | 61        |           | 80                           | 6                             | 24                            | 4                            |
| 100       | 40              | 20              | 71        |           | 90                           | 6                             | 24                            | 4                            |
| 125       | 50              | 30              | 91        | +0,3<br>0 | 114                          | 9                             | 36                            | 6                            |
| 160       | 62              | 35              | 116       |           | 145                          | 9                             | 41                            | 6                            |
| 200       | 62              | 35              | 116       |           | 145                          | 9                             | 41                            | 6                            |
| 250       | 72              | 40              | 117       |           | 155                          | 12                            | 48                            | 8                            |
| 320       | 85              | 50              | 142       |           | 180                          | 12                            | 58                            | 8                            |