
**Intelligent transport systems —
Dedicated short range communication
(DSRC) — DSRC application layer**

*Systèmes intelligents de transport — Communications spécialisées à
courte portée (DSRC) — Couche d'application DSRC*

STANDARDSISO.COM : Click to view the full PDF of ISO 15628:2013



STANDARDSISO.COM : Click to view the full PDF of ISO 15628:2013



COPYRIGHT PROTECTED DOCUMENT

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	2
3 Terms and definitions.....	2
4 Abbreviations.....	4
5 Structure of the application layer core.....	6
6 Transfer kernel.....	7
6.1 General.....	7
6.2 Services.....	8
7 Initialisation kernel.....	21
7.1 General.....	21
7.2 Services.....	21
7.3 Behaviour.....	24
8 Broadcast kernel.....	27
8.1 General.....	27
8.2 Services.....	27
8.3 Behaviour.....	28
9 Extensibility for different lower layer services and application interfaces.....	29
9.1 General.....	29
9.2 Extended definitions.....	30
Annex A (normative) Data structures.....	34
Annex B (normative) Naming and registration.....	40
Annex C (informative) Example of coding.....	41
Annex D (normative) Declaration of application layer features supported.....	44
Annex E (informative) Lower layer services.....	45
Bibliography.....	49

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

ISO 15628 was prepared by Technical Committee ISO/TC 204, *Intelligent transport systems*.

This second edition cancels and replaces the first edition (ISO 15628:2007), which has been technically revised.

Introduction

The communication requirements of many ITS applications can be fulfilled by DSRC. The DSRC International Standards enable compliant communication systems to serve multiple ITS applications in parallel.

The small service areas and severe real-time constraints require a specific protocol architecture leading to the reduced protocol stack shown in [Figure 1](#), built up by the “application layer”, the “data link layer” and the “physical layer”. Such architecture is very common for real-time environments.

This International Standard gives the architecture and services offered by the DSRC application layer.

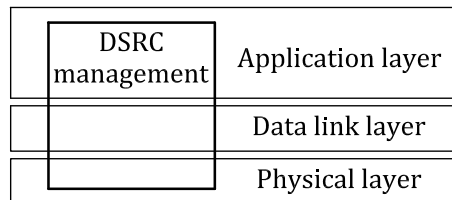


Figure 1 — DSRC protocol stack

This International Standard contains, besides the normative main body, three normative annexes: “Data structures”, “Naming and registration”, “Declaration of application layer features supported”; plus two informative annexes: “Example of coding” and “Lower layer services”.

STANDARDSISO.COM : Click to view the full PDF of ISO 15628:2013

Intelligent transport systems — Dedicated short range communication (DSRC) — DSRC application layer


1 Scope

This International Standard specifies the application layer core which provides communication tools for applications based on DSRC. These tools consist of kernels that can be used by application processes via service primitives. The application processes, including application data and application-specific functions, are outside the scope of this International Standard.

This International Standard is named “application layer”, although it does not cover all functionality of OSI Layer 7 and it includes functionality from lower layers.

It uses services provided by DSRC data link layer, and covers functionality of intermediate layers of the “OSI Basic Reference Model” (ISO/IEC 7498-1).

[Figure 2](#) illustrates the global data flow between the parts of the DSRC stack (physical, data link and application layers) and the application.

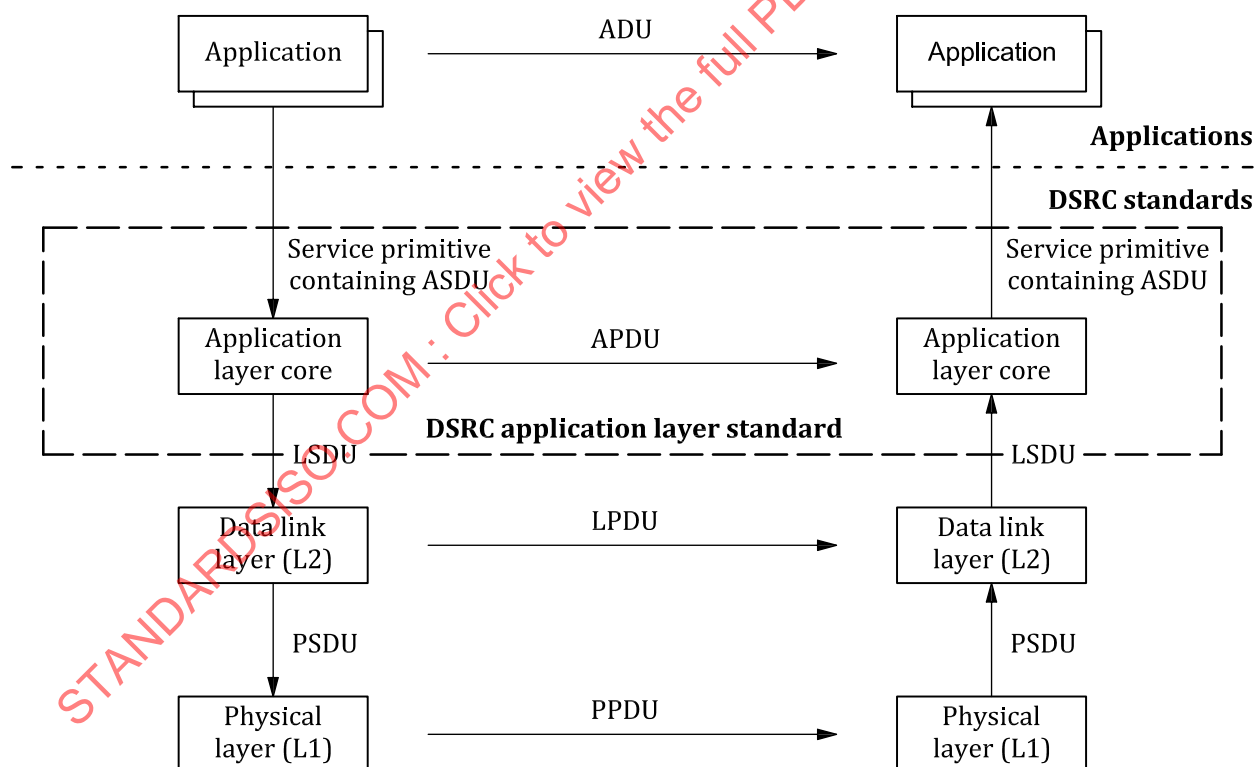

NOTE For definitions of the terms used in [Figure 2](#), see ISO/IEC 7498-1.

Figure 2 — Architecture and data flow of the DSRC stack

The following subjects are covered by this International Standard:

- application layer structure and framework;
- services to enable data transfer and remote operations;
- application multiplexing procedure;

- fragmentation procedure;
- concatenation and chaining procedures;
- common encoding rules to translate data from abstract syntax ASN.1 (ISO/IEC 8824-1) into transfer syntax (ISO/IEC 8825-2:2008) and vice versa;
- communication initialisation and release procedures;
- broadcast service support;
- DSRC management support including communication profile handling; and
- extensibility for different lower layer services and application interfaces.

It is outside the scope of this International Standard to define a security policy. Some transport mechanisms for security-related data are provided.

NOTE No implementation of the “broadcast pool” functionality has become known. “Broadcast pool” functionality is therefore considered untested.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 8825-2:2008, *Information technology — ASN.1 encoding rules: Specification of Packed Encoding Rules (PER)*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1 application

user of the services offered by the DSRC communication stack

3.2 attribute

value, which may have a structure, consisting of a set or sequence of data elements

Note 1 to entry: The value of an “attribute” can be observed or modified by sending a request to GET (read) or SET (write) the value.

3.3 attribute identifier

identifier which unambiguously distinguishes an attribute from all other attributes within the same element

3.4 beacon service table

data structure transmitted by the RSU indicating available services

3.5 broadcast pool

data structure broadcast from the RSU to the OBUs

3.6 chaining

function performed by the transfer kernel to link the execution of service primitives

3.7**concatenation**

function performed by the transfer kernel to map multiple T-APDU fragments into one data link layer service data unit

Note 1 to entry: The inverse function is called separation or deconcatenation.

3.8**element**

coherent set of data and functionality

Note 1 to entry: Application elements are created by the applications and are addressed using element identifiers.

3.9**element identifier**

identifier which unambiguously distinguishes an element from all other elements residing in the same OBU

3.10**fragmentation**

function performed by the transfer kernel to map one ASDU on multiple LSDUs

Note 1 to entry: In ISO/IEC 7498-1, fragmentation is called segmentation.

Note 2 to entry: The inverse function is called defragmentation or, in ISO/IEC 7498-1, disassembling.

3.11**head of the line**

queuing discipline (also referred to as strict or fixed priority queuing), where a number of queues are served in priority order

Note 1 to entry: A lower priority queue is served if all higher priority queues are empty, each queue is served in "first come, first served" order, and each user goes to the head of the line of the users of lower priorities but behind all users of equal or higher priority.

3.12**management**

provides and distributes values for the communication parameters for controlling the DSRC communication stack

3.13**multiplexing**

function within the transfer kernel allowing simultaneous support for more than one application in a single OBU

3.14**operation**

abstract representation of behaviour invoked in an entity

3.15**profile**

information about capabilities and settings in the different DSRC layers

3.16**single-T-APDU fragment**

T-APDU that contains a complete PDU

3.17**T-APDU fragment**

fragment header followed by part or all of the encoding of a value of the ASN.1 type T-APDUs

3.18

time

number of seconds passed since 1st January 1970, 00:00 (UTC)

3.19

vehicle service table

data structure transmitted by the OBU indicating available services

4 Abbreviations

For the purposes of this document, the following abbreviations apply.

4.1

ADU

application data unit

4.2

AID

application identifier

4.3

APDU

application protocol data unit

4.4

ARIB

Association of Radio Industries and Businesses

4.5

ASDU

application service data unit

4.6

ASN.1

abstract syntax notation one (ISO/IEC 8824-1)

4.7

ASTM

American Society of Testing and Materials

4.8

B-Kernel

broadcast kernel

4.9

BST

beacon service table

4.10

CEN

Comité européen de normalisation

4.11

DSRC

dedicated short range communication

4.12

EID

element identifier

4.13

EVENT-RT

event-report

4.14

FCS

frame check sequence

4.15

ID

identifier

4.16

IEEE

Institute of Electrical and Electronic Engineers

4.17

IID

invoker identifier

4.18

I-Kernel

initialisation kernel

4.19

LID

logical link control identifier

4.20

LLC

logical link control

4.21

LPDU

LLC protocol data unit

4.22

LSDU

LLC service data unit

4.23

L1

layer 1 of DSRC (physical layer)

4.24

L2

layer 2 of DSRC (data link layer)

4.25

L7

application layer core of DSRC

4.26

MAC

medium access control

4.27

NEN

Nederlands Normalisatie-instituut

4.28

OBU

on-board unit

Note 1 to entry: This equipment usually resides on board a vehicle.

4.29

PDU

protocol data unit

4.30

PPDU

physical layer protocol data unit

4.31

PSDU

physical layer service data unit

4.32

PER

packed encoding rules (ISO/IEC 8825-2:2008)

4.33

RSU

road-side unit

Note 1 to entry: This is often referred to as beacon.

4.34

RTTT

road transport and traffic telematics

4.35

SDU

service data unit

4.36

T-APDU

transfer application protocol data unit

4.37

T-Kernel

transfer kernel

4.38

VST

vehicle service table

5 Structure of the application layer core

The “application layer core” shall consist of the T-Kernel and either the I-Kernel or the B-Kernel, or both.

[Figure 3](#) shows the application layer kernels and the relationships to external entities. The T-Kernel provides the basic transportation facilities that can be used by the I-Kernel, by the B-Kernel and by the applications.

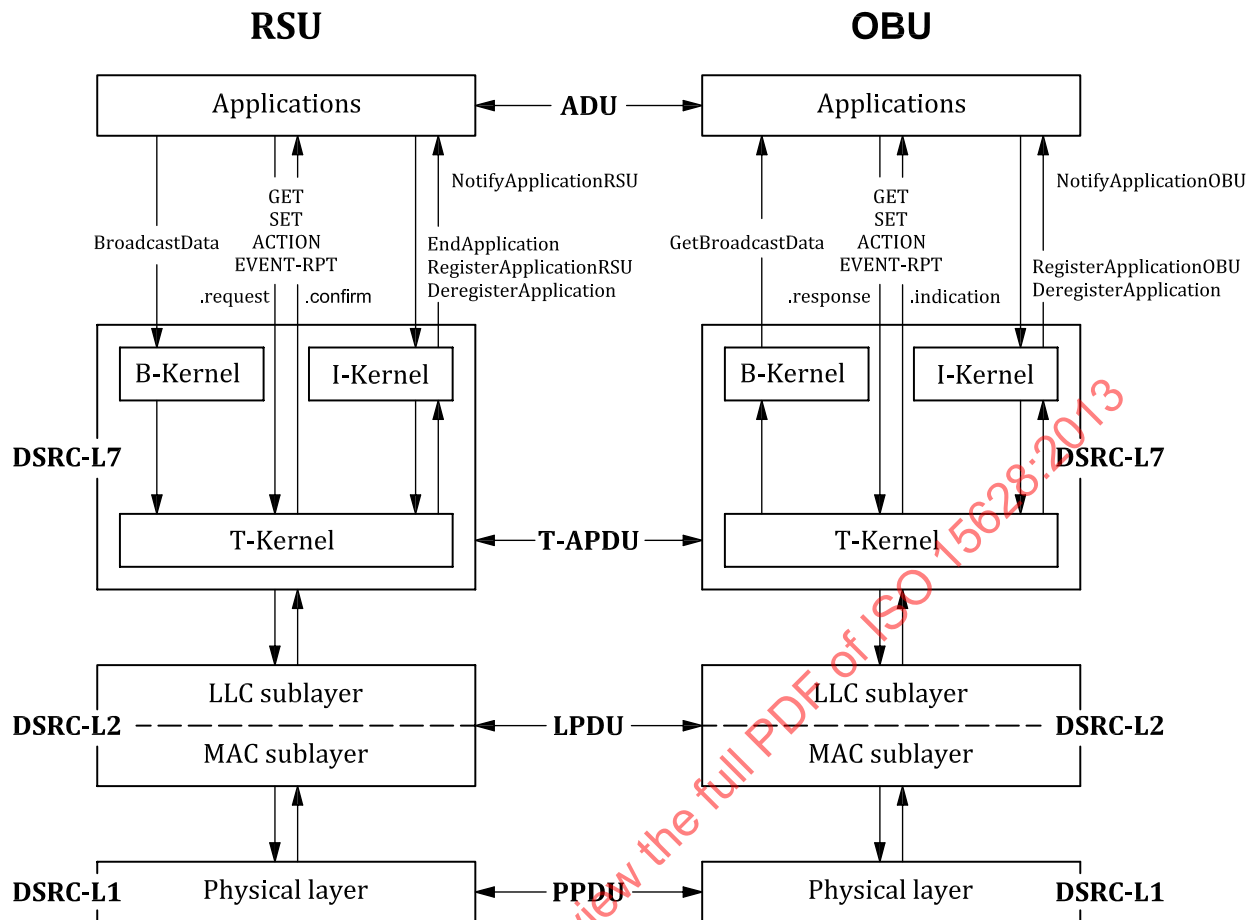


Figure 3 — Context and structure of the application layer core

6 Transfer kernel

6.1 General

The T-Kernel shall transfer information between two peer kernels or applications, and shall abstract from the realization of this transfer.

The T-Kernel shall offer its services by means of service primitives defined in [6.2.2](#).

The T-Kernel shall transfer the information by means of T-APDUs defined in [Annex A](#).

The T-Kernel shall realize the transfer by means of a protocol with the behaviour defined in [6.2.5](#).

The T-Kernel shall use the services of the logical link control sub-layer of the DSRC data link layer, which is defined in [Clause 9](#) and [Annex E](#).

NOTE The behaviour defined in [6.2.5](#) does not guarantee that the service elements with the same priorities will be delivered to a receiving application in the same order as they were delivered to the T-Kernel on the sending side.

6.2 Services

6.2.1 General

The T-Kernel shall provide the following services:

- GET: The invocation of the “GET” service by an application shall result in the retrieval (reading) of information (i.e. attributes) from a peer application. The service shall only be requested in a confirmed mode, and a reply is expected.
- SET: The invocation of the “SET” service by an application shall result in the modification (writing) of information (i.e. attributes) by a peer application. The service may be requested in confirmed or non-confirmed mode. In confirmed mode, a reply is expected.
- ACTION: The invocation of the “ACTION” service by an application shall result in the performance of an action by a peer application. An action is further qualified by the value of the “ActionType” (see ISO 14906 for examples). The service may be requested in confirmed or non-confirmed mode. In confirmed mode, a reply is expected.
- EVENT-REPORT: The invocation of the “EVENT-REPORT” service by an application or by the I-Kernel shall result in the notification of an event to a peer application or I-Kernel. The service may be requested in confirmed or non-confirmed mode. In confirmed mode, a reply is expected.
- INITIALISATION: The invocation of the “INITIALISATION” service by the I-Kernel shall result in an attempt to initialise the communication between an RSU and each OBU that has not yet established communication with that RSU. The “INITIALISATION” service shall only be used by the I-Kernel.

6.2.2 Service primitives

The T-Kernel shall provide the services given in [6.2.1](#) by the following service primitives:

- GET.request;
- GET.indication;
- GET.response;
- GET.confirm;
- SET.request;
- SET.indication;
- SET.response;
- SET.confirm;
- ACTION.request;
- ACTION.indication;
- ACTION.response;
- ACTION.confirm;
- EVENT-REPORT.request;
- EVENT-REPORT.indication;
- EVENT-REPORT.response;
- EVENT-REPORT.confirm;

- INITIALISATION.request;
- INITIALISATION.indication;
- INITIALISATION.response;
- INITIALISATION.confirm.

The INITIALISATION.request and INITIALISATION.confirm primitives shall only be used on the RSU side, the INITIALISATION.indication and INITIALISATION.response primitives shall only be used on OBU side.

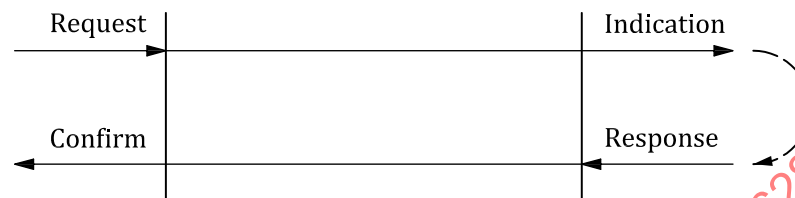


Figure 4 — Services used in confirmed mode



Figure 5 — Services used in non-confirmed mode

6.2.3 Format of service primitives

The T-ASDUs for the service primitives shall have the formats defined in [Tables 2 to 6](#), with the notation defined in [Table 1](#).

Table 1 — Definition of the expressions used in Tables 2 to 5

Symbol	Definition
iid/eid	Mandatory. IID of related indication if present, else EID of related indication.
optional	The use of the optional fields is detailed by the underlying ASN.1 standards.
=	Same as in corresponding request/indication.
—	Not applicable.

Table 2 — Format of the GET service primitives

Parameter name	Request/indication	Response	Confirm	ASN.1 type
Invoker identifier (IID)	optional	=		Dsrc-EID
Link identifier (LID)	mandatory	=		BIT STRING
Chaining	mandatory	=		Boolean
Element identifier (EID)	mandatory	iid/eid		Dsrc-EID
Access credentials	optional	—		OCTET STRING
Attribute Id list (AttrIdList)	optional	—		AttributeIdList
FlowControl	mandatory	mandatory	optional	INTEGER
Attribute list (AttrList)	—	optional		AttributeList
Return code (Ret)	—	optional		ReturnStatus

Table 3 — Format of the SET service primitives

Parameter name	Request/indication	Response	Confirm	ASN.1 type
Invoker identifier (IID)	optional	=		Dsrc-EID
Link identifier (LID)	mandatory	=		BIT STRING
Chaining	mandatory	=		Boolean
Element identifier (EID)	mandatory	iid/eid		Dsrc-EID
Access credentials	optional	—		OCTET STRING
Attribute list (AttrList)	mandatory	—		AttributeList
Mode	mandatory	—		Boolean
FlowControl	mandatory	mandatory	optional	INTEGER
Return code (Ret)	—	optional		ReturnStatus

Table 4 — Format of the ACTION service primitives

Parameter name	Request/indication	Response	Confirm	ASN.1 type
Invoker identifier (IID)	optional	=		Dsrc-EID
Link identifier (LID)	mandatory	=		BIT STRING
Chaining	mandatory	=		Boolean
Element identifier (EID)	mandatory	iid/eid		Dsrc-EID
ActionType	mandatory	—		INTEGER(0..127,..)
Access credentials	optional	—		OCTET STRING
ActionParameter	optional	—		Container
Mode	mandatory	—		Boolean
FlowControl	mandatory	mandatory	optional	INTEGER
ResponseParameter	—	optional		Container
Return code (Ret)	—	optional		ReturnStatus

Table 5 — Format of the EVENT-REPORT service primitives

Parameter name	Request/indication	Response	Confirm	ASN.1 type
Invoker identifier (IID)	optional	=		Dsrc-EID
Link identifier (LID)	mandatory	=		BIT STRING
Chaining	mandatory	=		Boolean
Element identifier (EID)	mandatory	iid/eid		Dsrc-EID
EventType	mandatory	—		INTEGER(0..127,..)
Access credentials	optional	—		OCTET STRING
EventParameter	optional	—		Container
Mode	mandatory	—		Boolean
FlowControl	mandatory	mandatory	optional	INTEGER
Return code (Ret)	—	optional		ResponseStatus

Table 6 — Format of the INITIALISATION service primitives

Parameter name	Request/indication	Response	Confirm	ASN.1 type
Link identifier (LID)	mandatory	mandatory (private)		BIT STRING
Initialisation parameter	mandatory (BST)	mandatory (VST)		BST/VST

6.2.4 Parameters

The parameters shall be set and interpreted as follows:

IID shall be of ASN.1 type Dsrc-EID and carry the identifier of the element initiating the request or the response, respectively. This parameter is not needed if an answer is sent to a default invoker. If IID is used, it shall contain the EID of the response to this primitive.

LID shall be the LID chosen by the I-Kernel on the OBU side as specified in [7.3.2](#).

Chaining shall be a Boolean parameter. If true, “concatenation with chaining”, defined in [6.2.11](#), is performed.

EID shall be of ASN.1 type Dsrc-EID and carry the identifier of the element that shall receive the indication or confirm related to a request or response, respectively. This EID is used by the T-Kernel on the side of the receiver to deliver an indication or a confirm to the addressed element. When the IID is used in a request, the element invoking a response shall use this IID as the EID.

AccessCredentials shall be of ASN.1 type OCTET STRING and carry security-related information needed to fulfil access conditions in order to perform the operation on the addressed element.

AttrIdList shall be a list of IDs of attributes of the element receiving a GET.indication. The values of these attributes shall be sent via a GET.response and GET.confirm to the element invoking the GET.request, provided that applicable access conditions have been fulfilled.

FlowControl shall be a parameter that represents the behaviour of the underlying communication service. This parameter shall be mapped by the T-Kernel on a certain LLC service. The relation between FlowControl parameter, application layer behaviour and LLC service shall be as defined in [Table 7](#). Other lower layer (LLC) services related or not related to this table are described in [Clause 9](#) and [Annex E](#).

Table 7 — Relation between FlowControl parameter, application layer behaviour and LLC service

Flow-Control	Application layer	LLC service
1	no flow control, no answer	DL-UNITDATA.request without response request
2	no flow control, answer	DL-UNITDATA.request with response request
3	no flow control	DL-UNITDATA.indication
4	flow control, data unit transmission	DL-DATA-ACK.request
5	flow control, data unit transmission	DL-DATA-ACK.indication
6	flow control, data unit transmission status	DL-DATA-ACK-STATUS.indication
7	flow control, data unit exchange	DL-REPLY.request
8	flow control, data unit exchange	DL-REPLY.indication
9	flow control, data unit exchange status	DL-REPLY-STATUS.indication
10	flow control, data unit exchange preparation	DL-REPLY-UPDATE.request
11	flow control, data unit exchange preparation status	DL-REPLY-UPDATE-STATUS.indication

AttrList shall be a sequence of attributes sent by SET.request/SET.indication or GET.response/GET.confirm. The element receiving a SET.indication shall modify the values of the attributes identified in the AttrIdList to the values given in the AttrIdList, provided that applicable access conditions have been fulfilled. In the case of GET.response/GET.confirm, the element that received the corresponding GET.indication shall send the values of the attributes addressed in the AttrIdList of the GET.indication to the element invoking the GET.request, provided that applicable access conditions have been fulfilled.

Ret shall be a return code issued as an answer to a service indication. The following codes are predefined:

- noError: the requested operation was performed successfully;
- accessDenied: the requested operation was not performed for reasons pertinent to the security of the system;
- argumentError: one or more attribute values were not accessed because the identifier for the specified attribute was not recognized or the attribute value specified was out of range or otherwise inappropriate for one or more attributes, or the action or event-report invoked was not supported by the receiving entity;
- complexityLimitation: the requested operation was not performed because a parameter was too complex;
- processingFailure: a general failure in processing the operation was encountered;
- processing: the requested operation is being processed, and the result is not yet available;
- chainingError: the requested operation was not performed in accordance with the rule defined in [6.2.11](#), "concatenation with chaining".

Mode shall be a Boolean parameter. If true, then there shall be a service.response to a service.indication (confirmed mode).

ActionType shall identify an operation of the element which receives an ACTION.indication and which shall be invoked.

ActionParameter shall be the information needed for the invocation of an operation identified in an ACTION.indication.

ResponseParameter may be information resulting from the execution of the operation invoked by ACTION.indication.

EventType shall identify the message which shall be delivered to an element which receives an EVENT-REPORT.indication.

EventParameter shall be the additional information needed for the message sent via an EVENT-REPORT.request and EVENT-REPORT.indication, respectively.

Initialisation parameter shall be the information needed for the initialisation of the communication (i.e. the BST on the downlink and VST on the uplink) sent via an initialisation service.

6.2.5 Behaviour

The transfer protocol shall consist of the following steps, described in [6.2.6](#) to [6.2.17](#):

- a) translating SDU to a T-APDU,
- b) encoding of the T-APDU,
- c) fragmentation of the T-APDU,
- d) multiplexing of T-APDU fragments,
- e) concatenation of short T-APDU fragments,
- f) access to the LLC,
- g) access from the LLC,
- h) demultiplexing of T-APDU fragments,
- i) defragmentation of non-concatenated T-APDU fragments,
- j) decoding and separation of a T-APDU, possibly concatenated with one or more single-T-APDU fragments, and
- k) translating PDU to SDU and distribution to addressee.

NOTE 1 The implementation of individual steps is outside the scope of this International Standard as long as their (externally observable) behaviour complies with requirements below. An implementation may even change the order of steps as long as this does not have any implication for its peer implementation and for the overall behaviour of the whole sequence of steps, i.e. for the T-APDUs and the LPDUs.

NOTE 2 The arrows shown in [Figures 6 to 8](#) and 10 to 17 indicate the conversion process.

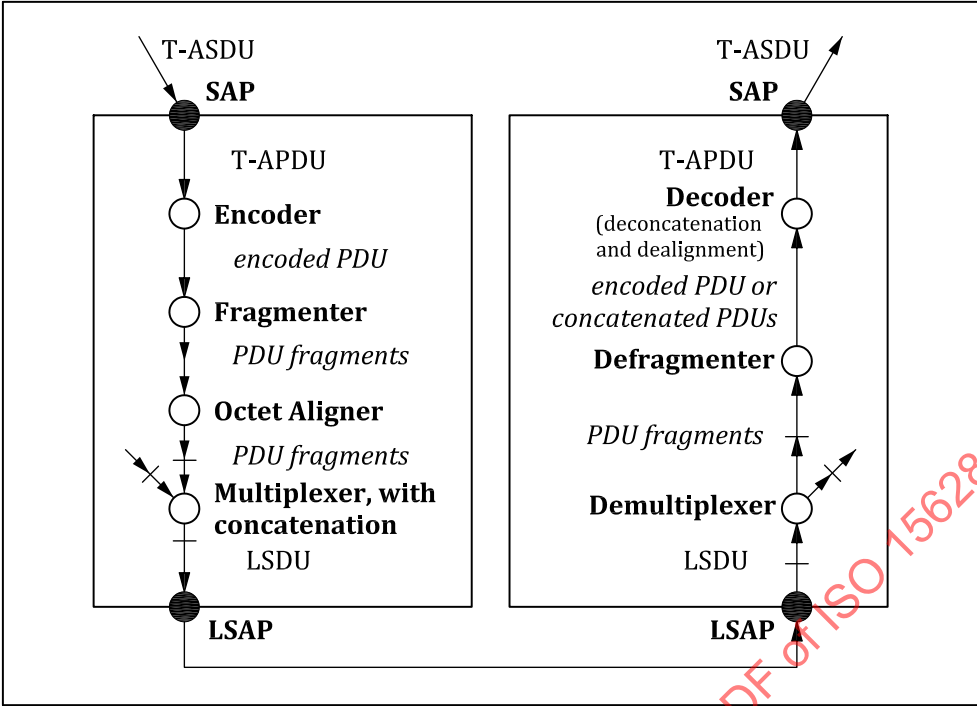


Figure 6 — Functionality of the T-Kernel

6.2.6 SDU to PDU

The T-Kernel shall translate the request and response service primitive into T-APDUs according to the following rules.

A service.request is translated into the corresponding service-request T-APDU defined in [Annex A](#). A service.response is translated into the corresponding service-response T-APDU defined in [Annex A](#). The LID shall be removed and shall be given to the LLC in each LLC service primitive as defined in [6.2.12](#). In the case of the INITIALISATION.request, the LID field shall be 1111 1111₂.

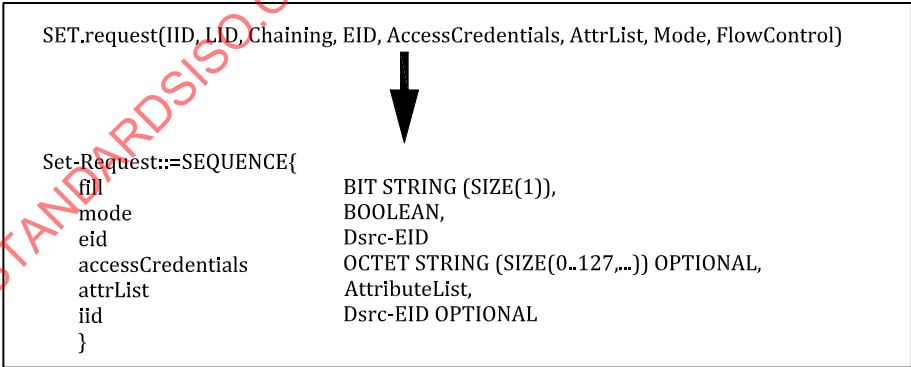


Figure 7 — SDU to PDU

6.2.7 Encoding

The T-Kernel shall encode the request and response PDUs according to ASN.1 BASIC-PER, UNALIGNED (ISO/IEC 8825-2:2008). The encodable ASN.1 types are specified in [Annex A](#). The fill bit of ASN.1-type definitions shall be set to zero.

NOTE In order to mitigate the implication of UNALIGNED encoding, some fill bits are included in the ASN.1-type definition in [Annex A](#). The encoding result is always an integral multiple of eight bits (octet). The octet alignment and octet dealignment procedures are performed in PDU encoding and decoding steps, if it is needed. The octet alignment and octet dealignment procedures are outside the scope of this International Standard. Refer to 10.1 of ISO/IEC 8825-2:2008.

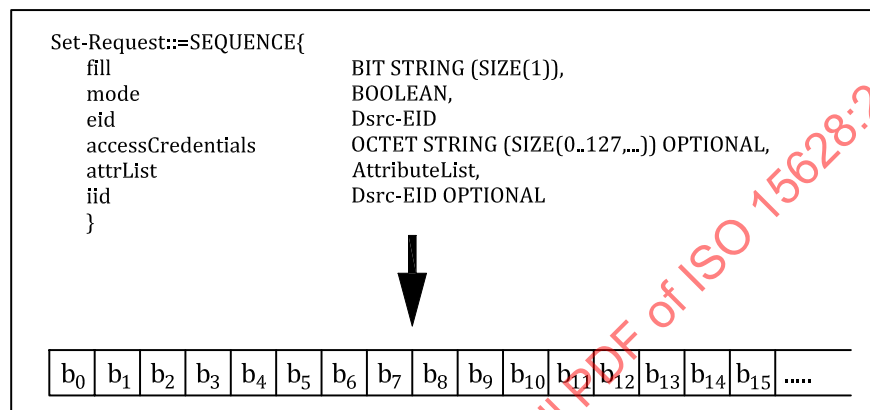


Figure 8 — Encoding

6.2.8 Fragmentation

The T-Kernel shall fragment encoded T-APDUs down to T-APDU fragments, which include a fragmentation header. A fragmentation header shall have a length of at least 1 octet and at most 3 octets. The length of the T-APDU fragments shall not exceed the maximum LLC frame length. The number of bits inside a fragment shall be a multiple of 8 bits. All but the last fragment shall have the same length. Fragmentation shall be made from the most significant bit down to the least significant bit according to ASN.1 BASIC-PER.

NOTE 1 Fragmentation is based on the property that the length of the PER encoded T-APDU is a multiple of eight bits.

Fragmentation of multiple PDUs shall be done in parallel.

NOTE 2 As fragmentation is done in parallel, the fragmentation of a small T-APDU may be finished before a larger one that was received from the SAP before the smaller one. As a consequence, T-APDUs with the same priority might not be sent in the same order as they were received from the SAP.

A T-APDU fragment that contains a complete T-APDU is called a single-T-APDU.

6.2.8.1 Fragmentation header

The first octet of the fragmentation header shall be the first octet of the fragment. If the fragmentation header consists of more than one octet, these octets are given in increasing order directly after the first octet.

6.2.8.2 Structure of the fragmentation header

The fragmentation header shall consist of one fragmentation indicator, one PDU number, one fragment counter, and one fragment number extension indicator. The position of the related bits is described in [Figure 9](#). The bits are numbered from 7 to 0, where bit 7 is the most significant and bit 0 is the least significant bit.

7	6	5	4	3	2	1	0
Fragmentation Indicator	PDU number				Fragment counter		Extension indicator

Figure 9 — One-octet fragmentation header

6.2.8.3 Fragmentation indicator

The most significant bit (bit 7) of any fragmentation header shall be the fragmentation indicator. The fragmentation indicator shall be 1₂ if this fragment is the last of a sequence of fragments belonging to one PDU or if the PDU is not fragmented. The fragmentation indicator shall be 0₂ if fragmentation is performed and if it is not the last fragmented frame in a message.

6.2.8.4 PDU number

Bits 6 to 3 of the first octet represent a PDU number, which shall be unique for each LID during the defragmentation time in the receiving entities and the same in all T-APDU fragments belonging to one T-APDU. PDU number 0000₂ and 0001₂ shall only be used by T-APDU fragments that are sent by the B-Kernel.

6.2.8.5 One-octet fragmentation header

A one-octet fragmentation header shall be used if no fragmentation is performed or, if fragmentation is performed, for fragments numbered 0 to 3. A fragment counter shall be used to identify a fragment. Bits 2 and 1 shall be interpreted as an unsigned integer, where the highest significant bit is bit 2 of the first octet and the least significant bit is bit 1 of the first octet. Bit 0 shall be set to 1₂. If fragmentation is performed then the first fragment shall be given the fragment counter value 0, the second fragment the fragment counter value 1, etc. If no fragmentation is performed, then the fragment shall be given the fragment counter value 0.

6.2.8.6 Two-octet fragmentation header

A two-octet fragmentation header shall be used for fragments between 4 and 511; bit 0 of the first octet shall be set to 0₂. Bits 2 and 1 of the first octet and bits 7 to 1 of the second octet shall be interpreted as an unsigned integer, where the highest significant bit is bit 2 of the first octet and the least significant bit is bit 1 of the second octet. Bit 0 of the second octet shall be set to 1₂. Fragment numbers shall be assigned to the fragment as specified in [6.2.8.5](#).

6.2.8.7 Three-octet fragmentation header

A three-octet fragmentation header shall be used for fragments between 512 and 65535; bit 0 of the first octet shall be set to 0₂. Bits 2 and 1 of the first octet, bits 7 to 1 of the second octet and bits 7 to 1 of the third octet are interpreted as unsigned integers, where the highest significant bit is bit 2 of the first octet and the least significant bit is bit 1 of the third octet. Bit 0 of the second octet shall be set to 0₂ and bit 0 of the third octet shall be set to 1₂. Fragment numbers shall be assigned to the fragment as specified in [6.2.8.5](#).

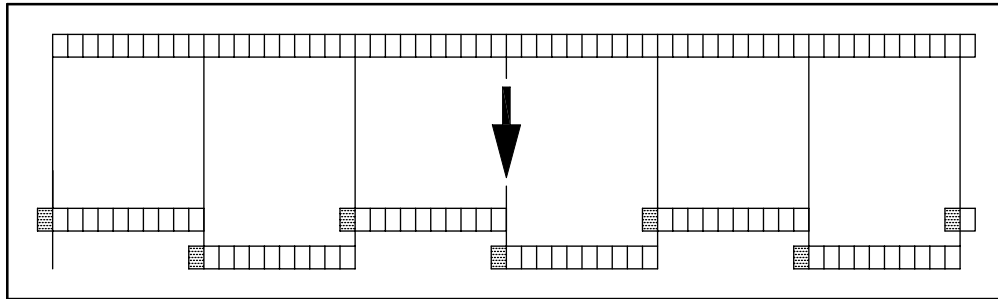


Figure 10 — Fragmentation

6.2.9 Multiplexing

The T-Kernel shall multiplex the T-APDU fragments according to a head-of-the-line strategy where the priorities are given by the I-Kernel (see 7.3.2).

NOTE Apart from respecting priorities, this International Standard does not impose any restriction on how a multiplexer should serve the queues. As a consequence, T-APDUs with the same priority may not be sent in the same order as they were fragmented.

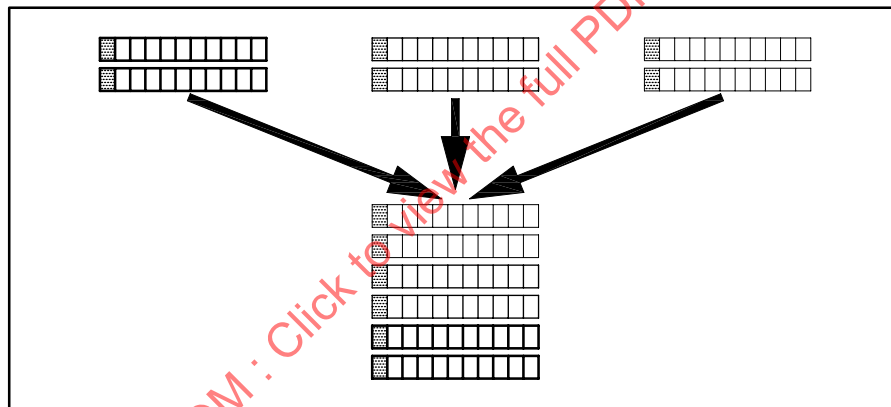


Figure 11 — Multiplexing

6.2.10 Concatenation

Multiple consecutive T-APDU fragments may be mapped on one LLC service if the services and the LID used in the services are the same and the size constraints for the LLC frames are not violated. The order of the T-APDU fragments inside the LSDU shall be the one given by the multiplexing procedure.

NOTE These conditions for concatenation will only occur in the following two situations.

- One or more T-APDU fragments, each containing one short, unfragmented T-APDU, are mapped on one LSDU.
- One or more T-APDU fragments, each containing one short, unfragmented T-APDU, are mapped on one LSDU after the last fragment of a series of T-APDU fragments belonging to one T-APDU.

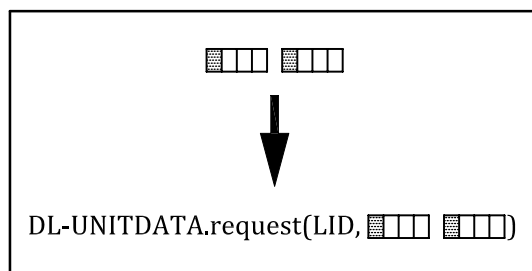


Figure 12 — Concatenation

6.2.11 Concatenation with chaining

A chain consists of consecutive and ordered concatenated T-APDU fragments having the same PDU number.

The execution of operations invoked by a T-APDU belonging to a chain is dependent on the successful execution of the operations invoked in the previous T-APDU fragments of the same chain.

If a chained T-APDU fragment generates a response T-APDU fragment with a ReturnStatus different from “no error”, none of the operations invoked by the subsequent T-APDU fragments of the same chain shall be performed and all associated responses shall contain a ReturnStatus of “chainingError”.

NOTE If a chaining parameter has the value “true”, and the procedures defined in 6.2.11 are ignored, it would not affect the whole peer-to-peer protocol because the chaining parameters are not passed to a peer receiver side.

6.2.12 Access to LLC

The T-Kernel shall use the LLC service assigned in the FlowControl parameter of the T-ASDU. The FlowControl parameter shall be interpreted as defined in 6.2.4. For the INITIALISATION.request service the “DL-UNITDATA.request with response request” service shall be used; for the INITIALISATION.response service, the “DL-UNITDATA.request without response request” service shall be used.

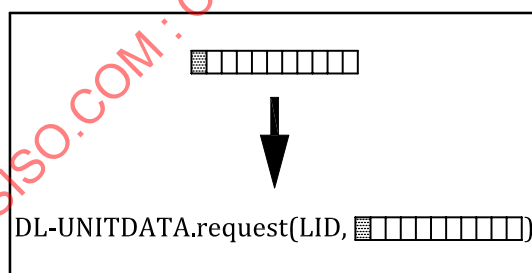


Figure 13 — Access to LLC

6.2.13 Access from LLC

The T-Kernel on the receiving side shall receive the LSDUs in the LLC indication primitives via the LSAP.

6.2.14 Demultiplexing

The T-Kernel shall demultiplex the LSDUs containing one or more concatenated T-APDU fragments according to the PDU number in the first fragmentation header.

The T-Kernel shall demultiplex LSDUs containing concatenated T-APDU fragments according to the PDU number in the first fragmentation header.

An LSDU with an invalid first fragmentation header shall be discarded.

NOTE 1 This results in queues in which all LSDUs have the same PDU number in their first fragment header. As subsequent T-APDU fragments in an LSDU can only be single-T-APDU fragments, all T-APDU fragments from a T-APDU will be put in the same queue.

NOTE 2 As only a decoder that knows the type of PDUs to be decoded can determine the length of a PER-encoded PDU, the demultiplexer cannot determine the length of concatenated T-APDU fragments. Therefore, separation of concatenated T-APDU fragments is postponed until the decoding step. As this demultiplexing step guarantees that any two T-APDU fragments with the same PDU number will always be put in the same queue, this demultiplexing (separation) can indeed be solved later.

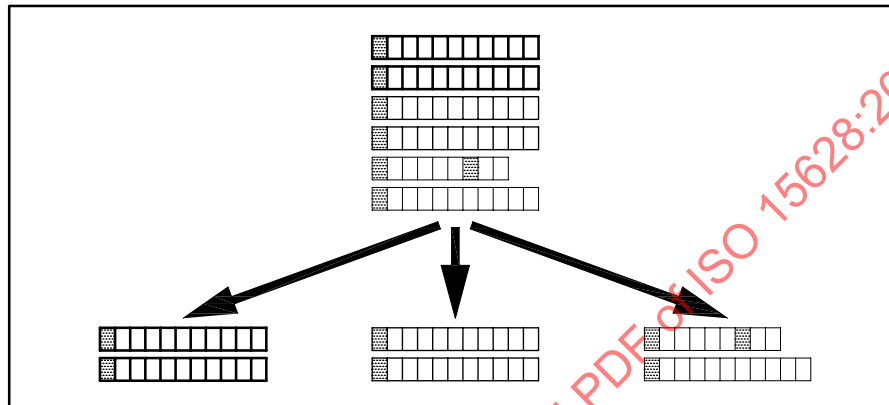


Figure 14 — Demultiplexing

6.2.15 Defragmentation

The T-Kernel shall defragment the LSDUs per queue, i.e. all LSDUs with same PDU number in the first fragmentation header, by removing in each LSDU the first fragmentation header and by concatenating the remaining LSDU parts according to the fragment number in the first fragmentation header. If the fragmentation header is not valid, the LSDU and all other LSDUs with same PDU number in their first fragmentation header shall be discarded.

NOTE 1 This defragmentation results in octet strings that contain one complete T-APDU possibly concatenated with one or more single-T-APDU fragments.

NOTE 2 As only a decoder that knows the type of PDUs to be decoded can determine the length of a PER-encoded PDU, the defragmenter cannot determine the length of the first T-APDU and therefore cannot separate a T-APDU from any concatenated single-T-APDU fragments. The separation of concatenated T-APDU fragments is postponed until the decoding step.

NOTE 3 As one defective first fragmentation header will cause the deletion of all LSDUs with the same PDU number in their first fragmentation header, such a defect will cause the deletion of any concatenated single-T-APDU fragments.

If one or more T-APDU fragment headers of a T-APDU are still missing when T-APDU fragments with the eight higher PDU numbers (out of 14 cyclically used values) are received, all LSDUs with a PDU number equal to the PDU number of a missing T-APDU fragment are discarded.

NOTE 4 As the T-APDU fragments could not be interpreted, a T-Kernel cannot determine whether or not a discarded T-APDU is part of an indication or part of a conformance application service primitive, or whether it was part of an action, an event-report, a set or a get. The T-Kernel is therefore unable to generate or assist an application element in generating a T-APDU with the correct value of the ReturnStatus.

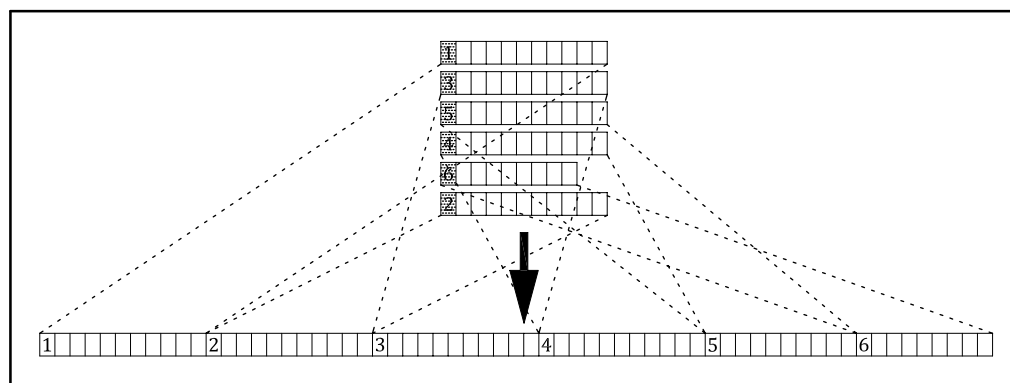


Figure 15 — Defragmentation

6.2.16 Decoding and separation

The T-Kernel shall decode the defragmented T-APDU according to ASN.1 BASIC-PER, UNALIGNED (ISO 8825-2:2008). The decodable ASN.1 types are specified in [Annex A](#).

When provided with an octet string containing a T-APDU with possibly concatenated single-T-APDU fragments, the decoder (separator) proceeds decoding steps as described below.

- 1) It decodes the T-APDU.
- 2) If it does not succeed in decoding the T-APDU, the whole octet string is discarded.
- 3) If it succeeds in decoding the T-APDU, it passes the decoded T-APDU to the next procedure (see [6.2.17](#)).
- 4) It shall look for trailing octets and assume that these remaining octets contain one more single-T-APDU fragments.
- 5) It shall check the validity of the first fragment header of the remaining octet string (bit 2 to bit 0 shall have the value "001₂").
- 6) If the first fragment header is invalid, all the remaining T-APDU fragments shall be discarded.
- 7) If the first fragment header of the T-APDU is valid, the fragment header shall be removed and the decoder (separator) shall proceed decoding with step 1.

This requires an ASN.1 decoder that does not collapse when it has to decode an octet string longer than the PDU to be decoded. The decoder should even be able to return the remaining octet string. Whether or not such an ASN.1 decoder is commercially available is outside the scope of this International Standard.

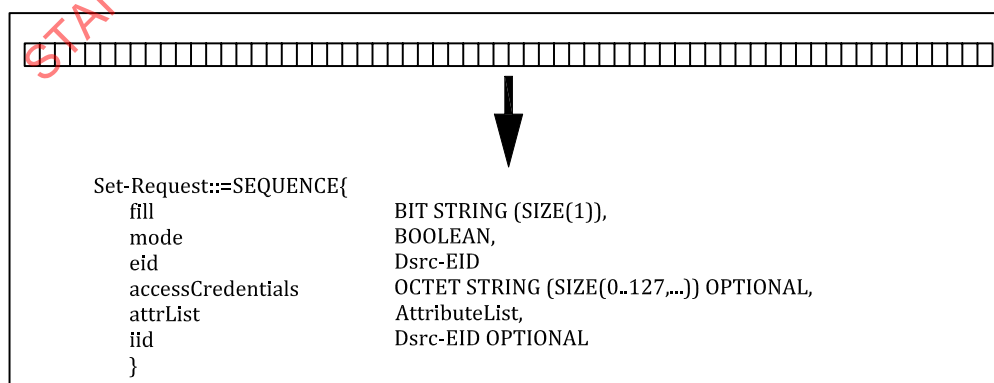


Figure 16 — Decoding

6.2.17 PDU to SDU

The decoded T-APDU shall be used to build the T-ASDU according to the following rules.

A service-request shall be translated into the corresponding service.indication T-ASDU. A service-response shall be translated into the corresponding service.confirm T-ASDU.

The T-ASDU shall be delivered to the element addressed in the EID parameter of the T-APDU, but not to the T-Kernel itself. The INITIALISATION.indication SDU shall be delivered to the I-Kernel.

If the addressed element is not present, the T-ASDU shall be discarded.

The T-Kernel shall inform the management about the LID of this SDU.

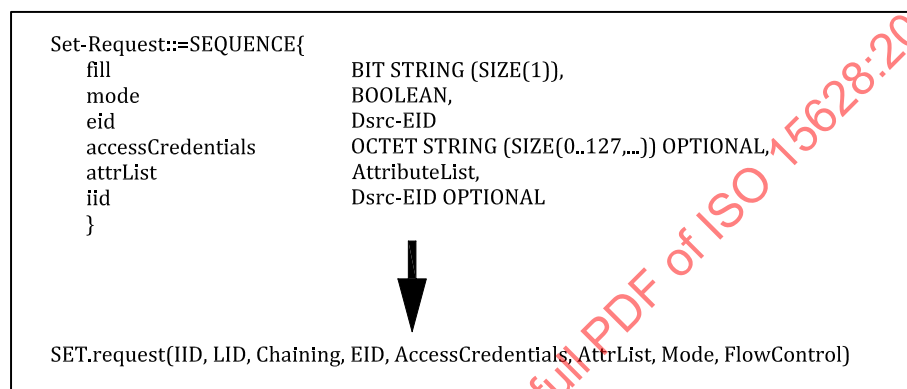


Figure 17 — PDU to SDU

7 Initialisation kernel

7.1 General

The I-Kernel shall realize the initialisation of the communication between OBU and RSU by exchanging information concerning profiles and applications with its peer entity. It shall inform the applications inside the OBU about the presence of a peer application inside the RSU. It shall handle the LID of the OBU.

The I-Kernel shall offer its services by means of service primitives defined in 7.2.

The I-Kernel shall initialise the communication by means of a BST as defined in Annex A. The BST shall be transferred in one LLC service primitive.

The I-Kernel may initialise the communication by means of a VST as defined in Annex A.

The I-Kernel shall perform the initialisation by a protocol with the behaviour defined in 7.3.

The I-Kernel shall perform associations by means of the LID, the BST and a release mechanism.

7.2 Services

7.2.1 Description of service primitives

The I-Kernel shall provide the following services to other kernels or applications:

- RegisterApplicationRSU: The invocation of the RegisterApplicationRSU service by an application on the RSU side shall result in the registration of this application in the ApplicationList of the I-Kernel.
- RegisterApplicationOBU: The invocation of the RegisterApplicationOBU service by an application on the OBU side shall result in the registration of this application in the ApplicationList of the I-Kernel.

- **DeregisterApplication:** The invocation of the DeregisterApplication service by an application shall result in the deletion of the related entry in the ApplicationList.
- **NotifyApplicationOBU:** The I-Kernel uses the NotifyApplicationOBU service to inform the application on the OBU side about the presence of a potential communication partner (i.e. application on the RSU side) and the LID generated by the OBU.
- **NotifyApplicationRSU:** The I-Kernel uses the NotifyApplicationRSU service to inform the application on the RSU side about the presence of a potential communication partner (i.e. application) and the LID of the associated OBU.
- **EndApplication:** The invocation of the EndApplication service by the application shall result in the notification of the I-Kernel that the LID is no longer needed for this application.

7.2.2 Format of service primitives

The initialisation ASDU for the service primitives shall have the formats defined in [Tables 8 to 13](#).

Table 8 — RegisterApplicationRSU

Parameter name	ASN.1 type	Optional or default
AID	DSRCApplicationEntityID	
MandatoryApplication	BOOLEAN	
Priority	INTEGER	
EID	Dsrc-EID	optional
Profiles	SEQUENCE OF Profile	optional
Parameter	ApplicationContextMark	optional

Table 9 — RegisterApplicationOBU

Parameter name	ASN.1 type	Optional or default
AID	DSRCApplicationEntityID	
Priority	INTEGER	
EID	Dsrc-EID	
Profiles	SEQUENCE OF Profile	optional
Parameter	ApplicationContextMark	optional

Table 10 — DeregisterApplication

Parameter name	ASN.1 type	Optional or default
AID	DSRCApplicationEntityID	
EID	Dsrc-EID	optional

Table 11 — NotifyApplicationRSU

Parameter name	ASN.1 type	Condition
Priority	INTEGER	
EID	Dsrc-EID	if present for AID in VST
LID	BIT STRING	
Parameter	ApplicationContextMark	optional
ObeConfiguration	ObeConfiguration	

Table 12 — NotifyApplicationOBU

Parameter name	ASN.1 type	Condition
RSU	BeaconID	
Priority	INTEGER	
EID	Dsrc-EID	if present for AID in BST
LID	BIT STRING	
Parameter	ApplicationContextMark	optional

Table 13 — EndApplication

Parameter name	ASN.1 type	Condition
EID	Dsrc-EID	
LID	BIT STRING	

7.2.3 Parameters

The parameters shall be interpreted as follows:

- AID identifies the DSRC application.
- MandatoryApplication is “true” if the application is mandatory and “false” if it is non-mandatory.
- Priority is the priority of the application. A small value represents a high priority, a large value represents a low priority. The I-Kernel may take this parameter into account when deciding on the priority of the application.

The EID parameter includes the following:

- For the RegisterApplicationRSU service, the EID identifies the element to be registered. EID is not used if the application is the single default application.
- For the RegisterApplicationOBU service, the EID identifies the element to be registered.
- For the NotifyApplication services, the EID identifies an element of the peer application, if present.

Profiles, if present, give a list of profiles associated with the application.

The parameter is optional information for the RegisterApplicationRSU and RegisterApplicationOBU services. If present, the parameter is conveyed in the NotifyApplicationOBU or NotifyApplicationRSU services, respectively. Parameter is of type ApplicationContextMark, which shall be of Container CHOICE type OCTET STRING (SIZE(0..127,...)).

RSU indicates the identification of the RSU which offers the service.

ObeConfiguration describes the configuration and the status of the OBU related to the LID given in the NotifyApplicationRSU.

7.2.4 Location of services

On the RSU side, the I-Kernel shall provide the RegisterApplicationRSU, DeregisterApplication, NotifyApplicationRSU and EndApplication services.

On the OBU side, the I-Kernel shall provide the RegisterApplicationOBU, DeregisterApplication, NotifyApplicationOBU and EndApplication services.

7.3 Behaviour

7.3.1 RSU: Repetitive transmission of BST

7.3.1.1 Reason

System implementation requires transmission of BST.

7.3.1.2 Behaviour

On the RSU side, the I-Kernel shall transmit the BST defined in [Annex A](#). It shall use the INITIALISATION.request service of the T-Kernel with the following parameter settings: initialisation parameter = BST.

The time between subsequent BST transmissions is a system implementation issue and is outside the scope of this International Standard.

7.3.2 OBU: Reception of BST and transmission of VST

7.3.2.1 Reason

The OBU I-Kernel receives a BST by means of an INITIALISATION.indication of the T-Kernel with the following parameter settings: Initialisation parameter = BST.

7.3.2.2 Behaviour

If at least one of the following conditions,

- a) the BeaconID differs from the last received BeaconID;
- b) the time between the last received BST and the current received BST exceeds T seconds, the value of which is defined in [Clause 9](#),

is fulfilled, the OBU I-Kernel shall show the following behaviour:

- The I-Kernel shall inform the management about the profile received in the BST. This profile shall be the default profile for the communication.
- The I-Kernel shall compare the DSRCApplicationEntityIDs given in the ApplicationList inside the BST with the registered DSRCApplicationEntityIDs. For all registered DSRCApplicationEntityIDs which are inside the BST it shall:
 - add the DSRCApplicationEntityIDs and, if present in the related RegisterApplicationOBU, the EID and the parameters into the ApplicationList of the VST;
 - notify the registered element by means of a NotifyApplicationOBU with the following parameters:
 - RSU = BeaconID given in the BST;
 - Priority = position in the mandatory ApplicationList of the BST for all DSRCApplicationEntityIDs inside the mandatory ApplicationList or the number of DSRCApplicationEntityIDs in the mandatory ApplicationList plus the registered priority for all DSRCApplicationEntityIDs inside the non-mandatory ApplicationList;
 - Link identifier = LID selected by the I-Kernel;
 - Parameter = parameter received in the BST if present, else empty.
- The I-Kernel shall choose a random LID having an approximately uniform distribution over the range of possible values according to LLC requirements, as defined in [Clause 9](#).

- The I-Kernel shall inform the T-Kernel via the management about the priorities of the notified applications.
- The I-Kernel shall select a profile out of the profile or the profileList of the BST which is supported in the OBU (i.e. which is known by the I-Kernel), and shall set the profile data element of the VST to this profile.
- The VST is of ASN.1 type VST as defined in [Annex A](#).
- The I-Kernel shall transmit the VST. It shall use the INITIALISATION.response service of the T-Kernel with the following parameter settings:
 - Link identifier = LID;
 - Initialisation parameter = VST.
- The I-Kernel shall store the BeaconID and time.
- The I-Kernel shall store the ApplicationList of the VST together with the LID as long as the LID is valid.

7.3.3 RSU: Answer to VST

7.3.3.1 Reason

The RSU I-Kernel receives a VST by means of an INITIALISATION.confirm of the T-Kernel with the parameters:

- Link identifier = LID;
- Initialisation parameter = VST.

7.3.3.2 Behaviour

For all DSRCApplicationEntityIDs inside the VST, the I-Kernel shall notify the registered element by means of a NotifyApplicationRSU with the following parameters:

- Priority = position in the list of mandatory applications, mandApplications of the BST for all DSRCApplicationEntityIDs inside the mandApplications, or the number of DSRCApplicationEntityIDs in the mandApplications plus the position in the nonmandApplications for all DSRCApplicationEntityIDs inside the nonmandApplications;
- EID = EID received in the VST if present, else empty;
- LID = LID received in the INITIALISATION.confirm;
- Parameter = Parameter received in the VST if present, else empty;
- ObeConfiguration = ObeConfiguration received in the VST.

The I-Kernel shall inform the management about the relation between LID and the profile given inside the VST. This profile shall be used for further communication with the OBU with this LID, i.e. outgoing data shall be sent using this profile and incoming data shall be received using this profile.

The I-Kernel shall store the ApplicationList of the VST together with the LID given in the INITIALISATION.confirm.

7.3.4 RSU: RegisterApplicationRSU

7.3.4.1 Reason

The reason for this is the invocation by an application (application on the RSU side).

7.3.4.2 Behaviour

On receiving a RegisterApplicationRSU primitive, the RSU I-Kernel shall insert the information given in the primitive into the ApplicationList for mandatory or non-mandatory applications, as applicable. It may use the information given in the parameters "MandatoryApplication" and "Priority". If a B-Kernel is present, then the priority of the B-Kernel is decided by the I-Kernel. The profiles may be inserted into the ProfileList of the BST.

7.3.5 OBU: RegisterApplicationOBU

7.3.5.1 Reason

The reason for this is the invocation by an application.

7.3.5.2 Behaviour

On receiving a RegisterApplicationOBU, the OBU I-Kernel shall add this application to the list of registered applications.

Each element in the OBU shall have a unique number. The process shall guarantee that one unique EID is allocated for each element registered in the OBU (eid = 0 reserved for system).

7.3.6 OBU: DeregisterApplication

7.3.6.1 Reason

The reason for this is the invocation by an application.

7.3.6.2 Behaviour

On receiving a DeregisterApplication, the I-Kernel shall remove this application from the list of registered applications.

7.3.7 RSU: DeregisterApplication

7.3.7.1 Reason

The reason for this is the invocation by an application.

7.3.7.2 Behaviour

On receiving a DeregisterApplication, the I-Kernel shall remove the entry from the ApplicationList of the BST.

7.3.8 RSU: Release application

7.3.8.1 Reason

The reason for this is the invocation by an application.

7.3.8.2 Behaviour

On receiving an EndApplication, the I-Kernel shall delete the entry from the stored ApplicationList from the VST. If the application list is empty (i.e. all applications have ended), the I-Kernel shall transmit a release to the peer I-Kernel. It shall use the EVENT-REPORT.request service of the T-Kernel with the following parameter settings:

— Invoker identifier = (empty);

- Link identifier = LID;
- Element identifier = EID = 0;
- EventType = Release (0);
- EventParameter = (empty);
- Mode = FALSE;
- FlowControl = 1.

7.3.9 Reception of a Release

7.3.9.1 Reason

The I-Kernel receives a Release by means of an EVENT-REPORT.indication of the T-Kernel with the parameters:

- Invoker identifier = (empty);
- Link identifier = LID;
- EventType = Release (0);
- EventParameter = (empty);
- Mode = FALSE.

NOTE EID and FlowControl parameters are “mandatory” in [Table 5](#). However, the EVENT-REPORT.indication does not need these parameters in the context of the RSU Release application process. Therefore, these are omitted.

7.3.9.2 Behaviour

The I-Kernel shall delete the VST related to the LID. The LID shall no longer be valid.

8 Broadcast kernel

8.1 General

The B-Kernel shall realize the collection, broadcast and distribution of information for different applications in the OBU and RSU by exchanging the broadcast pool.

The B-Kernel shall offer its services by means of service primitives defined in [8.2](#).

The B-Kernel shall realize the communication by sending a BroadcastPool defined in [Annex A](#).

The B-Kernel shall realize the broadcast by a protocol with the behaviour defined in [8.3](#).

8.2 Services

8.2.1 Description of service primitives

The B-Kernel shall provide the following services.

- BroadcastData: The invocation of the BroadcastData service by the application on the RSU side shall result in the broadcast of information to the peer application on the OBU side or in the update of this information.
- GetBroadcastData: The invocation of the GetBroadcastData service by an application shall result in the retrieval of the broadcast data.

8.2.2 Format of service primitives

The broadcast ASDU for the service primitives shall have the formats defined in [Tables 14](#) and [15](#).

Table 14 — BroadcastData

Parameter name	ASN.1 type
File	NamedFile

Table 15 — GetBroadcastData.request

Parameter name	Request	Confirm	ASN.1 type
Name	Mandatory	a	FileName
EID	Mandatory	a	Dsrc-EID
File	a	Mandatory	NamedFile
a Not applicable.			

8.2.3 Parameters

The parameters shall be set and interpreted as follows.

- The file shall be the NamedFile, which contains the information which shall be broadcast or retrieved, as applicable, from the broadcast pool.
- The name shall be the FileName of the file, which shall be retrieved from the broadcast pool.
- The EID shall be the Dsrc-EID of the element invoking the GetBroadcastData service.

8.2.4 Location of services

On the RSU side, the B-Kernel shall provide the BroadcastData primitive. On the OBU side, the B-Kernel provides the GetBroadcastData.request and GetBroadcastData.confirm primitives.

8.3 Behaviour

8.3.1 RSU: Transmission of the BroadcastPool

8.3.1.1 Reason

System implementation requires transmission of the broadcast pool.

8.3.1.2 Behaviour

On the RSU side, the B-Kernel shall transmit the BroadcastPool defined in [Annex A](#). It shall use the SET request service of the T-Kernel periodically with the following parameter settings:

- Invoker identifier = (empty);
- Link identifier = 1111 1111₂;
- Element identifier = EID = 0;
- Attribute list = (0, BroadcastPool);
- Mode = FALSE;
- FlowControl = 1.

The determination of the length of the period between two transmissions is outside the scope of this International Standard.

8.3.2 OBU: Receiving the broadcast pool

8.3.2.1 Reason

The OBU B-Kernel receives the broadcast pool by means of a SET.indication of the T-Kernel with the following parameters:

- Invoker identifier = (empty);
- Link identifier = 1111 1111₂;
- Attribute list = (0, BroadcastPool);
- Mode = FALSE.

8.3.2.2 Behaviour

On the OBU side, the B-Kernel shall replace the current value of the BroadcastPool by the new value of the BroadcastPool.

8.3.3 RSU: BroadcastData

8.3.3.1 Reason

The reason for this is the invocation by an application.

8.3.3.2 Behaviour

The B-Kernel shall insert the file of the NamedFile into the content of the BroadcastPool and the FileName into the Directory. If there is a file with the same FileName in the BroadcastPool, this file is replaced by the new file.

8.3.4 OBU: GetBroadcastData.request

8.3.4.1 Reason

The reason for this is the invocation by an application.

8.3.4.2 Behaviour

The B-Kernel shall retrieve the file with the given FileName and give it to the application with Dsrc-EID (EID) by means of a GetBroadcastData.confirm.

9 Extensibility for different lower layer services and application interfaces

9.1 General


This clause specifies the extended definitions for this International Standard to conform to the different application interface (API) standards and/or the lower layer (data link layer) standards. A set of extended definitions could be identified as a “DSRC Profile”, which represents characteristics of the communication partners as described in [Annex D](#), by applications. The profile may be able to be used for maintaining interoperability in applications.

9.2 Extended definitions

9.2.1 CEN

Extended definitions in CEN RTTT DSRC standards (see related reference standards in [9.2.1.2](#)) are described in this subclause. A data link layer link connection and an application layer initialisation are simultaneously executed in cooperation (see [Figure 18](#)).

STANDARDSISO.COM : Click to view the full PDF of ISO 15628:2013

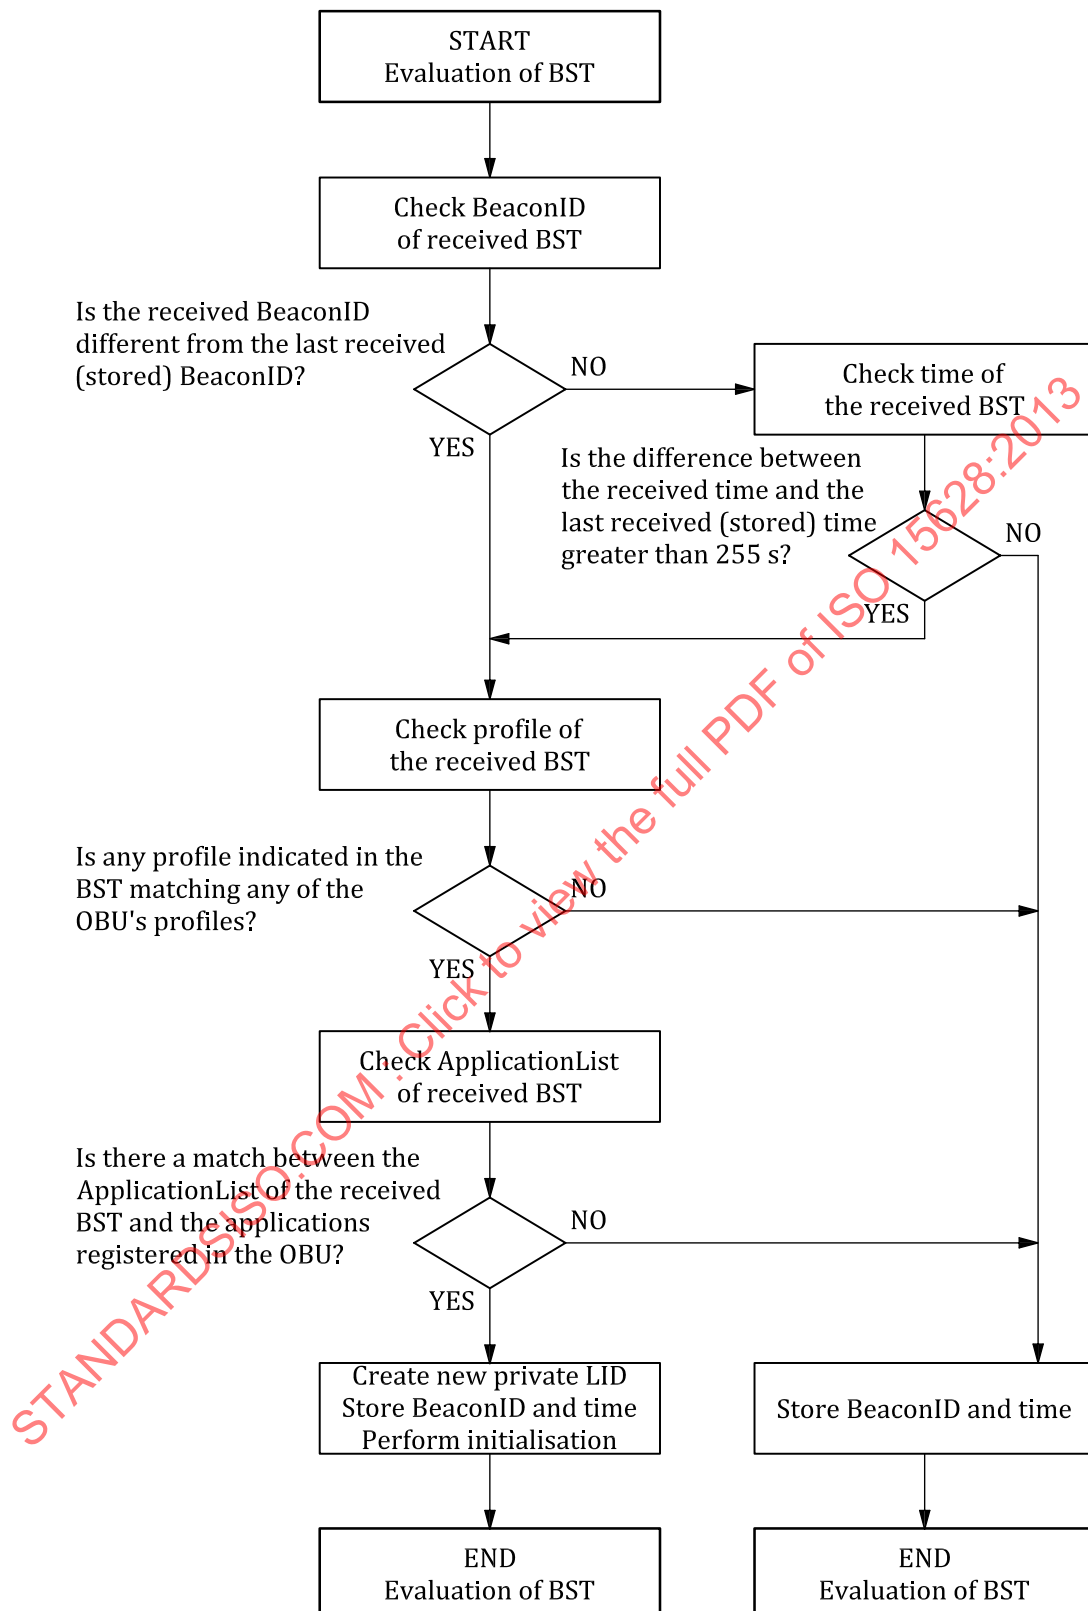

NOTE The time may be calculated by the OBU from the time given in the BST.

Figure 18 — Evaluation of BST

9.2.1.1 Definitions

Details of extended definitions are as follows.

- Parameters of primitives defined in [6.2.3](#), described below, are mandatory.
- The FlowControl parameter of each GET.confirm, SET.confirm, ACTION.confirm and EVENT-REPORT.confirm is mandatory.
- The LID of INITIALISATION.request/indication defined in [Table 6](#) shall be the broadcast address.
- Time between the last received BST and the current received BST defined in [7.3.2](#) shall be 255 seconds.
- The I-Kernel shall choose a random LID in VST transmission behaviour defined in [7.3.2](#).
- The EID of a SET.request service for the Broadcast Pool transmission defined in [8.3.1](#) shall be 0.
- Recovery/retransmission mechanisms are defined in the lower layer.
- ActionType definition and value assignments are available at <http://www.tc278.eu/>.
- Assignment of profile numbers according to Annex A in EN 12834:2003 are based on the underlying definitions of DSRC profiles as defined in EN 13372.

NOTE The CEN (Comité Européen de Normalisation, European Committee for Standardization) DSRC standard is a set of four standards; refer to <http://www.tc278.eu/>.

9.2.1.2 Informative references

Informative references include EN 12795:2003, EN 13372:2004 and ISO 14906:2011.

9.2.2 IEEE/ASTM International

Extended definitions in IEEE standards and ASTM standards (see related reference standards in [9.2.2.2](#)) are described in this subclause.

NOTE 1 For IEEE (Institute of Electrical and Electronics Engineers), refer to <http://www.ieee.org>.

NOTE 2 For ASTM International, refer to <http://www.astm.org>.

9.2.2.1 Definitions

Details of extended definitions are to be described.

9.2.2.2 Informative reference

This includes IEEE 1455:1999.

9.2.3 ARIB

Extended definitions in ARIB STD-T75:2001 are described in this subclause. In this ARIB DSRC standard, the BST/VST exchange for the application layer initialisation is made using PDUs after the data link layer link connection establishment. Its LID is a private address randomly chosen by the I-Kernel and it passes to the data link layer link with management services.

9.2.3.1 Definitions

Details of extended definitions are as follows.

- The FlowControl parameter of each GET.confirm, SET.confirm, ACTION.confirm and EVENT-REPORT.confirm is not applicable.

- The LID of INITIALISATION.request/indication defined in [Table 6](#) shall be a private address (a randomly chosen LID).
- Adds FlowControl 12 defined in [Table 16](#), DL-UNITDATA.request wait response request to [Table 7](#).

Table 16 — Additional FlowControl parameter

Flow-Control	Application layer	LLC service
12	no flow control, answer with wait	DL-UNITDATA.request wait response request

- Adds Norm_end parameter defined in [Table 17](#) to EndApplication of [Table 13](#) in [7.2.2](#), as optional. Norm_end indicates the EndApplication condition after completion of the application function. The I-Kernel may use this parameter to determine the value of the Timer T defined in [7.3.2](#).

Table 17 — Optional parameter of EndApplication

Parameter name	ASN.1 type	Condition
EID	Dsrc-EID	
LID	BIT STRING	
Norm_end	BOOLEAN	optional

Time between the last received BST and the current received BST defined in [7.3.2](#) should be 0 through 255 s.

The I-Kernel shall use a private (randomly chosen) LID in VST transmission behaviour defined in [7.3.2](#).

The EID of a SET.request service for the broadcast pool transmission defined in [8.3.1](#) may be any number.

NOTE 1 The ARIB (Association of Radio Industries and Businesses, Japan) DSRC standard is one standard. Reference standards for this subclause are defined in [9.2.3.2](#). Refer to <http://www.arib.or.jp> or <http://www.arib.or.jp/english/>.

NOTE 2 The timer value is an implementation parameter. If a timer value of more than 255 seconds is required, the maximum timer value might be changed.

NOTE 3 No implementation of the broadcast kernel functionality has become known according to this ARIB standard. Broadcast kernel functionality is to be considered further regarding the EID definition.

9.2.3.2 Informative references

These include ARIB STD-T75 and ISO 14906.

Annex A (normative)

Data structures

A.1 Use of modules

This annex specifies a reference data structures defined in [Clauses 6](#) to [8](#). Referring to this annex, a user of this International Standard shall specify the detail of data structures for a user system, and the T-Kernel in such a system shall use the DSRCData module and the DSRCTransferData module according to data structures.

Considering interoperability, the user should also register the data structures using an unambiguous identifier to the registration authority.

NOTE The IMPORT and EXPORT mechanisms are standardized in ISO/IEC 8824-1.

A.2 ASN.1 modules

DSRCData {iso(1) standard(0) dsrsrc(15628) dsrsrcData(0) version (1)}

DEFINITIONS AUTOMATIC TAGS::= BEGIN

```
-- IMPORTS
-- New type definitions shall be imported from other ASN.1 modules as follows:
-- Type1, Type2 FROM ModuleA;
-- where:
-- - Type1 and Type2 shall be replaced with the names of the types to be
imported.
-- - ModuleA shall be replaced by the name of the exporting ASN.1 module
-- EXPORTS everything;
```

Action-Request::=SEQUENCE{

```
mode          BOOLEAN,
eid           Dsrc-EID,
actionType    ActionType,
accessCredentials OCTET STRING (SIZE (0..127,...)) OPTIONAL,
actionParameter Container OPTIONAL,
iid           Dsrc-EID OPTIONAL
}
```

Action-Response::=SEQUENCE{

```
fill          BIT STRING (SIZE(1)),
eid           Dsrc-EID,
iid           Dsrc-EID OPTIONAL,
responseParameter Container OPTIONAL,
ret           ReturnStatus OPTIONAL
}
```


ActionType::=INTEGER(0..127,...)
 -- (0..118) Reserved for ISO/CEN use.
 -- ActionTypes below defined in ISO 14906
 -- 0 : getStamped
 -- 1 : setStamped
 -- 2 : getSecure
 -- 3 : setSecure
 -- 4 : getInstance
 -- 5 : setInstance
 -- 6 : getNonce
 -- 7 : setNonce
 -- 8 : transferChannel
 -- 9 : copy
 -- 10 : setMMI
 -- 11 : subtract
 -- 12 : add
 -- 13 : debit
 -- 14 : credit
 -- 15 : echo
 -- (119-127) Reserved for private use

ApplicationContextMark::=Container -- OCTET STRING (SIZE(0..127,...))
 -- Illustration of an ApplicationContextMark example
 -- can be found in ISO 14906, referred to as an EFC-ContextMark

ApplicationList::=SEQUENCE (SIZE (0..127,...)) OF
 SEQUENCE {
 aid DSRCAApplicationEntityID,
 eid Dsrc-EID OPTIONAL,
 parameter ApplicationContextMark OPTIONAL
 }

AttributeIdList::=SEQUENCE (SIZE(0.. 127,...)) OF INTEGER(0..127,...)

AttributeList::=SEQUENCE (SIZE(0..127,...)) OF Attributes

Attributes::=SEQUENCE{
 attributeId INTEGER (0..127,...),
 attributeValue Container
 }

BeaconID::=SEQUENCE{
 manufacturerid INTEGER(0..65535),
 individualid INTEGER(0..134217727)
 } -- for registration of manufacturerid see www.nen.nl/cen278

BroadcastPool::=SEQUENCE{
 directoryvalue Directory,
 content SEQUENCE (SIZE(0..127,...)) OF File
 }

BST::=SEQUENCE{
 rsu BeaconID,
 time Time,
 profile Profile,
 mandApplications ApplicationList,
 nonmandApplications ApplicationList OPTIONAL,
 profileList SEQUENCE (SIZE(0..127,...)) OF Profile
 }

```

Container::=CHOICE{
    integer            [0]    INTEGER,
    bitstring          [1]    BIT STRING,
    octetstring        [2]    OCTET STRING (SIZE (0..127, ...)),
    universalString    [3]    UniversalString,
    beaconId           [4]    BeaconID,
    t-apdu              [5]    T-APDUs,
    dsrCApplicationEntityId [6] DSRCAApplicationEntityID,
    dsrC-Ase-Id         [7]    Dsrc-EID,
    attrIdList          [8]    AttributeIdList,
    attrList            [9]    AttributeList,
    broadcastPool       [10]   BroadcastPool,
    directory           [11]   Directory,
    file                [12]   File,
    fileType            [13]   FileType,
    record              [14]   Record,
    time                [15]   Time,
    vector              [16]   SEQUENCE (SIZE(0..255)) OF INTEGER(0..127,...),
    -- tags [17..69] are defined in ISO 14906 for CEN Dsrc application use
    -- tags [70..86] are reserved for ISO/CEN Dsrc application use
    -- tags [87..127] are reserved for private use and intended for the
    -- addressing of the corresponding private attribute identifiers.
    ...                -- extension marker
    -- New attributes shall be inserted as:
    -- componentName1 [i] ModuleA.Type1
    -- where
    -- - componentName1 is a name unique within the Container definition
    -- - "i" is the registered tag chosen from the ranges as specified above.
    -- - Type1 is the name of an imported type and
    -- - ModuleA is the name of the module from which the type Type1 is imported.
    -- The prefix "ModuleA" is only required in case of a name conflict,
    -- if the name "Type1" is not also defined in the DsrcData module and not
    -- imported from another module, the prefix "ModuleA" should be omitted.
}

Directory::=SEQUENCE (SIZE(0..127,...)) OF FileName
Dsrc-EID::=INTEGER(0..127, ...)

```

```

DSRCApplicationEntityID::=INTEGER{
    system (0),
    electronic-fee-collection (1),
    freight-fleet-management (2),
    public-transport (3),
    traffic-traveller-information (4),
    traffic-control (5),
    parking-management (6),
    geographic-road-database (7),
    medium-range-preinformation (8),
    man-machine-interface (9),
    intersystem-interface (10),
    automatic-vehicle-identification (11),
    emergency-warning (12),
    private (13),
    multi-purpose-payment (14),
    dsrc-resource-manager (15),
    after-theft-systems (16),
    cruise-assist-highway-system (17),
    multi-purpose-information-system (18),
    multi-mobile-information-system (19),
    efc-compliance-check-communication
    -applications (20),
    efc-localisation-augmentation
    -communication-applications (21)
    -- (22..28) are reserved for ISO/CEN-dsrc-applications
    -- (29..30) are reserved for private use
    -- 31 is reserved for ISO/CEN-dsrc-applications
} (0..31,...)
-- For the latest standard use of application definitions,
-- refer to Clause 9
-- As an example, the application "electronic-fee-collection (1)"
-- is standardized by ISO 14906

Event-Report-Request::=SEQUENCE{
    mode BOOLEAN,
    eid Dsrc-EID,
    eventType EventType,
    accessCredentials OCTET STRING (SIZE(0..127,...)) OPTIONAL,
    eventParameter Container OPTIONAL,
    iid Dsrc-EID OPTIONAL
}

Event-Report-Response::=SEQUENCE{
    fill BIT STRING (SIZE(2)),
    eid Dsrc-EID,
    iid Dsrc-EID OPTIONAL,
    ret ReturnStatus OPTIONAL
}

EventType::=INTEGER{
    release (0)
    -- (1..118) are reserved for ISO/CEN use
    -- (119..127) are reserved for private use
} (0..127,...)

File::=SEQUENCE (SIZE(0..127,...)) OF Record
FileName::=SEQUENCE{
    aseID Dsrc-EID,
    fileID INTEGER(0..127,...)
}

-- Not defined. This might be defined in a future version.

```

```

Get-Request::=SEQUENCE{
    fill          BIT STRING (SIZE(1)),
    eid           Dsrc-EID,
    accessCredentials OCTET STRING (SIZE(0..127,...)) OPTIONAL,
    iid           Dsrc-EID OPTIONAL,
    attrIdList    AttributeIdList OPTIONAL
}

Get-Response::=SEQUENCE{
    fill          BIT STRING (SIZE(1)),
    eid           Dsrc-EID,
    iid           Dsrc-EID OPTIONAL,
    attributelist AttributeList OPTIONAL,
    ret          ReturnStatus OPTIONAL
}

Initialisation-Request::=BST
Initialisation-Response::=VST
NamedFile::=SEQUENCE{
    name      FileName,
    file      File
}
-- NamedFile will be used in T-Kernel with GetBroadcastData-Request,
-- that might be specified in T-APDU in a future version.

ObeConfiguration::=SEQUENCE{
    equipmentClass  INTEGER(0..32767),
    manufacturerID  INTEGER(0..65535),
    obeStatus       INTEGER(0..65535) OPTIONAL
}

Profile::=INTEGER(0..127,...)
-- (0..118) are reserved for ISO/CEN use,
-- (119..127) are reserved for private use

Record::=CHOICE{ simple VisibleString,
    ...
}

ReturnStatus::=INTEGER{
    noError          (0),
    accessDenied     (1),
    argumentError    (2),
    complexityLimitation (3),
    processingFailure (4),
    processing        (5),
    chainingError     (6),
    -- (7..99) are reserved for future ISO/CEN use,
    -- (100..127) are reserved for private use
} (0..127,...)

Set-Request::=SEQUENCE{
    fill          BIT STRING (SIZE(1)),
    mode          BOOLEAN,
    eid           Dsrc-EID,
    accessCredentials OCTET STRING (SIZE(0..127,...)) OPTIONAL,
    attrList      AttributeList,
    iid           Dsrc-EID OPTIONAL
}

Set-Response::=SEQUENCE{
    fill          BIT STRING (SIZE(2)),
    eid           Dsrc-EID,
    iid           Dsrc-EID OPTIONAL,
    ret          ReturnStatus OPTIONAL
}

Time::=INTEGER(0..4294967295)
-- The number of seconds passed since
-- 1st January 1970, 00:00 (UTC)

```