

INTERNATIONAL
STANDARD

ISO
17131

IULTCS/IUP
56

First edition
2012-08-15

**Leather — Identification of leather with
microscopy**

Cuir — Identification du cuir par microscopie

STANDARDSISO.COM : Click to view the full PDF of ISO 17131:2012



Reference number
ISO 17131:2012(E)
IULTCS/IUP 56:2012(E)

© ISO 2012

STANDARDSISO.COM : Click to view the full PDF of ISO 17131:2012



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Principle	1
5 Apparatus and materials	1
6 Procedure	2
7 Test report	2
Annex A (normative) Scanning electron microscope cross-section photographs	3
Annex B (normative) Light microscope cross-section photographs	8
Bibliography	11

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 17131 was prepared by the European Committee for Standardization (CEN) Technical Committee CEN/TC 289, *Leather*, in collaboration with the Physical Tests Commission of the International Union of Leather Technologists and Chemists Societies (IUP Commission, IULTCS) in accordance with the agreement on technical cooperation between ISO and CEN (Vienna Agreement).

IULTCS, originally formed in 1897, is a world-wide organization of professional leather societies to further the advancement of leather science and technology. IULTCS has three Commissions, which are responsible for establishing international methods for sampling and the testing of leather. ISO recognizes IULTCS as an international standardizing body for the preparation of test methods for leather.

Introduction

The identification of leather is best made by operators experienced in material identification using microscopy, which is the preferred method. With other methods, such as chemical analysis, it can be difficult to absolutely determine that the material is leather.

STANDARDSISO.COM : Click to view the full PDF of ISO 17131:2012

STANDARDSISO.COM : Click to view the full PDF of ISO 17131:2012

Leather — Identification of leather with microscopy

1 Scope

This International Standard specifies a method using microscopy to identify leather and distinguish it from other materials. The method is not applicable for identifying specific leathers (e.g. sheep leather).

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 15987, *Leather — Terminology — Key definitions for the leather trade*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 15987 apply.

4 Principle

A cross-section of the material is cut perpendicular to the surface. The material structure is compared with typical pictures or known samples by means of microscopy.

The method should be carried out by operators experienced in material identification by microscopy.

5 Apparatus and materials

5.1 Light microscope or scanning electron microscope, capable of giving a normal magnification of at least 20 $\times$.

NOTE For some materials it is necessary to use a microscope with a magnification of 500 $\times$.

5.2 Razor blade, capable of cutting a clean cross-section in leather.

5.3 Coating unit, sputter or evaporation, including a suitable element or alloy (e.g. gold) for coating, if a scanning electron microscope is used.

5.4 Specimen stubs, suitable for a scanning electron microscope, if used.

5.5 Reference materials, with known designation.

6 Procedure

6.1 From the material being tested, cut two test pieces approximately 10 mm × 10 mm using a suitable cutting device and then section each of the test pieces in accordance with 6.2.

6.2 Place the cutting edge of the razor blade (5.2) with the blade perpendicular to the surface and press the blade through the whole thickness of the test piece, ensuring that the blade remains vertical and the section is cleanly cut. If the test piece is considered to be leather, make the cut with the flesh or inner side uppermost.

NOTE It is useful to prepare the second test piece section perpendicular to the first.

6.3 When using a scanning electron microscope, ensure that the prepared section adheres to a specimen stub (5.4) with the cut surface uppermost. Coat the stub and section in the coating unit (5.3) so that good image quality can be obtained.

6.4 Place the sections under the microscope and compare the material structure with the typical pictures presented in Annex A (scanning electron microscope photos) and/or Annex B (light microscope photos) or with known reference materials (5.5). Use a suitable magnification to distinguish the typical fibre structure of leather from other materials. Consider the appropriate terms for leather defined in EN 15987.

For the absolute identification of leather it is necessary to identify the more or less intact original fibrous structure.

6.5 If necessary, determine the surface coating thickness and the total thickness in accordance with ISO 17186.

6.6 Define the designation of the material considering the results of 6.4 and 6.5 and the leather terms defined in EN 15987.

7 Test report

The test report shall include the following:

- a) reference to this document (i.e. ISO 17131);
- b) type and origin of the analysed material sample;
- c) designation of the material (see 6.6) as leather or another material;
- d) if necessary, the thickness of the coating layer and total thickness in accordance with ISO 17186;
- e) if requested, photographs of the sections;
- f) any deviations from the procedure;
- g) any additional information important for the designation;
- h) the date of the test.

Annex A (normative)

Scanning electron microscope cross-section photographs

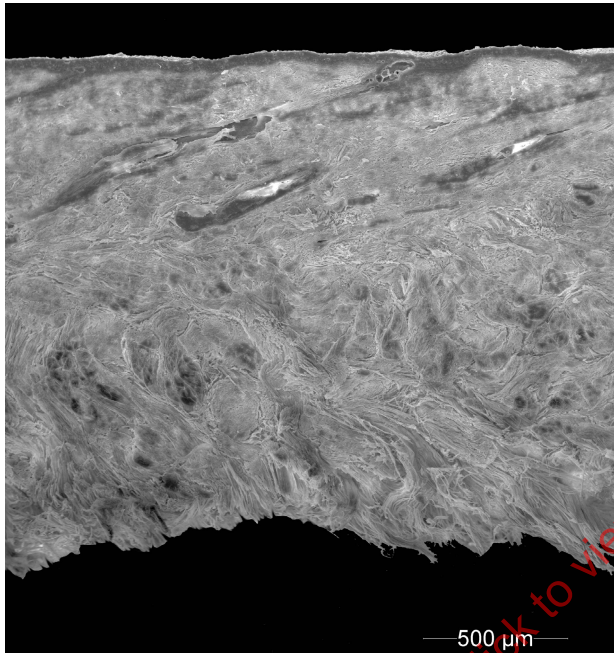


Figure A.1 — Typical section of bovine leather with surface coating of less than 150 µm

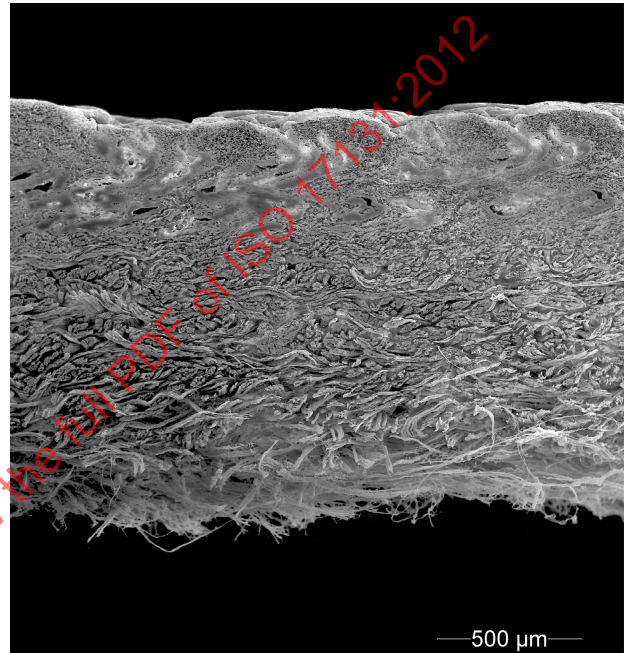


Figure A.2 — Typical section of sheep leather

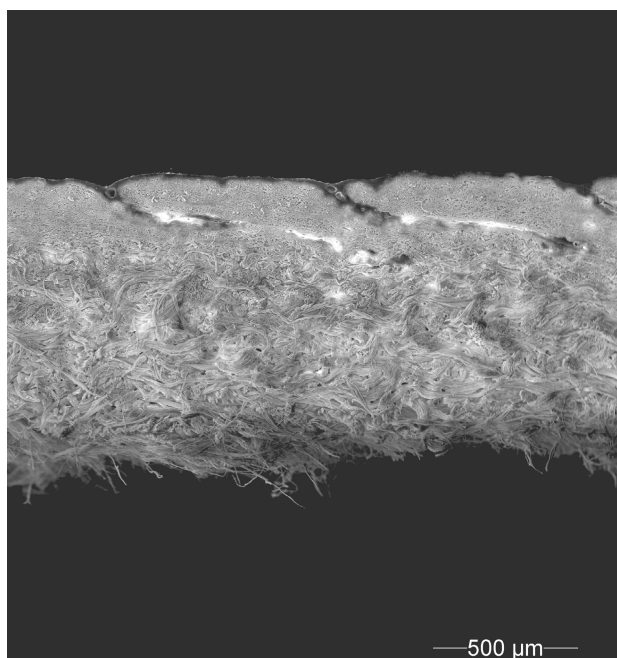


Figure A.3 — Typical section of goat skin leather

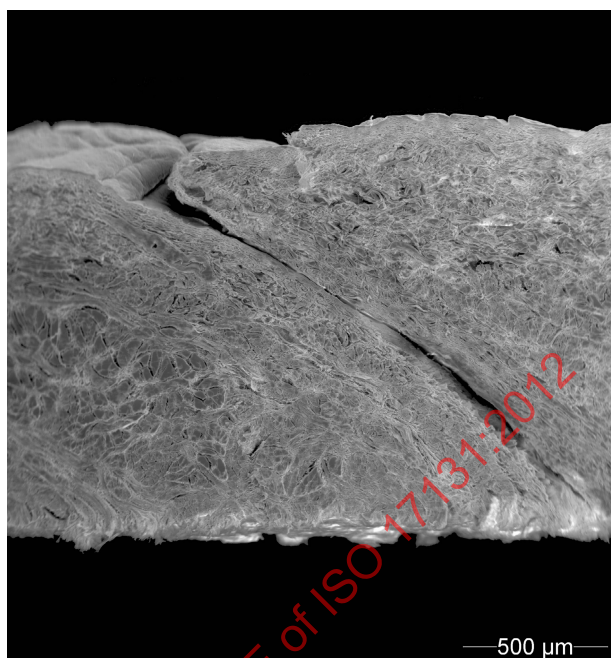


Figure A.4 — Typical section of pig skin leather



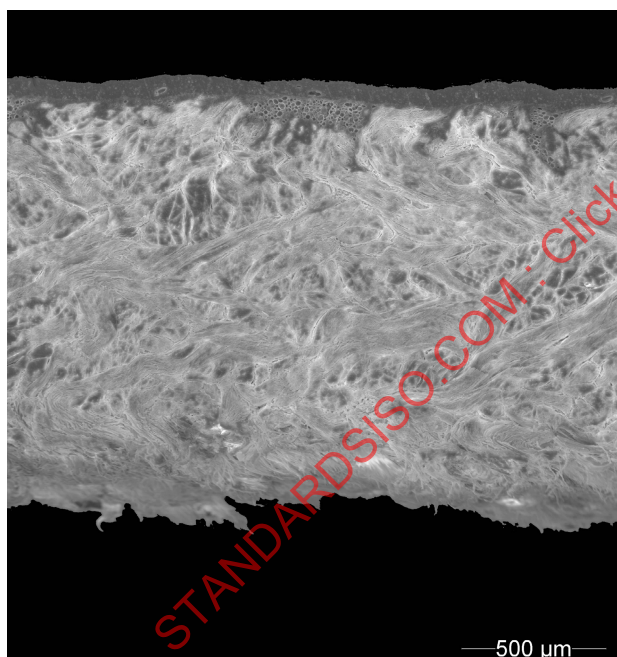


Figure A.5 — Typical section of coated bovine split leather

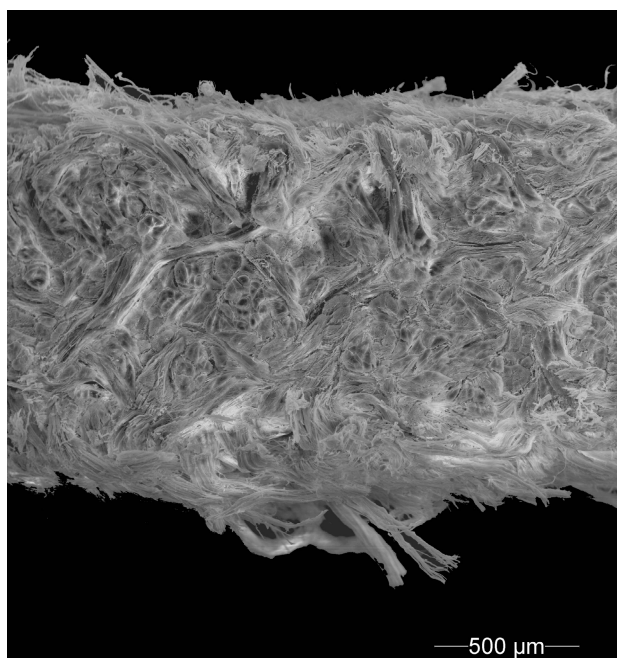


a) Moderate magnification

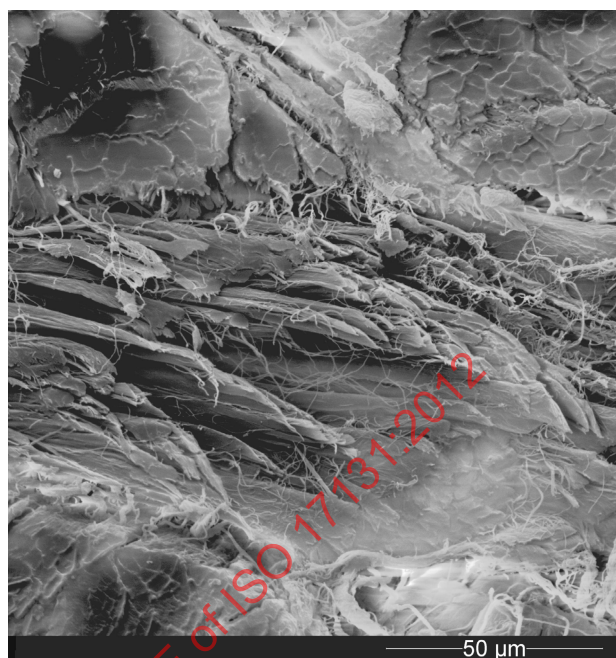


b) High magnification

Figure A.6 — Typical section of bovine suede leather

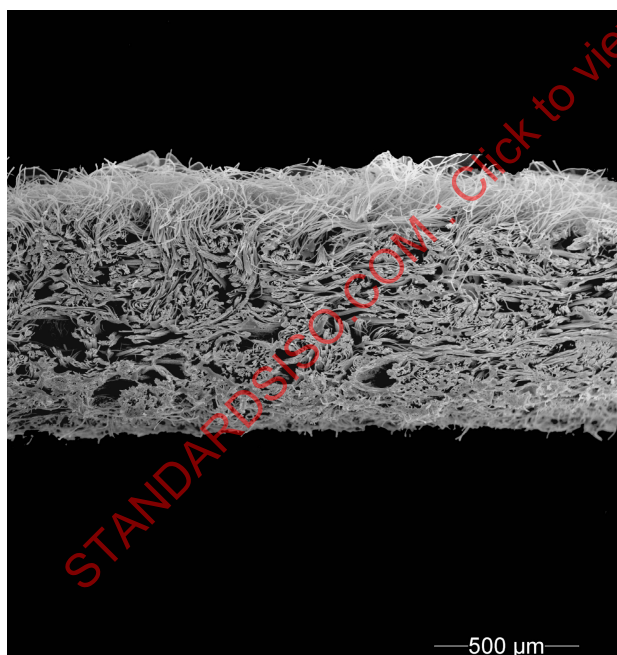

a) Section of a microfibre material
with moderate magnification

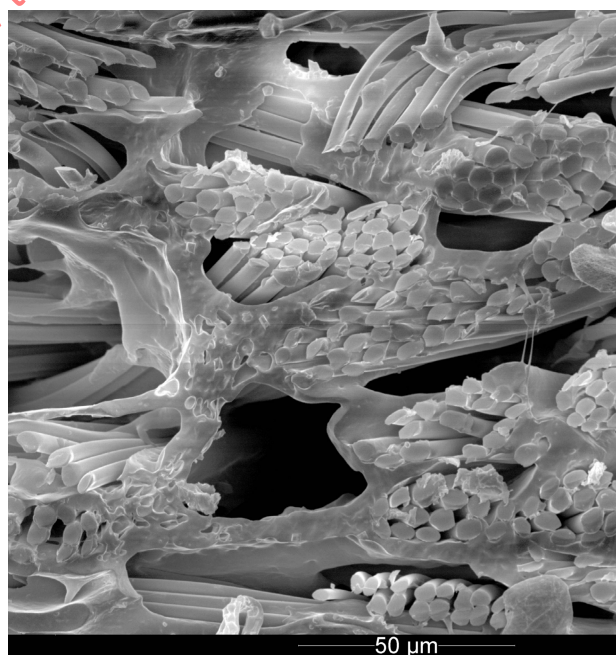

b) Section of a microfibre material
with high magnification

Figure A.7 — Typical section of a microfibre material


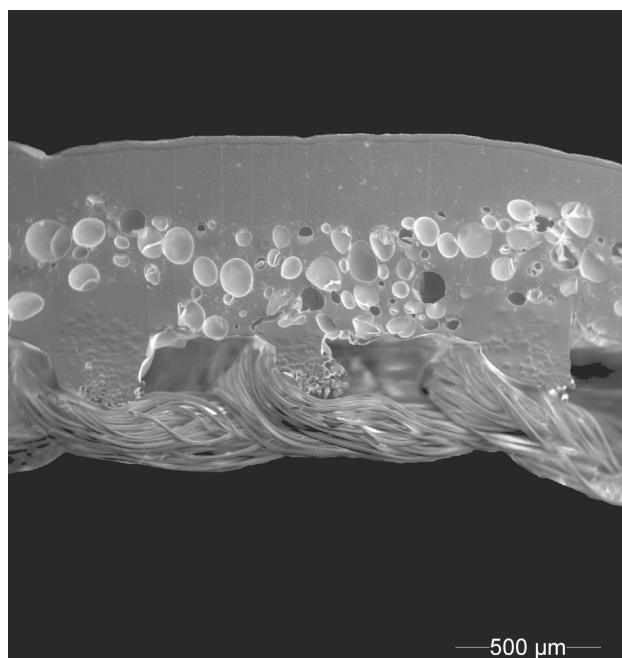



Figure A.8 — Typical section of a synthetic material with a PVC coating



Figure A.9 — Typical section of a synthetic material with a polyurethane coating

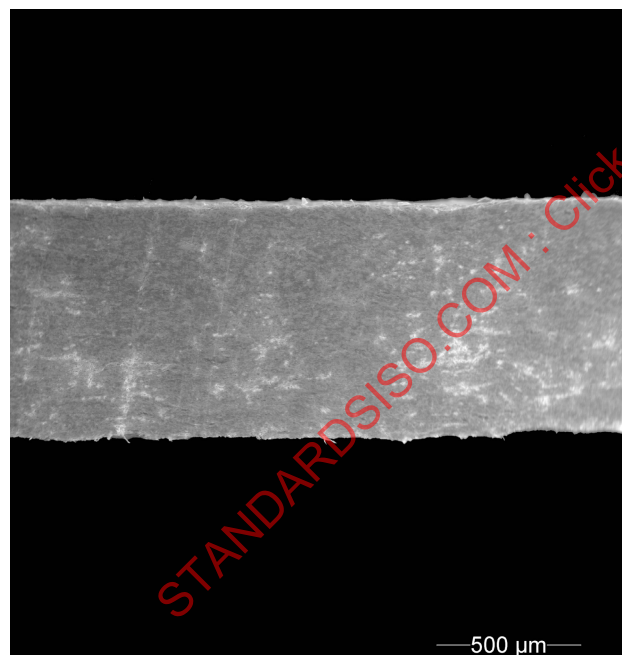

a) Section of a leather fibre board material with moderate magnification

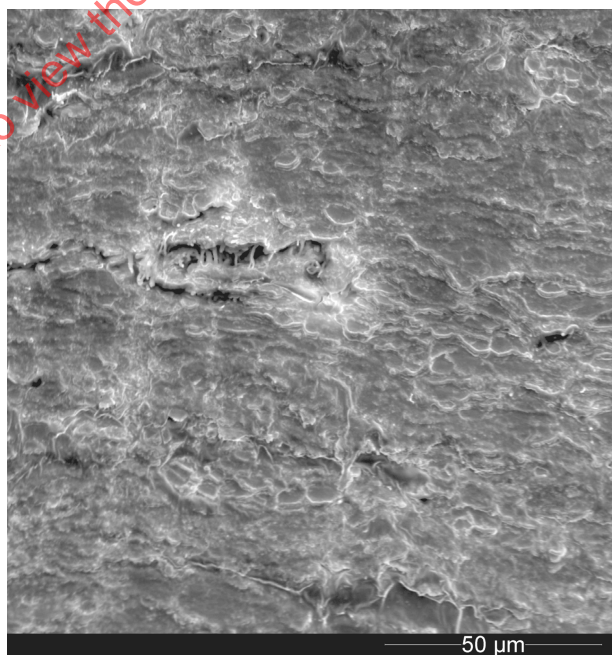

b) Section of a leather fibre board material with high magnification

Figure A.10 — Typical section of a leather fibre board material



Figure A.11 — Section of textile material coated with leather fibres

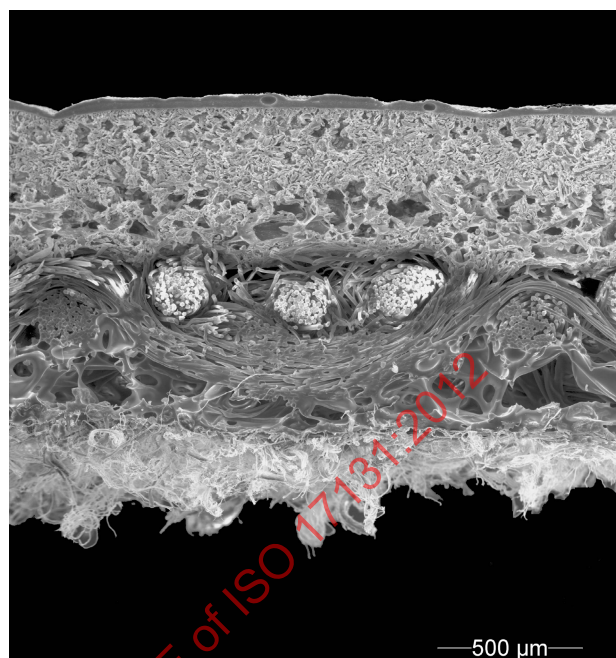


Figure A.12 — Synthetic material with leather fibres on back

Annex B (normative)

Light microscope cross-section photographs



Figure B.1 — Typical section of bovine leather with surface coating of less than 150 µm

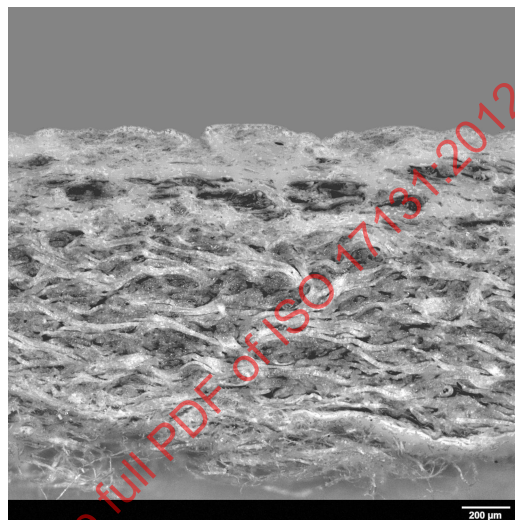


Figure B.2 — Typical section of sheep leather

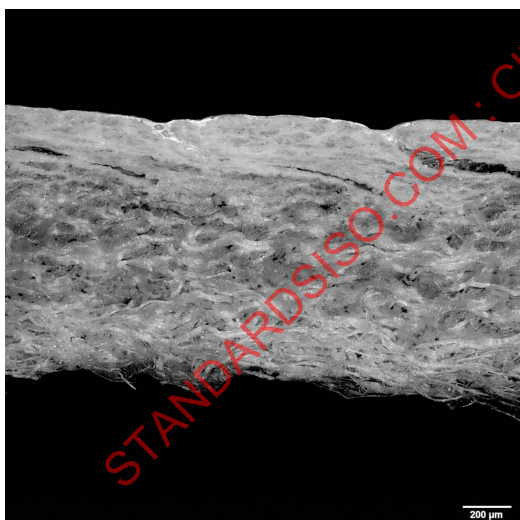


Figure B.3 — Typical section of goat skin leather

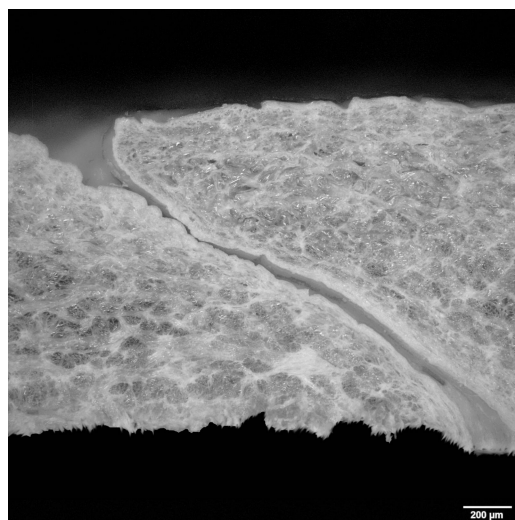


Figure B.4 — Typical section of pig skin leather