
**Road vehicles — 50 Ω impedance radio
frequency connection system interface —**

Part 1:

Dimensions and electrical requirements

*Véhicules routiers — Interface de système de connexion de fréquence
radio de 50 Ω —*

Partie 1: Dimensions et exigences électriques



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 20860-1:2008



COPYRIGHT PROTECTED DOCUMENT

© ISO 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions.....	1
4 Dimensions and coding	2
4.1 General.....	2
4.2 Male connector.....	2
4.3 Female connector	2
4.4 Coding ribs	2
4.5 Mechanical and colour codings of the connection system.....	2
4.6 Multiple interfaces	2
5 Designations	9
6 Characteristic values	9
7 Test procedures	11
Bibliography	12

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 20860-1 was prepared by Technical Committee ISO/TC 22, *Road vehicles*.

ISO 20860 consists of the following parts, under the general title *Road vehicles — 50 Ω impedance radio frequency connection system interface*:

- *Part 1: Dimensions and electrical requirements*
- *Part 2: Test procedures*

Road vehicles — 50 Ω impedance radio frequency connection system interface —

Part 1: Dimensions and electrical requirements

1 Scope

This part of ISO 20860 specifies male and female connectors of the 50 Ω impedance system interface for radio frequency applications in road vehicles, and ensures communication to and within road vehicles.

It specifies dimensional and electrical requirements and characteristics required for interchange ability.

This connection system can be applied in all relevant equipment and cable connections of road vehicles.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 20860-2, *Road vehicles — 50 Ω impedance radio frequency connection system interface — Part 2: Test procedures*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

male contact

pin contact

contact intended to make electrical engagement on its outer surface and which will enter a female contact (socket)

3.2

female contact

socket contact

contact intended to make electrical engagement on its inner surface and which will accept entry of a male contact (pin)

3.3

male connector

pin connector

connector containing a male centre contact

3.4

female contact

socket connector

connector containing a female centre contact

4 Dimensions and coding

4.1 General

Unspecified details shall be shown as required in accordance with the characteristics defined in Clause 6.

4.2 Male connector

The dimension of the cable connector (CC) and the connector on apparatus (CoA) of the 50 Ω connection system shall conform to Figures 1, 2 and 3.

4.3 Female connector

The dimensions of the female cable connectors (FCC) for use with the male connectors in accordance with 4.2, shall conform to Figures 4 and 5.

4.4 Coding ribs

The dimensions and denominations of the coding ribs shall be in accordance with Figure 6.

4.5 Mechanical and colour codings of the connection system

The male connector of the 50 Ω connection system allows the use of the mechanical coding options, by applying the coding ribs specified in Figure 6 and their arrangement according to Figure 7 and Table 1.

The mechanical design of the female connector shall consider the codings, the locking mechanism and the guide tube on the male connector.

4.6 Multiple interfaces

Applications for multiple connectors of the 50 Ω connection system are shown in Figures 8 and 9.

reference plane

coding ribs (dimensions according to Figure 6)

locking nose

E For Section A-A, see Figure 2.

Figure 1 — Male connector dimensions

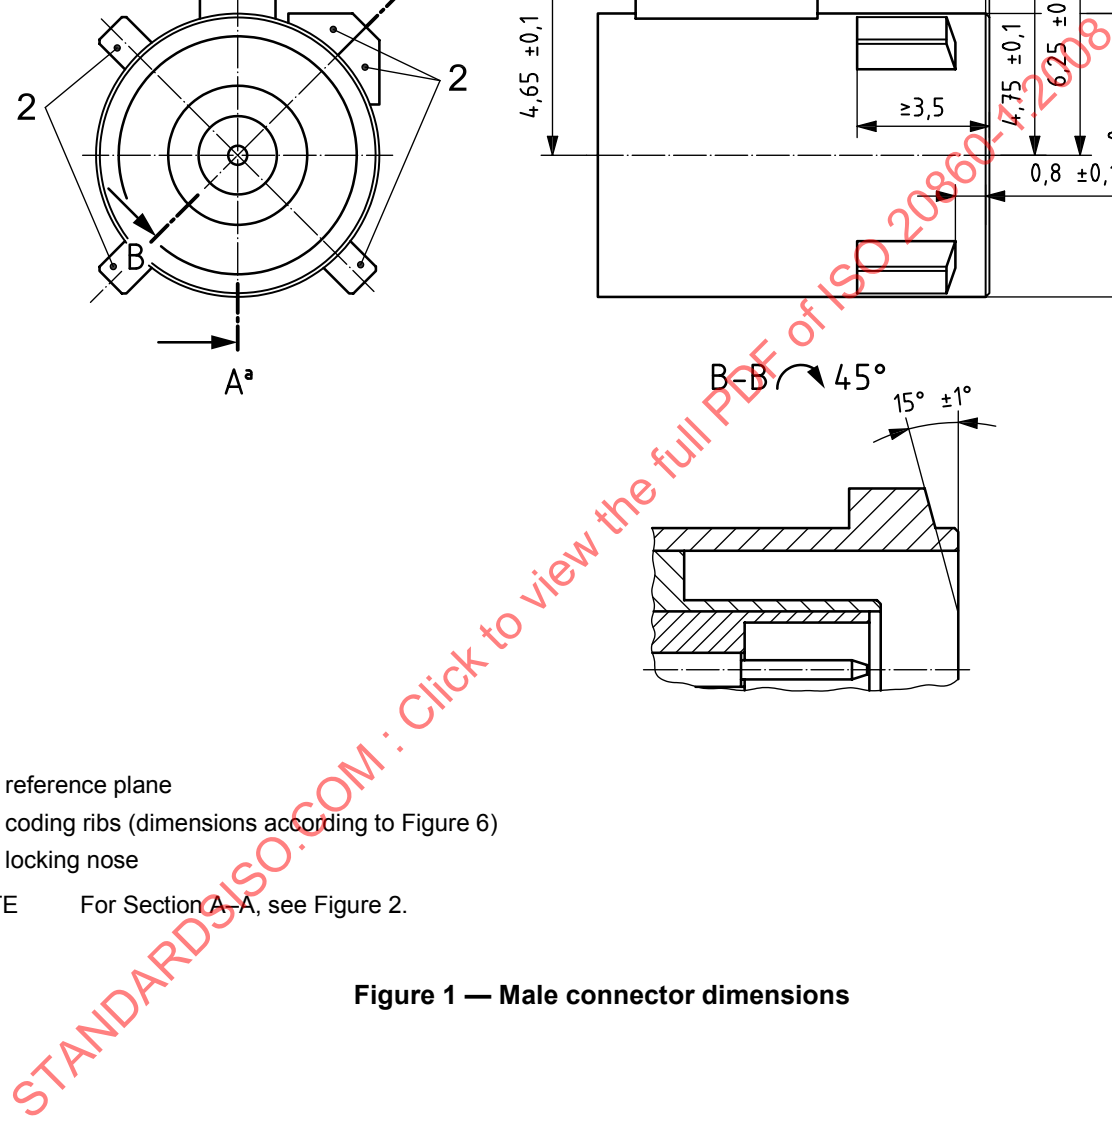
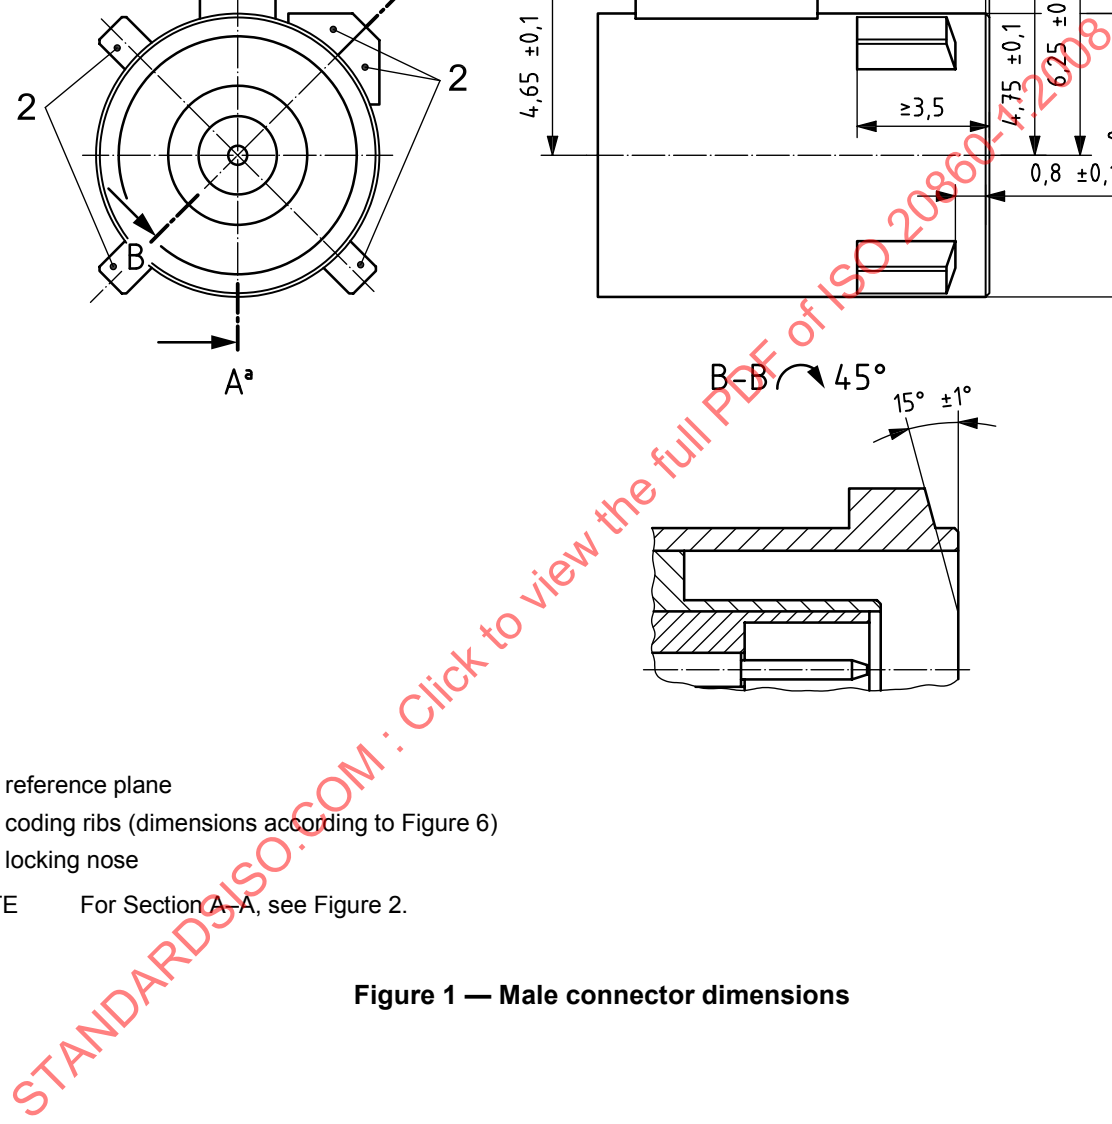


Figure 1 — Male connector dimensions



Key

- 1 reference plane
- 2 coding ribs (dimensions according to Figure 6)
- 3 locking nose

NOTE For Section A-A, see Figure 2.

Figure 1 — Male connector dimensions

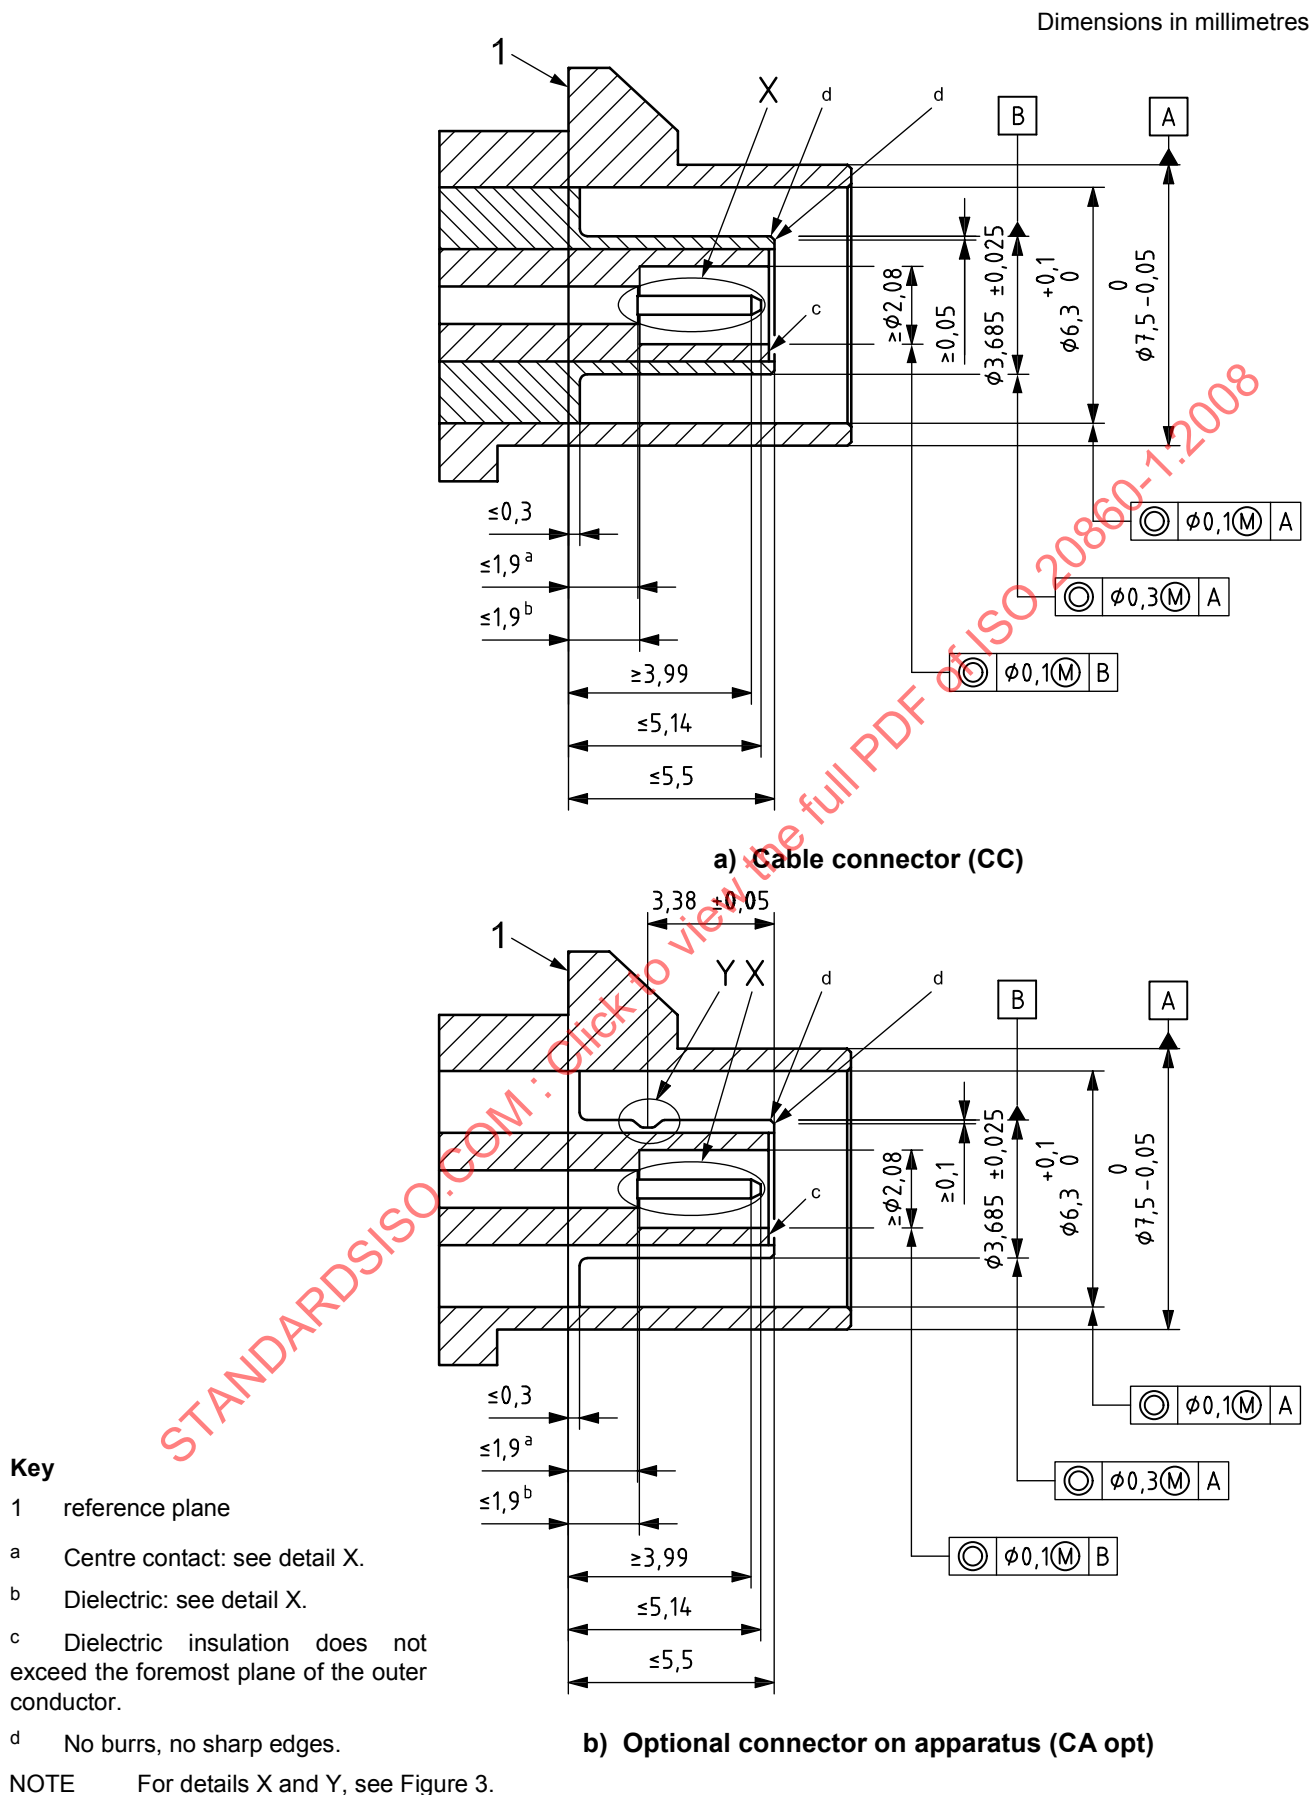


Figure 2 — Section A-A of the male connector

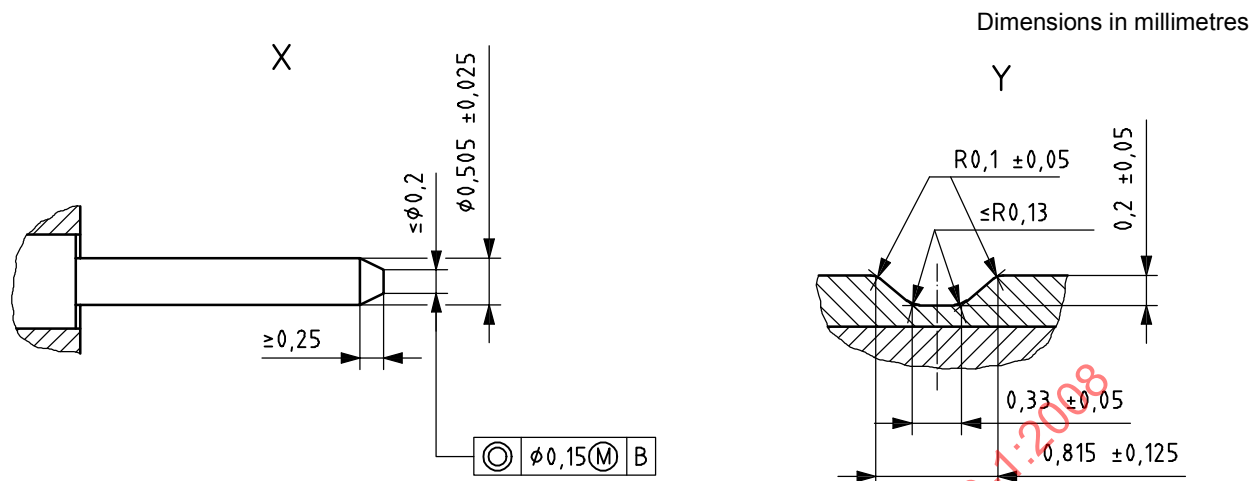
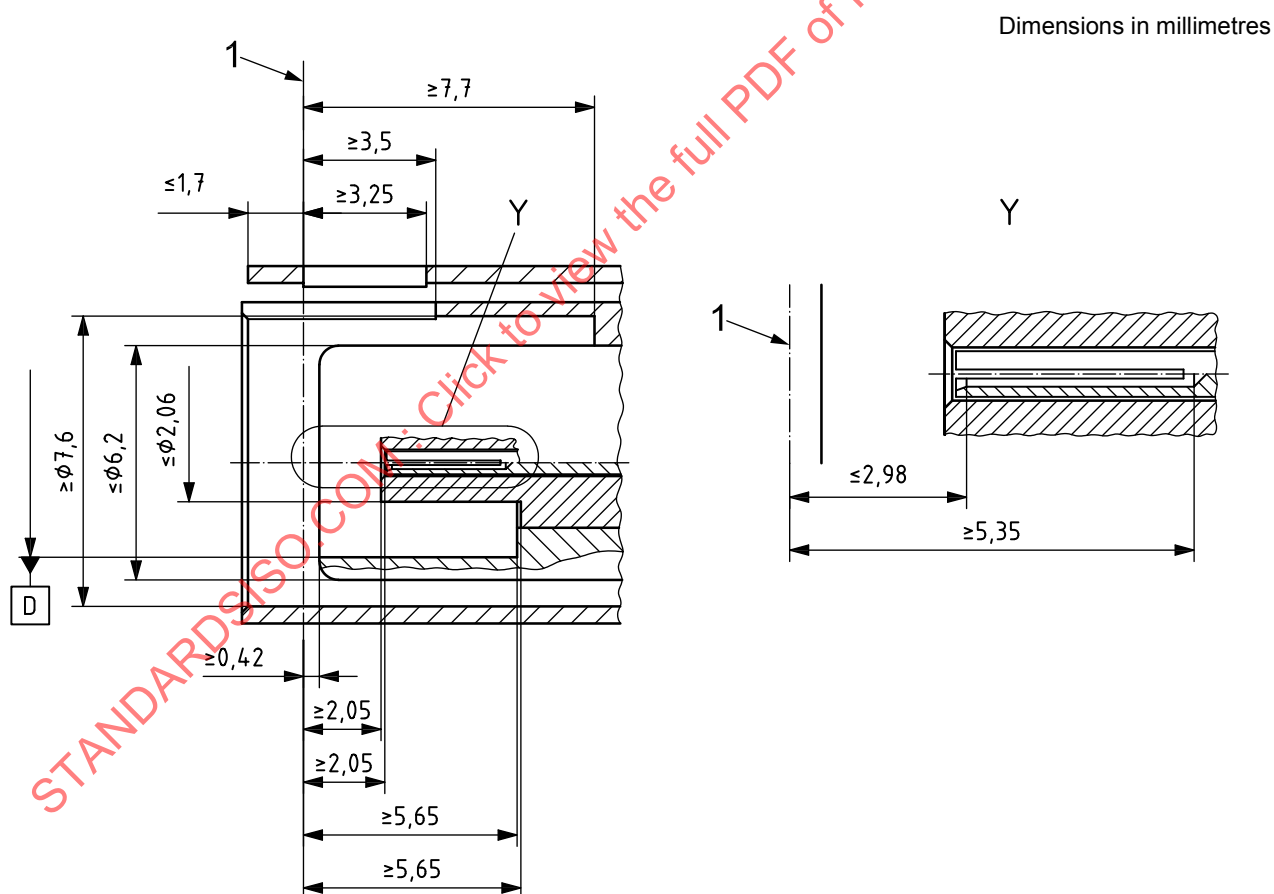


Figure 3 — Details X and Y of Figure 2




Key

1 reference plan

Figure 4 — Female cable connector (FCC)

Dimensions in millimetres



- ^a The catch circle is coaxially arranged to reference datum axis D (geometrically ideal). (See Figure 4.)

Figure 5 — Arrangement of the catch circle

Dimensions in millimetres

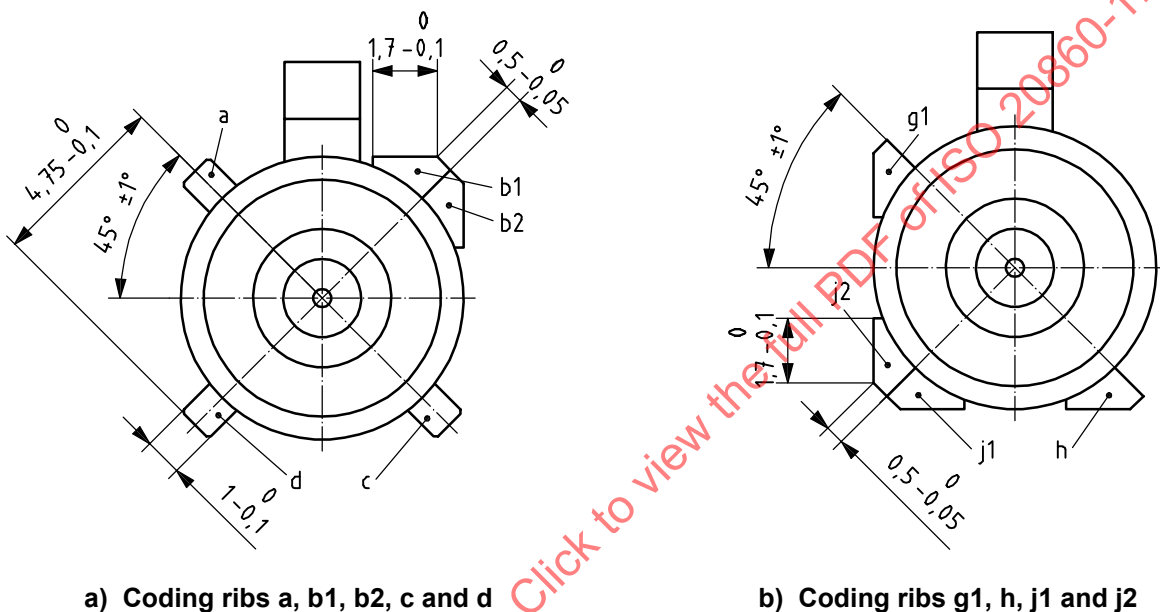


Figure 6 — Dimensions and denominations of coding ribs

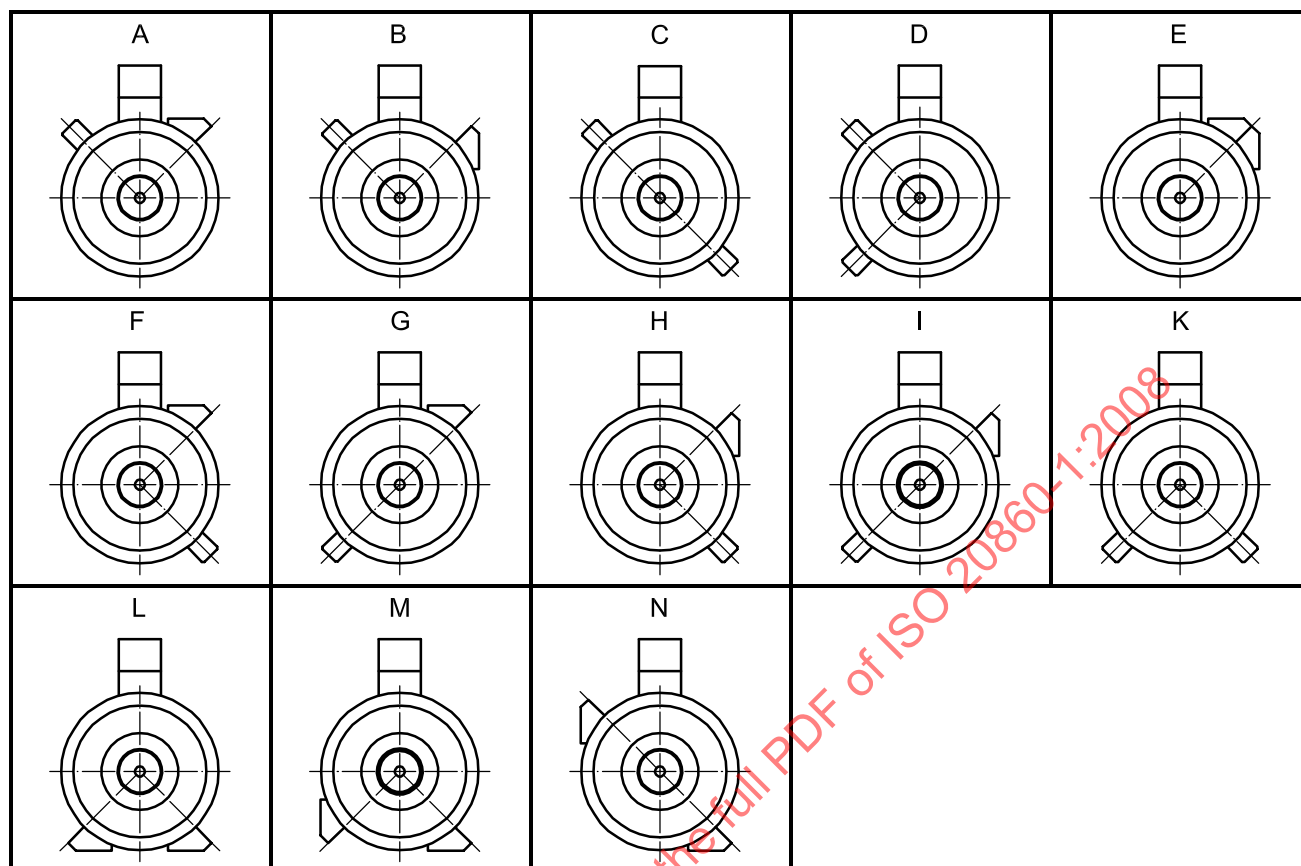
Figure 7 — Mechanical codings of single-pole 50 Ω connection system

Table 1 — Mechanical and colour codings

Coding	Combinations of coding ribs	Colour	Similar colour RAL number ^a
A	a – b1	Deep black	9005
B	a – b2	Cream white	9001
C	a – c	Signal blue	5005
D	a – d	Bordeaux violet	4004
E	b1 – b2	Leaf green	6002
F	b1 – c	Brown	8011
G	b1 – d	Blue grey	7031
H	b2 – c	Violet	4003
I	b2 – d	Beige	1001
K	c – d	Curry yellow	1027
L	h – j1	Carmine red	3002
M	h – j2	Pastel orange	2003
N	h – g1	Pastel green	6019

^a See Bibliography [1].

Dimensions in millimetres

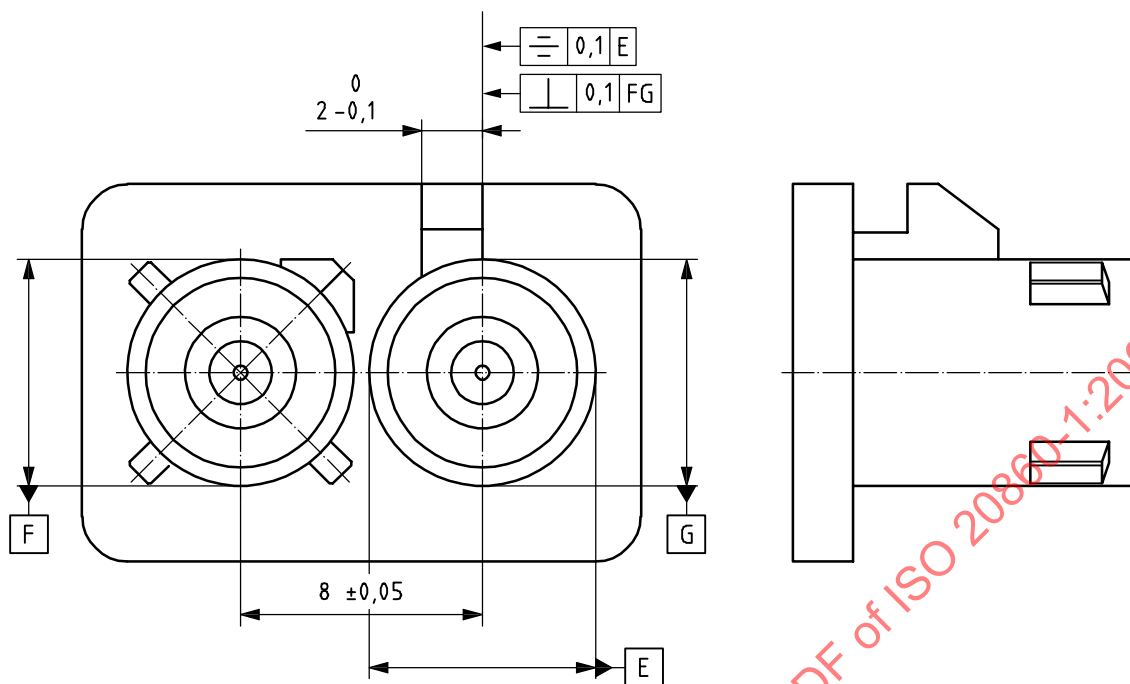


Figure 8 — Dual male connector (DC) Type X

Dimensions in millimetres

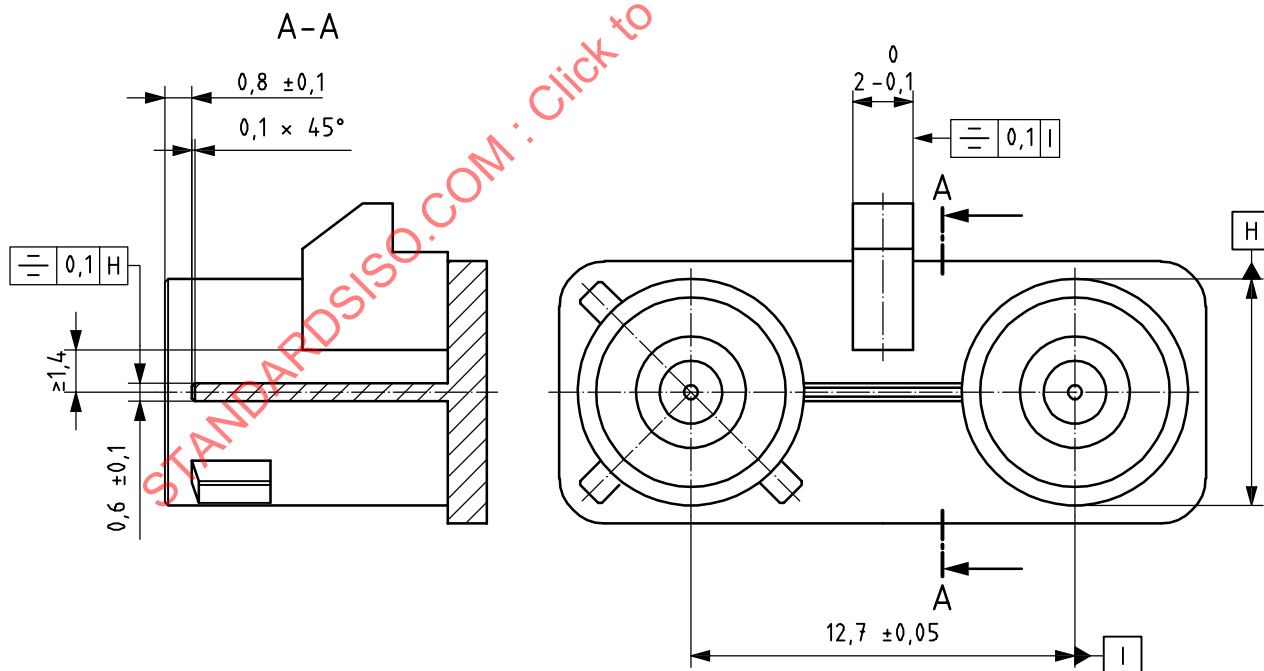


Figure 9 — Male connector Type Y

5 Designations

Designations for a single male cable connector (CC), coding H:

Cable connector ISO 20860 CC – H

Designation for an optional connector on apparatus (CA opt), coding A:

Connector on apparatus ISO 20860 CA opt – A

Designation for a female cable connector (FCC), coding C:

Female cable connector ISO 20860 FCC – C

Designation for a dual male connector Type X (DC):

Dual male connector ISO 20860 XDMC

Designation for a Type Y male connector:

Dual male connector ISO 20860 YDMC

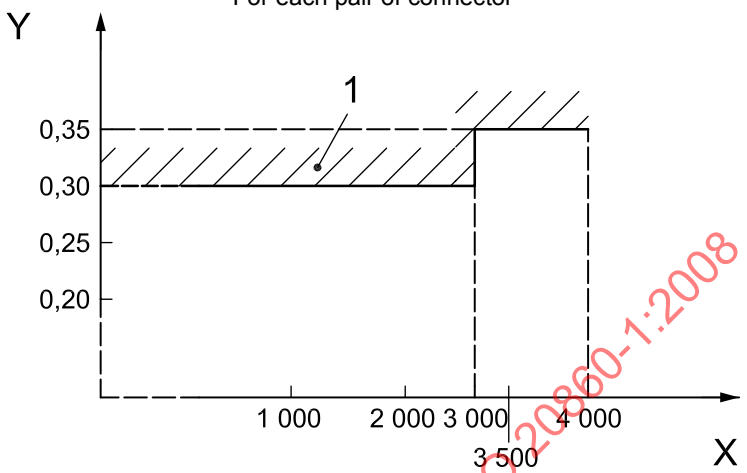
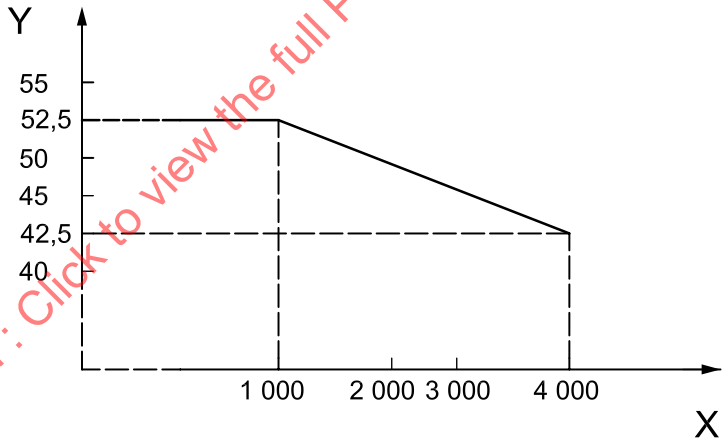
6 Characteristic values

The 50 Ω connection system in accordance with this part of ISO 20860 shall meet the characteristic values specified in Tables 2, 3 and 4.

Table 2 — Electrical performance characteristics of the coaxial interface

Nomination	Specification value
Frequency range	0 GHz to 4 GHz
Nominal characteristic impedance	50 Ω
Return loss	Y 17 16 15,6 15 14 1 000 2 000 3 000 4 000 X 1,33 1,38 1,40 1,43 1,50 Z Key 1 restricted area for measurement X frequency, in Mhz Y return loss, in dB Z VSWR

Table 2 (continued)

Nomination	Specification value
Insertion loss	For each pair of connector  Key 1 restricted area for measurement X frequency, in Mhz Y return loss, in dB
Shielding effectiveness	 Key X frequency, in Mhz Y return loss, in dB
Insulation resistance	$\geq 1\,000\text{ M}\Omega$ before, and $\geq 500\text{ M}\Omega$ after strain
Centre contact resistance	$\leq 5\text{ m}\Omega$ before, and $\leq 40\text{ m}\Omega$ after 25 matings
Outer contact resistance	$\leq 5\text{ m}\Omega$ before, and $\leq 40\text{ m}\Omega$ after 25 matings
Dielectric withstanding voltage	500 V minimum
Working voltage	$\leq 60\text{ V d.c.}$
Working current	$\leq 1\text{ A d.c.}$