
Stationary training equipment —

Part 7:

**Rowing machines, additional specific
safety requirements and test method**

Équipement d'entraînement fixe —

*Partie 7: Rameurs — Exigences spécifiques de sécurité et méthodes
d'essai supplémentaires*



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 20957-7:2005

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 20957-7 was prepared by CEN (as EN 957-7) and was adopted, under a special “fast-track procedure”, by Technical Committee ISO/TC 83, *Sports and recreational equipment*, in parallel with its approval by the ISO member bodies.

ISO 20957 consists of the following parts, under the general title *Stationary training equipment*:

- *Part 1: General safety requirements and test methods*
- *Part 2: Strength training equipment, additional specific safety requirements and test methods*
- *Part 4: Strength training benches, additional specific safety requirements and test methods*
- *Part 5: Pedal crank training equipment, additional specific safety requirements and test methods*
- *Part 6: Treadmills, additional specific safety requirements and test methods*
- *Part 7: Rowing machines, additional specific safety requirements and test methods*
- *Part 8: Steppers, stairclimbers and climbers — Additional specific safety requirements and test methods*
- *Part 9: Elliptical trainers, additional specific safety requirements and test methods*

Contents

Foreword 3

Introduction 3

1 Scope..... 4

2 Normative references 4

3 Definitions 4

4 Classification 6

5 Safety requirements..... 6

6 Test methods 8

7 Additional instructions for use 12

STANDARDSISO.COM : Click to view the full PDF of ISO 20957-7:2005

Foreword

This European Standard has been prepared by Technical Committee CEN/TC 136 "Sports, playground and other recreational equipment", the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 1998, and conflicting national standards shall be withdrawn at the latest by December 1998.

This standard EN 957 "Stationary training equipment" consists of the following parts:

Part 1: General safety requirements and test methods

Part 2: Strength training equipment, additional specific safety requirements and test methods

Part 4: Strength training benches, additional specific safety requirements and test methods

Part 5: Pedal crank training equipment, additional specific safety requirements and test methods

Part 6: Tread mills, additional specific safety requirements and test methods

Part 7: Rowing machines, additional specific safety requirements and test methods

Part 8: Steppers, stairclimbers and climbers, additional specific safety requirements and test methods

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

Introduction

This part of EN 957 concerns the safety of rowing machines.

It amends and supplements EN 957-1. The requirements of this specific standard take priority over those in the general standard.

1 Scope

This part of EN 957 specifies safety requirements for rowing machines in addition to the general safety requirements of EN 957-1 and should be read in conjunction with it.

This part of EN 957 is applicable to stationary training equipment type rowing machines (type 7), hereinafter referred to as rowing machines, within the classes S and H and class A regarding accuracy.

If accessories are provided with the rowing machine for the performance of additional exercises these are subject to the requirements of EN 957-1 and any other specific requirements of the appropriate part of this standard.

2 Normative references

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

EN 71-1, *Safety of toys — Mechanical and physical properties*.

EN 547-3, *Safety of machinery — Human body measurements — Part 3: Anthropometric data*.

EN 957-1:1996, *Stationary training equipment — Part 1: General safety requirements and test methods*.

3 Definitions

For the purposes of this standard the definitions of EN 957-1 and the following apply:

rowing machine

stationary training equipment with a moving seat simulating a motion like rowing (see figures 1 to 3).

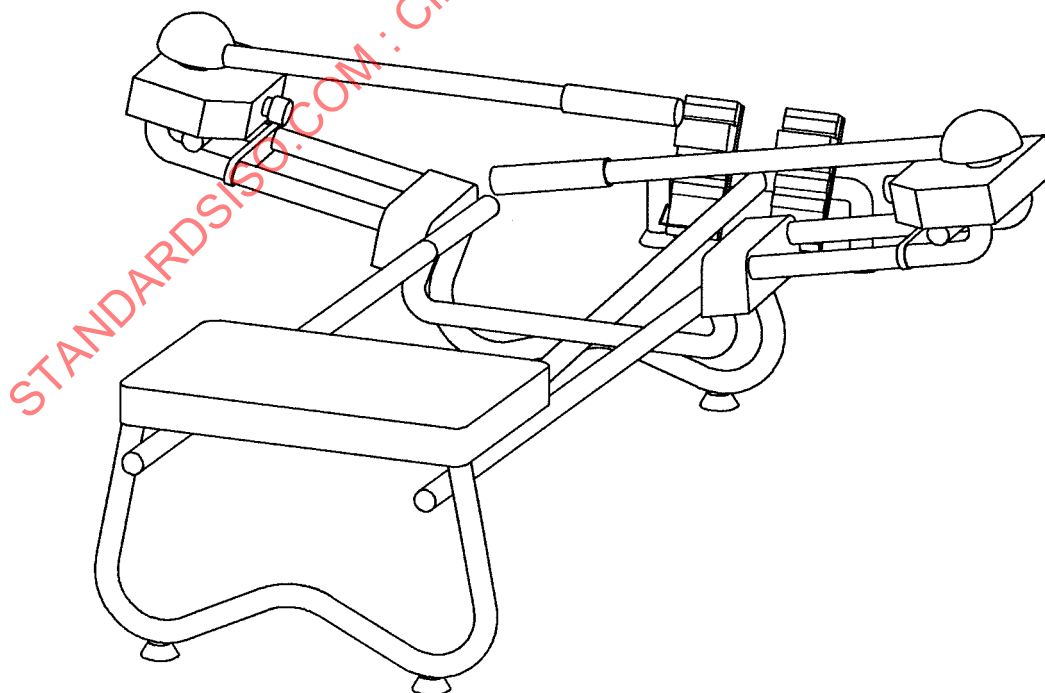
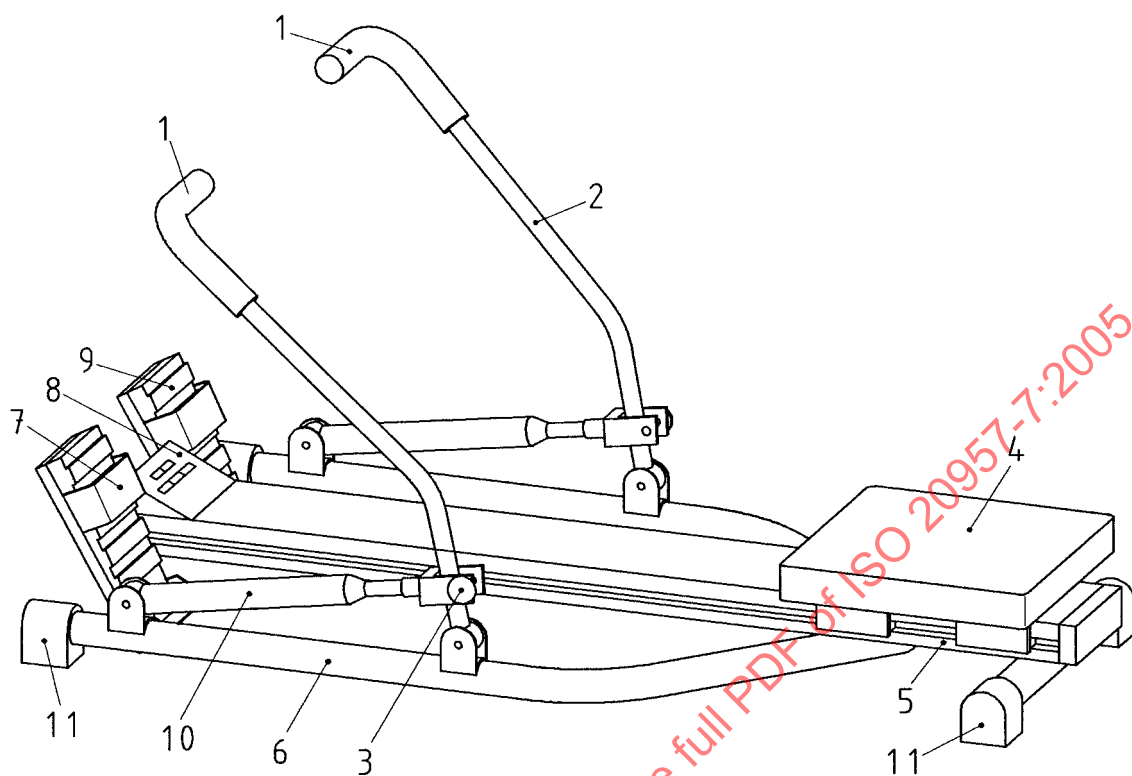


Figure 1 — Example of a rowing machine with sculling system

**Key**

- 1 hand grip
- 2 rower arm
- 3 tension adjustment
- 4 seat
- 5 rail
- 6 frame
- 7 foot-strap
- 8 display
- 9 foot support
- 10 hydraulic/pneumatic piston
- 11 base support

Figure 2 — Example of a rowing machine with hydraulic/pneumatic system

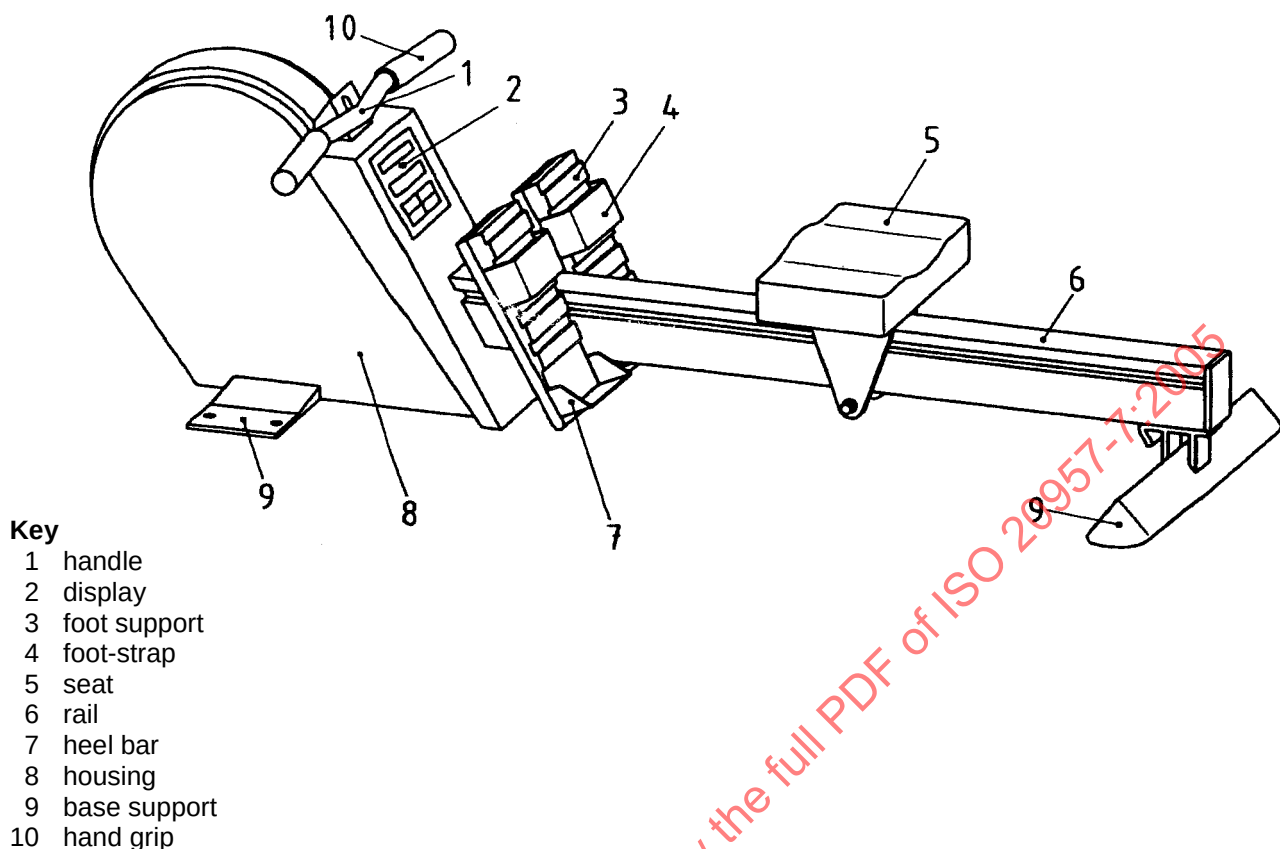


Figure 3 — Example of a rowing machine with cable system

4 Classification

Clause 4 of EN 957-1:1996 applies.

5 Safety requirements

5.1 General

Depending on the design of the piece of equipment the following requirements shall apply as appropriate.

5.2 External construction


5.2.1 Squeeze, shear and reciprocating points within the accessible area

The distance between movable parts and adjacent movable or rigid parts shall be at least 25 mm if relevant for fingers, otherwise it shall be at least 60 mm.

Required stops are excluded (if the user is not put at risk). Accessible stops shall each have a minimum surface of 400 mm². Stops which compress shall each produce a surface of 400 mm² when compressed with a pressure of 90 N/cm².

The 60 mm does not apply when the squeeze points remain within the user's field of vision over the full range of movement during use (see figure 4).

If the distance between movable parts and adjacent rigid parts does not change during the movement, the test fingers of 6.2 shall not become trapped.

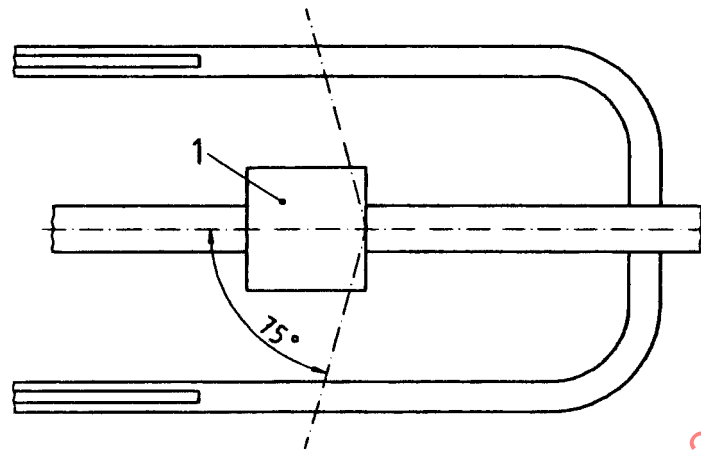

Key
1 seat

Figure 4 — Field of vision

5.2.2 Transmission elements and rotating parts

Transmission elements, fans and flywheels shall be protected, so that, when tested in accordance with 6.2, the test finger cannot be trapped.

5.2.3 Temperature rise

When tested according to 6.4, accessible parts of the rowing machine shall not have a temperature greater than 65 °C.

5.2.4 Seats

When tested in accordance with 6.3 and 6.1.4, the seat shall not derail.

5.3 Intrinsic loading

When tested according to 6.5

- with 250 kg for class H and
- with 300 kg for class S

each piece of equipment shall withstand the test force without being deformed for more than $f = 1/100$ for a simply supported beam and $f = 1/150$ for a cantilever beam (see figure 5).

After the test all parts of the equipment shall function according to the manufacturer's instructions for use.

The seat wheels or rollers should not have excessive play and shall rotate freely.

5.4 Handles

In rowing machines where the handle is connected to the machine by a flexible member (rope belts or chains) the mass of the handle without a flexible member shall not exceed 600 g.

Test according to 6.1.5.

EN 957-7:1998 (E)**5.5 Foot supports and foot straps**

For classes S and H provisions shall be made for fastening the foot (foot straps), for class S the foot support or foot strap shall be adjustable for different foot sizes. Test according to 6.1.4.

When tested in accordance with 6.1, each foot strap shall withstand in

- class H: 500 N
- class S: 1 000 N

without breakage.

When tested in accordance with 6.6.2, each foot support shall withstand a load test with 1 000 N without breakage.

5.6 Endurance test

When tested in accordance with 6.7, the rowing machine shall withstand

- 12 000 cycles for class H and
- 100 000 cycles for class S.

After the test the rowing machine shall be capable to functioning according to the manufacturer's instructions for use on the correct use and shall not show any signs of damage, e. g. oil leakage.

5.7 Stability

When tested according to 6.8, the base of the rowing machine shall not lift for more than 10 mm.

5.8 Additional requirement for class A

The variation of the indicated or determined power P from the power input shall not exceed ± 5 W up to 50 W and ± 10 % over 50 W.

Testing in accordance with 6.9.

6 Test methods**6.1 General****6.1.1 Dimensional check****6.1.2 Visual examination****6.1.3 Tactile examination****6.1.4 Performance test****6.1.5 Weighing test**

6.2 Testing of squeeze, shear and reciprocating points within the accessible area and transmission elements and rotating parts

Apparatus:

- test finger probe B in accordance with EN 71-1 for class H and
- test finger in accordance with 6.5 of EN 957-1:1996 for class S.

Approach the test fingers from all sides to all moving parts.

Determine whether the test finger is trapped.

6.3 Testing of seats

Apply a test force of 100 N for 1 min to all directions of the seat.

Check if the seat always remains attached to the rail.

6.4 Testing of temperature rise

Apparatus: contact thermometer with an accuracy of ± 1 °C.

Operate the rowing machine for 20 min with the following values:

a) for speed-dependent equipment

- 25 complete strokes per min;
- 350 N measured at one or both handles combined;
- 60 % of the whole movement;

b) for speed-dependent equipment

- 350 N over 60 % of the movement at the appropriate stroke rate.

The power of 350 N is the average power produced over 1 complete stroke.

6.5 Testing of intrinsic loading

Place the rowing machine freely on a flat floor and clamp the seat in the middle position of the frame supports.

Apply a test load F of

- 250 kg (class H) and
- 300 kg (class S)

to the seat for 5 min, see figure 5.

Remove the load and determine the reference dimensions f according to figure 5.

The feet of the equipment shall not be fixed to the floor during the test.