
**Building construction machinery and
equipment — Mobile crushers —**

**Part 1:
Terminology and commercial
specifications**

*Machines et matériels pour la construction des bâtiments —
Concasseurs mobiles —*

Partie 1: Terminologie et spécifications commerciales



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 21873-1:2008



COPYRIGHT PROTECTED DOCUMENT

© ISO 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions.....	1
4 Description of components	4
4.1 Working device	4
4.2 Operation control device	4
4.3 Power source and transmitting devices.....	4
4.4 Hydraulic device	5
4.5 Travel device	5
5 Commercial specifications	5
5.1 General data	5
5.2 Detailed data for mobile crusher components	6
5.2.1 Internal combustion engine.....	6
5.2.2 Electric motor.....	6
5.2.3 Feed hopper	7
5.2.4 Feed device	7
5.2.5 Crushing device	7
5.2.6 Discharge device	7
5.2.7 Travel device (for crawler mounted machines only).....	8
5.2.8 Travel device for truck mounted machine	8
5.2.9 Travel device for semi-trailer mounted machine.....	8
5.2.10 Tanks.....	9
5.3 Attachments available.....	9
Annex A (informative) Structures and dimensional characteristics of mobile crushers — Examples	10
Annex B (informative) Simplified method for calculating feed hopper volume.....	14
Bibliography	16

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 21873-1 was prepared by Technical Committee ISO/TC 195, *Building construction machinery and equipment*.

STANDARDSISO.COM : Click to view the full PDF of ISO 21873-1:2008

Introduction

This part of ISO 21873 deals with mobile crushers used together with earth-moving machinery mainly at construction job sites for crushing natural rocks, stones or concrete debris.

STANDARDSISO.COM : Click to view the full PDF of ISO 21873-1:2008

STANDARDSISO.COM : Click to view the full PDF of ISO 21873-1:2008

Building construction machinery and equipment — Mobile crushers —

Part 1: Terminology and commercial specifications

1 Scope

This part of ISO 21873 establishes terminology and content of commercial literature specifications for mobile crushers, mounted on crawler, truck or semi-trailer, used in the building construction industry. It is not applicable to fixed crushers.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 11375:1998, *Building construction machinery and equipment — Terms and definitions*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 11375 and the following apply.

3.1

mobile crusher

machine intended for reducing the size of mineral-based material to particles of smaller dimension and which is capable of relocation on its own chassis

NOTE 1 Depending on the method of relocation, three mobile crusher types are identified:

- self-propelled mobile crusher mounted on crawler chassis (see Figure A.1);
- truck-mounted mobile crusher;
- semi-trailer-mounted mobile crusher.

NOTE 2 An equivalent definition is given in ISO 11375:1998, 3.4, as “Crushing and screening plant (recycling plant)”.

3.2

basic unit

base machine of the mobile crusher usually composed of a working device, an operation control device, a power source, and transmitting device, and a travel device

NOTE An hydraulic device is most often used as the power transmitting device.

3.3

attachment

additional component that can be added to the basic unit to adapt it for a different application

NOTE Attachments can include the following: magnetic separator, metal detector, vibrating screen, dust suppression system, conveyor belt scale, additional conveyors, hydraulic rock pick and hopper extensions. These are attached to, and move with, the mobile crusher.

3.4

charged material

input material

primarily mineral-based material

EXAMPLE Natural stone, concrete, asphalt, or clean demolition rubble.

NOTE The charged material can also contain small amounts of foreign materials such as wood and metal.

3.5

feed hopper

receptacle that takes in charged material transitorily and charges it into the feed device

NOTE See Annex B for a simplified method of calculating hopper volume for a sloped side-feed hopper with constant cross-section.

3.6

feed device

feeder

device that supplies charged material to the crushing system

NOTE The following feed device types are identified:

- vibrating (grizzly) feeder;
- belt feeder;
- apron feeder;
- reciprocating plate feeder;
- roller grizzly;
- push feeder;
- vibrating screen.

3.7

by-pass device

device that diverts material separated from the crusher feed (by-pass material) away from the crusher

NOTE The following by-pass device types are identified:

- chute;
- reversible belt conveyors;
- vibrating screen.

A chute can have internal baffles that allow the diverted material to combine with material that passes through the crusher, or else the diverted material can be separated from the material that passes through the crusher and discharged with the by-pass conveyor. A reversible belt conveyor can work in the same way as the chute by changing the belt rotation direction.

3.8**by-pass conveyor**

side conveyor

discharge device for fine material separated from the crusher feed (by-pass)

3.9**crushing device**

crusher

mechanism that reduces the size of charged material by fracturing larger pieces into multiple smaller pieces

NOTE For examples of crushing devices (crushers) types, see ISO 11375.

3.10**discharge device**

mechanism that removes processed material

NOTE The following discharge device types are identified:

- belt conveyor;
- screw conveyor;
- chute;
- vibrating feeder;
- reciprocating plate feeder.

3.11**return conveyor**

device used to transfer oversized material back to the crusher or crusher feed device for additional processing

3.12**magnetic separator**

device for removing, using magnets, ferrous contaminants from the material processed by the crusher

3.13**dust suppression system**

device or set of components used to reduce the amount of fugitive dust emission from a mobile crusher

NOTE The following dust suppression system types are identified:

- water spray system;
- suction filter system (e.g. bag filter).

3.14**belt scale**

device mounted to conveyor used to weigh material carried by the conveyor

3.15 machine mass**3.15.1****machine mass**

(in operating mode) mass of the machine without operator and charged material with working device and attachments designated by the manufacturer, full fuel tank, and full lubricating, hydraulic and cooling systems

3.15.2

machine mass

(in transporting mode) mass of the machine without operator, without charged material, with working device and attachments designated by the manufacturer, fuel tank half-full, and with full lubricating, hydraulic and cooling systems

NOTE When specifying the machine mass of a self-propelled crusher, a mass representing the operator equal to 75 kg is added. Where parts are removed or attached for transporting, their weights are deducted from and/or included in the machine mass.

3.16

ground clearance

height of the lowest point of the machine from the ground when travelling, at the centre part of the machine and with a minimum width of 25 % of track gauge or axle track

NOTE The ground clearance for wheel-mounted units does not include axles.

3.17

gradability

maximum inclination which allows the mobile crusher, without charged material, to climb, descend and stop without losing stability, spilling fluids or causing engine or other component damage

4 Description of components

4.1 Working device

The working device can contain the following components:

- a) feed hopper;
- b) feed device;
- c) crushing device;
- d) discharge device.

4.2 Operation control device

The operation control device consists of one or more of the following types of systems:

- a) mechanical;
- b) electric (electronic);
- c) hydraulic.

4.3 Power source and transmitting devices

Power source and transmitting devices consist of one or more of the following components:

- a) internal combustion engine;
- b) electric generator;
- c) electric motor;

d) transmission:

- hydraulic device (see 4.4);
- fluid coupling;
- torque converter;
- clutch;
- v-belts and sheaves;
- drive shaft.

4.4 Hydraulic device

The hydraulic device consists of one or more of the following components:

- a) pump;
- b) oil filter;
- c) pipe and hose;
- d) cylinder;
- e) valve;
- f) motor;
- g) oil tank;
- h) oil cooler.

4.5 Travel device

The travel device consists of one of the following:

- a) crawler type undercarriage;
- b) truck chassis for truck mounted crushers;
- c) semi-trailer chassis for semi-trailer mounted crushers.

5 Commercial specifications**5.1 General data**

Specify the following:

- a) manufacturer or importer (if imported);
- b) model;
- c) prime mover type (internal combustion engine, electric motor);

- d) power installed kW;
- e) overall dimensions in operating mode:
 - length (see L_0 in Figures A.2, A.3 and A.4) mm;
 - width (see W_0 in Figures A.2, A.3 and A.4) mm;
 - height (see H_0 in Figures A.2, A.3 and A.4) mm;
- f) mass in operating mode kg;
- g) overall dimensions in transporting mode:
 - length (see L_1 in Figures A.2, A.3 and A.4) mm;
 - width (see W_1 in Figures A.2, A.3 and A.4) mm;
 - height (see H_1 in Figures A.2, A.3 and A.4) mm;
- h) mass in transporting mode kg;
- i) ground clearance (see H_4 in Figures A.2, A.3 and A.4) mm.

5.2 Detailed data for mobile crusher components

5.2.1 Internal combustion engine

Specify the following:

- a) manufacturer;
- b) model name;
- c) swept capacity cm³;
- d) net power (according to the standard specified by manufacturer) kW;
- e) rated revolutions r/min;
- f) fuel type;
- g) fuel tank capacity l.

5.2.2 Electric motor

Specify the following:

- a) type (e.g. squirrel-cage induction motor, wound-rotor induction motor, direct current motor);
- b) power kW;
- c) rated current A;
- d) voltage and frequency V and Hz;
- e) revolutions r/min.

NOTE See IEC 60034-1 for the specification of electric motor.

5.2.3 Feed hopper

Specify the following:

- a) type (fixed or foldable);
- b) size (charging width $\times$ charging length)
(see $W_4 \times L_4$ in Figures A.2 and A.4) mm $\times$ mm;
- c) capacity (struck capacity)
(see Annex B for simplified method of calculating
hopper volume for a sloped side feed hopper with constant cross-section) m³;
- d) charging height (see H_2 in Figures A.2, A.3 and A.4) mm.

5.2.4 Feed device

Specify the following:

- a) type (see 3.6);
- b) drive type (e.g. hydraulic, mechanical or electric);
- c) width $\times$ length (see $W_5 \times L_5$ in Figures A.2 and A.4) mm $\times$ mm.

5.2.5 Crushing device

Specify the following:

- a) type (see 3.9);
- b) feed opening size (e.g. $W_6 \times L_6$ in Figure A.2) mm $\times$ mm;
- c) discharge setting range (min. to max.) mm;
- d) revolutions operating r/min;
- e) drive type (e.g. hydraulic, mechanical or electric).

5.2.6 Discharge device

Specify the following:

- a) type (see 3.10);
- b) size $\times$ length (e.g. for belt conveyors use width of belt $\times$ length
between centres of head and tail pulleys) mm $\times$ mm;
- c) discharging height (distance between the ground and top of a head pulley—
see H_3 in Figures A.2, A.3 and A.4) mm;
- d) drive type (e.g. hydraulic, mechanical or electric).

5.2.7 Travel device (for crawler mounted machines only)

Specify the following:

- a) track gauge (see W_2 in Figure A.2) mm;
- b) track shoe width (see W_3 in Figure A.2) mm;
- c) track length on ground (see L_2 in Figure A.2) mm;
- d) ground contact pressure average (base unit) kPa;
- e) maximum travel speed km/h;
- f) drive type (e.g. hydraulic, mechanical or electric).

5.2.8 Travel device for truck mounted machine

Specify the following:

- a) manufacturer;
- b) wheelbase (see L_2 in Figure A.3) mm;
- c) axle loads (base unit):
 - rear kN;
 - front kN;
- d) axle track (see W_2 in Figure A.3) mm;
- e) travel speeds
(maximum travel speed at each speed gear ratio) km/h;
- f) truck engine power kW;
- g) axle spacing (see L_3 in Figure A.3) mm.

5.2.9 Travel device for semi-trailer mounted machine

Specify the following:

- a) number of axles;
- b) semi-trailer axle spacing (see L_3 in Figure A.4) mm;
- c) semi-trailer axle track (see W_2 in Figure A.4) mm;
- d) wheelbase (see L_2 in Figure A.4) mm;
- e) kingpin design height (see H_5 in Figure A.4) mm;
 - kingpin load kN;
 - axle load (at centre of axle group, see Figure A.4) kN;
- f) semi-trailer mass (base unit) kg.

5.2.10 Tanks

Specify the following (capacity of tanks listed):


- | | |
|--|----|
| a) fuel | l; |
| b) hydraulic oil | l; |
| c) engine oil | l; |
| d) crusher oil (lubricating oil for crusher) | l; |
| e) engine cooling water | l; |
| f) water for dust suppression | l. |

5.3 Attachments available

Specify the attachment (3.3), including installed weights (with axle loads for truck mounted crusher, and axle and kingpin loads for semi-trailer mounted crusher) for attachments.

Annex A (informative)

Structures and dimensional characteristics of mobile crushers — Examples

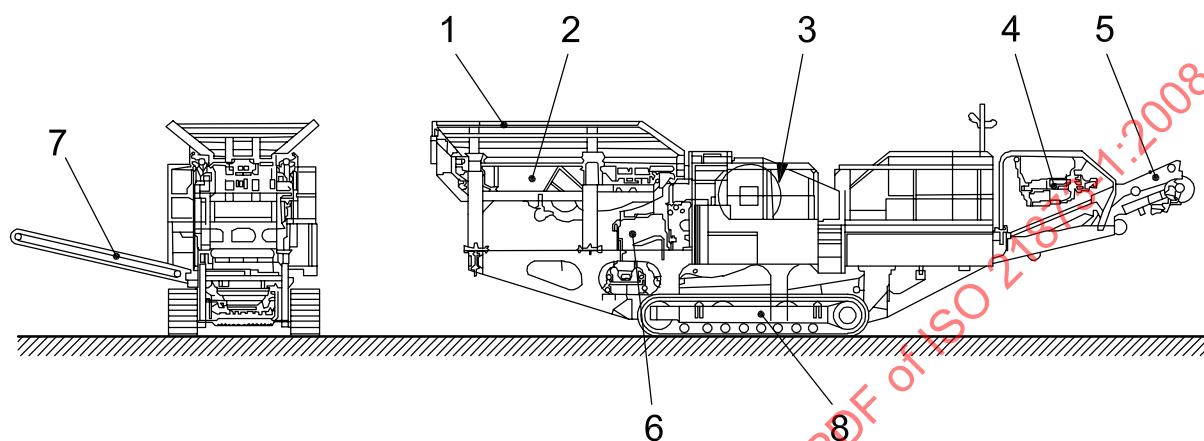


Key



- 1 feed hopper
- 2 feed device
- 3 crushing device
- 4 magnetic separator
- 5 discharge device (belt conveyor)
- 6 by-pass device
- 7 by-pass (side) conveyor
- 8 travel device (track undercarriage)

NOTE The structure of other types of mobile crusher is similar, except for the travel device, here crawler.

Figure A.1 — Structure of self-propelled mobile crusher

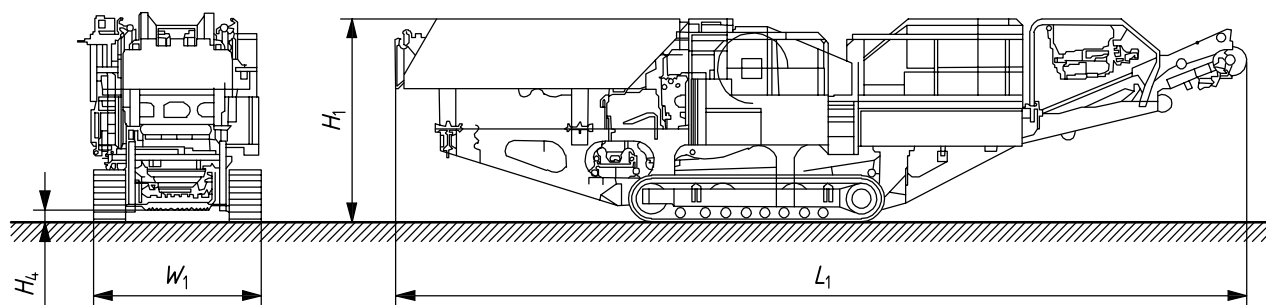

a) Dimensions in transporting mode

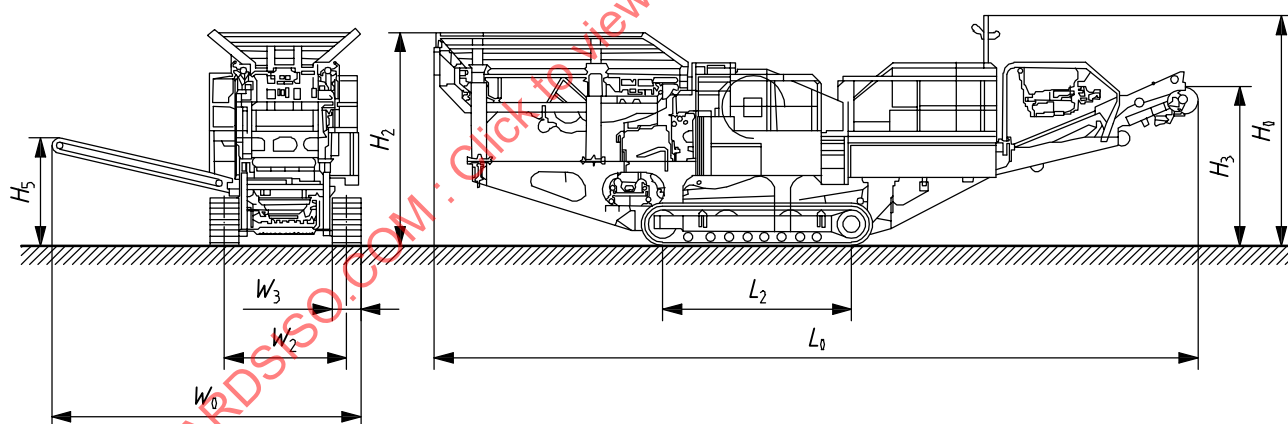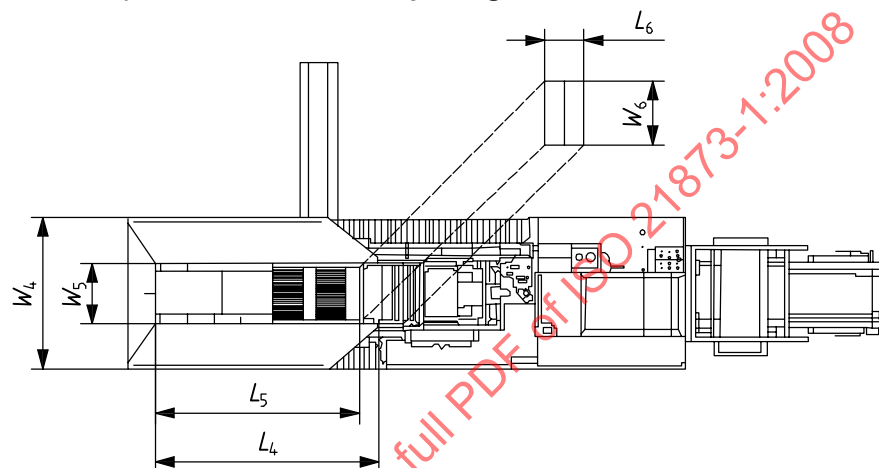


b) Dimensions in operating mode

Key

H_0	overall height (operating mode)	L_5	feeder length
H_1	overall height (transporting mode)	L_6	length of crusher feed opening
H_2	charging height	W_0	overall width (operating mode)
H_3	discharging height (top of conveyor)	W_1	overall width (transporting mode)
H_4	ground clearance	W_2	track gauge
H_5	discharging height of the by-pass conveyor	W_3	track shoe width
L_0	overall length (operating mode)	W_4	feed hopper charging width
L_1	overall length (transporting mode)	W_5	feeder width
L_2	track length on ground	W_6	width of crusher feed opening
L_4	feed hopper charging length		


Figure A.2 — Dimensional characteristics of self-propelled mobile crusher on crawler chassis

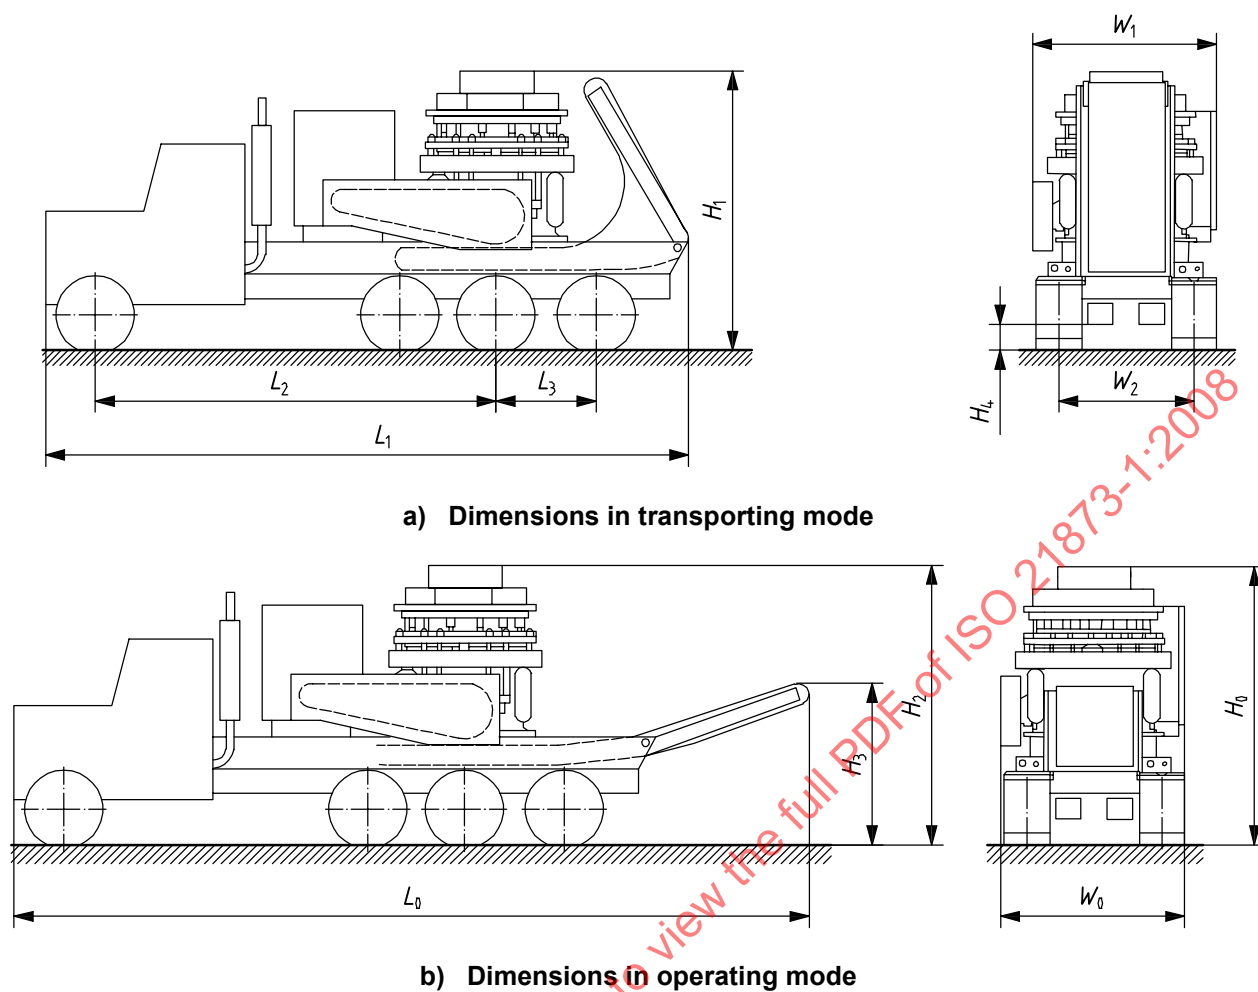


Key

H_0 overall height (operating mode)	L_1 overall length (transporting mode)
H_1 overall height (transporting mode)	L_2 truck wheelbase
H_2 charging height of the feed hopper	L_3 truck axle spacing
H_3 discharging height (top of the conveyor)	W_0 overall width (operating mode)
H_4 ground clearance	W_1 overall width (transporting mode)
L_0 overall length (operating mode)	W_2 truck axle track

Figure A.3 — Dimensional characteristics of truck-mounted mobile crusher

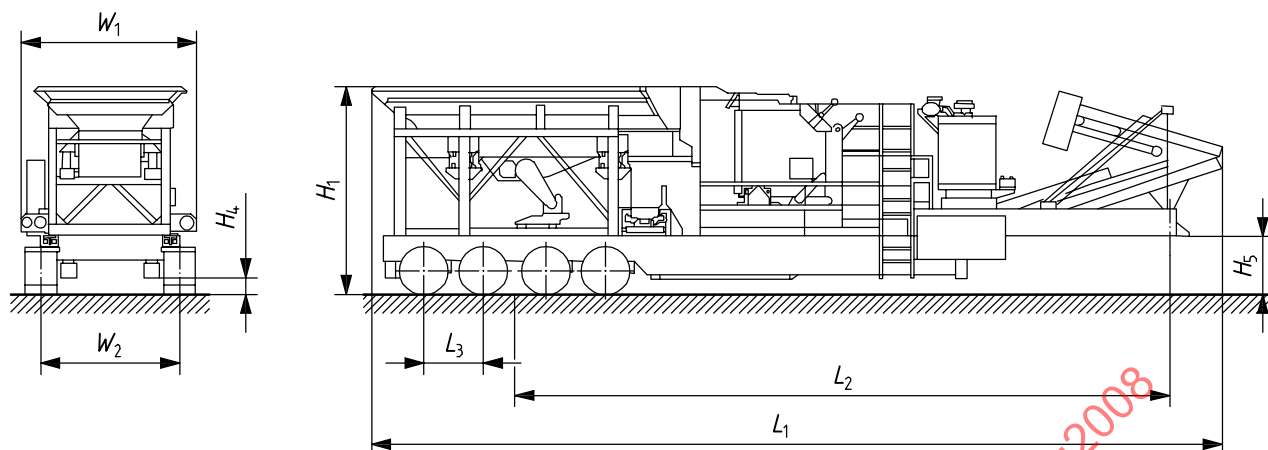

a) Dimensions in transporting mode

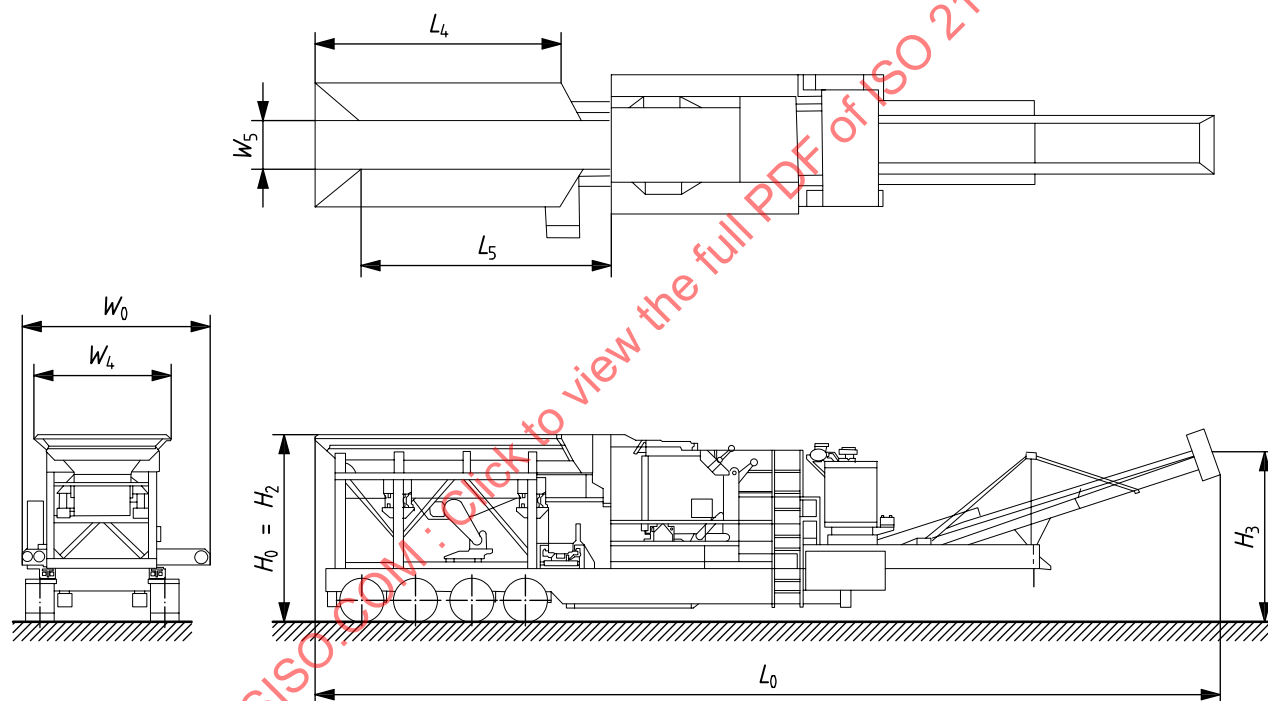

b) Dimensions in operating mode

Key

H_0	overall height (operating mode)	L_3	semi-trailer axle spacing
H_1	overall height (transporting mode)	L_4	feed hopper length
H_2	charging height of the feed hopper	L_5	feeder length
H_3	discharge height (top of the conveyor)	W_0	overall width (operating mode)
H_4	ground clearance	W_1	overall width (transporting mode)
H_5	kingpin design height	W_2	semi-trailer axle track
L_0	overall length (operating mode)	W_4	feed hopper width
L_1	overall length (transporting mode)	W_5	feeder width
L_2	semi-trailer wheelbase		

Figure A.4 — Dimensional characteristics of semi-trailer-mounted mobile crusher