INTERNATIONAL STANDARD

ISO 22884

First edition
2004-04-15

Castors and wheels — Requirements for applications over 1,1 m/s (4 km/h) and up to 4,4 m/s (16 km/h)

Roues et roulettes — Exigences pour des applications à plus de 1,1 m/s (4 km/h) et jusqu'à 4,4 m/s (16 km/h)

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

Reference number
ISO 22884:2004(E)

© ISO 2004

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

© ISO 2004

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

 © ISO 2004 – All rights reserved

Contents

Page

1 Scope 1
2 Normative references 1
3 Terms and definitions 1
4 Classification, characteristics and dimensions 1
4.1 Classification 1
4.2 Characteristics 1
4.3 Top plate 2
4.4 Offset 3
4.5 Wheel 3
4.6 Load capacity 6
5 Requirements for testing 6
5.1 General 6
5.2 Standard conditions 6
5.3 Initial wheel play 7
5.4 Initial swivel play 7
5.5 Electrical resistance test 8
5.6 Fatigue test for braking and/or locking device 8
5.7 Efficiency check of wheel braking and/or locking device 9
5.8 Efficiency check of swivel braking and/or locking device 10
5.9 Static test 10
5.10 Dynamic test 10
5.11 Efficiency check of wheel braking and/or locking device 12
5.12 Efficiency check of swivel braking and/or locking device 12
5.13 Final wheel play 12
5.14 Final swivel play 12
6 Conformity 12
7 Marking of the product 13
7.1 Product marking 13
7.2 Marking of electrically conductive or antistatic castors or wheels 13
Bibliography 14

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

© ISO 2004 – All rights reserved

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 22884 was prepared by Technical Committee ISO/TC 110, *Industrial trucks*, Subcommittee SC 3, *Castors and wheels*.

This first edition of ISO 22884 cancels and replaces ISO 2175:1981, ISO 2184-1:1972, ISO 3101:1981 and ISO 3102:1981.

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

© ISO 2004 – All rights reserved

Castors and wheels — Requirements for applications over 1,1 m/s (4 km/h) and up to 4,4 m/s (16 km/h)

1 Scope

This International Standard specifies the technical requirements, the appropriate dimensions and the requirements for testing of castors and wheels (which may include accessories), specifically for manually propelled or power-towed industrial applications at speeds over 1,1 m/s (4 km/h) and up to 4,4 m/s (16 km/h).

Pneumatic wheels and drive wheels are not covered by this International Standard.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 22877, *Castors and wheels — Vocabulary, symbols and multilingual terminology*

ISO 22878:2004, *Castors and wheels — Test methods and apparatus*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 22877 apply. Symbols are given in ISO 22878:2004, Annex A.

4 Classification, characteristics and dimensions

4.1 Classification

The castors and wheels are divided into three categories: A, B and C. These categories define three increasing speed ratings and are listed in Table 1.

Table 1

Category	A	B	C
Speed, m/s (km/h)	1,7 (6)	2,8 (10)	4,4 (16)

4.2 Characteristics

The characteristics of a castor are

— top plate,

— offset,

— wheel, and

— load capacity.

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

© ISO 2004 – All rights reserved

4.3 Top plate

Rectangular top plates are used with four fixing holes. The design of the outer profile is left to the manufacturer, provided that it is inscribed in a rectangle of maximum size $l \times b$ as indicated in Table 2 and shown in Figure 1.

The fixing holes are located at the corners of a rectangle inscribed in the outer profile. The holes may be oblong and form slots, provided the width of the slot is suitable for bolts of diameter (D_{G1}) as in Table 2.

Table 2 lists the standardized dimensions of the different classes of top plates.

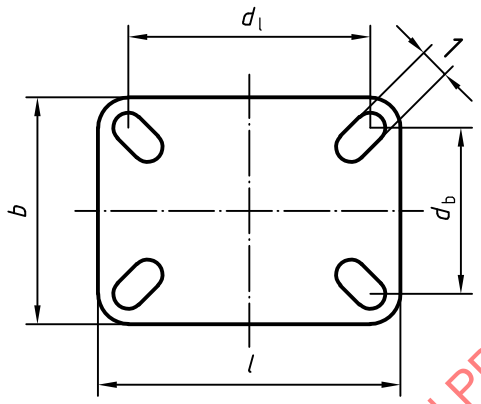

Key

1 adapted to D_{G1}

NOTE The symbols $A \times B$ (top plate outer dimensions) and $a \times b$ (bolt hole spacing) may be used in place of the recommended symbols stated above as these are of common use within the trade.

Figure 1 — Rectangular top plate

Table 2

Dimensions in millimetres

Class	Top plate outer dimensions $l \times b$	Bolt hole spacing $d_l \times d_b$	Fixing bolt diameter D_{G1}
R51	160 × 120	105 × 80	10 12
R52	180 × 160	140 × 105	10 12 14 16
R53	230 × 180	160 × 120	12 14 16 20
R54	270 × 230	210 × 160	14 16 20

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

© ISO 2004 – All rights reserved

4.4 Offset

Table 3 specifies the minimum and maximum offset values (d_F) for swivel castors, corresponding to the wheel diameter (D), as in Figure 2.

For shock-absorbing castors, the offset may vary from the dimensions stated.

Table 3

Dimensions in millimetres

Wheel diameter D	Offset d_F	
	Minimum	Maximum
125	25	75
150/160	30	95
200	40	120
250	50	150
280/300	55	180
350/360	70	215
400	80	240
450	90	270
500	100	300

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

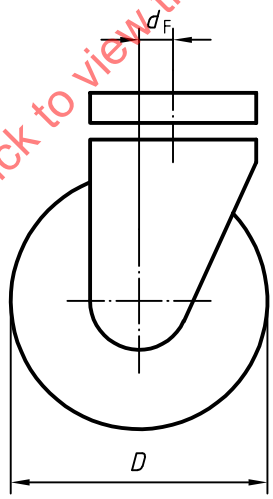

Figure 2 — Offset

4.5 Wheel

4.5.1 Characteristics

The characteristics of a wheel are

— diameter,

— hub width,

— bore diameter, and

— load capacity.

© ISO 2004 – All rights reserved

The characteristics of the wheel are illustrated in Figure 3 and the hub width (b_{T1}) and bore diameter (D_d) corresponding to each wheel diameter (D) are listed in Table 4. Wheels are not restricted to these hub widths and bores when used in castors.

The user shall verify the mechanical strength of axle components (bolts, nuts, bushes, spacers, etc.).

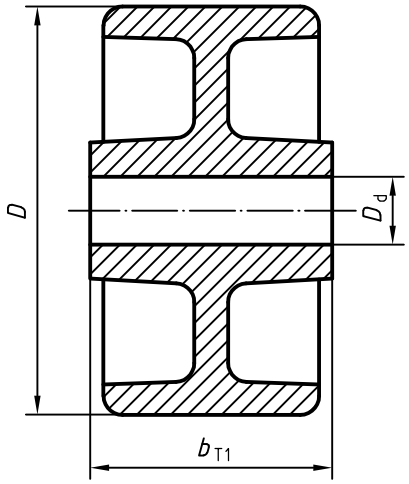

Figure 3 — Wheel dimensions

Table 4

Dimensions in millimetres

Wheel diameter D	Hub width b_{T1}	Bore diameters[a] D_d
125	50	20
		25
	60	20
		25
150/160	60	20
		25
200	60	20
		25
	75	25
	90	25
		30
250	60	25
		30
	75	25
		30
	90	25
		30
	140	30
		40

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

© ISO 2004 – All rights reserved

Table 4 (*continued*)

Dimensions in millimetres

Wheel diameter D	Hub width b_{T1}	Bore diameters[a] D_d
280	60	25
		30
	75	25
		30
	90	25
		30
300	90	25
		30
		35
	120	35
		40
350/360	75	30
		40
	90	35
		40
400	75	30
		35
		40
	90	35
		40
	120	40
		50
	140	40
		50
450	90	40
		50
	120	60
500	90	40
		50
	120	60
	160	60

[a] The above bores refer to the nominal diameter of the axle.

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

4.5.2 Wheel diameter tolerance

The tolerance on wheel diameter (D) shall be $\pm$1,5 %.

4.5.3 Hub width tolerance

The tolerance on hub width (b_{T1}) shall be $^{0}_{-2\%}$.

© ISO 2004 – All rights reserved

4.6 Load capacity

This is the maximum load, in newtons, which can be carried by a wheel or a castor so as to fully comply with the required acceptance criteria.

5 Requirements for testing

5.1 General

Test apparatus and procedures shall be as specified in ?ISO 22878:-?. A static test is not required for this type of castor.

5.2 Standard conditions

5.2.1 Environmental conditions

Tests shall be carried out at a temperature between 15 °C and 28 °C. During the 24 h prior to the test, the samples shall remain at the specified temperature, in an environment with a relative humidity between 40 % and 70 %.

Samples shall not be artificially cooled during testing.

5.2.2 Test sequence

Tests, where applicable, shall be carried out in the sequence as listed in Table 5.

Table 5

Reference in this International Standard	Test sequence	Castors and wheel types	Test procedures given in ISO 22878:2004, subclause
5.3	Initial wheel play	All castors	**4.2**
5.4	Initial swivel play	Swivel castors with or without accessories	**4.3**
5.5	Electrical resistance	Castors and wheels electrically conductive or antistatic	**4.4**
5.6	Fatigue test for braking and/or locking device	Castors with — wheel locking/braking device — directional locking device — total locking/braking device — central locking/braking device If device is operated by means of threaded mechanism this test will not be applicable.	**4.5**
5.7	Efficiency check of wheel braking and/or locking device	Castors with — wheel locking/braking device — total locking/braking device — central locking/braking device	**4.6**
5.8	Efficiency check of swivel braking and/or locking device	Castors with — directional locking/braking device — total locking/braking device — central locking/braking device	**4.7**

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

© ISO 2004 – All rights reserved

Table 5 (*continued*)

Reference in this International Standard	Test sequence	Castors and wheel types	Test procedures given in ISO 22878:2004, subclause
5.9	Static test	This test is not required	**4.9**
5.10	Dynamic test	All castors	**4.8**
5.11	Efficiency check of wheel braking and/or locking device	Castors with — wheel locking/braking device — total locking/braking device — central locking/braking device	**4.6**
5.12	Efficiency check of swivel braking and/or locking device	Castors with — directional locking/braking device — total locking/braking device — central locking/braking device	**4.7**
5.13	Final wheel play	All castors	**4.2**
5.14	Final swivel play	Swivel castors with or without accessories	**4.3**

5.3 Initial wheel play

5.3.1 Test objectives, apparatus and procedures

These shall be as specified in ISO 22878:2004, 4.2.

5.3.2 Acceptance criteria

The measured initial wheel play shall not exceed the value d_{W1} given in Table 6.

Table 6

Symbol	Value	Description
D	variable	wheel diameter
d_{W1}	0,5 % of D	maximum initial wheel play

5.4 Initial swivel play

5.4.1 Test objectives, apparatus and procedures

These shall be as specified in ISO 22878:2004, 4.3.

5.4.2 Acceptance criteria

The measured initial swivel play shall not exceed the value d_{S1} given in Table 7.

Table 7

Symbol	Value	Description
d_{S1}	3 mm	maximum initial swivel play

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

© ISO 2004 – All rights reserved

5.5 Electrical resistance test

5.5.1 Test objectives, apparatus and procedures

These shall be as specified in ISO 22878:2004, 4.4.

5.5.2 Test values

The test values shall be as listed in Table 8.

Table 8

Symbol	Value	Description
F_{max}	variable	load capacity
F_{17}	10 % of F_{max}	test load
R	variable	electrical resistance

5.5.3 Tolerances

The tolerances shall be as shown in Table 9.

Table 9

Symbol	Unit	Tolerance	
		Acceptable	Unit
F_{17}	N	$^{+2\%}_{0}$	N

5.5.4 Acceptance criteria

The resistance R of the sample tested shall be

— $R \leqslant 10^5\ \Omega$ for conductive castors or wheels, and

— $10^5\ \Omega < R \leqslant 10^7\ \Omega$ for antistatic castors or wheels.

5.6 Fatigue test for braking and/or locking device

5.6.1 Test objectives, apparatus and procedures

These shall be as specified in ISO 22878:2004, 4.5.

5.6.2 Test values

The test values shall be as listed in Table 10.

Table 10

Symbol	Value	Description
n_E	5 000	number of locking actions
f_E	10 cycles per min	frequency of locking actions
F_{max}	variable	load capacity
F_3	10 % of F_{max}	test load

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

© ISO 2004 – All rights reserved

5.6.3 Tolerances

The tolerances shall be as shown in Table 11.

Table 11

Symbol	Unit	Tolerance	
		Acceptable	Unit
n_E	—	$^{0}_{-1\%}$	—
f_E	cycles/min	$^{0}_{-2}$	cycles/min
F_3	N	$^{+2\%}_{0}$	N

5.6.4 Acceptance criteria

There shall be no wear and/or permanent deformation that adversely affects the performance of the sample.

5.7 Efficiency check of wheel braking and/or locking device

5.7.1 Test objectives, apparatus and procedures

These shall be as specified in ISO 22878:2004, 4.6.

5.7.2 Test values

The test values shall be as listed in Table 12.

Table 12

Symbol	Value	Description
F_{max}	variable	load capacity
F_{11}	equal to F_{max}	test load
F_{K1}	tread hardness $\geqslant$ 90 Shore A: 10 % of F_{max} tread hardness $<$ 90 Shore A: 15 % of F_{max}	horizontal tractive force

5.7.3 Tolerances

The tolerances shall be as shown in Table 13.

Table 13

Symbol	Unit	Tolerance	
		Acceptable	Unit
F_{11}	N	$^{+2\%}_{0}$	N
F_{K1}	N	$^{+4\%}_{0}$	N

5.7.4 Acceptance criteria

There shall be no revolving movement around the wheel axis during the second application of the force F_{K1}.

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

© ISO 2004 – All rights reserved

5.8 Efficiency check of swivel braking and/or locking device

5.8.1 Test objectives, apparatus and procedures

These shall be as specified in ISO 22878:2004, 4.7.

5.8.2 Test values

The test values shall be as listed in Table 14.

Table 14

Symbol	Value	Description
F_{max}	variable	load capacity
F_{11}	equal to F_{max}	test load
F_{K2}	tread hardness $\geqslant$ 90 Shore A: 10 % of F_{max} tread hardness $<$ 90 Shore A: 15 % of F_{max}	horizontal tractive force

5.8.3 Tolerances

The tolerances shall be as shown in Table 15.

Table 15

Symbol	Unit	Tolerance	
		Acceptable	Unit
F_{11}	N	$^{+2\%}_{0}$	N
F_{K2}	N	$^{+4\%}_{0}$	N

5.8.4 Acceptance criteria

There shall be no swivelling movement during the second application of the force F_{K2}.

5.9 Static test

This is not required.

5.10 Dynamic test

5.10.1 Test objectives, apparatus and procedures

These shall be as specified in ISO 22878:2004, 4.8.

5.10.2 Test values

The test values shall be as listed in Tables 16 and 17.

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

© ISO 2004 – All rights reserved

Table 16

Symbol	Value	Description
F_{max}	variable	load capacity[a]
v_1	see Table 17	average speed of running period
v_2	see Table 17	speed at impact with obstacles
h_1	height of obstacles for wheels with: tread hardness $\geqslant$ 90 Shore A: 2,5 % of D tread hardness $<$ 90 Shore A: 5,0 % of D	height of obstacles
d_c	see Table 17	distance between obstacles
n	5 times D, in mm	number of obstacles to be passed by the wheel
n_{r1}	not required in this test	number of wheel revolutions
t_{z1}	3 min	running period
t_{z2}	1 min	pause
D	variable	wheel diameter

[a] A simulated load applied mechanically, hydraulically or pneumatically is acceptable provided that it has been previously verified.

Table 17 — Test settings for speed categories

Category	A	B	C
Average speed of running period, m/s (km/h)	1,7 (6)	2,8 (10)	4,4 (16)
Speed of impact with the obstacles, m/s (km/h)	1,7 (6)	2,8 (10)	4,4 (16)
Minimum distance between obstacles, m	1	1,5	3

5.10.3 Tolerances

The tolerances shall be as shown in Table 18.

Table 18

Symbol	Unit	Tolerance	
		Acceptable	Unit
v_1	m/s	$^{+5\%}_{0}$	m/s
v_2	m/s	$^{+5\%}_{0}$	m/s
h_1	mm	$^{0}_{-5\%}$	mm
n	—	$^{+1\%}_{0}$	—
n_{r1}	—	$^{+1\%}_{0}$	—
t_{z1}	min	$\pm$ 10	s
t_{z2}	min	$\pm$ 10	s

5.10.4 Acceptance criteria

There shall be no permanent deformation of the sample that adversely affects its performance.

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

© ISO 2004 – All rights reserved

5.11 Efficiency check of wheel braking and/or locking device

Repeat test 5.7.

5.12 Efficiency check of swivel braking and/or locking device

Repeat test 5.8.

5.13 Final wheel play

5.13.1 Test objectives, apparatus and procedures

These shall be as specified in ISO 22878:2004, 4.2.

5.13.2 Acceptance criteria

The wheel wear play shall not exceed the value d_{W2} given in Table 19.

Table 19

Symbol	Value	Description
D	variable	wheel diameter
d_{W2}	0,5 % of D	maximum wheel wear play

5.14 Final swivel play

5.14.1 Test objectives, apparatus and procedures

These shall be as specified in ISO 22878:2004, 4.3.

5.14.2 Acceptance criteria

The swivel wear play shall not exceed the value d_{S2} as given in Table 20.

Table 20

Symbol	Value	Description
d_{S2}	3 mm	maximum swivel wear play

6 Conformity

On request, the manufacturer shall declare by a certificate of conformity that the castors or wheels are in accordance with the requirements as stated in this International Standard.

The type of test machine shall be stated in the conformity document.

STANDARDSISO.COM : Click to view the full PDF of ISO 22884:2004

© ISO 2004 – All rights reserved