

---

# INTERNATIONAL STANDARD



# 2587

---

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

---

## Side and face milling cutters with plain bore and key drive — Metric series

First edition — 1972-12-01

STANDARDSISO.COM : Click to view the full PDF of ISO 2587:1972

---

UDC 621.914.28

Ref. No. ISO 2587-1972 (E)

**Descriptors** : tools, cutting tools, milling cutters, dimensions.

Price based on 1 page

## FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO Member Bodies). The work of developing International Standards is carried out through ISO Technical Committees. Every Member Body interested in a subject for which a Technical Committee has been set up has the right to be represented on that Committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the Technical Committees are circulated to the Member Bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 2587 was drawn up by Technical Committee ISO/TC 29, *Small tools*.

It was approved in February 1972 by the Member Bodies of the following countries :

|                     |                       |                |
|---------------------|-----------------------|----------------|
| Austria             | Italy                 | Switzerland    |
| Belgium             | Japan                 | Turkey         |
| Egypt, Arab Rep. of | Poland                | United Kingdom |
| France              | Romania               | U.S.A.         |
| Hungary             | South Africa, Rep. of | U.S.S.R.       |
| India               | Spain                 |                |
| Israel              | Sweden                |                |

The Member Body of the following country expressed disapproval of the document on technical grounds :

Czechoslovakia

# Side and face milling cutters with plain bore and key drive — Metric series

## 1 SCOPE AND FIELD OF APPLICATION

This International Standard specifies the dimensions of metric series side and face milling cutters with plain bore and key drive, intended for fitting to cutter arbors.

It is applicable to cutters with straight teeth and cutters with double alternate helix (staggered tooth).

The range of outside diameters of these cutters is taken from ISO/R 523, *Recommended range of outside diameters for milling cutters*.

## 2 REFERENCE

ISO/R 240, *Interchangeability dimensions for milling cutters and cutter arbors or cutter mandrels — Metric series and inch series*.

## 3 DIMENSIONS

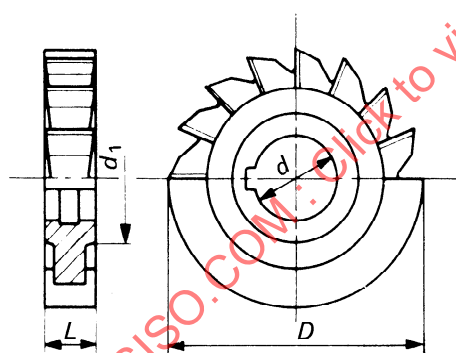


FIGURE 1 — Cutter with straight teeth

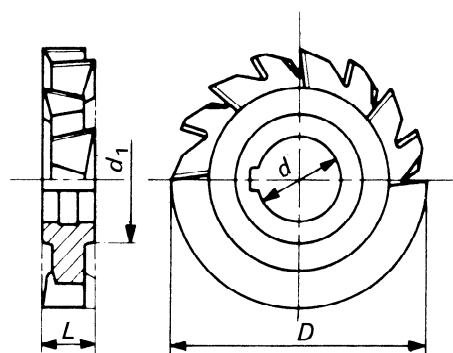


FIGURE 2 — Cutter with double alternate helix

Dimensions in millimetres

| $D$<br>$j_{s16}$ | $d$<br>H7 | $d_1$<br>min. | $L$<br>k11 |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|-----------|---------------|------------|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|
|                  |           |               | 4          | 5 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 25 | 28 | 32 | 36 | 40 |
| 50               | 16        | 27            | X          | X | X | X | X  |    |    |    |    |    |    |    |    |    |    |    |
| 63               | 22        | 34            | X          | X | X | X | X  | X  | X  | X  |    |    |    |    |    |    |    |    |
| 80               | 27        | 41            |            | X | X | X | X  | X  | X  | X  | X  | X  |    |    |    |    |    |    |
| 100              | 32        | 47            |            |   | X | X | X  | X  | X  | X  | X  | X  | X  | X  |    |    |    |    |
| 125              | 32        | 47            |            |   |   | X | X  | X  | X  | X  | X  | X  | X  | X  | X  |    |    |    |
| 160              | 40        | 55            |            |   |   |   | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  |    |    |
| 200              | 40        | 55            |            |   |   |   |    | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  |

The bore and keyway dimensions shall be in accordance with the metric series of ISO/R 240.