
International Standard



2905

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Modular units for machine tool construction — Spindle noses and adjustable adaptors for multi-spindle heads

Éléments standards pour la construction des machines-outils — Nez de broches et douilles de réglage pour têtes multibroches

Second edition — 1985-12-01

STANDARDSISO.COM : Click to view the full PDF of ISO 2905:1985

UDC 621.9-112

Ref. No. ISO 2905-1985 (E)

Descriptors : machine tools, modular structures, spindles, adaptors, dimensions.

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 2905 was prepared by Technical Committee ISO/TC 39, *Machine tools*.

ISO 2905 was first published in 1974. This second edition cancels and replaces the first edition, of which the tolerance on the adjustable adaptor outside diameter, d , has been technically revised.

Users should note that all International Standards undergo revision from time to time and that any reference made herein to any other International Standard implies its latest edition, unless otherwise stated.

Modular units for machine tool construction — Spindle noses and adjustable adaptors for multi-spindle heads

1 Scope and field of application

This International Standard specifies dimensions for spindle noses for use with adjustable adaptors and quick-change adaptors used in multi-spindle heads.

It specifies requirements for three types of adjustable adaptors to fit taper shank drills, reamers and spot-facing cutters, used in multi-spindle heads.

2 References

ISO 296, *Machine tools — Self-holding tapers for tool shanks*.

ISO 2901, *ISO metric trapezoidal screw threads — Basic profile and maximum material profiles*.

ISO 2903, *ISO metric trapezoidal screw threads — Tolerances*.

3 Spindle noses

3.1 Nominal sizes

The nominal size of the spindle nose shall be its nominal bore, which shall be identical with the nominal diameter of the adjustable adaptor with which it is to be used.

The range of nominal sizes is as follows :

8, 10, 12, 16, 20, 25, 28, 36 and 48 mm

3.2 Interchangeability

Spindle noses shall be capable of accepting adjustable adaptors manufactured in accordance with clause 4.

3.3 Dimensions

Dimensions shall comply with those given in table 1.

3.4 Locking screw

For reasons of safety, it is important that the locking screw when tightened does not protrude beyond the outside diameter of the spindle nose. Locking screws are therefore to be reduced in length if necessary; this correction should be carried out when the position of the adjustable adaptor in the spindle nose corresponds with the maximum wear of the tool.

4 Adjustable adaptors

4.1 Nominal sizes

The nominal size of an adaptor shall be its nominal outside diameter, which shall be identical with the nominal bore of the spindle nose with which it is to be used.

The range of nominal sizes is as follows :

8, 10, 12, 16, 20, 25, 28, 36 and 48 mm.

4.2 Interchangeability

Adaptors shall be capable of fitting spindle noses manufactured in accordance with clause 3.

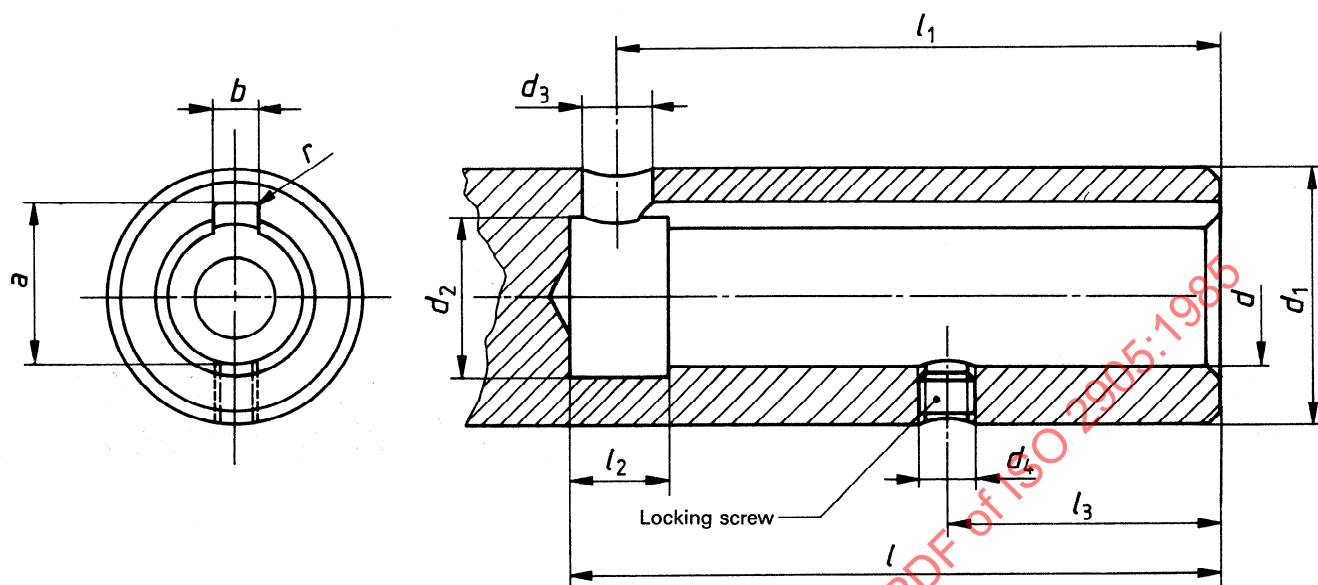


Table 1

Dimensions in millimetres

d H7	a $+0,3$ 0	b C11	$d_1^{1)}$	$d_2^{2)}$	d_3	d_4 6H	l min.	l_1	l_2	l_3 $\pm 0,1$	r max.	Locking screw
8	9	2	15	8,6	3,5	M4	42	35	8	16	0,2	M4 - 5
10	11	3	18	10,6	5	M5	52	48	8	22	0,2	M5 - 5
12	13	3	20	12,6	5	M5	52	48	8	22	0,2	M5 - 5
16	17,3	5	25	16,4	6	M6	74	70	8	34	0,2	M6 - 6
20	21,3	5	32	20,4	6	M6	77	73	8	34	0,2	M6 - 6
25	26,7	6	37	25,4	8	M8	85	80	10	38	0,4	M8 - 6
28	29,7	6	40	28,4	8	M8	85	80	10	38	0,4	M8 - 8
36	37,7	8	50	36,6	10	M8	106	101	10	45	0,4	M8 - 8
48	50,1	10	67	48,6	12	M10	129	123	12	57	0,4	M10 - 10

1) For nominal diameters 8 to 12, diameter d_1 depends on the design requirements; the values are therefore given for information only.

For nominal diameters 16 to 48, the tolerance on d_1 is f7 only if quick-change adaptors are to be used.

2) These values are given for information only.

4.3 Dimensions

Dimensions shall comply with those given in tables 2 and 3.

4.4 Threads

Threads shall comply with ISO 2901 and ISO 2903, except in the case of special material requirements for the major diameter on which the tolerance shall be g6 and for the pitch of 1 mm provided for the nominal size of 8 mm.

4.5 Bore taper

The bore of the adaptor body shall be tapered in accordance with ISO 296.

4.6 Drift slot

The drift slot of the appropriate self-holding taper complying with ISO 296 shall be provided 90° from the Woodruff key.

4.7 Locking screw (for nominal diameters 16 to 48)

For reasons of safety, it is important that the locking screw when tightened does not protrude beyond the outside diameter of the knurled portion of the nut. Locking screws are therefore to be reduced in length if necessary so that they do not protrude when the nut is locked.

4.8 Lead-in of the adjustable adaptors in the spindle noses

For types A and B, a suitable form of lead-in shall be machined on the closed end of the adaptor body, to facilitate insertion into the spindle nose.

4.9 Marking


The body of the adaptor shall be marked with the type, nominal size, size of Morse taper and, for type B adaptors only, the extension length.

Examples : A 10/Metr. 6
B 20/1/50
C 28/3

STANDARDSISO.COM : Click to view the full PDF of ISO 2905:1985

Dimensions and tolerances in millimetres

Type A — Short

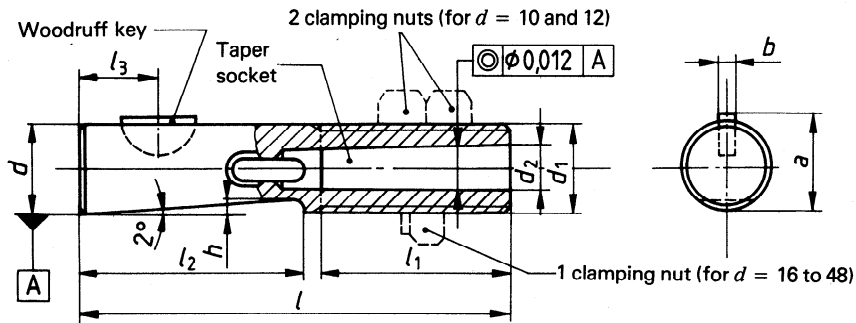

Type B — Long

For other dimensions, see type A

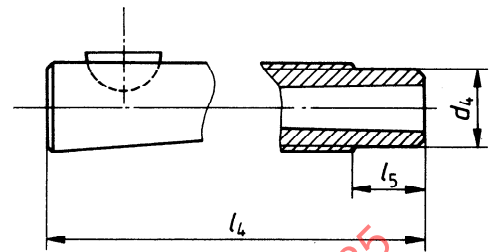


Table 2

Dimensions in millimetres

d g6	d_1^*	d_2 Taper	Basic diameter	a tol.	b P9/h9	h max.	l	l_1	l_2	l_3	d_4	l_4	l_5	Woodruff key	Range of adjustment
10	Tr 10 × 1,5	Metr. No. 6	6	10,9 0 -0,15	3	1	62	28	32	10	8	72 82 92	10 20 30	3 × 5	16
12	Tr 12 × 1,5	Metr. No. 6	6	12,9 0 -0,20	3	1	62	28	32	10	10	72 82 92 102	10 20 30 40	3 × 5	16
16	Tr 16 × 1,5	Morse No. 0 or 1	9,045 or 12,065	17,1 0 -0,25	5	1,3	85	40	43	11	14	110 135 160 185	25 50 75 100	5 × 6,5	28
20	Tr 20 × 2	Morse No. 1	12,065	21,1 0 -0,25	5	1,3	88	40	46	13	17	113 138 163 188	25 50 75 100	5 × 7,5	28
25	Tr 25 × 2	Morse No. 1 or 2	12,065 or 17,780	26,5 0 -0,25	6	1,5	95	42	51	15	22	120 145 170 195	25 50 75 100	6 × 9	30
28	Tr 28 × 2	Morse No. 1 or 2	12,065 or 17,780	29,5 0 -0,25	6	1,5	95	42	51	15	25	120 145 170 195	25 50 75 100	6 × 9	30
36	Tr 36 × 2	Morse No. 2 or 3	17,780 or 23,825	37,5 0 -0,35	8	1,7	118	50	65	20	33	148 178 208 238	30 60 90 120	8 × 11	36
48	Tr 48 × 2	Morse No. 3 or 4	23,825 or 31,267	49,9 0 -0,35	10	2,2	144	65	76	24	45	184 224 264 304	40 80 120 160	10 × 13	47

* Tolerance g6 on the major diameter.