
**T-slot cutters with cylindrical shanks and
with Morse taper shanks having tapped
hole**

*Fraises pour rainures à T, à queue cylindrique et à queue cône Morse à
trou taraudé*



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 3337:2000

© ISO 2000

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 3337 was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 2, *Drills, reamers, milling cutters and milling machine accessories*.

This third edition cancels and replaces the second edition (ISO 3337:1978), which has been technically revised in particular with the addition of threaded shanks.

T-slot cutters with cylindrical shanks and with Morse taper shanks having tapped hole

1 Scope

This International Standard specifies the dimensions of T-slot cutters with plain or flatted cylindrical shanks, with threaded shanks and with Morse taper shanks having tapped hole.

It applies to those tools which are intended for manufacturing T-slots for machine tools for equipment, in accordance with ISO 299.

T-slot cutters with plain cylindrical shanks or flatted cylindrical shanks and with threaded shanks are suitable for the production of slots in accordance with ISO 299 from 5 mm to 36 mm inclusive, those with Morse taper shanks are suitable for the production of slots in accordance with ISO 299 from 10 mm to 54 mm inclusive.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 296, *Machine tools — Self-holding tapers for tool shanks.*

ISO 299, *Machine tool tables — T-slots and corresponding bolts.*

ISO 3338-1, *Cylindrical shanks for milling cutters — Part 1: Dimensional characteristics of plain cylindrical shanks.*

ISO 3338-2, *Cylindrical shanks for milling cutters — Part 2: Dimensional characteristics of flatted cylindrical shanks.*


ISO 3338-3, *Cylindrical shanks for milling cutters — Part 3: Dimensional characteristics of threaded shanks.*

3 Dimensions

3.1 T-slot cutters with plain cylindrical shanks, with flatted cylindrical shanks and with threaded shanks

See Figure 1 and Table 1.

Plain cylindrical shanks, flatted cylindrical shanks and threaded shanks are in accordance with ISO 3338-1, ISO 3338-2 and ISO 3338-3 respectively.

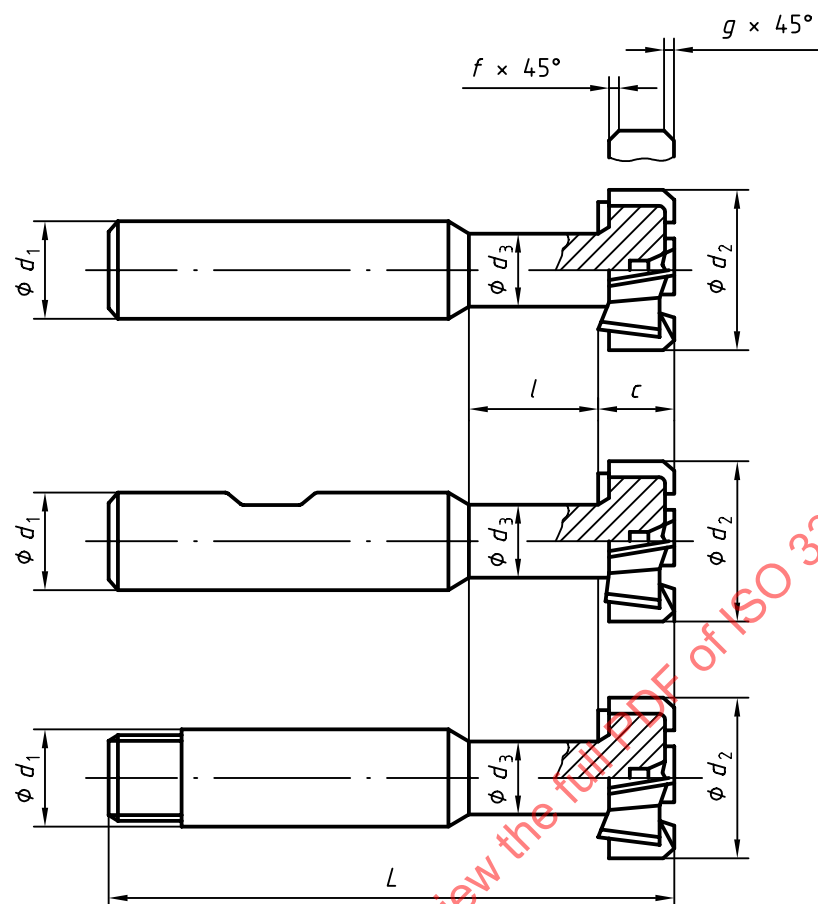

NOTE Chamfers f and g may be replaced by radii of the same value. These are optional configurations.

Figure 1

Table 1

Dimensions in millimetres

d_2	c	d_3	l +1 0	d_1^a	L	f	g	For slot of
h12	h12	max.				max.	max.	
11	3,5	4	6,5	10	53,5	0,6	1	5
12,5	6	5	7		57			6
16	8	7	10		62			8
18		8	13	70	10			
21	9	10	16	12	74			12
25	11	12	17		16		82	1,6
32	14	15	22	90		1	2,5	
40	18	19	27	25	108			22
50	22	25	34	32	124			28
60	28	30	43		139			36


^a Tolerance on d_1 (in accordance with ISO 3338-1, ISO 3338-2 and ISO 3338-3):

h8 for plain cylindrical shanks;
h6 for flatted cylindrical shanks;
h8 for threaded shanks.

3.2 T-slot cutters with Morse taper shanks with tapped hole

See Figure 2 and Table 2.

Morse taper shanks have tapers with tapped hole in accordance with ISO 296.

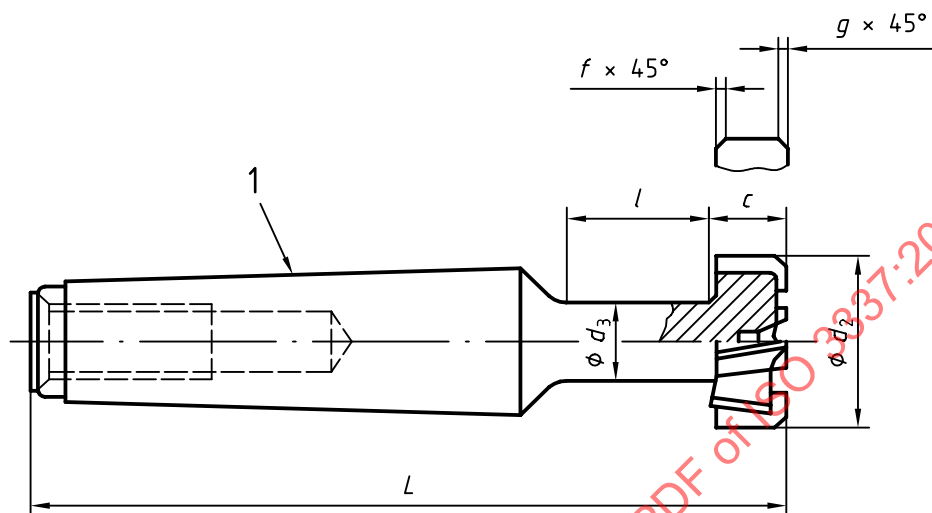

Key

1 Morse taper

NOTE Chamfers f and g may be replaced by radii of the same value. These are optional configurations.

Figure 2

Table 2

Dimensions in millimetres

d_2 h12	c h12	d_3 max.	l +1 0	L	f max.	g max.	Morse taper No.	For slot of
18	8	8	13	82	0,6	1	1	10
21	9	10	16	98		1,6	2	12
25	11	12	17	103				14
32	14	15	22	111	1	2,5	3	18
40	18	19	27	138			4	22
50	22	25	34	173				28
60	28	30	43	188	1,6	4	5	36
72	35	36	50	229				42
85	40	42	55	240				48
95	44	44	62	251	2	6		54

Bibliography

- [1] ISO 11529-1:1998, *Milling cutters — Designation — Part 1: Shank type end mills of solid or tipped design*.

STANDARDSISO.COM : Click to view the full PDF of ISO 3337:2000