

INTERNATIONAL STANDARD

ISO
3353-2

First edition
2002-07-15

Aerospace — Lead and runout threads — Part 2: Internal threads

*Aéronautique et espace — Filets incomplets, débuts et fins de filets —
Partie 2: Filetages intérieurs*



Reference number
ISO 3353-2:2002(E)

© ISO 2002

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 3353-2:2002

© ISO 2002

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 3353 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3353-2 was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 4, *Aerospace fastener systems*.

ISO 3353 consists of the following parts, under the general title *Aerospace — Lead and runout*:

- *Part 1: Rolled external threads*
- *Part 2: Internal threads*

Aerospace — Lead and runout threads —

Part 2: Internal threads

1 Scope

This part of ISO 3353 specifies the lead and runout thread and undercut requirements for internal threads (blind tapped holes) for aerospace construction.

It is applicable whenever it is referenced in a definition document.

2 Normative reference

The following normative document contains provisions which, through reference in this text, constitute provisions of this part of ISO 3353. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 3353 are encouraged to investigate the possibility of applying the most recent edition of the normative document indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 5855-1, *Aerospace — MJ threads — Part 1: General requirements*

3 Terms and definitions

For the purposes of this part of ISO 3353, the following terms and definitions apply.

3.1

lead threads

part of screw threads in which are located threads incompletely formed during cutting, beginning at the entering countersunk of the thread

3.2

runout threads

part of screw threads in which are located threads incompletely formed during cutting, between the completely formed threads and the end of the cylindrical part of the blind tapped hole

3.3

undercut

groove dug at the hole bottom to limit the threads with completely formed thread (except at the crossing between the last thread and the groove flank)

3.4

completely formed thread

thread, the profile of which ABC is located, over an axial distance of $1P$, within the limits specified in the definition document for the thread

See Figure 1.

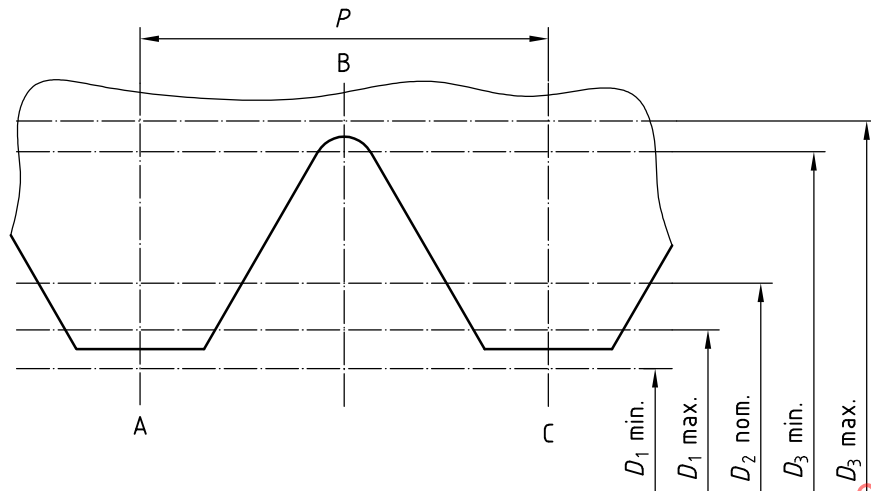


Figure 1

4 Symbols for threads

D_1 is the minor diameter of the thread.

D_2 is the pitch diameter of the thread.

D_3 is the major diameter of the thread.

P is the thread pitch.


5 Requirements

5.1 General requirements

The flanks at the root of the incompletely formed threads shall be joined by a radius or by two radii and a flat, that are smooth and devoid of abrupt tool marks not compatible with respect to the roughness specified in the product standard. This radius, or these radii shall be greater than or equal to the calculated radius of the root of the maximum profile specified ISO 5855-1 (diameter D_3 max.).

5.2 Lead threads

See Figure 2.

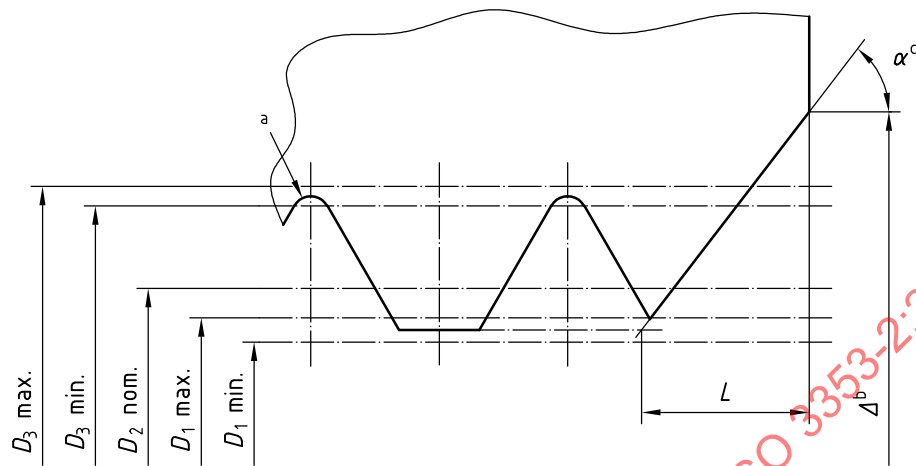

NOTE Length L corresponds to the length of the lead threads. It results from the intersection of the entering countersunk and of the minor diameter of the thread D_1 .

a Crest of first completely formed thread.

b $\Delta = D_3 \text{ max. } +^{0.6}_0$, for $D \leq 5 \text{ mm}$


$\Delta = D_3 \text{ max. } +^{0.8}_0$, for $D > 5 \text{ mm}$.

c $45^\circ \leq \alpha \leq 60^\circ$.

Figure 2

5.3 Runouts

See Figure 3.

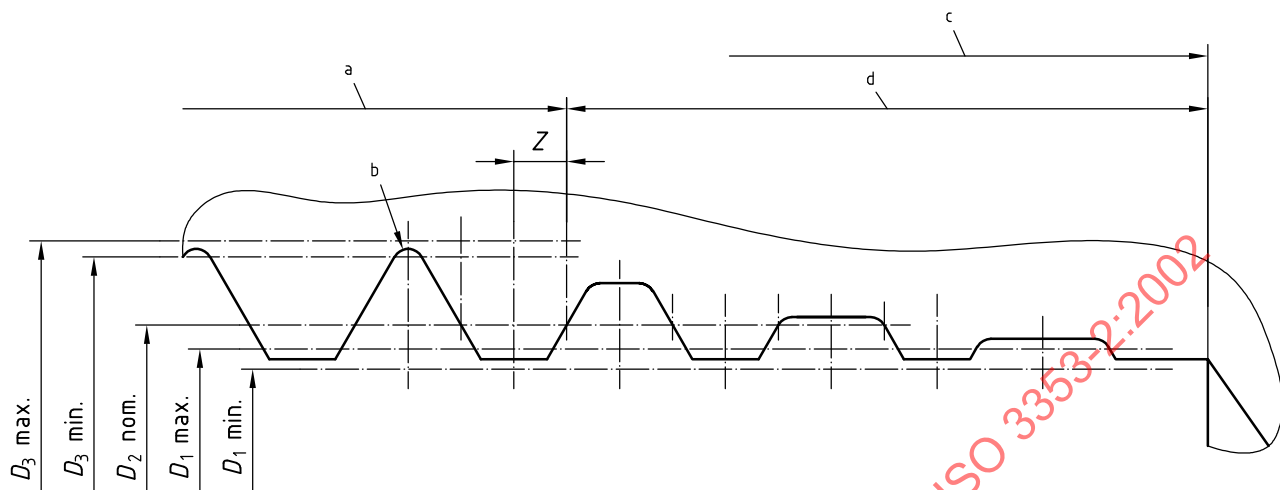


Over the area Z , the thread shall lie within the limits specified in the definition document for the thread.

- a Required minimum full thread depth as specified on the product standard or drawing.
- b Crest of first completely formed thread.
- c Maximum hole depth as permitted by the product standard or drawing.
- d Thread runout $\leq 10P$.

Figure 3

5.4 Undercuts

See Figure 4.

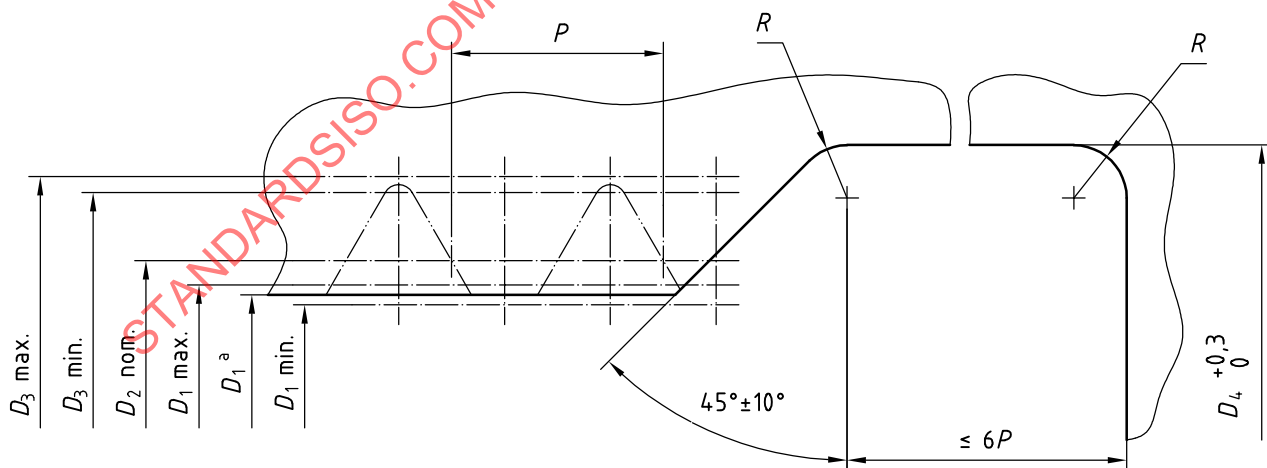

$$0,25P \leq R \leq 0,5P$$

$$D_4 = D_3 \text{ max.} + 0,3 \text{ mm for } P \leq 0,8 \text{ mm}$$

$$D_4 = D_3 \text{ max.} + 0,5 \text{ mm for } P > 0,8 \text{ mm}$$

- a Actual.

Figure 4