
**Packaging — Complete, filled transport
packages and unit loads — Dimensions
of rigid rectangular packages**

*Emballages — Emballages d'expédition complets et pleins et charges
unitaires — Dimensions des emballages rectangulaires rigides*

STANDARDSISO.COM : Click to view the full PDF of ISO 3394:2012



STANDARDSISO.COM : Click to view the full PDF of ISO 3394:2012



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Principle	1
5 Plan dimensions	1
6 Height	8
7 Tolerances	8
Annex A (informative) Examples of combination multiples and submultiples, arranged to interlock	9
Bibliography	10

STANDARDSISO.COM : Click to view the full PDF of ISO 3394:2012

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3394 was prepared by Technical Committee ISO/TC 122, *Packaging*

This third edition cancels and replaces the second edition (ISO 3394:1984), which has been technically revised.

STANDARDSISO.COM : Click to view the full PDF of ISO 3394:2012

Packaging — Complete, filled transport packages and unit loads — Dimensions of rigid rectangular packages

1 Scope

This International Standard sets forth a series of dimensions for rigid rectangular transport packages, based on the standard plan dimension (module) of 600 mm × 400 mm, 600 mm × 500 mm and 550 mm × 366 mm, as outlined in ISO 3676, which defines the plan dimensions of four series (1 219 mm × 1 016 mm, 1 200 mm × 1 000 mm, 1 200 mm × 800 mm, 1 100 mm × 1 100 mm).

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 21067, *Packaging — Vocabulary*

ISO 6780:2003, *Flat pallets for intercontinental materials handling — Principal dimensions and tolerances*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 21067 and the following apply.

3.1

plan dimensions

dimensions of the rectangle defined on a horizontal surface by the four vertical planes intersecting at right angles which enclose a transport package freestanding on that surface

NOTE See Figure 1.

3.2

load bulge

swelling of the freight which is caused by filling, both static and dynamic compression, deterioration and rough stacking, and is affected by transport packaging materials, characteristics of contents, method of filling/stuffing, duration of storage, humidity and temperature conditions, and condition of transportation, etc.

4 Principle

The effective outside dimensions (length and width) of transport packages shall be obtained by multiplying or dividing the standard plan dimension by an integer.

5 Plan dimensions

Examples of plan dimensions calculated following the principles of Clause 4 are set forth in Table 1 and in Figures 2 and 3. Pallet dimensions shall conform to 4.1.1 and 4.1.2 of ISO 6780:2003.




Figure 1 — Plan dimensions

Table 1 — Dimension of transport packages

Dimensions in millimetres

Module				
600 × 400		600 × 500		550 × 366
Recommended pallet sizes for each module				
1 200 × 800	1 219 × 1 016	1 219 × 1 016	1100 × 1100	1 100 × 1 100
	1 200 × 1 000	1 200 × 1 000		
Multiples				
1 200 × 800	1 200 × 1 000	1 200 × 1 000	1 100 × 1 100	1 100 × 1 100
1 200 × 400		1 200 × 500		1 100 × 550
800 × 600		1 000 × 600		1 100 × 366
Submultiples				
600×400	600×500		550×366	
300×400	300×500		275×366	
200×400	200×500		183×366	
150×400	150×500		137×366	
120×400	600×250		110×366	
600×200	300×250		550×183	
300×200	200×250		275×183	
200×200	150×250		183×183	
150×200	600×166		137×183	
120×200	300×166		110×183	
600×133	200×166		550×122	
300×133	150×166		275×122	
200×133	600×125		183×122	
150×133	300×125		137×122	
120×133	200×125		110×122	
600×100	150×125		#	
300×100	#		#	
200×100	#		#	

NOTE 1 The multiples and submultiples are examples calculated from the module 600 mm × 400 mm, 600 mm × 500 mm and 550 mm × 366 mm.


NOTE 2 Sizes below 110 mm × 122 mm are not recommended, as they are too small and of little practical use.

NOTE 3 Transport unit configurations shown in this table, Figure 2, Figure 3 and Figure 4 are illustrative only. Other transport unit configurations which are approved as rigid rectangular packages are available.

Table 1 (continued)

Module		
150×100	#	#
120×100	#	#
NOTE 1 The multiples and submultiples are examples calculated from the module 600 mm × 400 mm, 600 mm × 500 mm and 550 mm × 366 mm. NOTE 2 Sizes below 110 mm x 122 mm are not recommended, as they are too small and of little practical use. NOTE 3 Transport unit configurations shown in this table, Figure 2, Figure 3 and Figure 4 are illustrative only. Other transport unit configurations which are approved as rigid rectangular packages are available.		


STANDARDSISO.COM : Click to view the full PDF of ISO 3394:2012

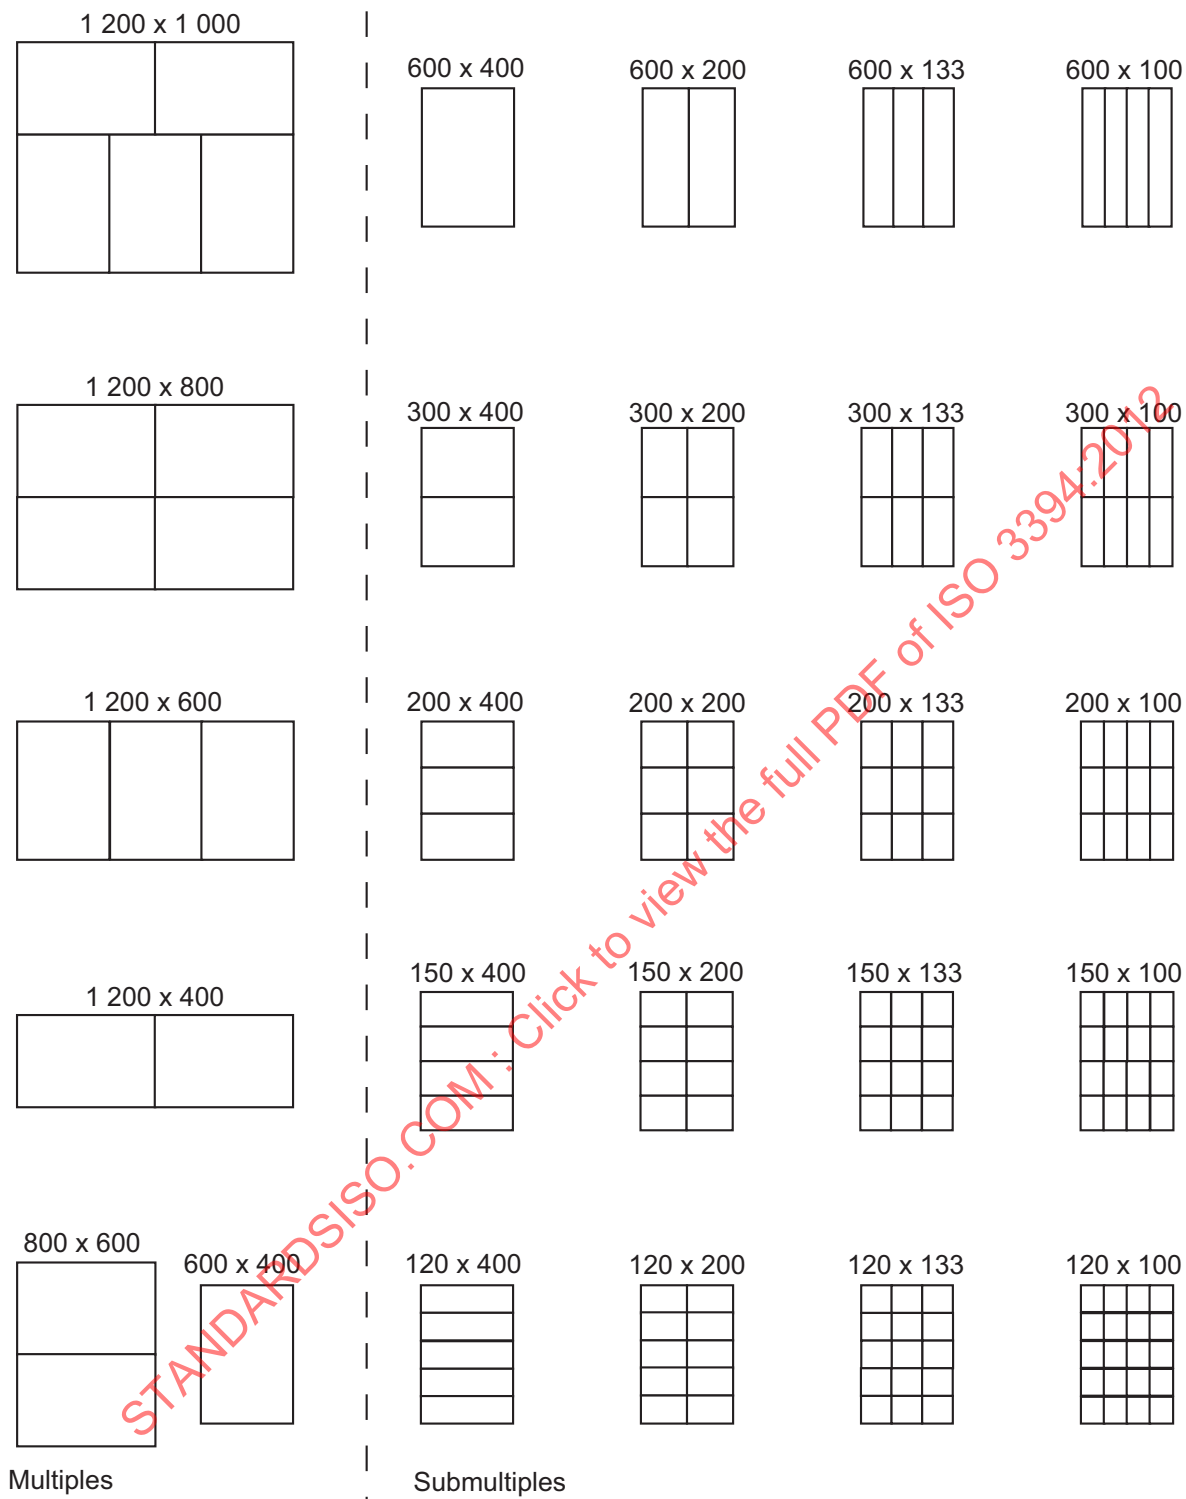

NOTE 1 Pallets with the dimensions of 1 219 × 1 016 mm will support the same pallet patterns.


NOTE 2 Dimensions in millimetres.

Figure 2 — Example of combination multiples and submultiples for 1 200 mm × 1 000 mm

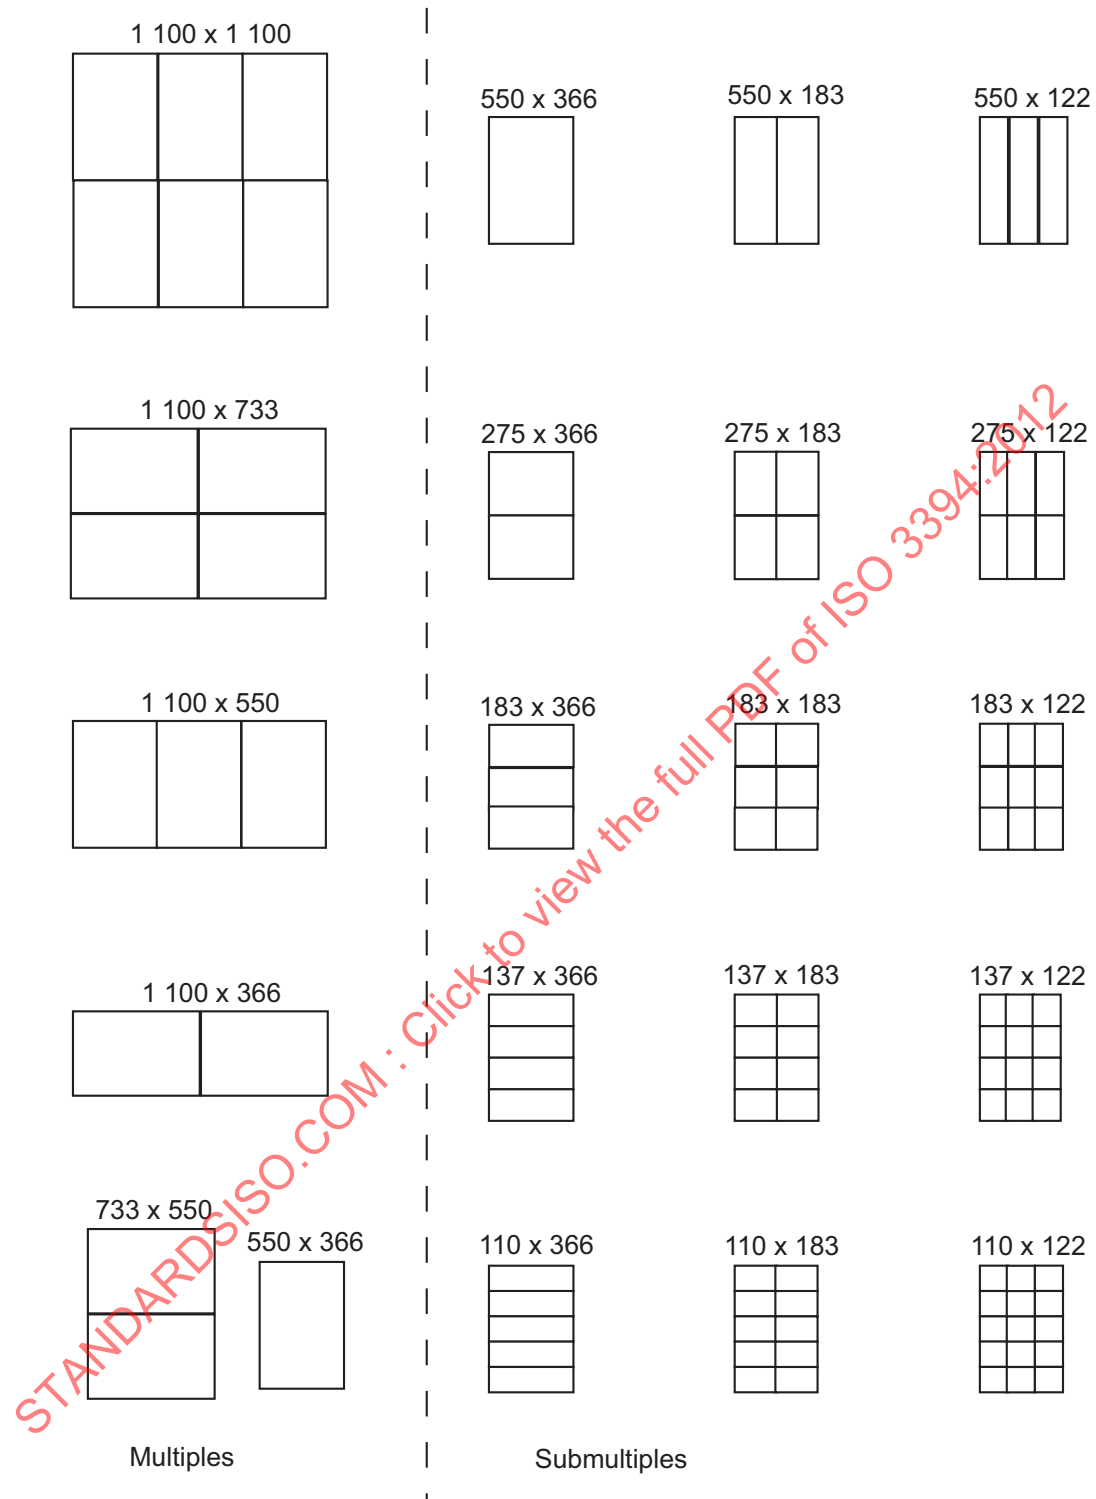

NOTE Dimensions in millimetres.


Figure 3 — Example of combination multiples and submultiples for 1 100 mm × 1 100 mm

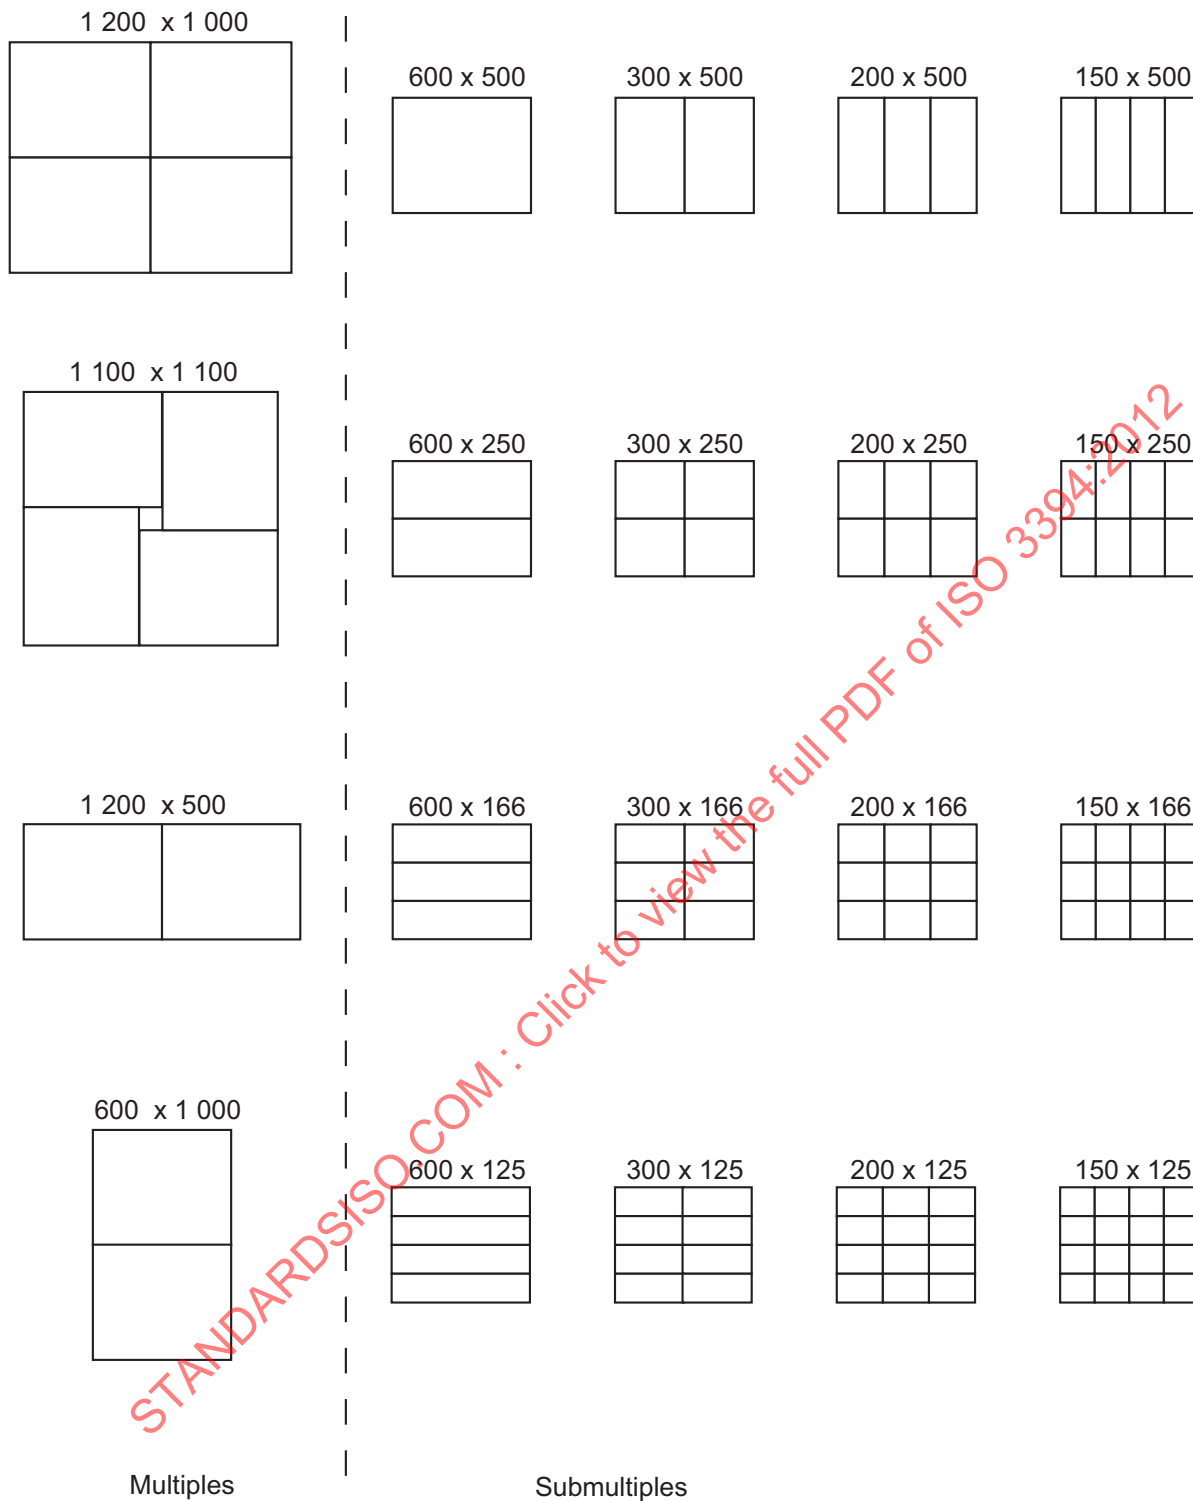

NOTE 1 Pallets with the dimensions of 1 219 mm × 1 016 mm will support the same pallet patterns.

NOTE 2 Dimensions in millimetres.


Figure 4 — Example of 600 mm × 500 mm multiples and submultiples for a 1 200mm × 1 000 mm pallet and 1 100 mm × 1 100 mm pallet

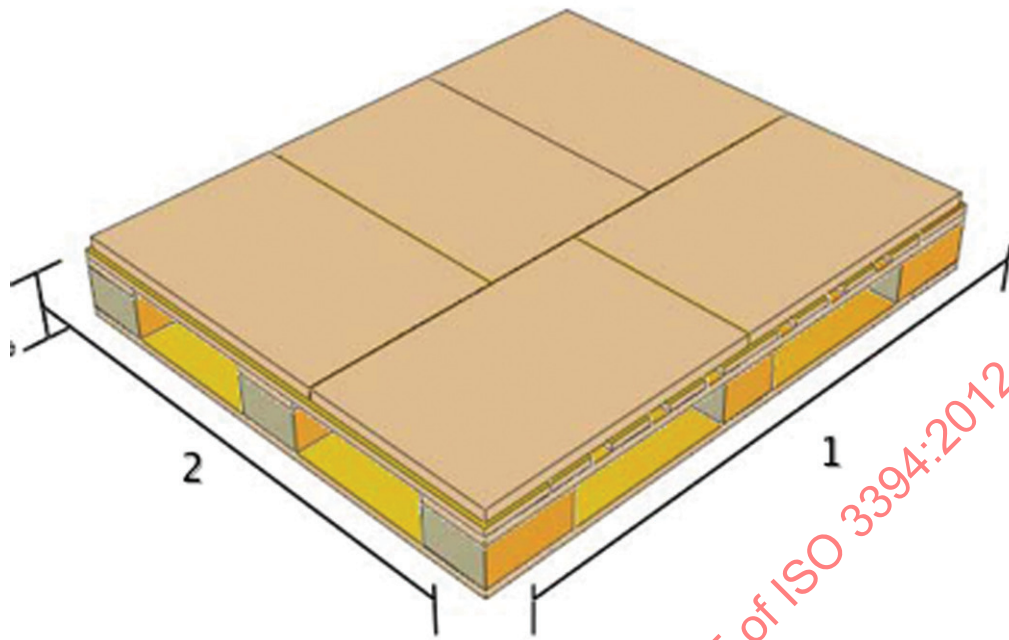

Key

- 1 1 200 mm or 1 219 mm
- 2 1 000 mm or 1 016 mm


Figure 5 — Example of 600 mm × 400 mm multiple for a 1 200 mm × 1 000 mm or 1 219 mm × 1 016 mm pallet

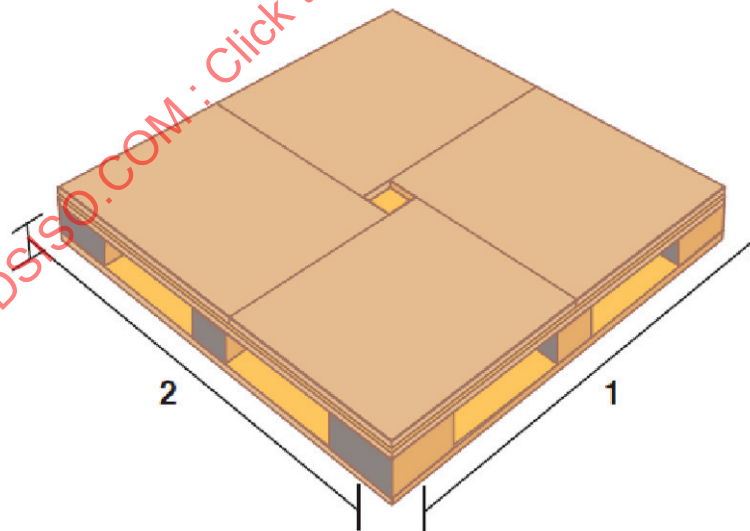

Key

- 1 1 100 mm
- 2 1 100 mm

Figure 6 — Example of 600 mm × 500 mm multiple for a 1 100 mm × 1 100 mm pallet

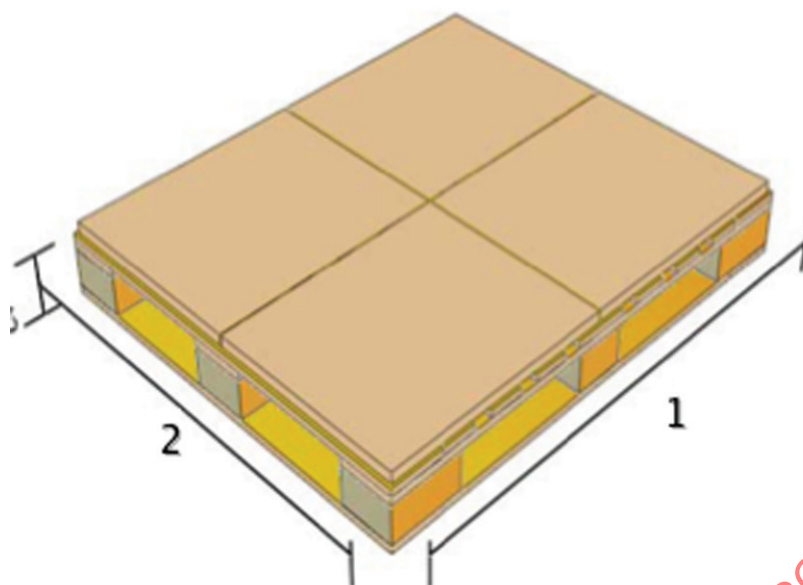

Key

- 1 1 200 mm or 1 219 mm
- 2 1 000 mm or 1 016 mm

Figure 7 — Example of 600 mm × 500 mm multiple for a 1 200 mm × 1 000 mm or 1 219 mm × 1 016 mm pallet

6 Height

The height of the transport packages shall be left to the discretion of the user.

7 Tolerances

The plan dimensions and all the derived dimensions are maximum dimensions for filled transport packages.