

# INTERNATIONAL STANDARD



# 3646

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

## **Cinematography — Motion-picture camera cartridge, 8 mm Type S Model II — Slots, projections and cartridge hole for indicating film speed, colour balance and film identification — Dimensions and positions**

*Cinématographie — Chargeurs, modèle II, pour caméras 8 mm type S — Encoches et bossage pour la sensibilité du film, cavité et bossage pour l'identification du film et pour le filtre de correction de couleur — Dimensions et positions*

First edition — 1976-07-01

STANDARDSISO.COM : Click to view the full PDF of ISO 3646:1976

UDC 771.531.352 : 778.533.4

Ref. No. ISO 3646-1976 (E)

**Descriptors :** cinematography, motion-picture cameras, film packs, motion-picture film 8 mm, notches, slots, specifications, dimensions, position (location).

Price based on 3 pages

## FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO Member Bodies). The work of developing International Standards is carried out through ISO Technical Committees. Every Member Body interested in a subject for which a Technical Committee has been set up has the right to be represented on that Committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the Technical Committees are circulated to the Member Bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 3646 was drawn up by Technical Committee ISO/TC 36, *Cinematography*, and circulated to the Member Bodies in February 1975.

It has been approved by the Member Bodies of the following countries :

|                |                       |                |
|----------------|-----------------------|----------------|
| Australia      | India                 | Sweden         |
| Austria        | Italy                 | Switzerland    |
| Belgium        | Japan                 | Turkey         |
| Canada         | Netherlands           | United Kingdom |
| Czechoslovakia | Romania               | U.S.A.         |
| Denmark        | South Africa, Rep. of | U.S.S.R.       |
| France         | Spain                 | Yugoslavia     |

No Member Body expressed disapproval of the document.

# Cinematography — Motion-picture camera cartridge, 8 mm Type S Model II — Slots, projections and cartridge hole for indicating film speed, colour balance and film identification — Dimensions and positions

## 1 SCOPE AND FIELD OF APPLICATION

This International Standard specifies the dimensions and location of cartridge slots, projections and a hole for the Model II 8 mm Type S film camera cartridge which, when included by the manufacturer, automatically preset some cameras in accordance with the effective film speed, and insert or withdraw a colour-balancing filter. The combinations which are possible, together with the area available for visible film identification, are also described.

## 2 REFERENCES

ISO 1700, *Cinematography — 8 mm Type S motion-picture raw stock film — Cutting and perforating dimensions*.

ISO 1787, *Cinematography — Camera usage of 8 mm motion-picture film perforated Type S*.

ISO 2863, *Cinematography — Motion-picture camera cartridge, 8 mm Type S Model II — Run length of film — Dimensions and specifications*.

ISO 3025, *Cinematography — Motion-picture camera cartridge, 8 mm Type S Model II — Film load position*.

ISO 3641, *Cinematography — Motion-picture camera cartridge, 8 mm Type S Model II — Cartridge fit and take-up core drive — Dimensions and specifications*.

ISO 3645, *Cinematography — Image area produced by 8 mm Type S motion-picture camera aperture and maximum projectable image area — Positions and dimensions*.

## 3 DIMENSIONS AND CHARACTERISTICS

3.1 The dimensions and characteristics shall be as shown in the figures and given in the tables.

3.2 The location of the hole, slots and projections for effective film speeds and for film sensitivity identification shall conform to the figures and the tables.

3.3 The dimensions for the film hole or projection intended for insertion or withdrawal of the colour-balancing filter apply if the cartridge is loaded with a colour film balanced for tungsten light exposure. This hole or projection is not included if the cartridge is loaded with colour film for daylight exposure.

3.4 The two slots and the projection used to specify the film speed, and the hole and the projection used to identify the inclusion of a tungsten-type film load, are mutually independent to allow design flexibility.

3.5 The dimensions and specifications of the external characteristics of the camera cartridge and the location of the datum planes used for dimensional reference are established in ISO 3641.

3.6 The corners of the two slots for film speed may be rounded to 0,1 mm (0.004 in) radius maximum.

3.7 The top and bottom corners of the projections for film speed and film identification may be rounded to 1,5 mm (0.06 in) maximum.

3.8 If visual inscriptions of film data, such as film name, number and length of load, are to be provided, they should be on the label side of the cartridge, figure 2, and the film type and speed should also be contained within the area specified.

NOTE — The International Organization for Standardization has been advised that the Fuji Photo Film Company, Ltd., owns the patents as listed below :

| Country        | Patent No.          |
|----------------|---------------------|
| Australia      | 290075              |
| Belgium        | 659363              |
| Canada         | 825419              |
| Italy          | 746611              |
| Spain          | 316413              |
| Sweden         | 322123              |
| Switzerland    | 428424              |
| United Kingdom | 1049844             |
| U.S.A.         | 3599550 and 3434782 |
| W. Germany     | 1274443             |

The International Organization for Standardization takes no position with respect to the scope and validity of these patents. With respect to patent identification, the Fuji Photo Film Company has assured the International Organization for Standardization that it will not assert any claim for infringement of such patents based on the manufacture, sale or use of cartridges in compliance with 3.1 and the figures and tables of dimensions. Noting that compliance with this International Standard does not require the use of the inventions covered by the patents identified above, the Fuji Photo Film Company, Ltd., has nevertheless assured the International Organization for Standardization that it is willing to grant licences under these patents on reasonable terms and conditions that are free of any unfair discrimination.

The terms have been declared in a letter dated 10 May 1972 to the ISO/TC 36 Secretariat by the Fuji Photo Film Company, Ltd., in order to clarify the range of the patent holders' assurance in accordance with Resolution 51, Council 1966. Licence details can be obtained from :

Fuji Photo Film Company, Ltd.  
 26-30 Nishiazabu 2-Chome  
 Minato-ku  
 Tokyo 106  
 Japan

No representation or warranty is made or implied that this is the only licence that may be required to avoid infringement in the use of this International Standard.

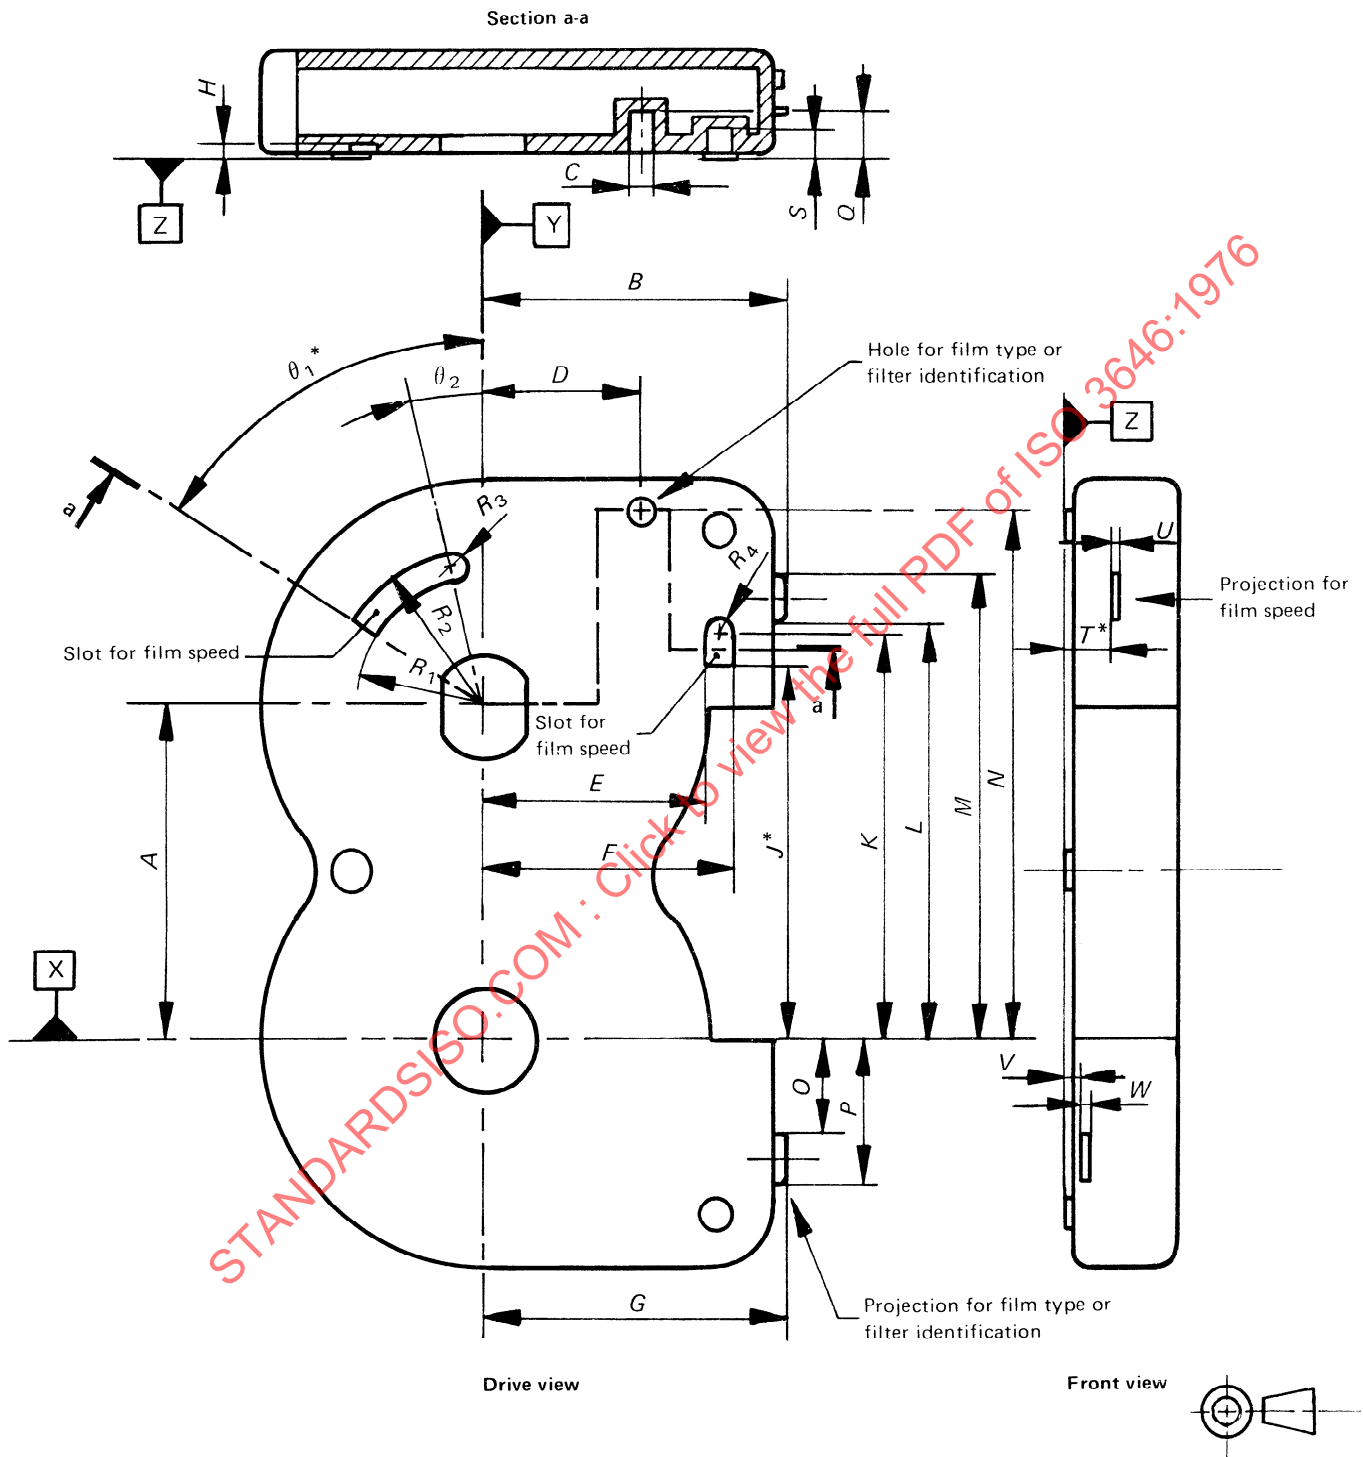


FIGURE 1 — Location and dimensions of slots, projections and hole

\* See table 2.

TABLE 1 — Dimensions and angle

| Dimension        | mm                                                     | in                                                      |
|------------------|--------------------------------------------------------|---------------------------------------------------------|
| A ref.           | 43,0                                                   | 1.69                                                    |
| B                | 38,5 $\begin{smallmatrix} 0 \\ -0,3 \end{smallmatrix}$ | 1.52 $\begin{smallmatrix} 0 \\ -0.01 \end{smallmatrix}$ |
| C min.           | 3,0                                                    | 0.12                                                    |
| D                | 21,0 $\pm 0,2$                                         | 0.827 $\pm 0.008$                                       |
| E                | 27,8 $\pm 0,2$                                         | 1.094 $\pm 0.008$                                       |
| F                | 30,8 $\pm 0,2$                                         | 1.213 $\pm 0.008$                                       |
| G                | 38,5 $\begin{smallmatrix} 0 \\ -0,3 \end{smallmatrix}$ | 1.52 $\begin{smallmatrix} 0 \\ -0.01 \end{smallmatrix}$ |
| H min.           | 1,35                                                   | 0.053                                                   |
| K min.           | 52,5                                                   | 2.07                                                    |
| L                | 55,5 $\pm 0,4$                                         | 2.19 $\pm 0.02$                                         |
| M                | 61,5 $\pm 0,4$                                         | 2.42 $\pm 0.02$                                         |
| N                | 68,00 $\pm 0,35$                                       | 2.677 $\pm 0.014$                                       |
| O                | 12,5 $\pm 0,4$                                         | 0.49 $\pm 0.02$                                         |
| P                | 18,5 $\pm 0,4$                                         | 0.73 $\pm 0.02$                                         |
| R <sub>1</sub>   | 16,1 $\pm 0,3$                                         | 0.63 $\pm 0.01$                                         |
| R <sub>2</sub>   | 19,9 $\pm 0,3$                                         | 0.78 $\pm 0.01$                                         |
| R <sub>3</sub>   | 1,90 $\pm 0,30$                                        | 0.075 $\pm 0.012$                                       |
| R <sub>4</sub>   | 1,5 $\pm 0,3$                                          | 0.06 $\pm 0.01$                                         |
| Y max.           | 23,0                                                   | 0.91                                                    |
| U min.           | 1,5                                                    | 0.06                                                    |
| V                | 1,1 $\pm 0,3$                                          | 0.04 $\pm 0.01$                                         |
| W min.           | 1,5                                                    | 0.06                                                    |
| S                | 2,7 $\pm 0,2$                                          | 0.106 $\pm 0.008$                                       |
| Q min.           | 6,0                                                    | 0.236                                                   |
| Angle $\theta_2$ | 10 $\pm 1/2^\circ$                                     |                                                         |

NOTE — Dimension C is a diameter.

Inch values for dimensions D, E, F, N, S and Q are intentionally carried to an additional decimal place.

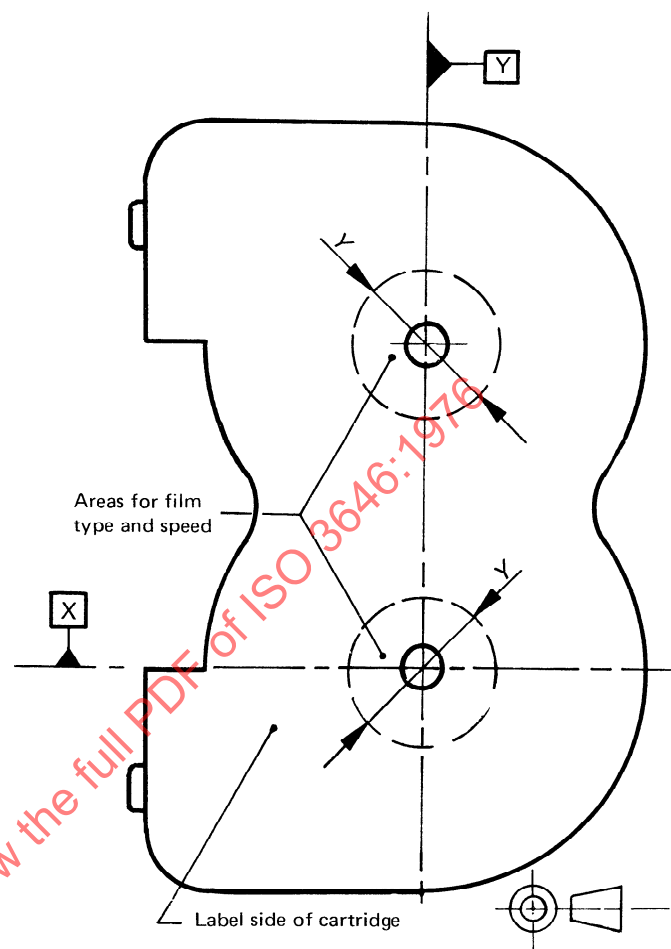


FIGURE 2 — Cartridge area for visible information or product identification

TABLE 2 — Dimensions controlling film speed values

| Film speed |     | $\theta_1^*$<br>degrees | $J^{**}$ |      | $T^{***}$ |       |
|------------|-----|-------------------------|----------|------|-----------|-------|
| DIN        | ASA |                         | mm       | in   | mm        | in    |
| 13         | 16  | 22                      | 51,0     | 2.01 | 11,6      | 0.457 |
| 14         | 20  | 26                      | 50,5     | 1.99 | 10,85     | 0.427 |
| 15         | 25  | 30                      | 50,0     | 1.97 | 10,10     | 0.398 |
| 16         | 32  | 34                      | 49,5     | 1.95 | 9,35      | 0.368 |
| 17         | 40  | 38                      | 49,0     | 1.93 | 8,60      | 0.339 |
| 18         | 50  | 42                      | 48,5     | 1.91 | 7,85      | 0.309 |
| 19         | 64  | 46                      | 48,0     | 1.89 | 7,10      | 0.280 |
| 20         | 80  | 50                      | 47,5     | 1.87 | 6,35      | 0.250 |
| 21         | 100 | 54                      | 47,0     | 1.85 | 5,60      | 0.220 |
| 22         | 125 | 58                      | 46,5     | 1.83 | 4,85      | 0.191 |
| 23         | 160 | 62                      | 46,0     | 1.81 | 4,10      | 0.161 |
| 24         | 200 | 66                      | 45,5     | 1.79 | 3,35      | 0.132 |
| 25         | 250 | 70                      | 45,0     | 1.77 | 2,60      | 0.102 |
| 26         | 320 | 74                      | 44,5     | 1.75 | 1,85      | 0.073 |
| 27         | 400 | 78                      | 44,0     | 1.73 | 1,10      | 0.043 |

\* Tolerance for all values  $\pm 1/2^\circ$ \*\* Tolerance for all values  $\pm 0,1$  mm (0.004 in)\*\*\* Tolerance for all values  $\pm 0,3$  mm (0.012 in)

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO 3646:1976