

---

# International Standard



# 3896

---

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

---

## Road vehicles — Screened and waterproof spark-plug and its connection — Type 3

*Véhicules routiers — Bougie d'allumage blindée et étanche et sa connexion — Type 3*

Third edition — 1986-03-15

STANDARDSISO.COM : Click to view the full PDF of ISO 3896:1986

---

UDC 621.43.045

Ref. No. ISO 3896-1986 (E)

**Descriptors** : road vehicles, internal combustion engines, controlled ignition engines, ignition systems, spark plugs, dimensions.

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 3896 was prepared by Technical Committee ISO/TC 22, *Road vehicles*.

This third edition cancels and replaces the second edition (ISO 3896:1979), of which it constitutes a minor revision.

Users should note that all International Standards undergo revision from time to time and that any reference made herein to any other International Standard implies its latest edition, unless otherwise stated.

# Road vehicles — Screened and waterproof spark-plug and its connection — Type 3

## 1 Scope

This International Standard specifies the essential dimensional characteristics of a spark-plug type used with spark ignition engines.

## 2 Field of application

The requirements of this International Standard apply to screened and waterproof spark-plugs and their connections, type 3.

## 3 References

ISO 68, *ISO general purpose screw threads — Basic profile.*

ISO 261, *ISO general purpose metric screw threads — General plan.*

ISO 965/1, *ISO general purpose metric screw threads — Tolerances — Part 1 : Principles and basic data.*

ISO 965/3, *ISO general purpose metric screw threads — Tolerances — Part 3 : Deviations for constructional threads.*

ISO 3412, *Road vehicles — Screened and waterproof spark plug and its connection — Type 1.*

ISO 3895, *Road vehicles — Screened and waterproof spark-plug and its connection — Type 2.*

## 4 Required characteristics for spark-plug and housing in the cylinder head

### 4.1 Dimensions and thread (see figure)

#### 4.1.1 Plug reach and other dimensions

Dimensions in millimetres

| <i>A</i>                | <b>M18 × 1,5</b> | <b>7/8"-18</b>             |                          |
|-------------------------|------------------|----------------------------|--------------------------|
| <i>B</i>                | 20,3 ± 0,2       | Normal reach<br>15,9 ± 0,2 | Long reach<br>19,4 ± 0,2 |
| <i>C</i><br>(see 4.1.2) | 2,0 to 2,3       | 1,1 to 1,7                 |                          |
| <i>D</i>                | 15,5 ± 0,25      | 19,8 ± 0,25                |                          |
| <i>E</i> max.           | 24,7             | 28,4                       |                          |
| <i>F</i> min.           | 27               | 32                         |                          |
| <i>G</i> min.           | 36               | 40                         | 29                       |
| <i>H</i> min.           | 34               | 38                         | 27                       |

#### 4.1.2 Gasket

When the spark-plugs have been tightened with a torque of 48 N·m (threads clean, smooth and dry), the gasket thickness shall correspond to dimension *C* in the table in 4.1.1. If the gaskets are of a different thickness, a corresponding adjustment to dimension *B* shall be made.

### 4.1.3 Thread

#### 4.1.3.1 Dimension limits of M18 × 1,5 thread

Dimensions in millimetres

| Dimension      |      | Plug thread<br>(on finished plug)<br>6e | Tapped hole in<br>cylinder head<br>6H |
|----------------|------|-----------------------------------------|---------------------------------------|
| Major diameter | max. | 17,933                                  | not specified                         |
|                | min. | 17,697                                  | 18,000                                |
| Pitch diameter | max. | 16,959                                  | 17,216                                |
|                | min. | 16,819                                  | 17,026                                |
| Minor diameter | max. | 16,092                                  | 16,676                                |
|                | min. | 15,845*                                 | 16,376                                |

\* With a root radius  $\geq 0,150$  mm (0,1 P).

#### 4.1.3.2 Tolerance classes of M18 × 1,5

The tolerance classes of thread M18 × 1,5 of the finished spark-plugs and of the corresponding tapped holes in the cylinder head are as follows :

- 6e for spark-plugs (see note 2);
- 6H for tapped holes in the cylinder head.

#### NOTES

1 The threads M18 × 1,5 of the spark-plugs and the corresponding tapped holes in the cylinder head shall conform to ISO 68, ISO 261, ISO 965/1 and ISO 965/3.

2 In order that the spark-plugs complying with this International Standard can be fitted in existing cylinder heads also in limiting cases, the value for the *maximum truncation* of the minor diameter of the spark-plug base has been slightly reduced with respect to the ISO value.

This maximum value of the minor diameter was calculated from a distance of  $H/6$  for the *maximum truncation* instead of the value given by the formula of ISO 965/1, clause 11, according to the formula given below.

$$\begin{aligned}\text{Maximum minor diameter} &= d_1 - e_s - 2(H/4 - H/6) \\ &= 16,376 - 0,067 - 0,217 \\ &= 16,376 - 0,284 = 16,092\end{aligned}$$

The value for the *basic profile* remains the same as for the ISO thread ( $16,376 - 0,067 = 16,309$ )

3 The initial clearance  $e = 0,067$  mm between the pitch diameters of the thread and of the tapped hole is intended to prevent the possibility of seizure, as a result of combustion deposits on the bare threads, when removing the spark-plugs.

This clearance is also intended to enable spark-plugs with threads in accordance with this International Standard to be fitted in existing tapped holes.

#### 4.1.3.3 Dimension limits of 7/8"-18 thread

Dimensions in millimetres

| Dimension      |      | Plug thread<br>(on finished plug)<br>6e | Tapped hole in<br>cylinder head<br>6H |
|----------------|------|-----------------------------------------|---------------------------------------|
| Major diameter | max. | 22,225                                  | not specified                         |
|                | min. | 22,017                                  | 22,225                                |
| Pitch diameter | max. | 21,295                                  | 21,412                                |
|                | min. | 21,191                                  | 21,308                                |
| Minor diameter | max. | 20,493                                  | 20,851                                |
|                | min. | not specified                           | 20,698                                |

### 4.2 Other dimensions of spark-plug and housing in the cylinder head

The other dimensions are indicated on the figure.

Details not specified are left to the manufacturer's choice.

## 5 Required characteristics for the connection

### 5.1 Dimension limits of 3/4-20 UNEF-3 connection thread

Dimensions in millimetres


| Dimension      |      | Plug thread<br>3/4-20 UNEF-3A | Connector thread<br>3/4-20 UNEF-3B |
|----------------|------|-------------------------------|------------------------------------|
| Major diameter | max. | 19,050                        | not specified                      |
|                | min. | 18,845                        | 19,050                             |
| Pitch diameter | max. | 18,224                        | 18,333                             |
|                | min. | 18,141                        | 18,225                             |
| Minor diameter | max. | 17,492                        | 17,873                             |
|                | min. | not specified                 | 17,679                             |

### 5.2 Other characteristics for connection

The connector of this spark-plug shall have a 3/4-20 UNEF-3B thread and a hexagon size of  $22,2 \begin{smallmatrix} 0 \\ -0,4 \end{smallmatrix}$  mm, with a width across corners of 24,6 mm min.

Moreover, the connector fitted to the spark-plug shall provide good watertightness, good electrical contact and good screening against emission of radio-electric radiation.

Dimensions in millimetres

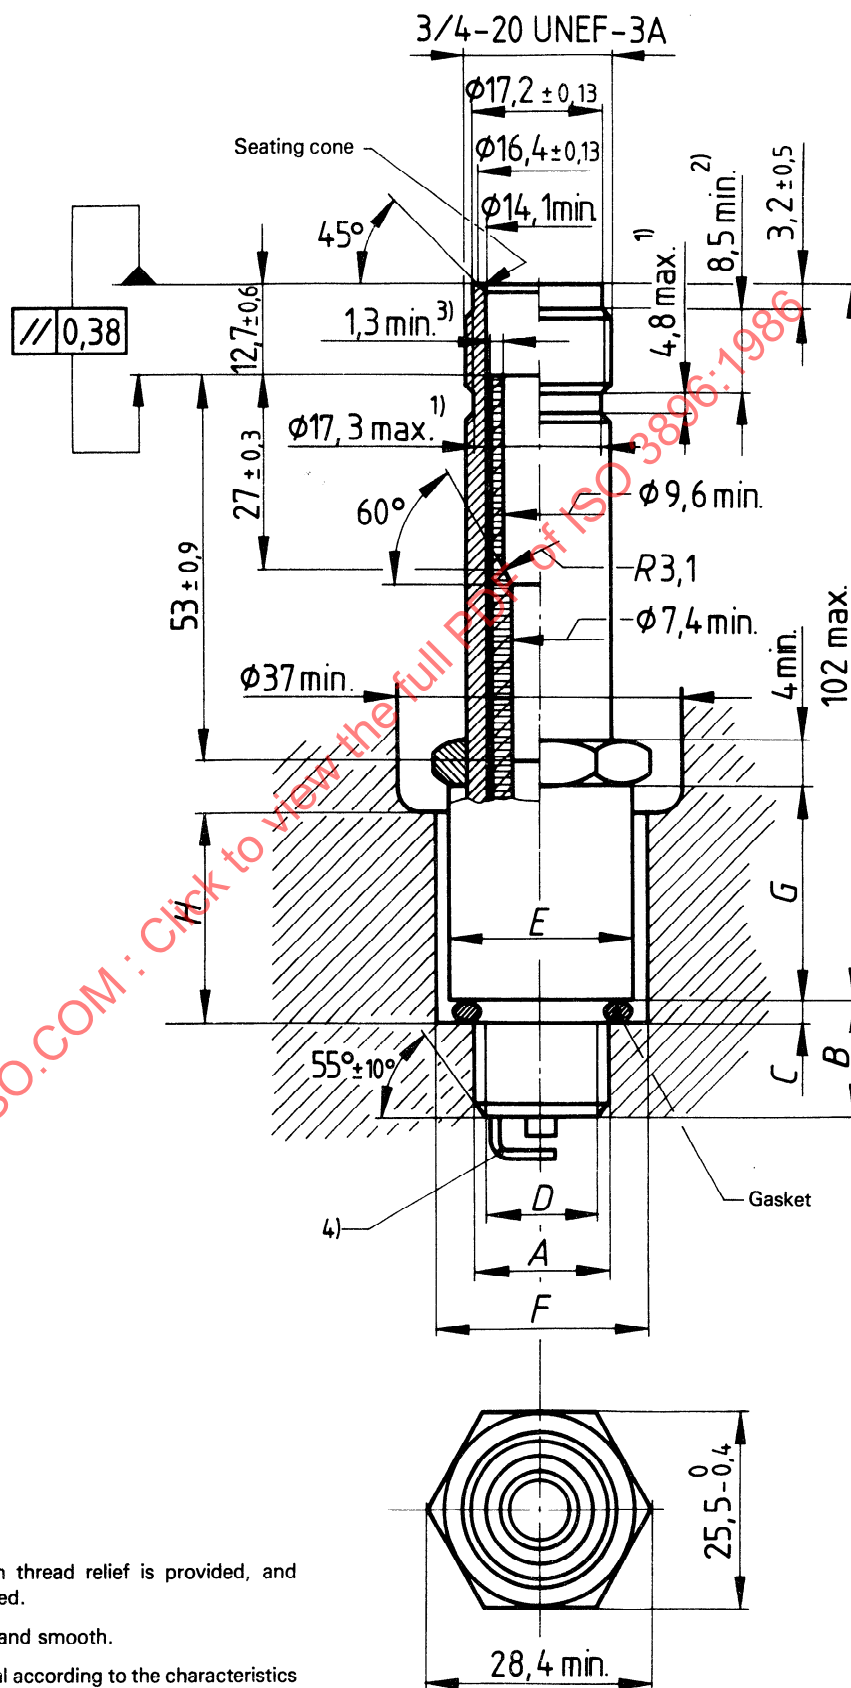

- 1) The thread relief is optional.
- 2) Usable thread length 8,5 min. when thread relief is provided, and 11,4 min. when no thread relief is provided.
- 3) The surface of 1,3 min. shall be flat and smooth.
- 4) Electrode gap configuration is optional according to the characteristics of the engine.

Figure — Screened and waterproof spark-plug, type 3

This page intentionally left blank